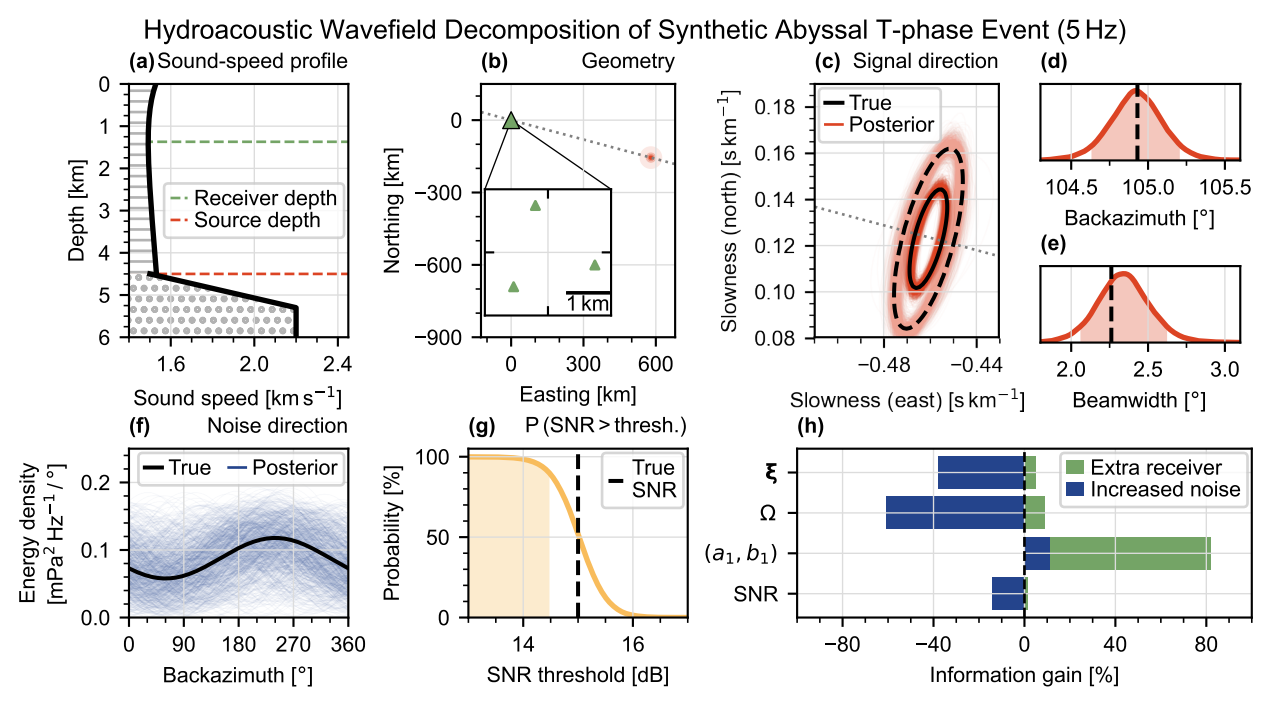

Hydroacoustic Wavefield Decomposition of Synthetic Abyssal T-phase Event (5 Hz)
(a) Sound-speed profile
Depth [km]
Receiver depth
Source depth
Sound speed [km s^{-1}]
(b) Geometry
Northing [km]
1 km
Easting [km]
(c) Signal direction
True
Posterior
Slowness (north) [s km^{-1}]
Slowness (east) [s km^{-1}]
(d)
Backazimuth [°]
(e)
Beamwidth [°]
(f) Noise direction
Energy density [mPa^2 Hz^{-1} / °]
Backazimuth [°]
(g) P (SNR > thresh.)
True SNR
Probability [%]
SNR threshold [dB]
(h)
ξ
Ω
(a_1, b_1)
SNR
Extra receiver
Increased noise
Information gain [%]