

Configuración Router:

```
Router_FW#write memory
Building configuration...
[OK]
Router_FW#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
GigabitEthernet0/0  192.168.1.1    YES manual up          up
GigabitEthernet0/1  192.168.2.1    YES manual up          up
GigabitEthernet0/2  192.168.3.1    YES manual up          up
Vlan1           unassigned     YES unset  administratively down down
Router_FW#
```

Copy

Paste

Ping:

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Web_DMZ

Physical Config Services Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer SERVER Command Line 1.0
C:\>ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Reply from 192.168.2.1: bytes=32 time=1ms TTL=255
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.2.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

PC_External

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.3.1



Pinging 192.168.3.1 with 32 bytes of data:

Reply from 192.168.3.1: bytes=32 time<1ms TTL=255
Reply from 192.168.3.1: bytes=32 time<1ms TTL=255
Reply from 192.168.3.1: bytes=32 time<1ms TTL=255
Reply from 192.168.3.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.3.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Verificación antes ACL

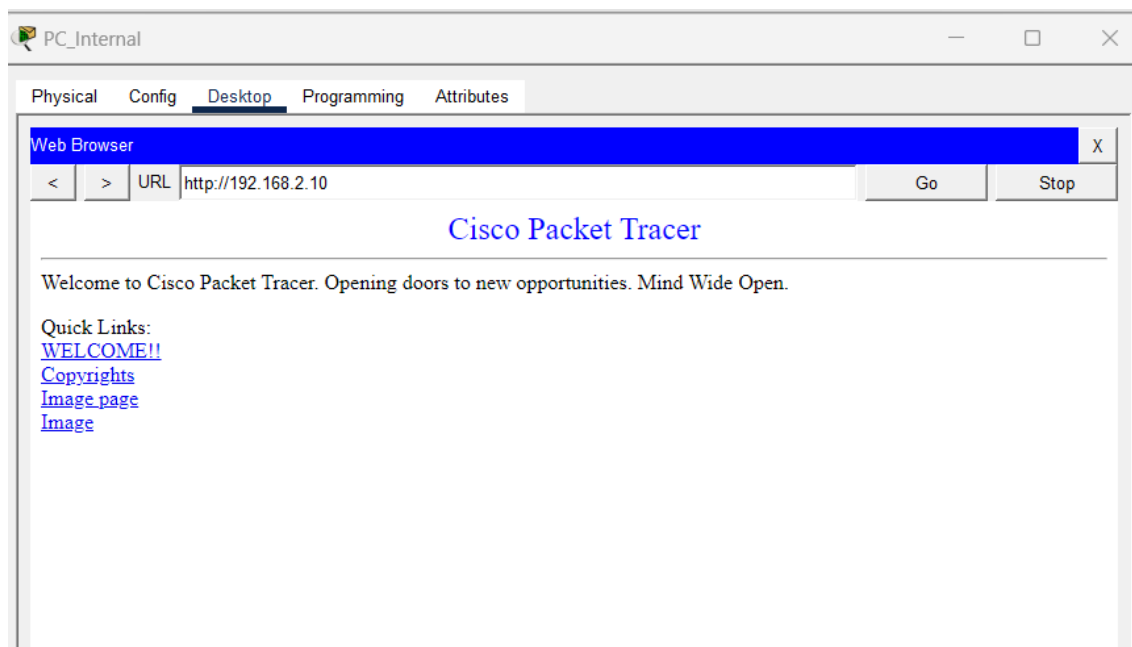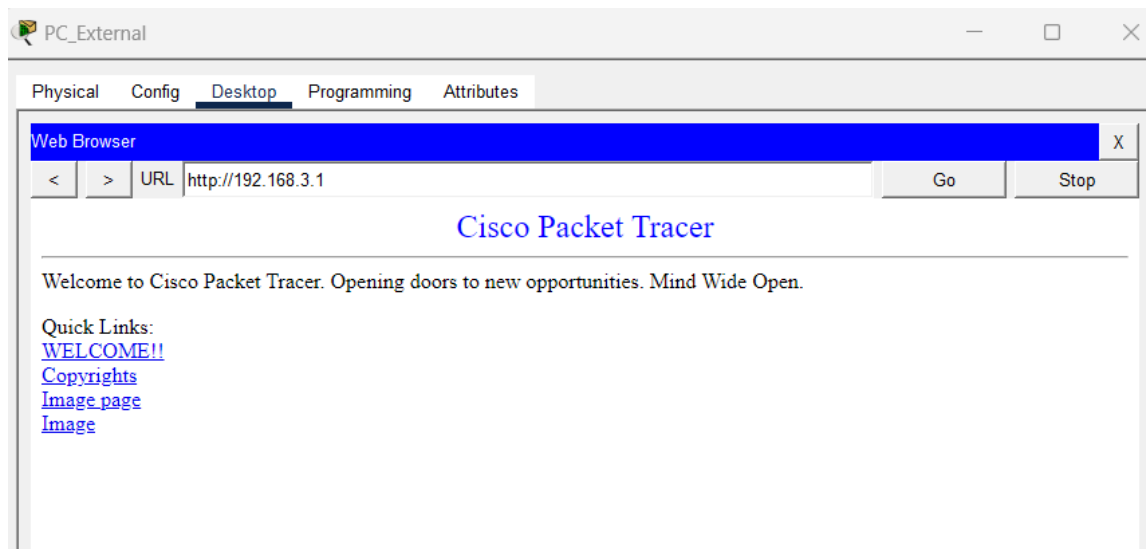

Verificación final de seguridad y funcionalidad

