




(a) Pooled cycle-time distribution, 30 condition cells per configuration

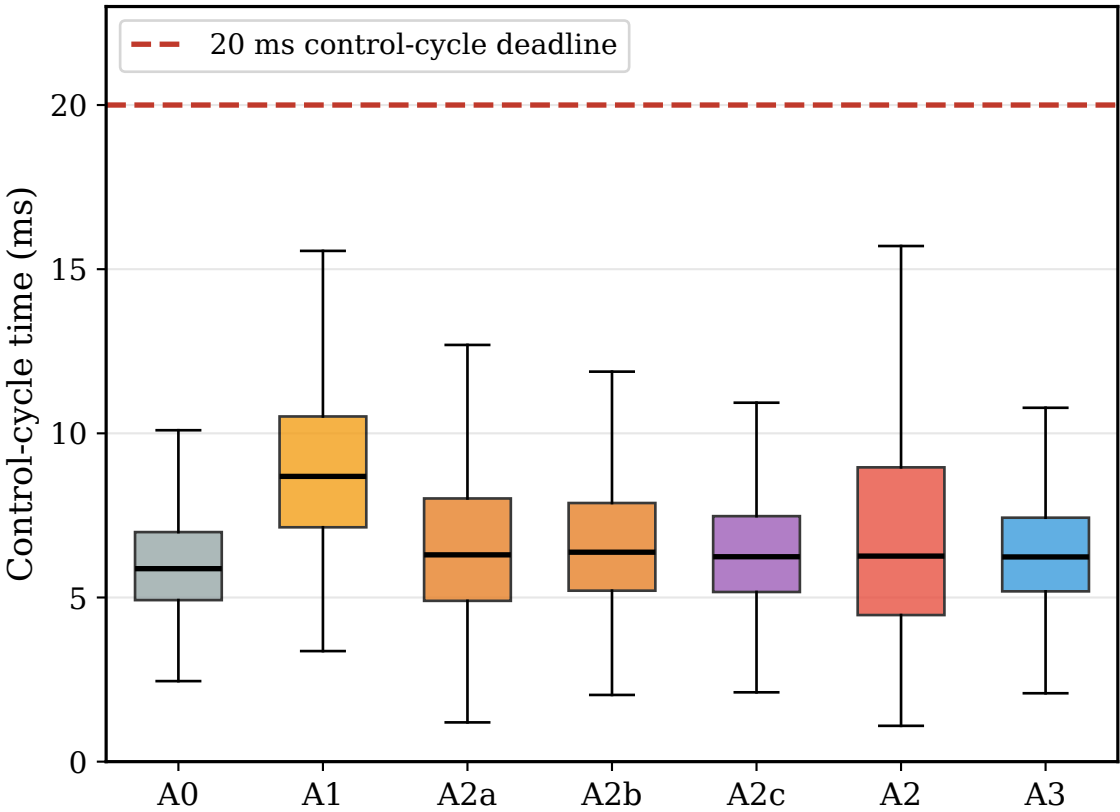

(b) Tail latency; bars on the median are bootstrap intervals over 30 runs

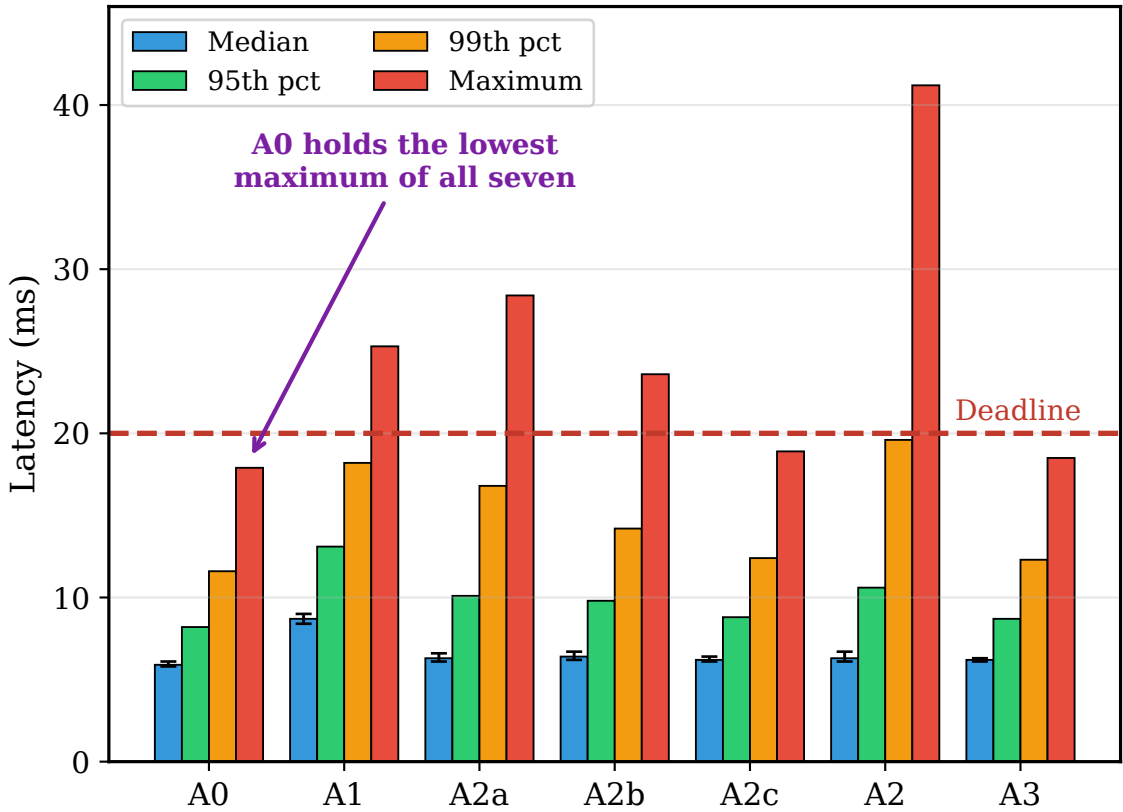

(c) Execution-time dispersion and release jitter are different quantities

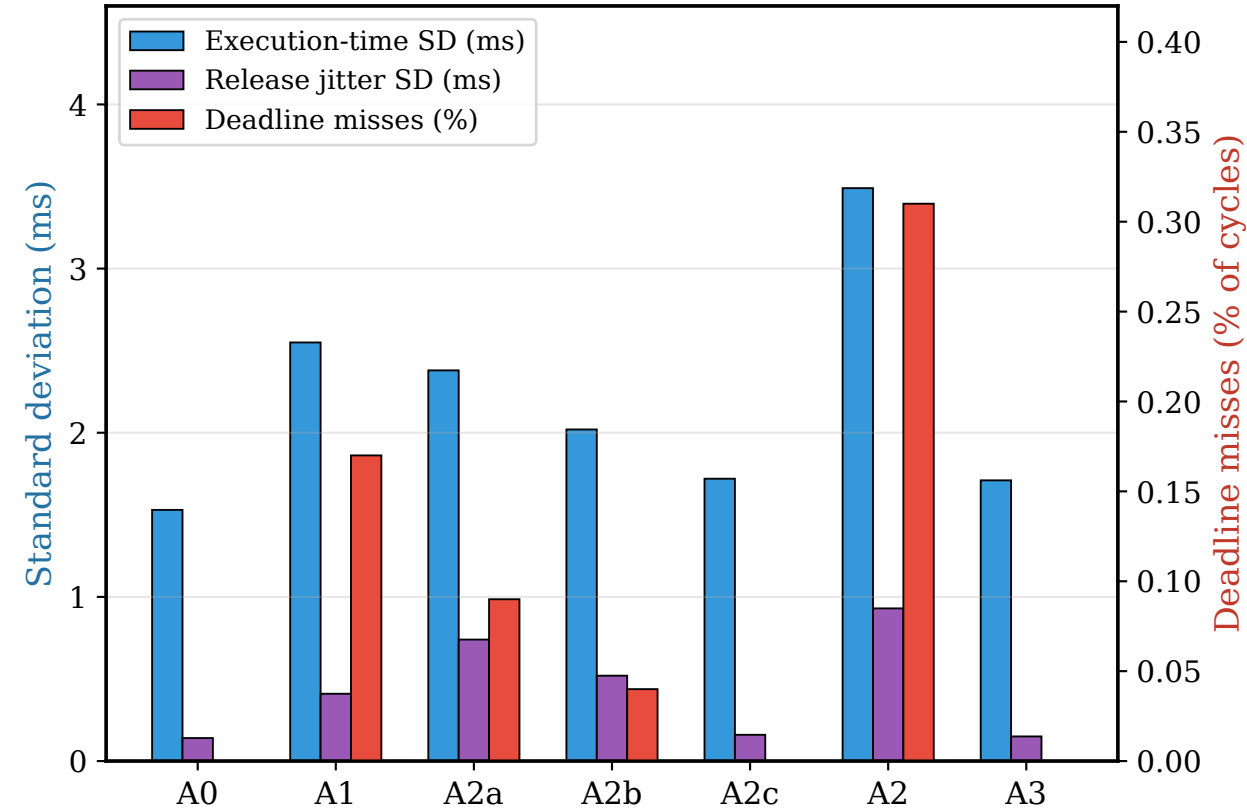

(d) Properties the timing data do not capture
(the first two belong to the interface contracts:
every layered configuration has them)

	A0	A1	A2a	A2b	A2c	A2	A3
Safety module builds without any vendor SDK linked	No	Yes	Yes	Yes	Yes	Yes	Yes
Vendor swap without editing control code	No	Yes	Yes	Yes	Yes	Yes	Yes
Zero-copy inter-layer transport	n/a	No	Yes	Yes	Yes	Yes	Yes
Real-time scheduling and core isolation	Yes	Yes	No	Part	Yes	No	Yes
Overrun watchdog active	Yes	Yes	Yes	Yes	No	No	Yes
No deadline miss observed	Yes	No	No	No	Yes	No	Yes

A0 monolithic A1 socket IPC A2a no RT priority A2b shared core A2c no watchdog A2 all three removed A3 proposed