




(a) Code reuse across platforms (86% aggregate)

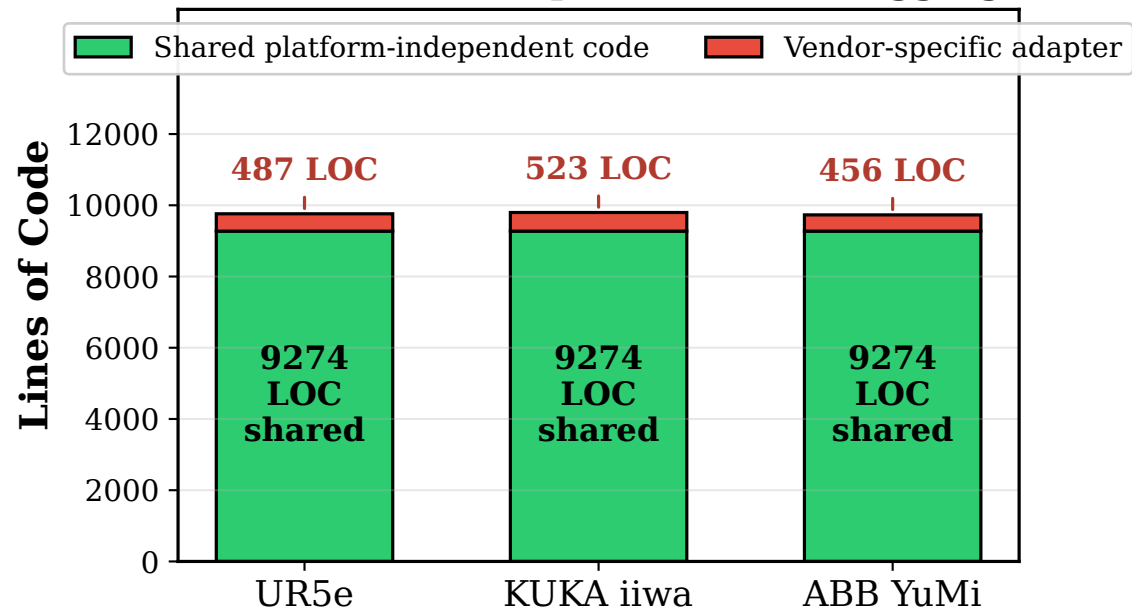

(b) Platform adaptation effort (measured vs. estimated)

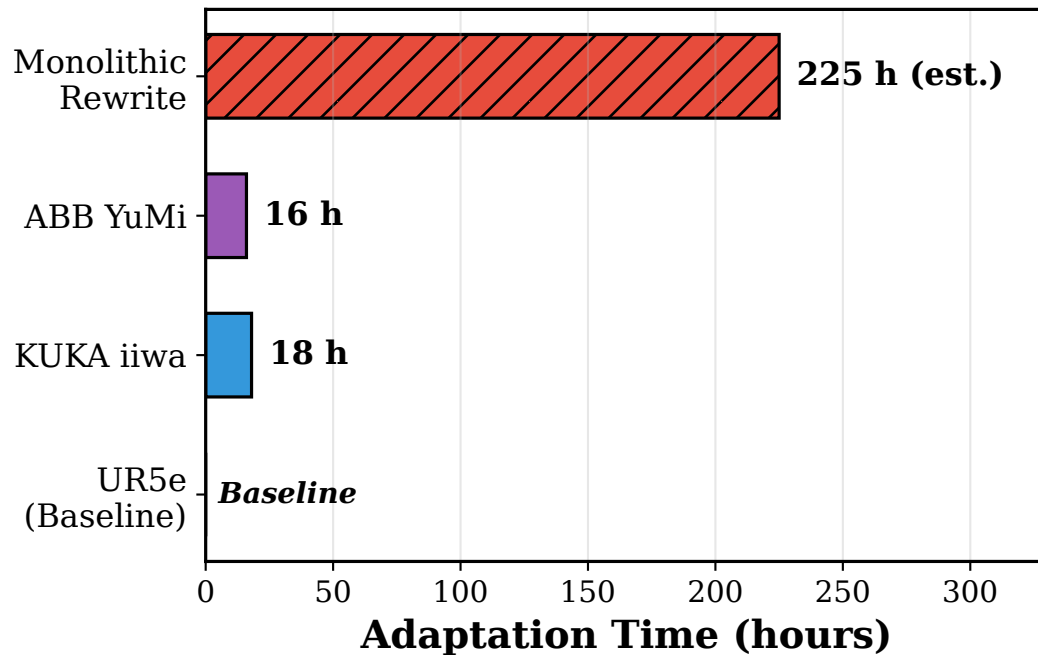

(c) Cyclomatic complexity (all below 5.0)

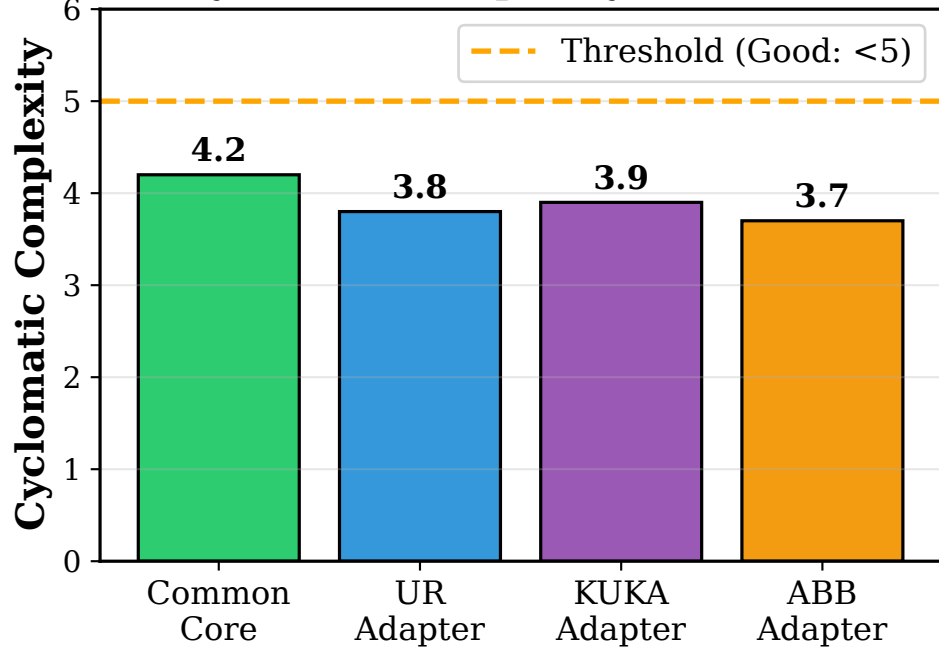

(d) Platform Capabilities Comparison

Feature	UR5e	KUKA iiwa	ABB YuMi
State rate	125 Hz	200 Hz	125 Hz
Interface	RTDE / TCP	FRI / UDP	RWS / HTTPS
Frame	Base, flange-aligned	Flange + TCP offset	Work-object
Protective stop	stopj()	stopMotion()	Panel control state
Integration Time	Baseline	18h	16h