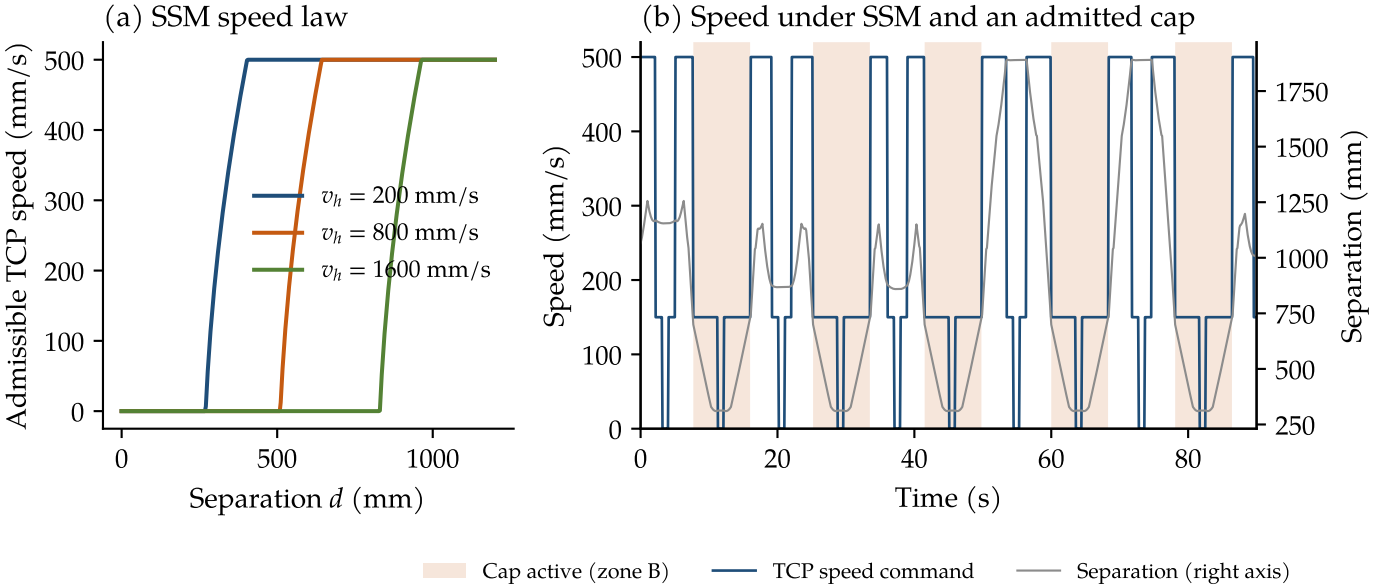
(a) SSM speed law
Admissible TCP speed (mm/s)
Separation d (mm)
v_h = 200 mm/s
v_h = 800 mm/s
v_h = 1600 mm/s
(b) Speed under SSM and an admitted cap
Speed (mm/s)
Separation (mm)
Time (s)
Cap active (zone B)
TCP speed command
Separation (right axis)