




16. Remove filter A, the spring seat, valve springs, valve holder and poppet valve from the push rod.



## Rebuild Kit

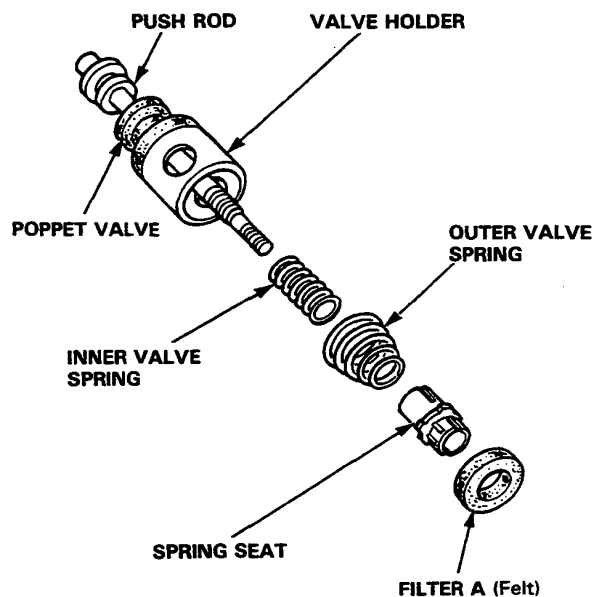

E-CLIP



SEAL




10 mm CIRCLIP



REACTION  
DISC



BOOT



DIAPHRAGM



POPPET VALVE



FILTER A  
(Felt)



E-CLIP



FILTER B  
(Sponge)



SNAP RING



BUSHING  
RETAINER



BUSHING



PISTON SEAL



19 mm CIRCLIP



O-RING



6 mm FLANGE  
LOCKNUT



SILICONE GREASE