


Heater Control Panel

Replacement


1. Remove the center console (section 14).
2. Remove the radio/cassette player.

**RADIO/CASSETTE
PLAYER**

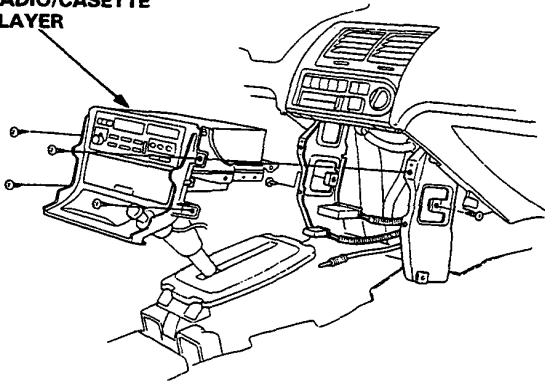


3. Remove the tapping screws (2) and remove the center air vent.

CENTER AIR VENT

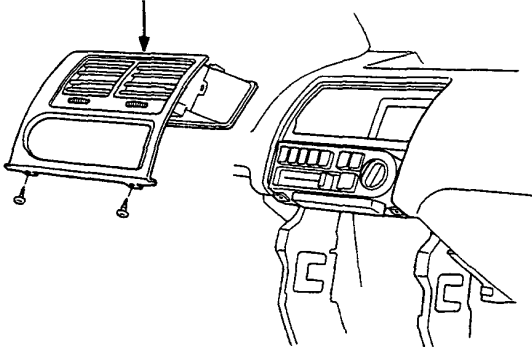

4. Disconnect the air mix cable at the heater assembly.
5. Remove the tapping screws (4) and pull out the heater control and disconnect the wire harness connectors, then remove the heater control.

HEATER CONTROL

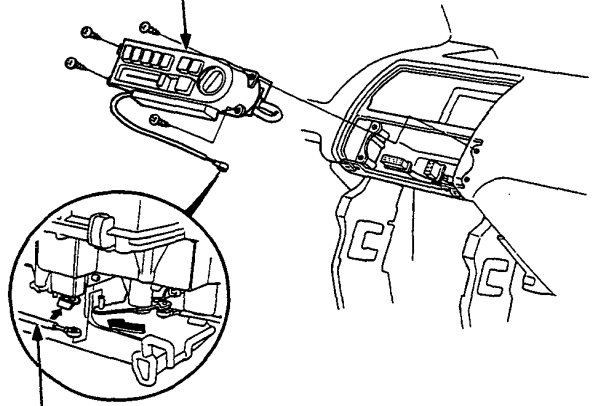

AIR MIX CABLE

Install in the reverse order of removal and connect and make sure that it is properly adjusted (page 15-20).