


Carpet



Replacement

1. Remove:
 - Front seats.
 - Front seat belt lower anchor bolts (page 14-41).
 - Center console.
 - Right and left kick panels.
 - Door sill moldings.
 - Fuel filler door and trunk lid openers.
 - Right and left quarter trim panels.
2. Pry out the clips at the rear edge and under the dashboard, peel off the tape and remove the clip nuts.

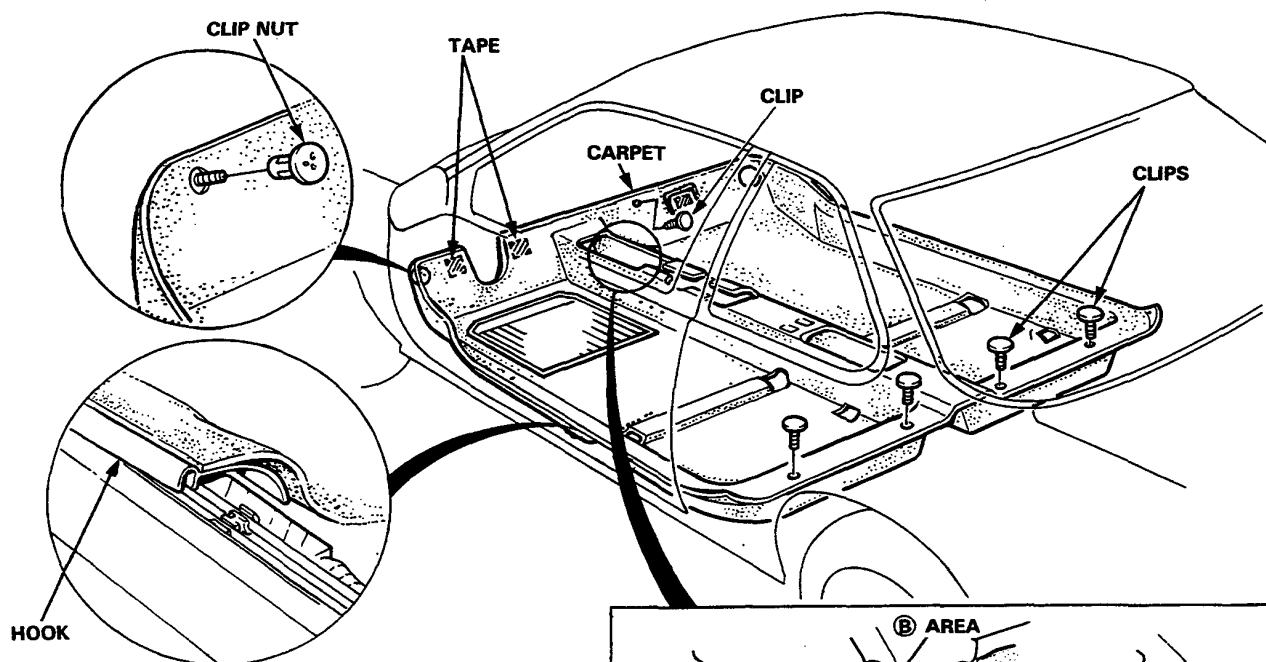

3. Cut the (A) area first, then pull backward and cut the (B) area as shown.
4. Remove the carpet.
5. Install the carpet in the reverse order of removal.

NOTE:

- Place (B) area under the heater unit.
- Reattach the cut areas with tape and tie bands as shown.

