


Hydraulic System

Index

CAUTION:

- Do not spill brake fluid on the car; it may damage the paint; if brake fluid does contact the paint, wash it off immediately with water.
- The flare nuts should be tightened to 15 N·m (1.5 kg-m, 11 lb-ft).
- The brake pipes and modulator fittings are color coded.

RESERVOIR
Brake Fluid Draining, page 13-73

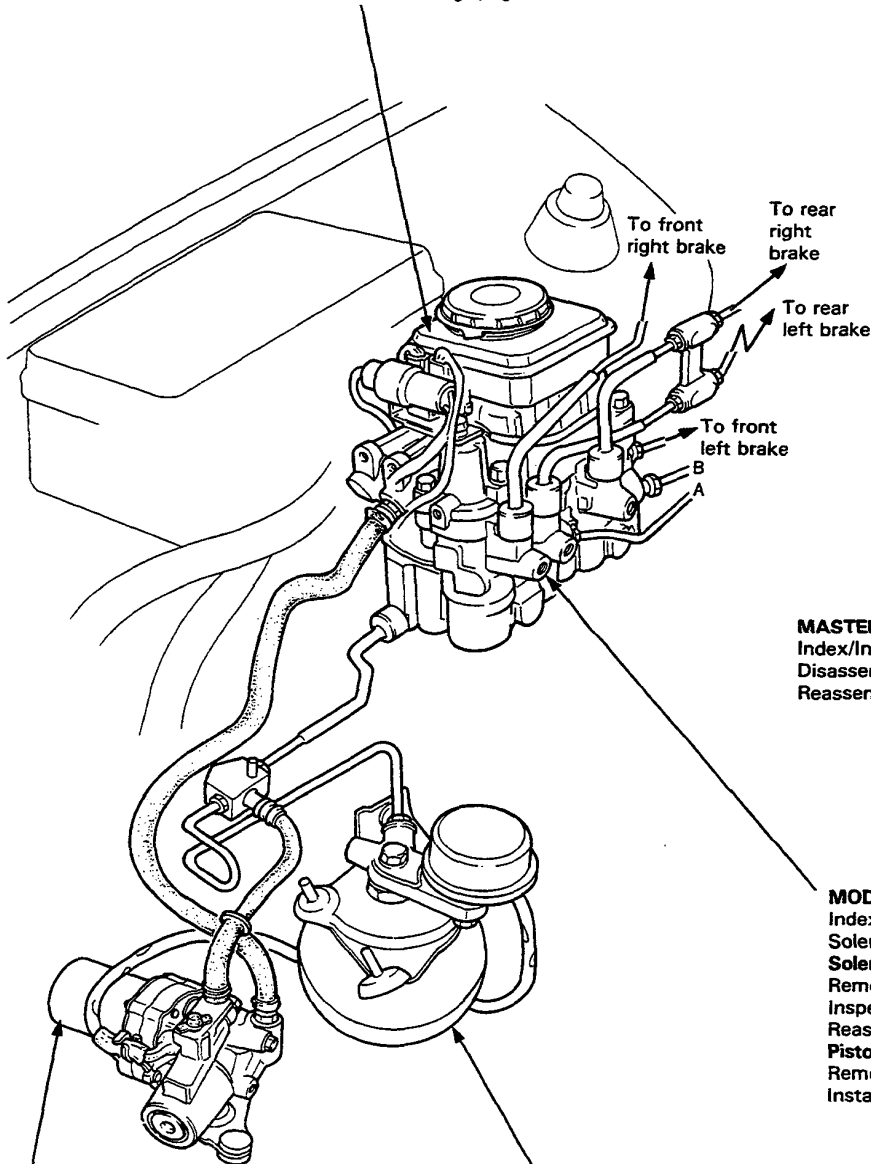

MASTER CYLINDER
Index/Inspection, page 13-68
Disassembly, page 13-69
Reassembly, page 13-70

MODULATOR
Index/Inspection, page 13-72
Solenoid Leak Test, page 13-73
Solenoid
Removal, page 13-74
Inspection, page 13-75
Reassembly, page 13-75
Piston
Removal, page 13-76
Installation, page 13-77

POWER UNIT
Index/Inspection, page 13-78
Disassembly, page 13-79
Reassembly, page 13-80

ACCUMULATOR
Index/Inspection, page 13-81
Disassembly/Reassembly,
page 13-82
Accumulator Disposal,
page 13-82