



Datasheet

Socket Panel Screw Mount

RS Stock number 490-923



Specifications:

Rating:

100V AC 4A max.

Contact Resistance:

Pins-30m Ω max; shell-50m Ω max.




Insulation Resistance:

100MΩ min. at 500V DC

Voltage Withstand:

250V AC R.M.S for 1 minute

Dimensions(mm)

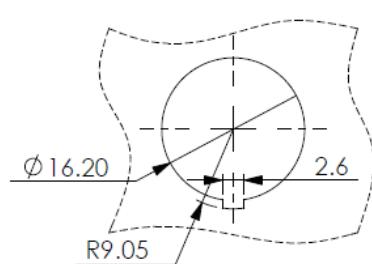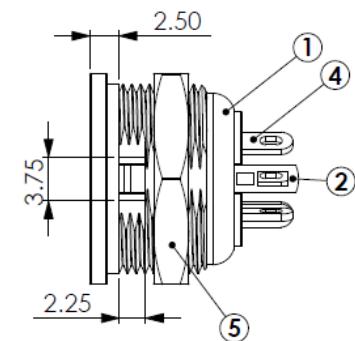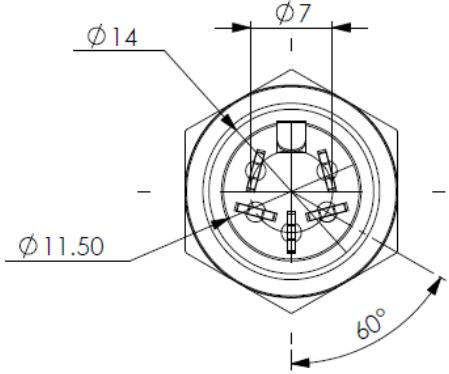

Through Hole Dimension

