

SF16 LED LINEAR FLEX

Mounting channel range.

Every profile below accepts the same SF16 strip. Dimensions in millimetres, drawn to the manufacturing tolerance of the extrusion. Items marked **ON REQUEST** are available to order — contact us for codes and lead times.


01

Aluminium channel


Aluminium channel, surface / recessed

OR-AL-CC


Rigid aluminium, standard specification

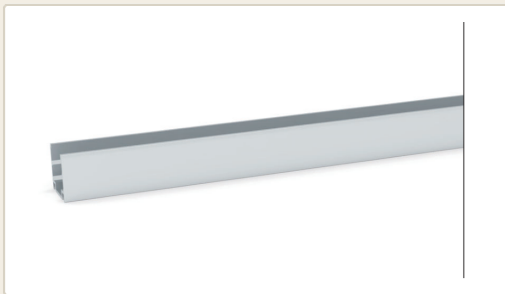

SECTION — MM




INSTALLATION



SURFACE / RECESSED

FIXING-HOLE SPACING — MM

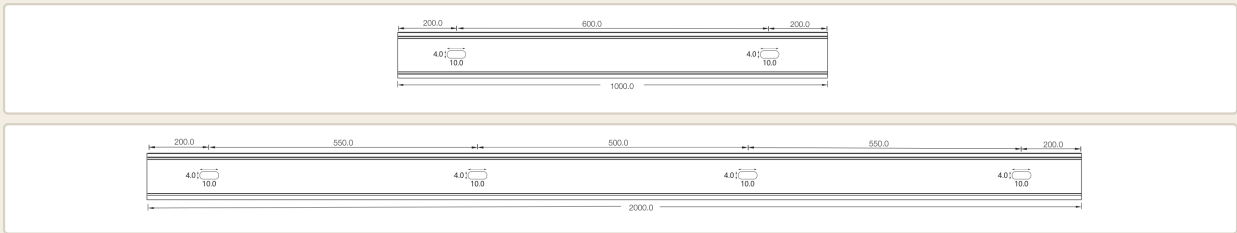

1000MM

2000MM

PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
OR-AL-CC	20.40 × 19.60	35mm	1 4.0mm	2	SF16 range
OR-AL-CC		1000mm	slot 4.0mm	2	SF16 range
OR-AL-CC		2000mm	slot 4.0mm	4	SF16 range


Aluminium channel, wide-body

Rigid aluminium, 22mm body with splice plates


ON REQUEST




SECTION — MM



INSTALLATION



FIXING-HOLE SPACING — MM

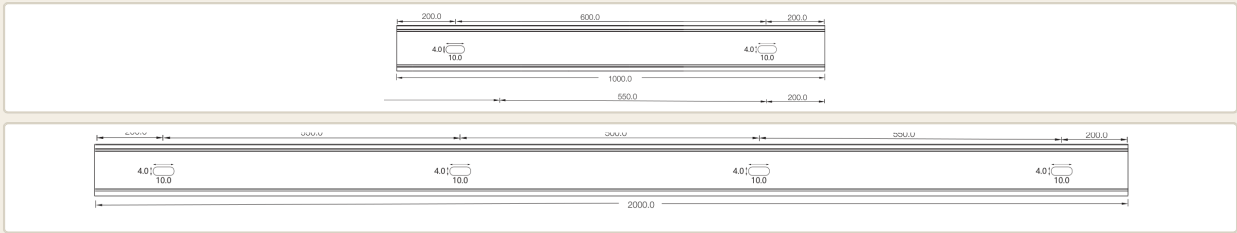

PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
ON REQUEST	22.00 × 20.80	35mm	1 4.0mm	2	SF16 range
ON REQUEST		1000mm	slot 4.0mm	2	SF16 range
ON REQUEST		2000mm	slot 4.0mm	4	SF16 range

Joins with 44.0 × 2.0mm splice plates (supplied on request) for continuous runs.


Aluminium channel, recessed flange

Rigid aluminium, 32mm trim flange for plaster / joinery reveals


ON REQUEST




SECTION — MM



INSTALLATION



FIXING-HOLE SPACING — MM


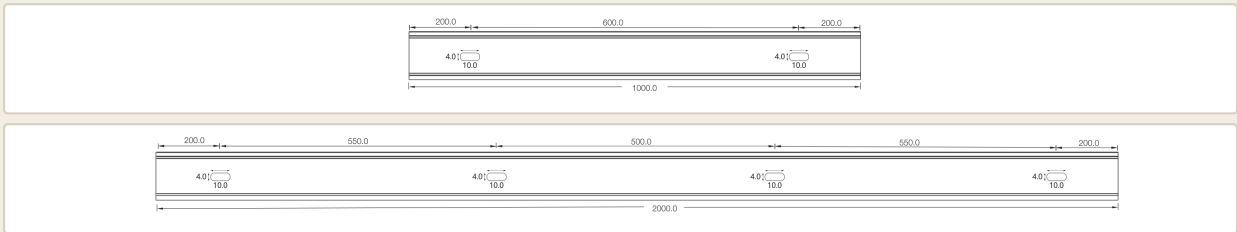


PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
ON REQUEST	22.00 × 22.80	35mm	1 4.0mm	2	SF16 range
ON REQUEST		1000mm	slot 4.0mm	2	SF16 range
ON REQUEST		2000mm	slot 4.0mm	4	SF16 range


Aluminium channel, deep-set

Rigid aluminium, 33.9mm deep body for regressed light lines

ON REQUEST



FIXING-HOLE SPACING — MM

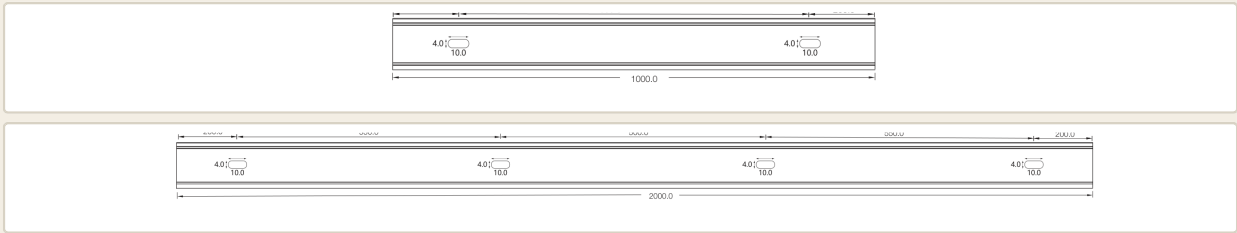




PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
ON REQUEST	22.00 × 33.90	35mm	4.0mm	2	SF16 range
ON REQUEST		1000mm	slot 4.0mm	2	SF16 range
ON REQUEST		2000mm	slot 4.0mm	4	SF16 range

Flexible aluminium channel


Flexible aluminium channel

Segmented aluminium — follows curves to the strip's own 120mm bend limit

OR-AL-FLX

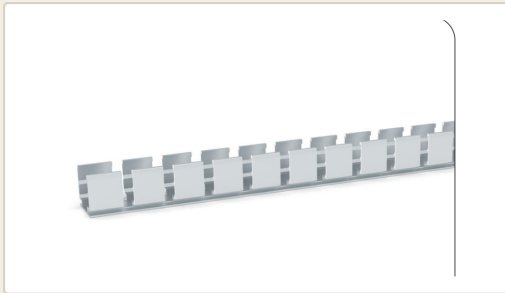

FIXING-HOLE SPACING — MM

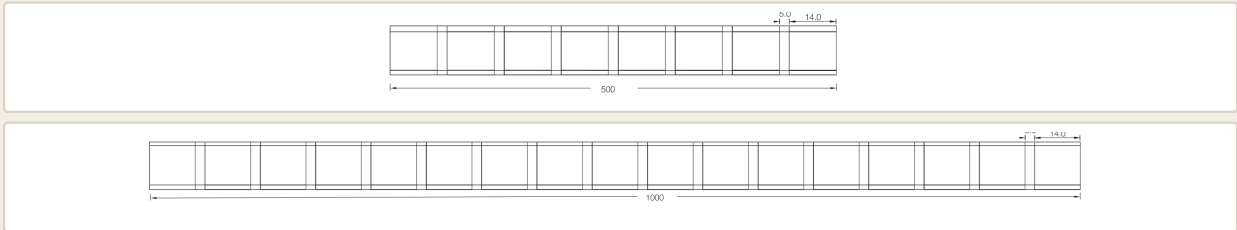

PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
OR-AL-FLX	20.40 × 19.79	500mm	segment fix	—	SF16 range
OR-AL-FLX		1000mm	segment fix	—	SF16 range

Segments 14.0mm wide at 5.0mm spacing.

03

Polycarbonate channel & clips


Polycarbonate channel

Clear polycarbonate — budget / light-duty


OR-PC-CC




SECTION — MM



INSTALLATION



FIXING-HOLE SPACING — MM

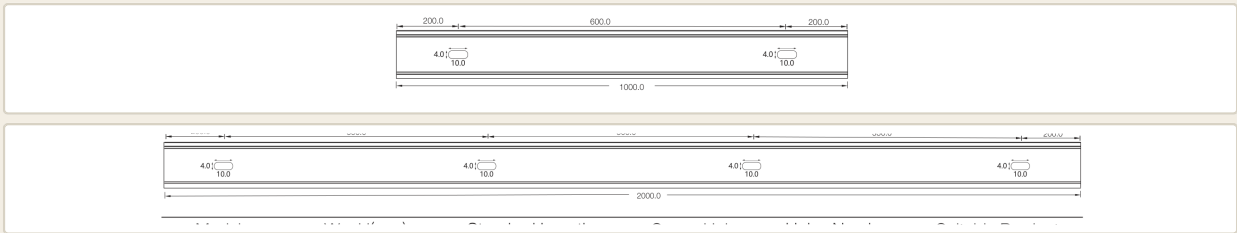

PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
OR-PC-CC	23.53 × 22.90	1000mm	4.0mm	2	SF16 range


Polycarbonate mounting clip

Clear polycarbonate saddle clip


ON REQUEST



SECTION — MM



INSTALLATION

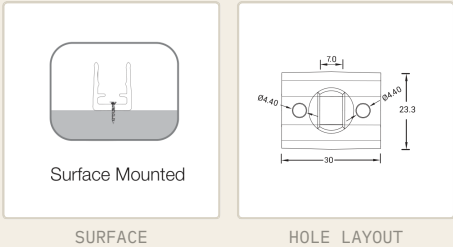

PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
ON REQUEST	23.30 × 28.70	30mm	4.4mm	2	SF16 range

04

Stainless steel channel


Stainless channel, rigid

Stainless steel 316L — recessed under pool coping

OR-SS-CC




SECTION — MM



INSTALLATION



FIXING-HOLE SPACING — MM



1000MM

PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
OR-SS-CC	18.60 × 20.30	1000mm	slot 4.0×10mm	2	SF16 range


Stainless mounting clip

Stainless steel 316L saddle clip



ON REQUEST



SECTION — MM



INSTALLATION




HOLE LAYOUT

PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
ON REQUEST	19.35 × 20.03	50mm	4.0mm	2	SF16 range


Stainless channel, deep-set

Stainless steel 316L, 33.26mm deep body


ON REQUEST

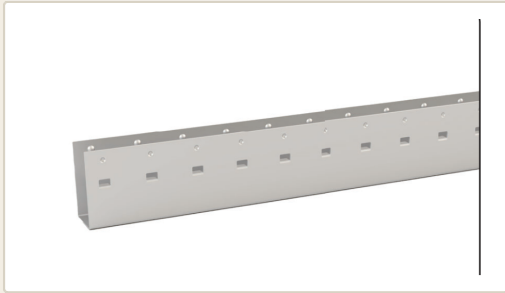

SECTION — MM




INSTALLATION



SURFACE / RECESSED

FIXING-HOLE SPACING — MM




1000MM

PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
ON REQUEST	18.45 × 33.26	1000mm	slot 4.0×10mm	2	SF16 range


Stainless channel, flexible

Stainless steel 316L segmented — recessed curved coping


OR-SS-FLX

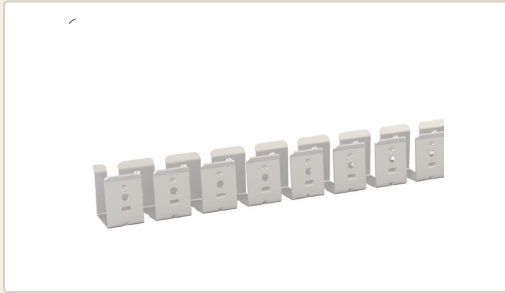

SECTION — MM




INSTALLATION



SURFACE


FIXING-HOLE SPACING — MM




1000MM

PART	W × H (MM)	LENGTH	SCREW HOLES	HOLES	SUITS
OR-SS-FLX	18.00 × 21.80	100mm	segment fix	—	SF16 range
OR-SS-FLX		300mm	segment fix	—	SF16 range
OR-SS-FLX		500mm	segment fix	—	SF16 range
OR-SS-FLX		1000mm	segment fix	—	SF16 range


05
Buried & recessed system

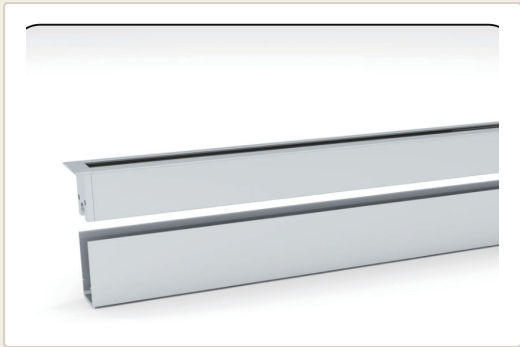


SECTION — MM

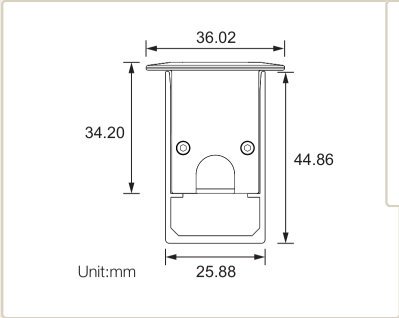

INSTALLATION

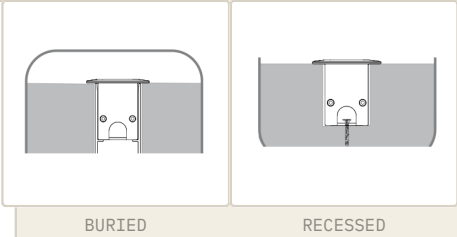

PROFILE SECTIONS — MM

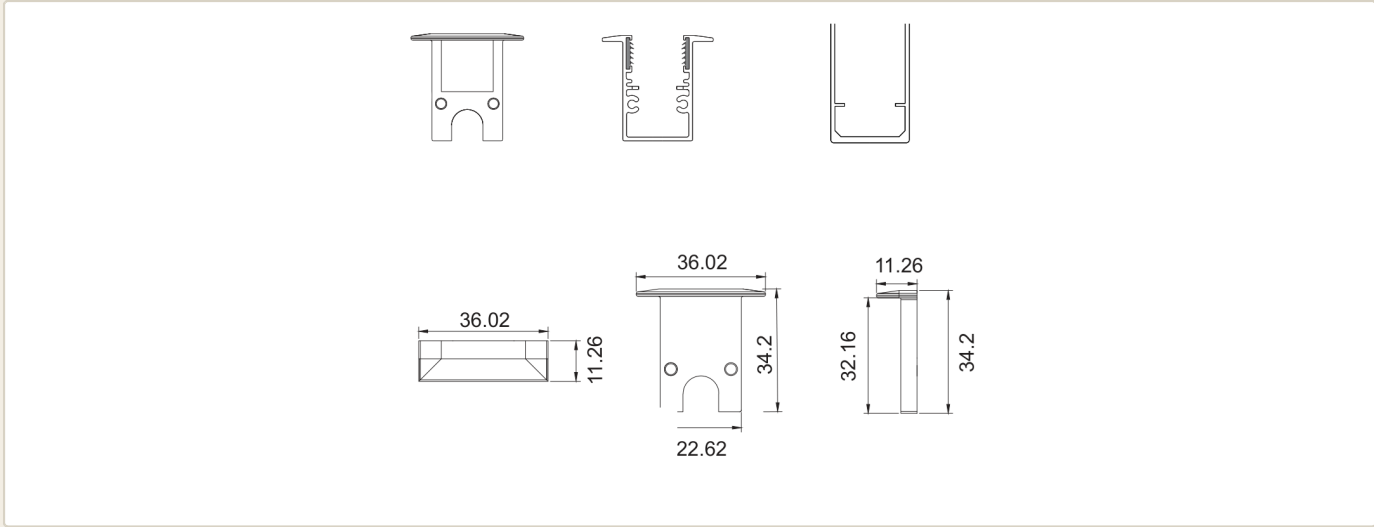

PART	W × H (MM)	INSTALLATION	LENGTHS
OR-AL-BUR	25.88 × 44.86	Buried mounted	500 / 1000 / 2000mm
ON REQUEST	36.02 × 34.20	Recessed	500 / 1000 / 2000mm
ON REQUEST	19.8 × 7.6	Connective accessory	80mm

The buried profile sits proud-of-slab in wet-pour applications; the recessed variant drops flush behind a 36mm trim. Runs join with the 80mm connective accessory. All parts suit the SF16 strip range.

HOW TO ORDER

Quote the OR- part code and length. Anything marked ON REQUEST — send us the drawing reference on this page and we'll confirm code, price and lead time.