Adaptive Beamforming for future ITS

A neural network approach to antenna beam steering for mmWave Systems

Clifford Beta
Anne Okemwa

October 13, 2017

mmWave Communication Potential

- multi-gigabit-per second communication

mmWave Communication Potential

- multi-gigabit-per second communication
- very low latency

Applications

Applications

- Autonomous driving
- Immersive gaming

Applications

- Autonomous driving
- Immersive gaming
- Virtual reality

Applications

- Autonomous driving
- Immersive gaming
- Virtual reality
- Augmented reality

Problem

- Increased vehicular mobility

Problem

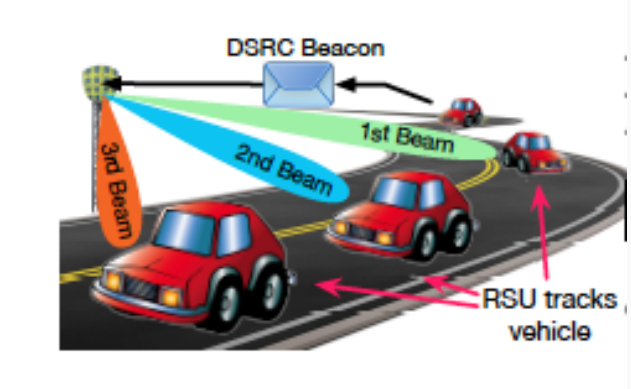

- Increased vehicular mobility
- Need for constant beam realignment.

Model

Neural Network

Neural networks have been proven to have the ability to compute any function, even

```
{Sequence prediction problems}
```

at which *LSTMs* shine ...

tanh Neuron

$\sigma(z) \equiv \tanh(z)$

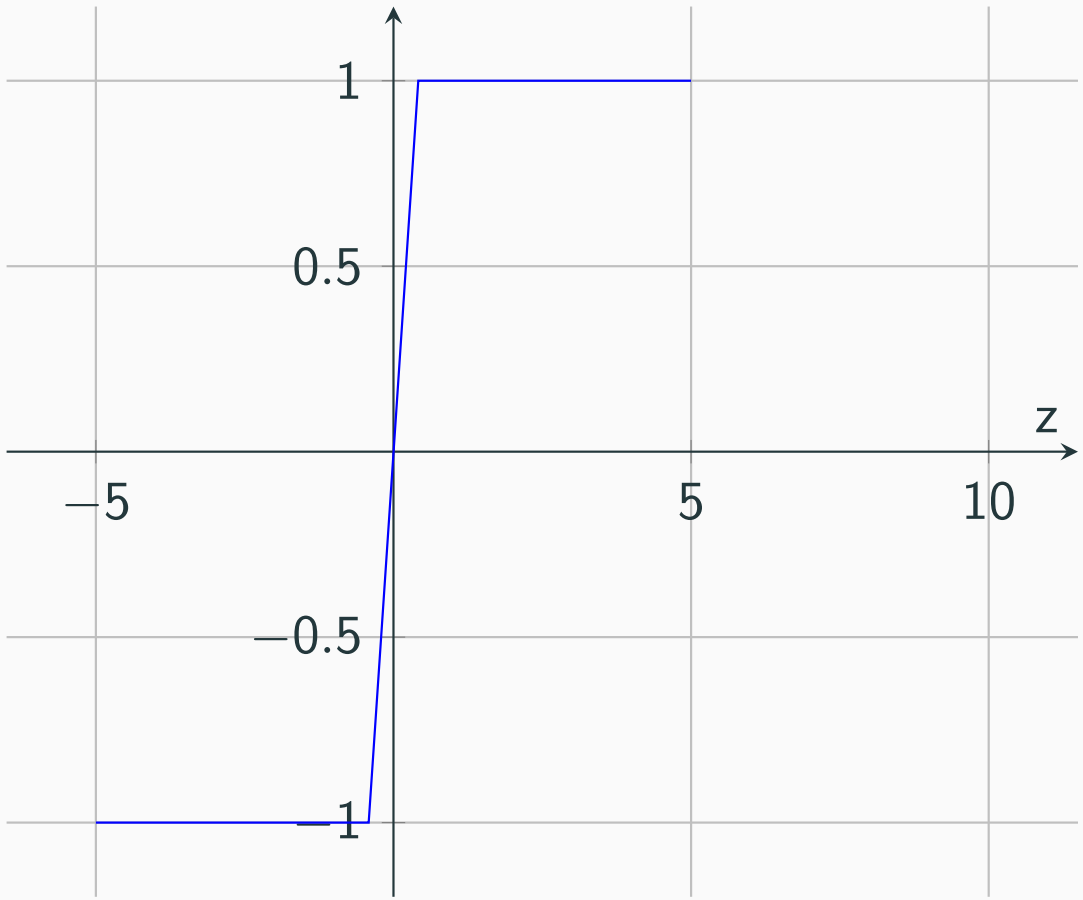

ReLU Neuron

$$\sigma(z) \equiv max(0, z)$$

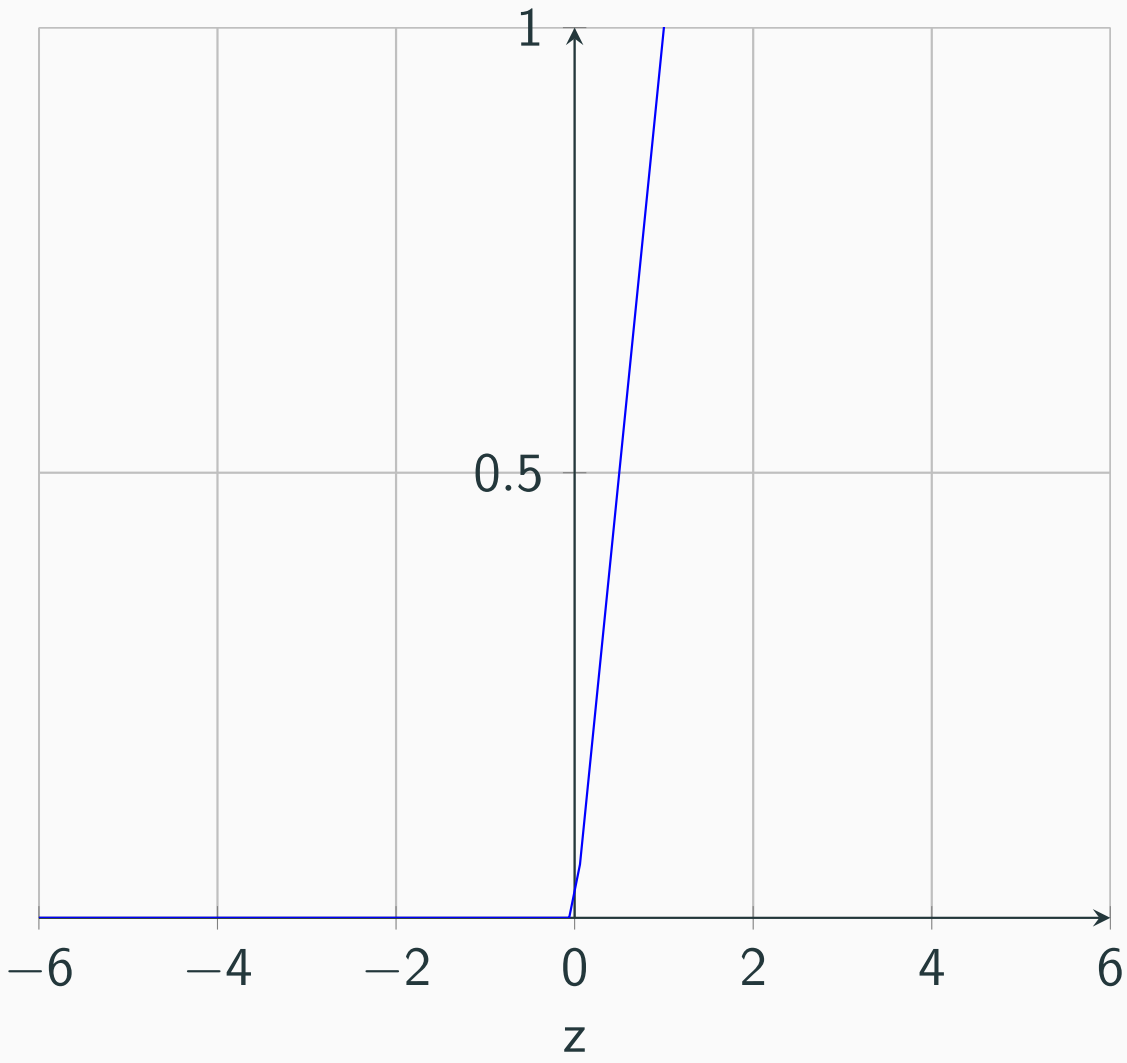

Sigmoid Neuron

$$\sigma(z) \equiv \frac{1}{1+e^{-z}}$$

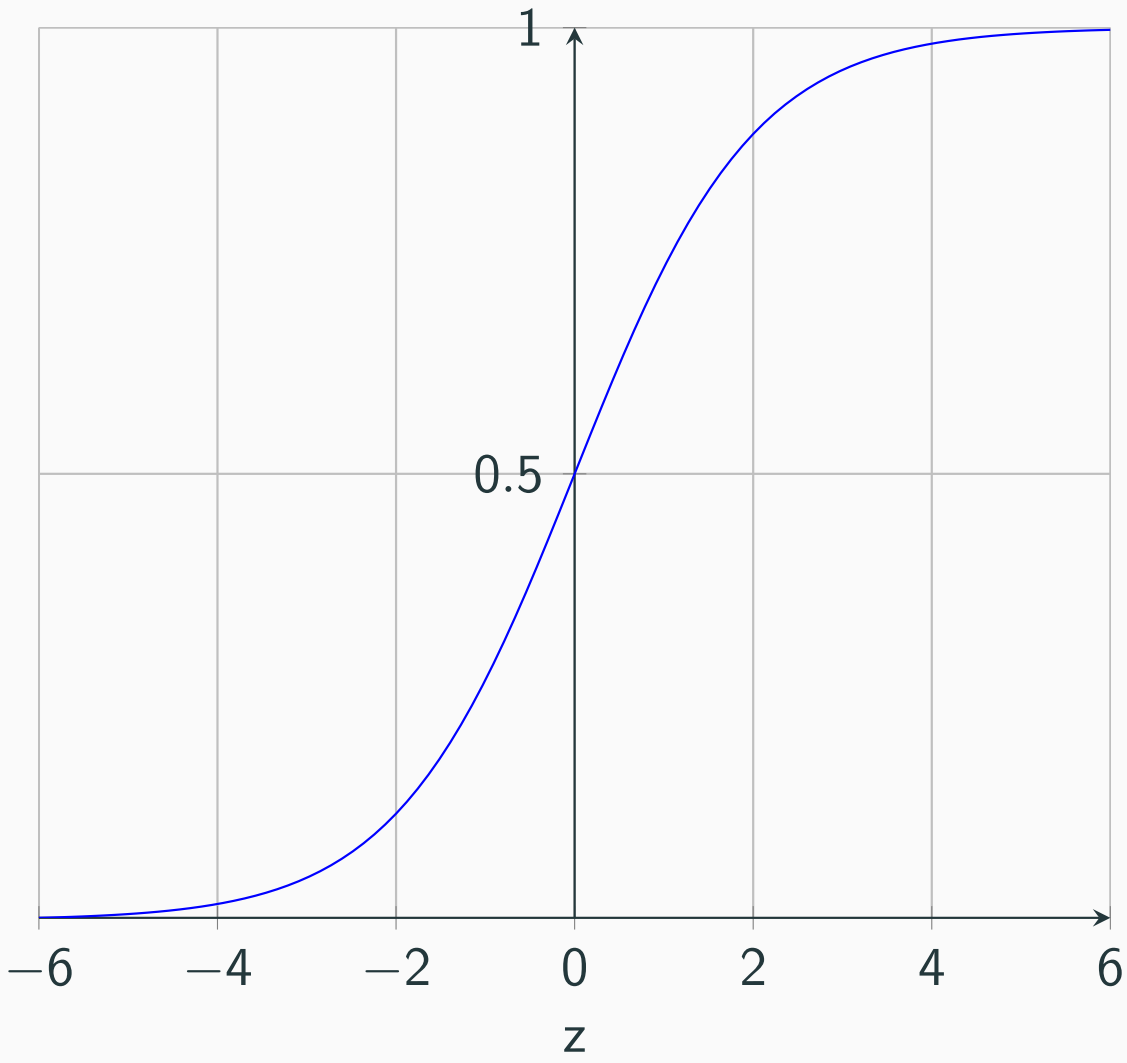

LSTM

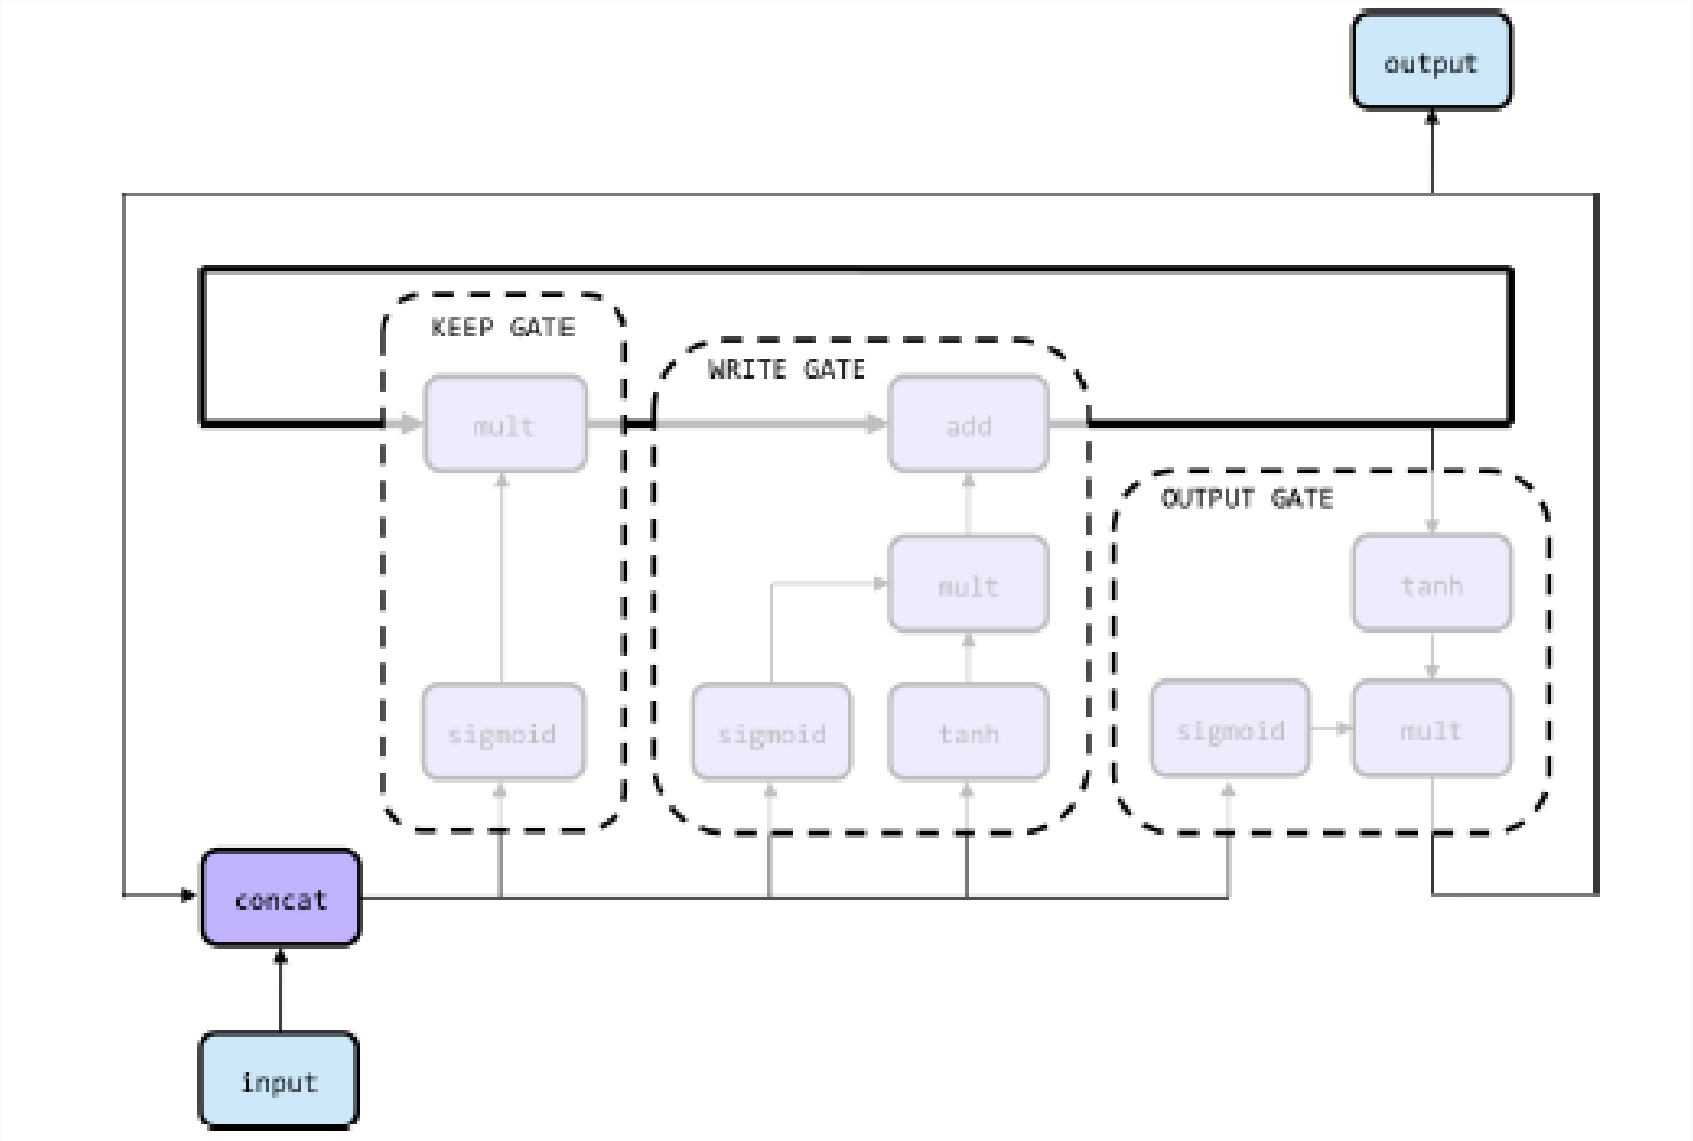
output
KEEP GATE
WRITE GATE
OUTPUT GATE
mult
add
mult
tanh
sigmoid
sigmoid
tanh
sigmoid
mult
concat
input

Neural Network

- Feed forward Neural Networks

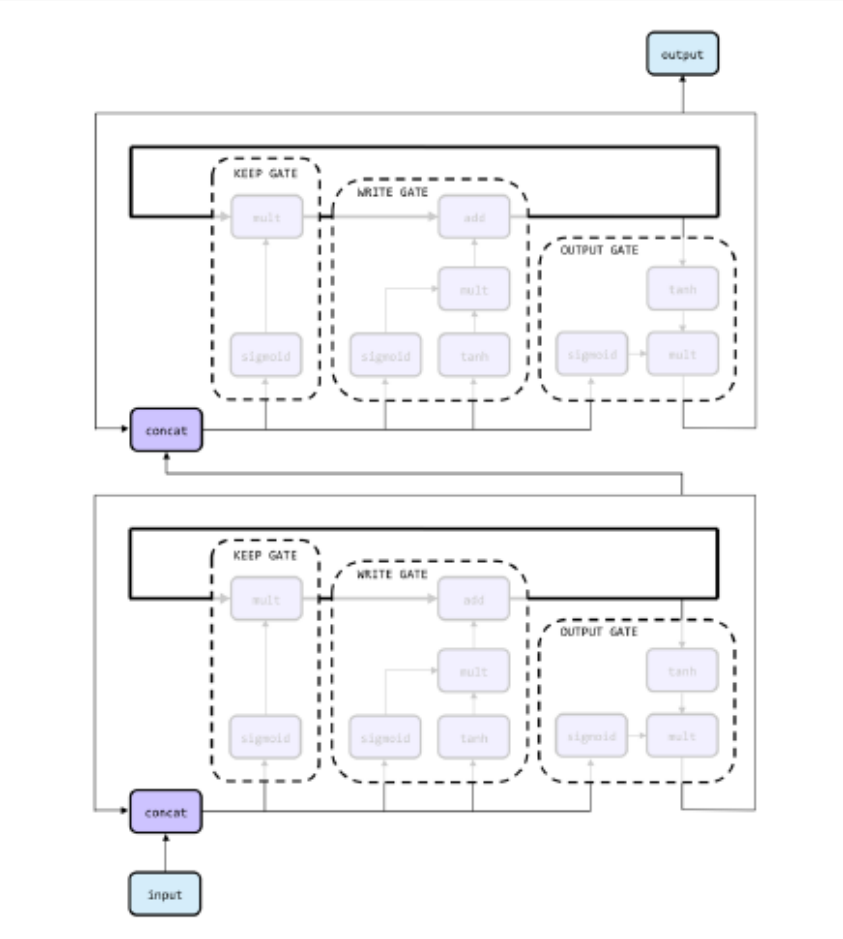

Neural Network

- Feed forward Neural Networks
- Recurrent Neural Networks

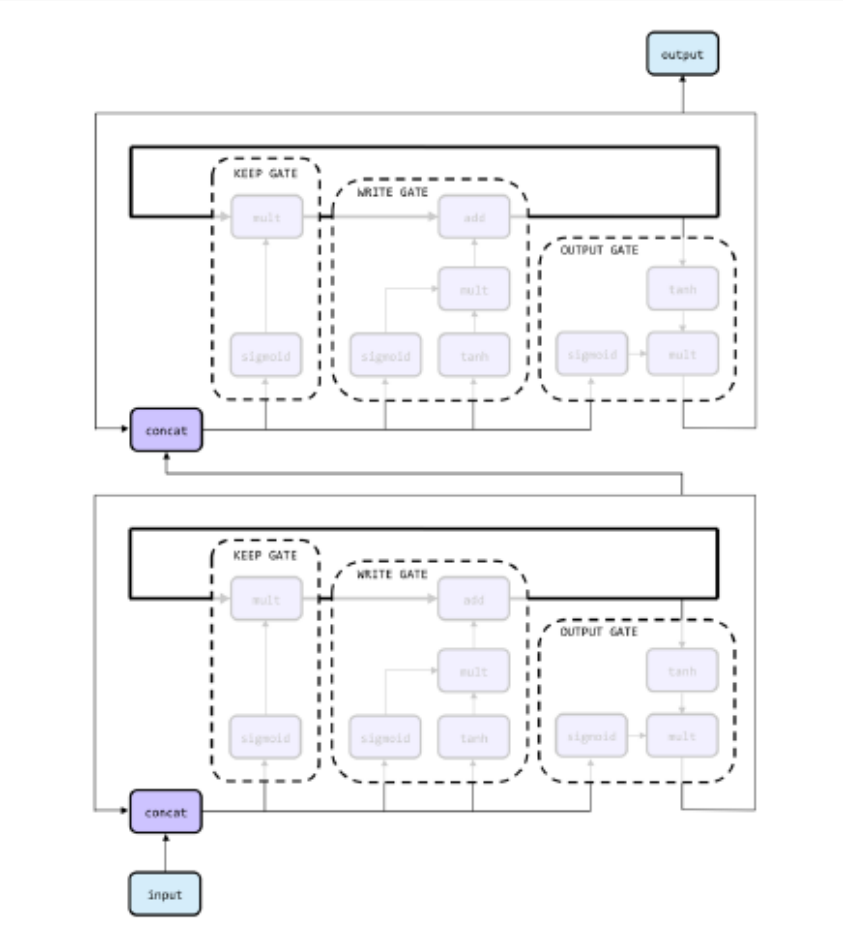

Neural Network

- Feed forward Neural Networks
- Recurrent Neural Networks
  - Long short term memory RNN (LSTM)

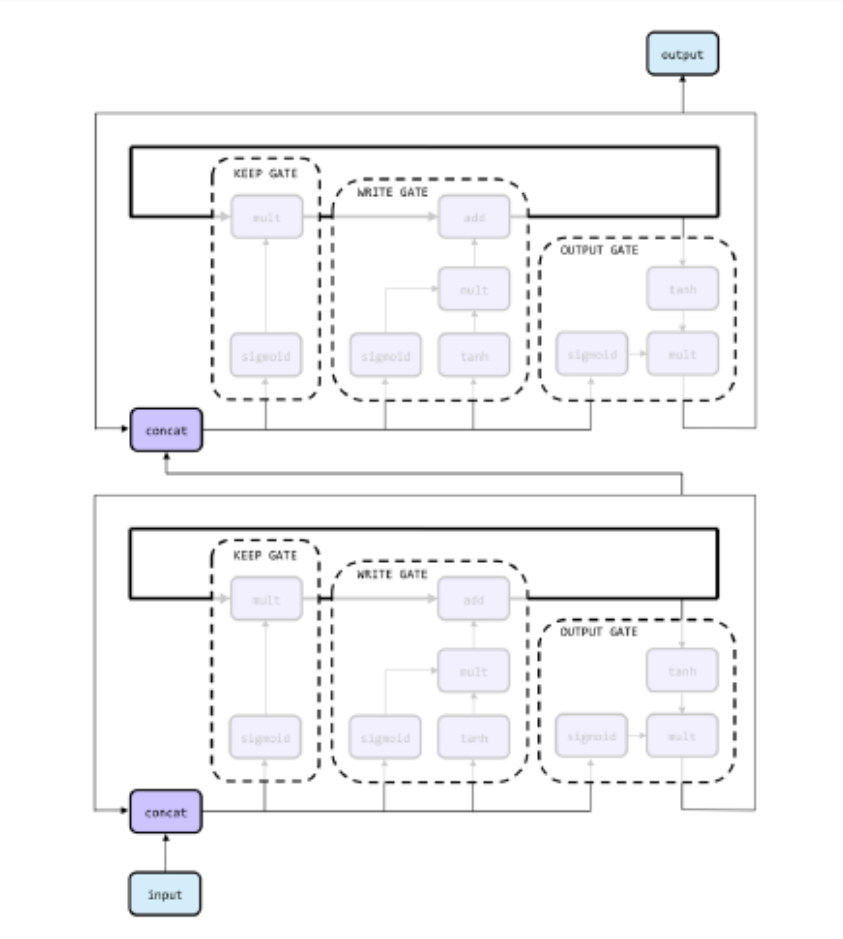

Beam-forming

- Least Mean Squares (LMS)
- Sample Matrix Inversion (SMI)
- Recursive Least Squares (RLS)
- Conjugate Gradient Method (CGM)

Algorithm

Require: Vehicles encapsulate position, motion and velocity in beacons
Ensure: Serving node has not changed after every update interval.
  if New beacon received **then**
  Find Closest node
    if *Receivedposition* $\neq$ *Predictedposition* **then**
  Beamforming: Align beam based on received position
    else
  Predict current position of vehicle
  Beamforming: Align beam based on predicted position
    end if
  end if

Merits

Higher SNR

Interference avoidance and rejection

Higher network efficiency

Questions?