

- Faculté : Faculté des sciences et de technologie


✓ TD N°6 –Réseau I

Nom & Prénom : COFFY Cliford


Niveau : L3

Date : 05/12/2025


1. A) Ici je reproduit une topologie apres pour faire configurer les services DHCP afin d'attribuer automatiquement les adresses IP aux dispositif du reseau.

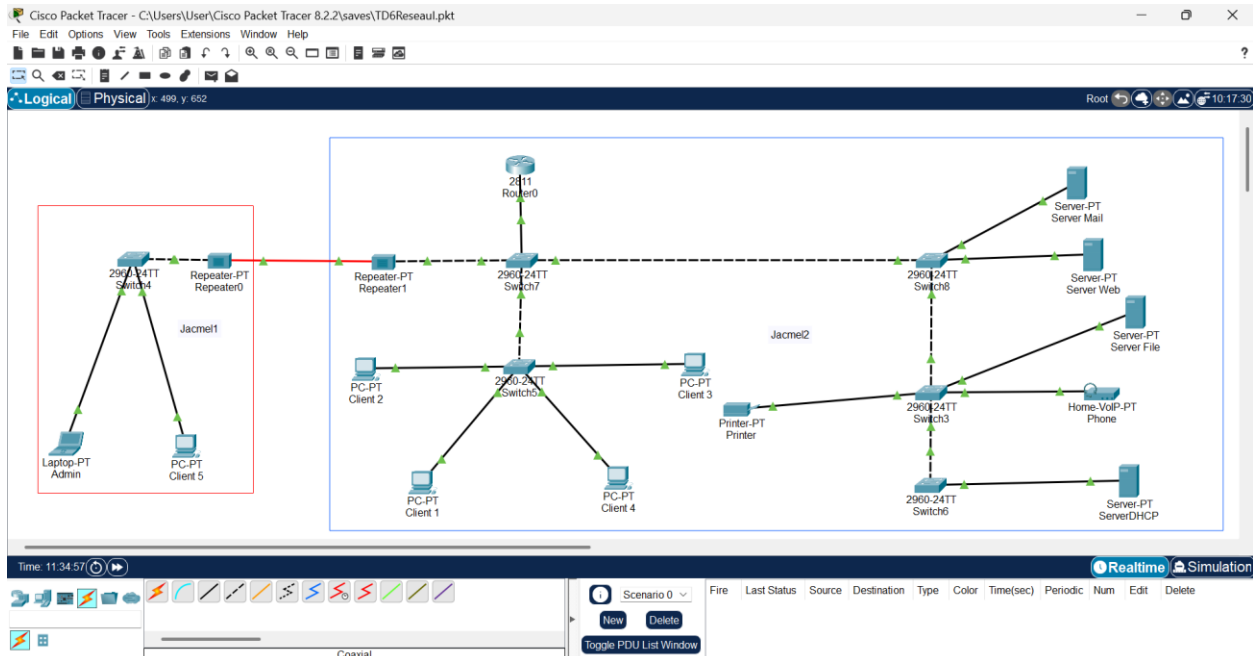


Ici je fais la configuration du routeur

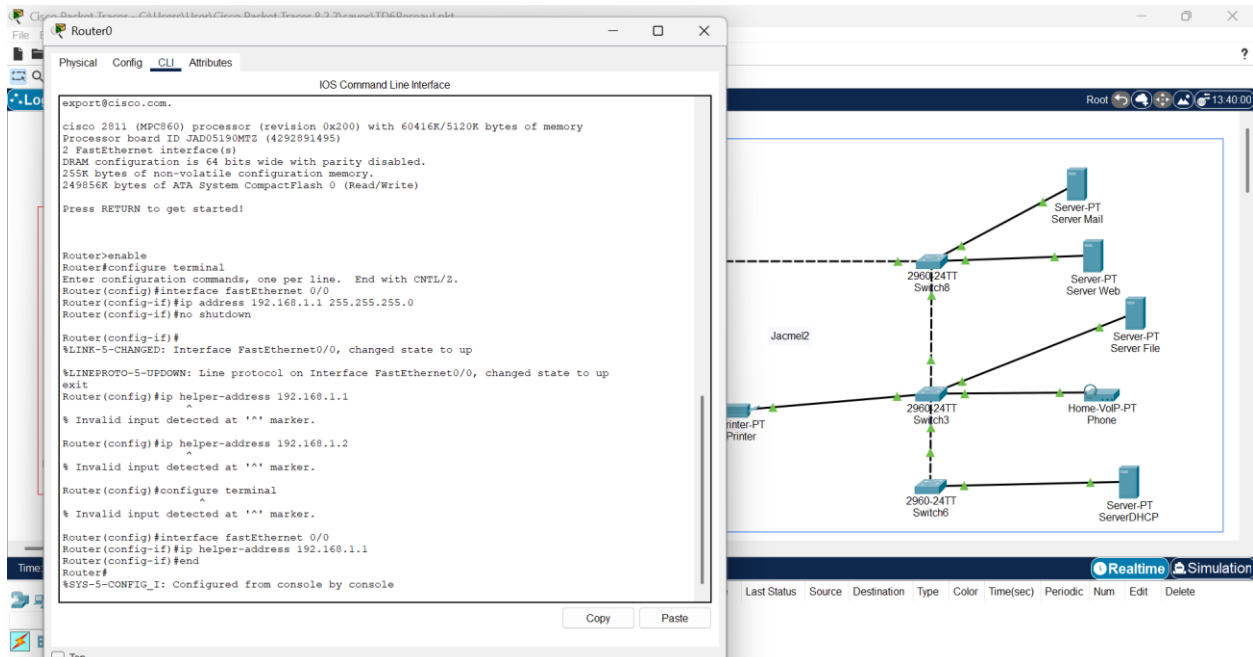

Après je configure le serveur DHCP suivant les normes.

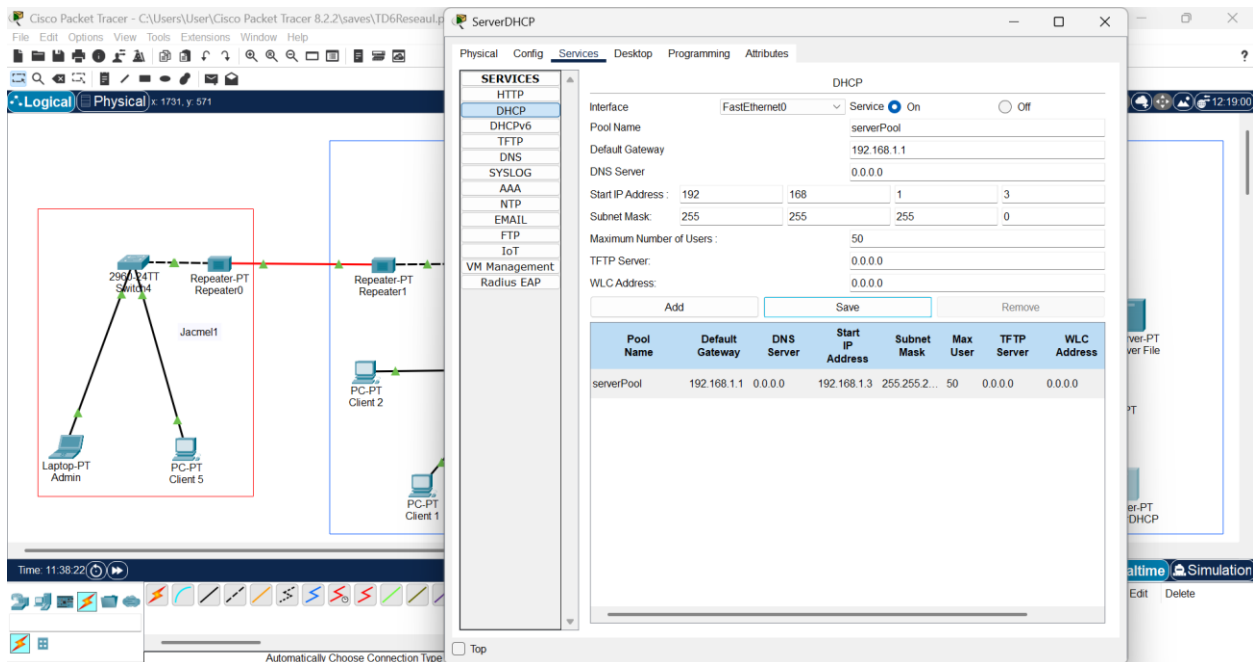

Ici on peut donc voir que après la configuration du serveur DHCP ça attribue aux hôtes des adresses IP automatiquement.

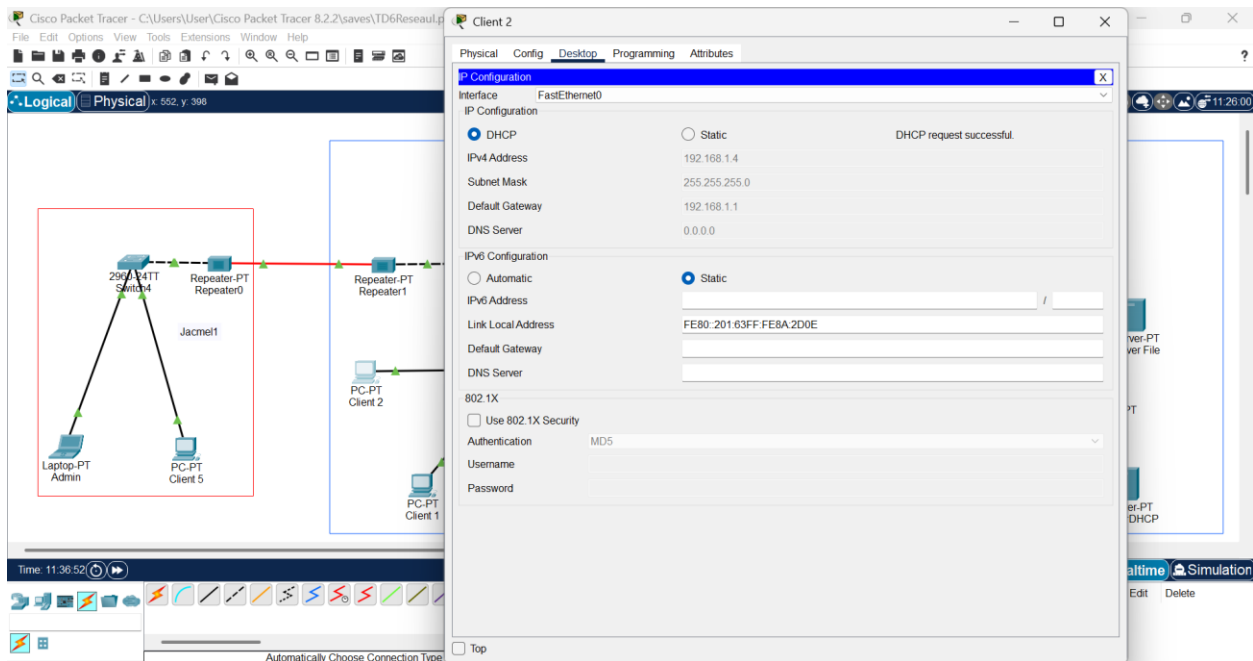

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x 1000, y 303

Time: 11:39:19

Automatically Choose Connection Type

Client 3

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.5

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address

Link Local Address FE80::2E0:B0FF:FE80:405C

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x 637, y 564

Time: 11:39:52

Automatically Choose Connection Type

Client 1

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.6

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address

Link Local Address FE80::260:2FFF:FEDD:7BD6

Default Gateway

DNS Server

802.1X



☐ Use 802.1X Security


Authentication MD5

Username


Password



☐ Top

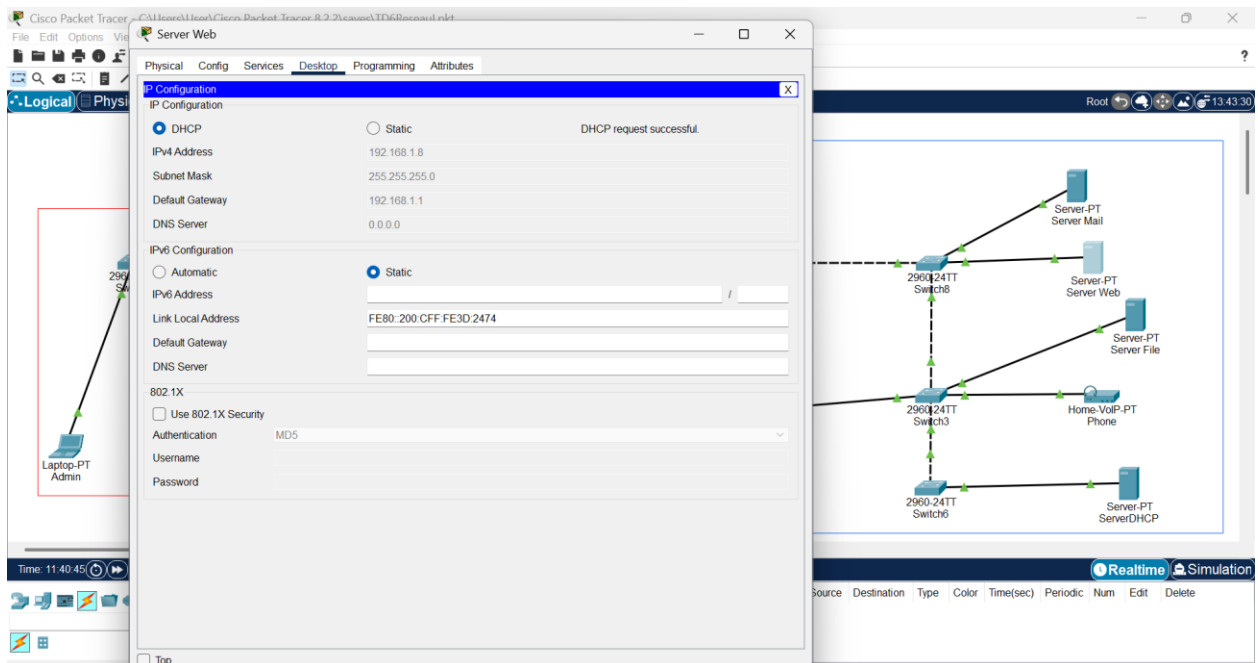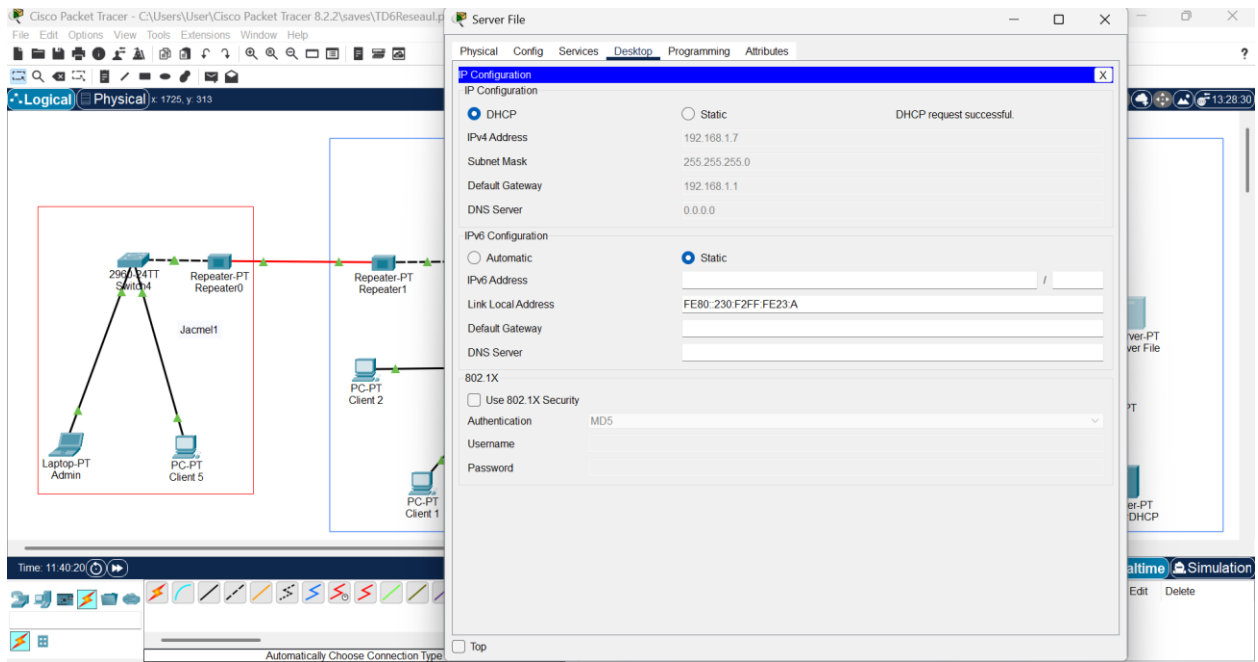


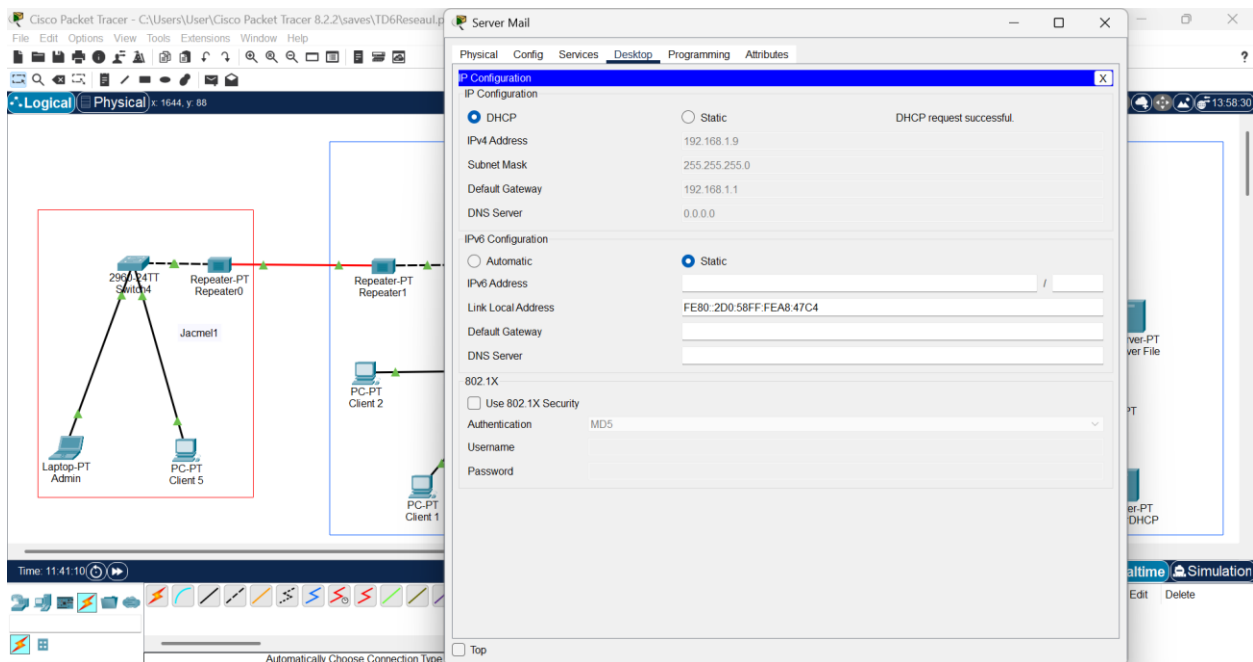


Ici on peu donc voir que les Dispositifs des réseaux sont en communications.

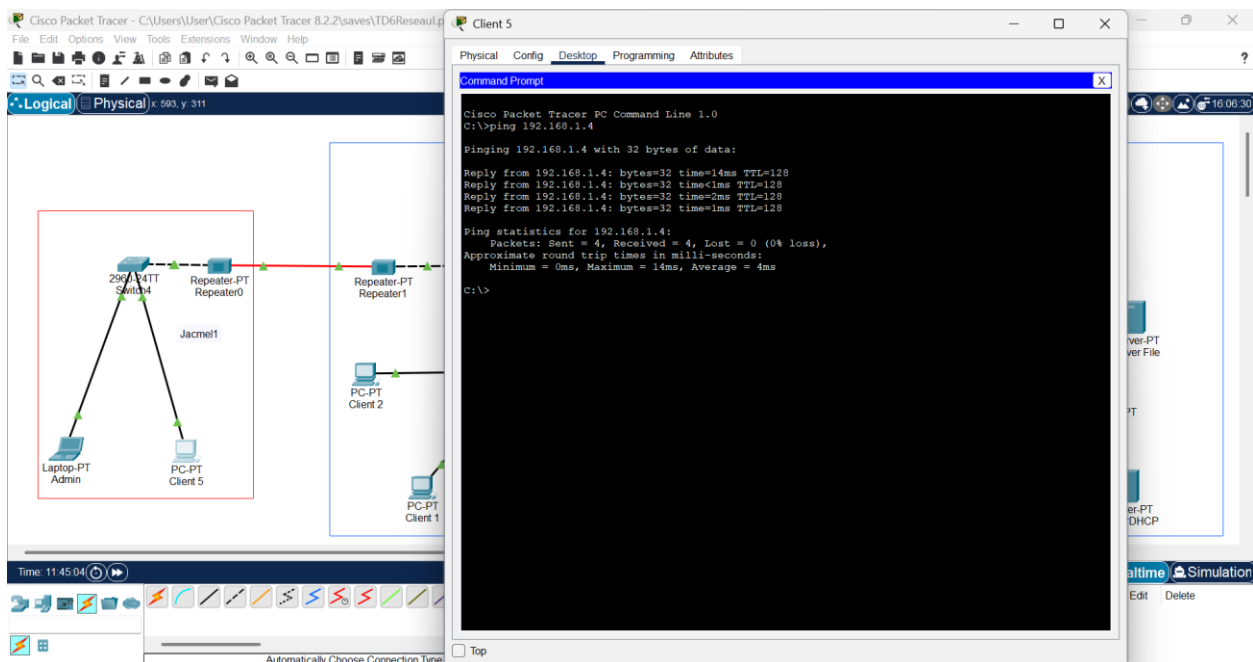

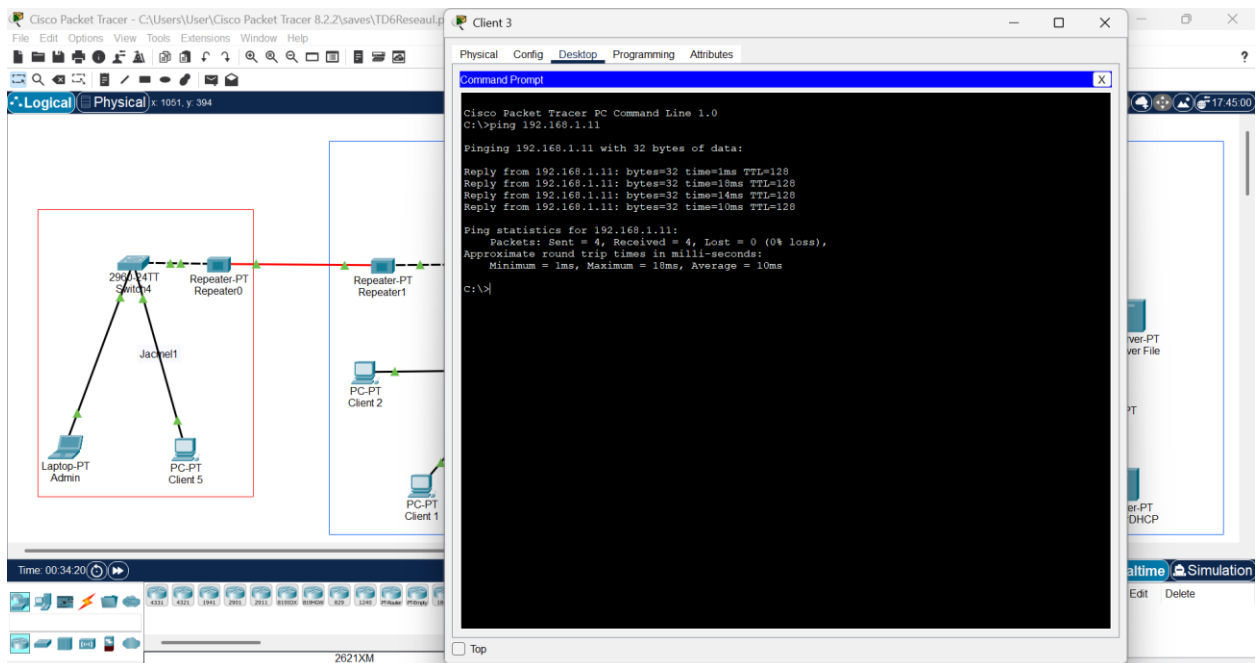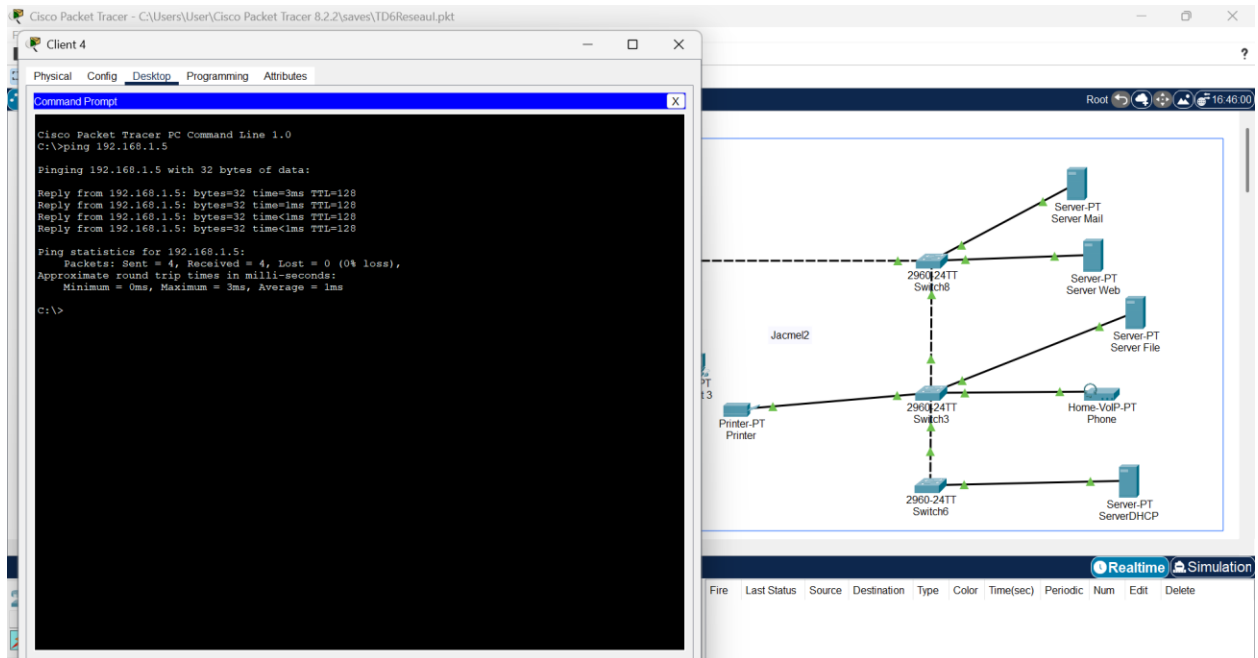


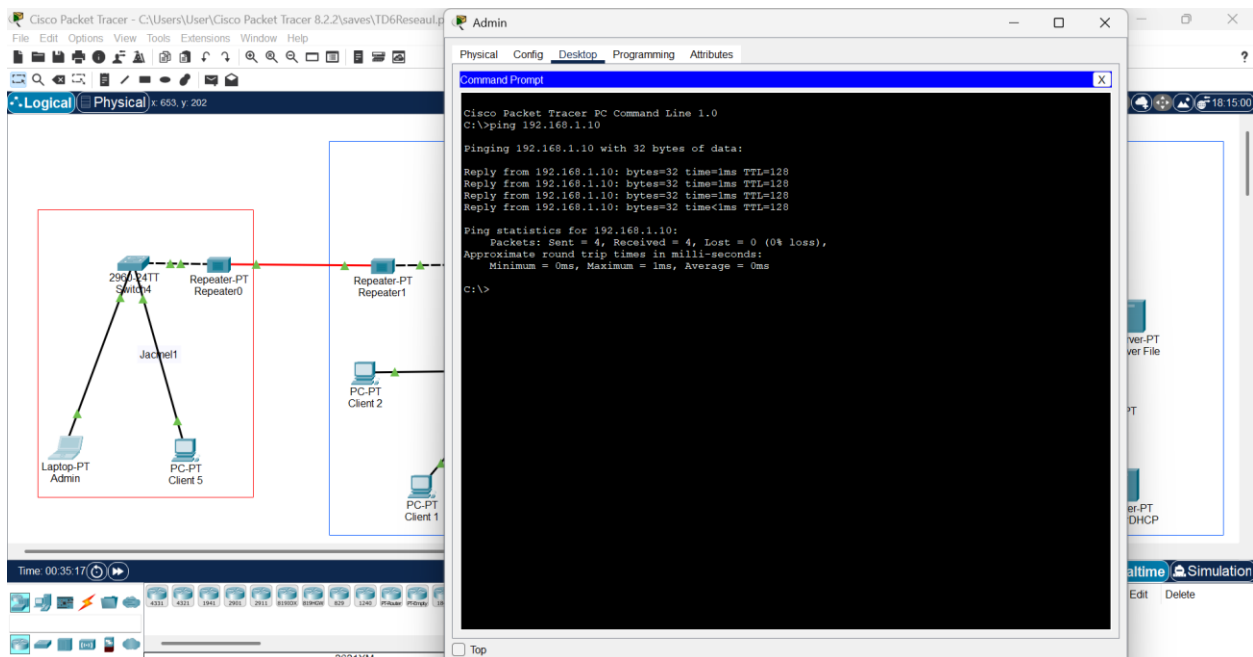


1. B) Ici je reproduit une topologie apres pour faire configurer les services DHCPv6 afin d'attribuer automatiquement les adresses IP aux dispositif du reseau.

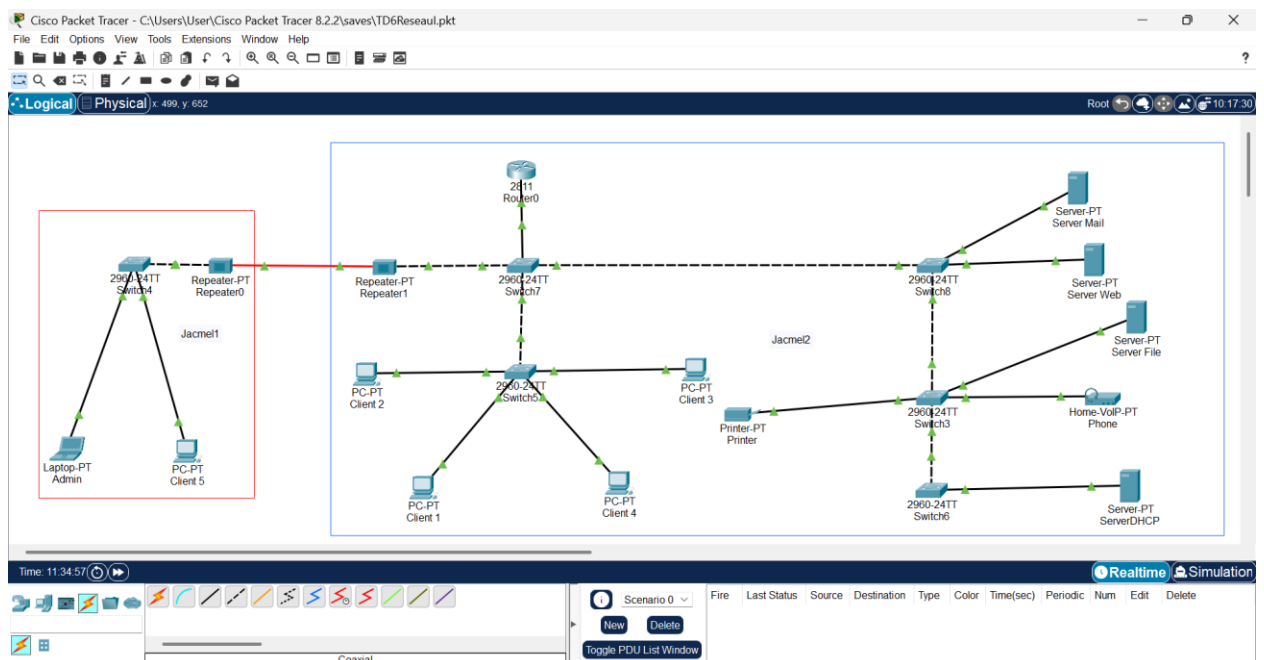

Après je configure le serveur DHCPv6 suivant les normes.

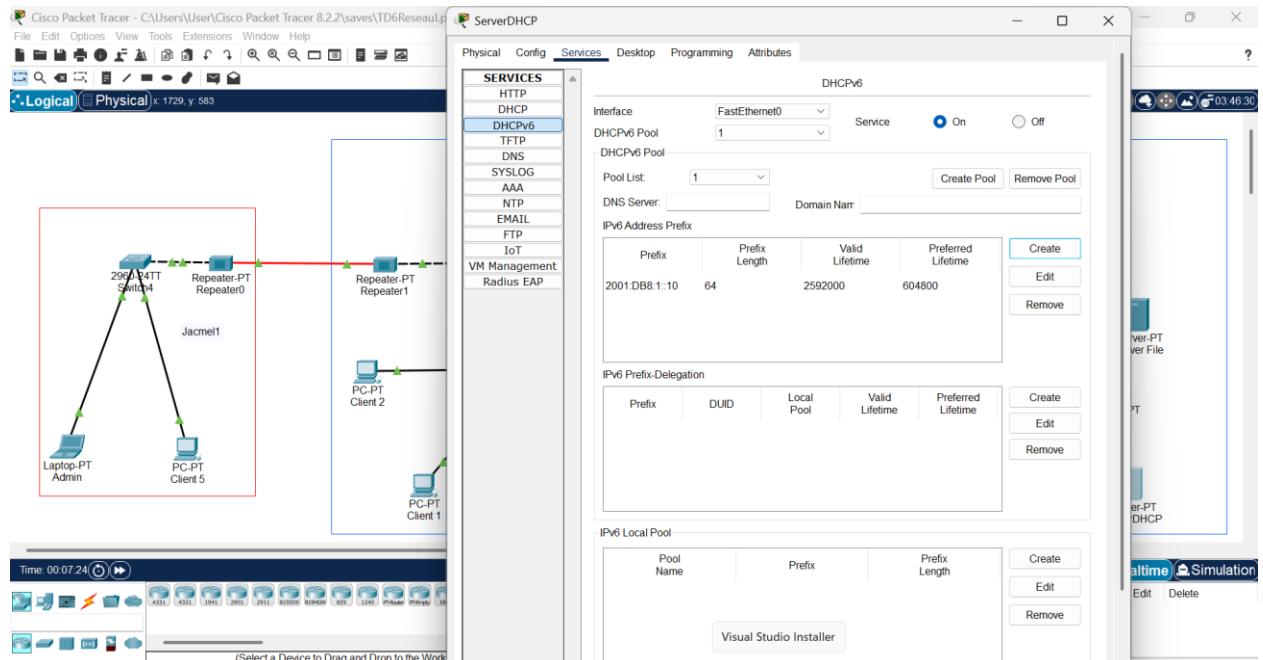

Ici je fais la configuration du Router en attribuant des address IPv6

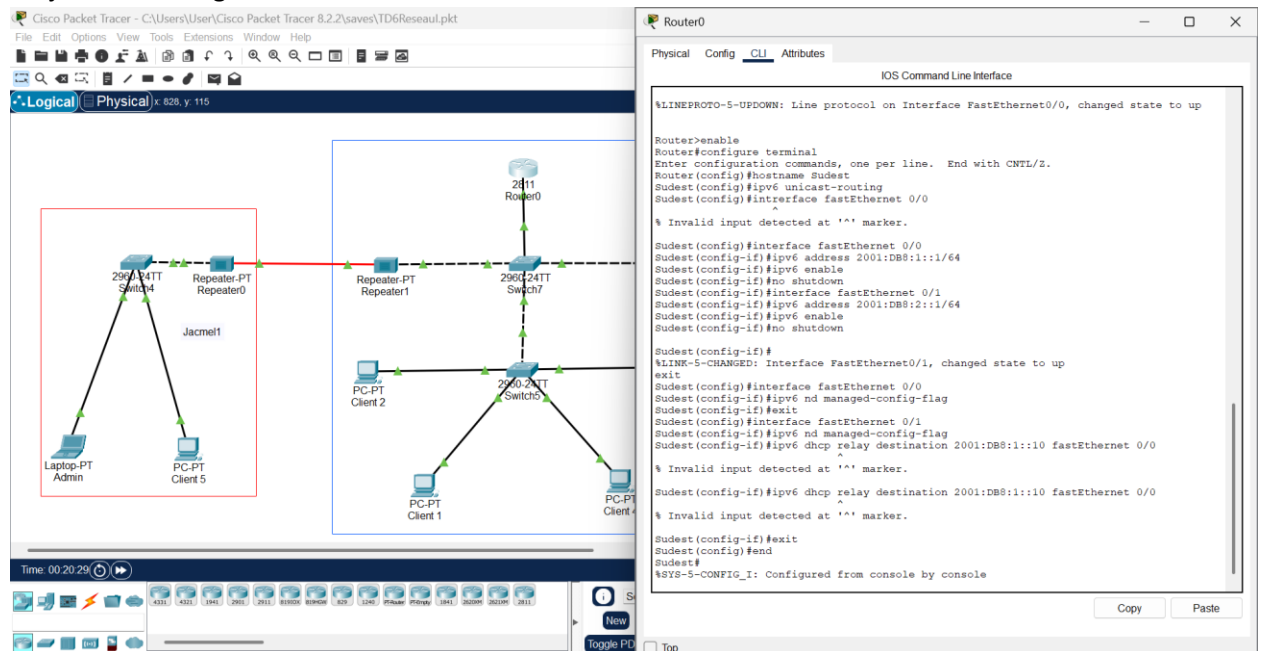

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x 424, y 419

2900-24TT Switch4 Repeater-PT Repeater0 Jacknet1 Laptop-PT Admin PC-PT Client 5

2900-24TT Switch7 Repeater-PT Repeater1 PC-PT Client 2 2900-24TT Switch5 PC-PT Client 1 PC-PT Client 4

Time: 00:30:00

819HG-4G-IOX

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
Sudest(config)#interface fastEthernet 0/0
Sudest(config-if)#ipv6 address 2001:DB8:1::1/64
Sudest(config-if)#ipv6 enable
Sudest(config-if)#no shutdown
Sudest(config-if)#interface fastEthernet 0/1
Sudest(config-if)#ipv6 address 2001:DB8:2::1/64
Sudest(config-if)#ipv6 enable
Sudest(config-if)#no shutdown

Sudest(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
^
Sudest(config)#interface fastEthernet 0/0
Sudest(config-if)#ipv6 nd managed-config-flag
Sudest(config-if)#exit
Sudest(config)#interface fastEthernet 0/1
Sudest(config-if)#ipv6 nd managed-config-flag
Sudest(config-if)#ipv6 dhcp relay destination 2001:DB8:1::10 fastEthernet 0/0
^
% Invalid input detected at '^' marker.
Sudest(config-if)#ipv6 dhcp relay destination 2001:DB8:1::10 fastEthernet 0/0
^
% Invalid input detected at '^' marker.
Sudest(config-if)#exit
Sudest(config)#end
Sudest#
%SYS-5-CONFIG_I: Configured from console by console

Sudest#config t
Enter configuration commands, one per line. End with CNTL/Z.
Sudest(config)#interface fastEthernet 0/0
Sudest(config-if)#ipv6 nd managed-config-flag
Sudest(config-if)#ipv6 dhcp relay destination 2001:DB8:1::10 fastEthernet 0/1
^
% Invalid input detected at '^' marker.
Sudest(config-if)#end
Sudest#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

Toggle PT

Ici on peut donc voir que les adresses IPv6 apparaissent automatiquement

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x 630, y 553

2900-24TT Switch4 Repeater-PT Repeater0 Jacknet1 Laptop-PT Admin PC-PT Client 5

PC-PT Client 2

PC-PT Client 1

Time: 00:30:58

CGR1240

Client 1

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.4

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static IPv6 request successful.

IPv6 Address 2001:DB8:1:0:D297:B663:A8C1:9A3F / 64

Link Local Address FE80:2602:FFFF:FEDD:7BD6

Default Gateway FE80:2D0:58FF:FE93:CC01

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x 412, y 569

Time: 00:31:21

Client 4

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.5

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static IPv6 request successful.

IPv6 Address 2001:DB8:1:0:565C:2D85:161:171 / 64

Link Local Address FE80::240:BFF:FE9C:7C01

Default Gateway FE80::2D0:58FF:FE93:CC01

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x 656, y 227

Time: 00:31:45

Client 2

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.9

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static IPv6 request successful.

IPv6 Address 2001:DB8:1:0:B181:87BA:6B96:6B96 / 64

Link Local Address FE80::201:63FF:FE8A:2D0E

Default Gateway FE80::2D0:58FF:FE93:CC01

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x: 690, y: 232

Time: 00:32:08

Client 3

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.10

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static IPv6 request successful.

IPv6 Address 2001:DB8:1:0:BC5E:8298:74F6:6674 / 64

Link Local Address FE80::2E0:B0FF:FE80:405C

Default Gateway FE80::2D0:58FF:FE93:CC01

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x: 447, y: 538

Time: 00:32:36

Client 5

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.11

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static IPv6 request successful.

IPv6 Address 2001:DB8:1:0:7EB:C082:B2F0:A47E / 64

Link Local Address FE80::260:70FF:FE82:9C82

Default Gateway FE80::2D0:58FF:FE93:CC01

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseaul.p

File Edit Options View Tools Extensions Window Help

Logical Physical x: 642, y: 181

2950 VTT Switch4

Repeater-PT Repeater0

Repeater-PT Repeater1

Laptop-PT Admin

PC-PT Client 5

PC-PT Client 2

PC-PT Client 1

Router-PT-Empty

Time: 00:32:57

Admin

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.12

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static ipv6 request successful.

IPv6 Address 2001:DB8:1:0:25DE:EE76:D0E3:C251 / 64

Link Local Address FE80::202:17FF:FE0B:597B

Default Gateway FE80::2D0:58FF:FE93:CC01

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x: 1643, y: 96

Time: 00:26:09

(Select a Device to Drag and Drop to the Work

Server Mail

Physical Config Services Desktop Programming Attributes

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.7

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static IPv6 request successful.

IPv6 Address 2001:DB8:1:0:CF31:4080:245C:16D9 / 64

Link Local Address FE80::2D0:58FF:FEA8:47C4

Default Gateway FE80::2D0:58FF:FE93:CC01

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x: 1666, y: 220

Time: 00:26:44

819HG-4G-JOX

Server Web

Physical Config Services Desktop Programming Attributes

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.8

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static IPv6 request successful.

IPv6 Address 2001:DB8:1:0:1747:EE71:D0EF:C25D / 64

Link Local Address FE80::200:CFF:FE3D:2474

Default Gateway FE80::2D0:58FF:FE93:CC01

DNS Server

802.1X


☐ Use 802.1X Security

Authentication MD5


Username

Password


☐ Top

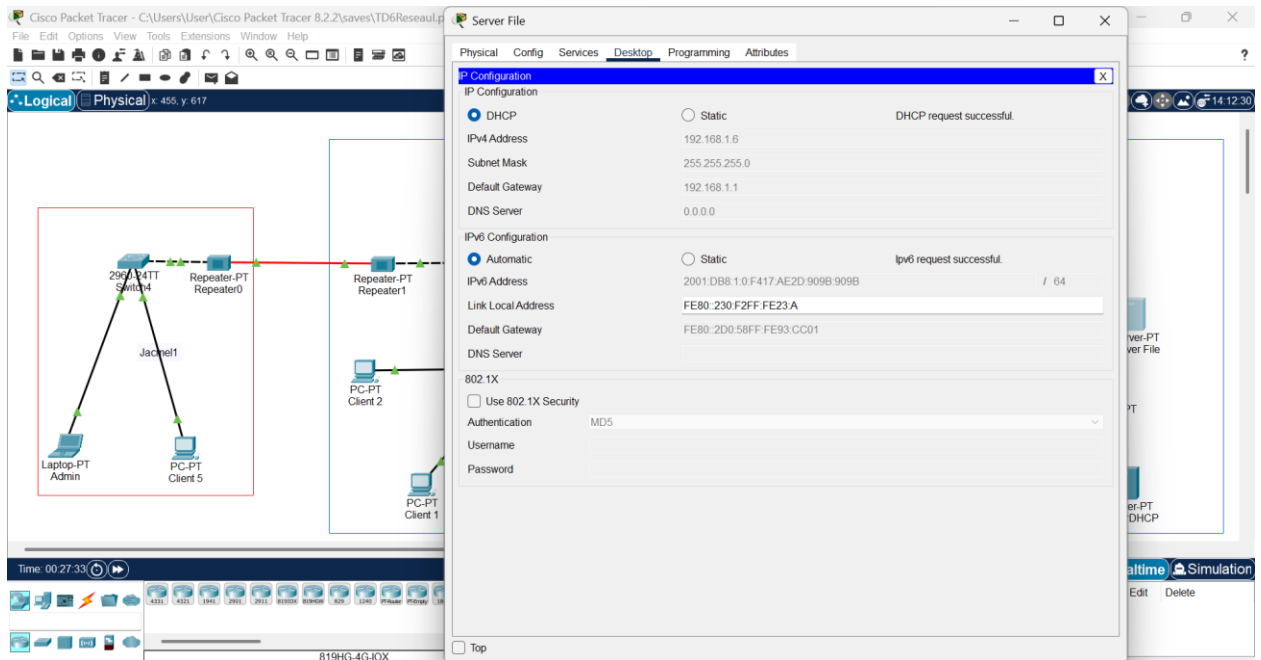


Ici on regarde si les dispositifs sont en communication dans les réseaux bien évidemment ils sont en communications

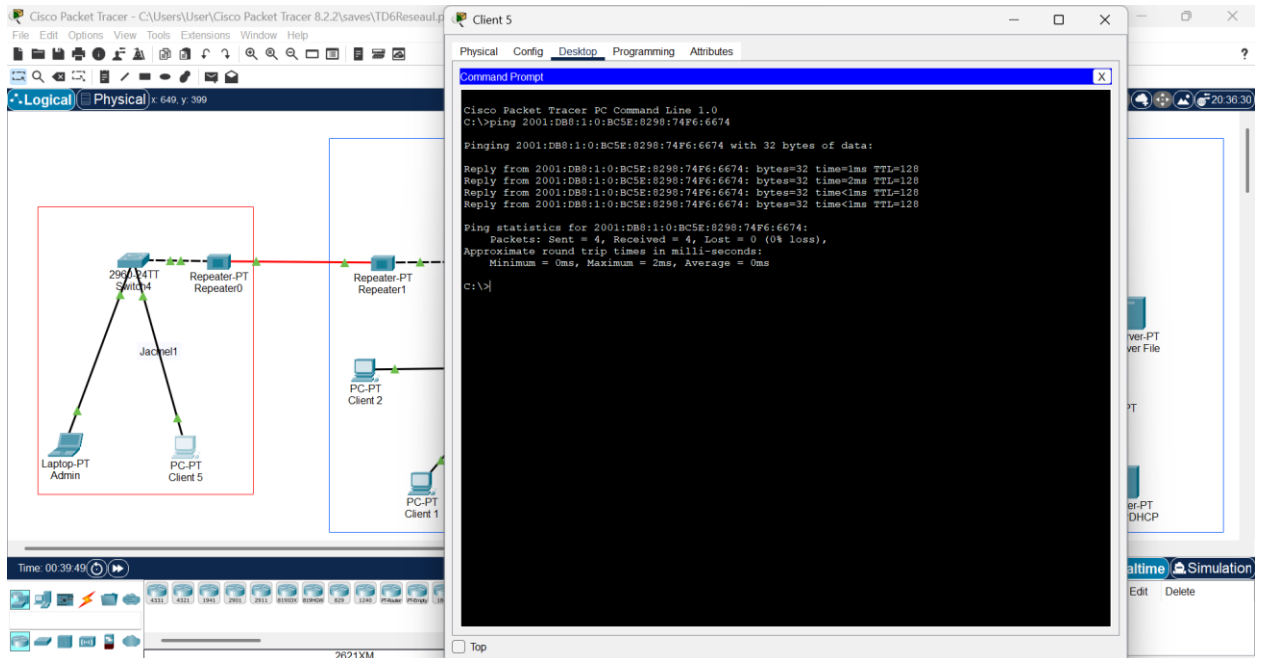

Ici je fais la configuration du router en l'utilisant comme serveur DHCP.

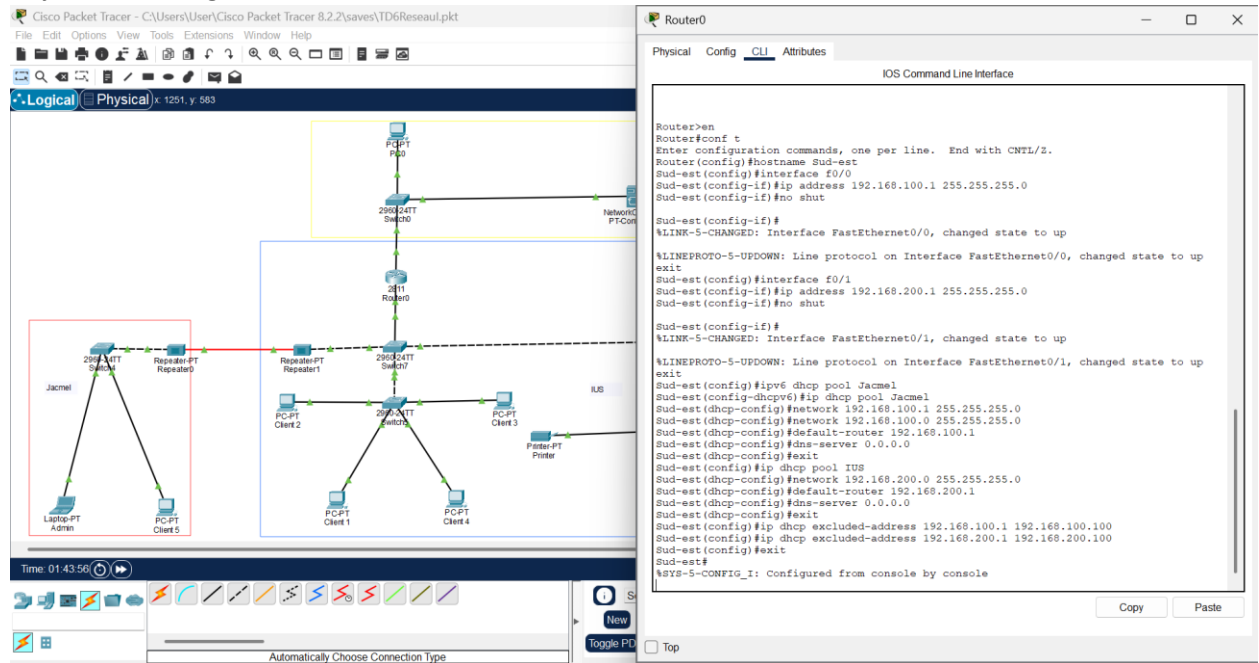

On peut voir que ça apparait automatiquement en vérifiant pour les dispositifs.

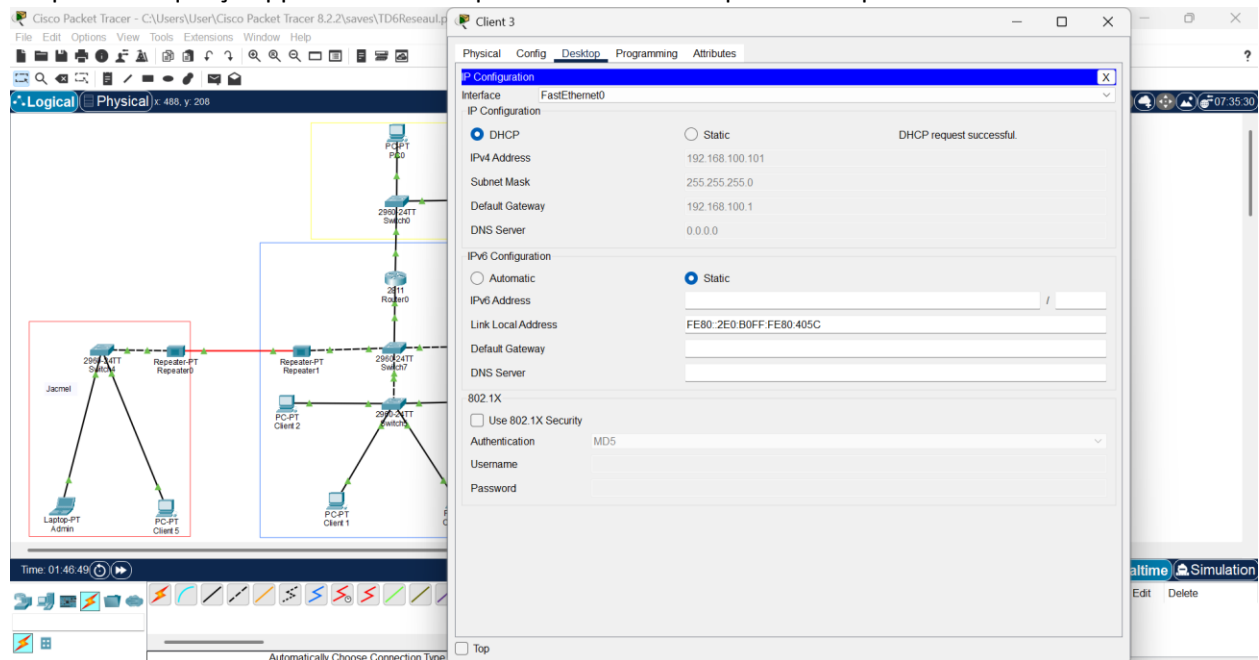

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x 728, y: 855

Time: 01:48:48

Automatically Choose Connection Type

Client 5

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful

IPv4 Address 192.168.100.110

Subnet Mask 255.255.255.0

Default Gateway 192.168.100.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address

Link Local Address FE80:260:70FF:FE82:9C82

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

alttime Simulation Edit Delete

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x 453, y: 181

Time: 01:47:54

Automatically Choose Connection Type

Client 2

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful

IPv4 Address 192.168.100.106

Subnet Mask 255.255.255.0

Default Gateway 192.168.100.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static IPv6 request successful

IPv6 Address

Link Local Address FE80:201:63FF:FE8A:2D0E

Default Gateway

DNS Server

802.1X


☐ Use 802.1X Security

Authentication MD5


Username

Password



alttime Simulation Edit Delete

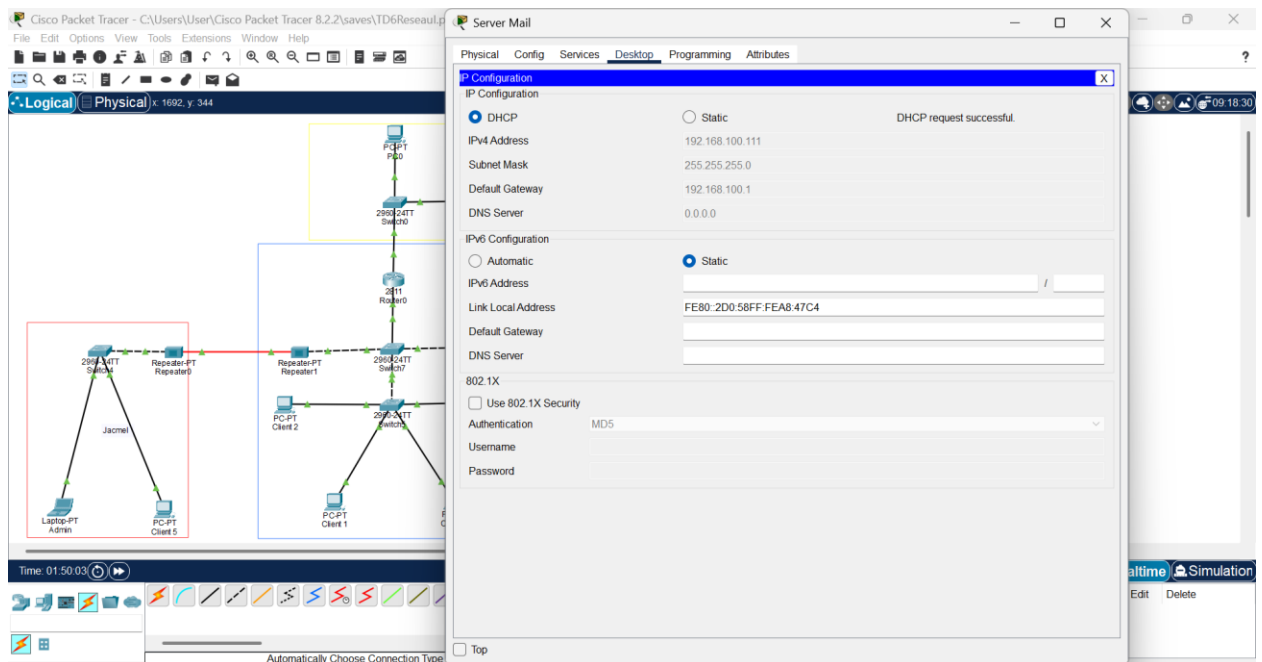


Et ici on peut voir que l'autre plage d'adresse a un autre address IP

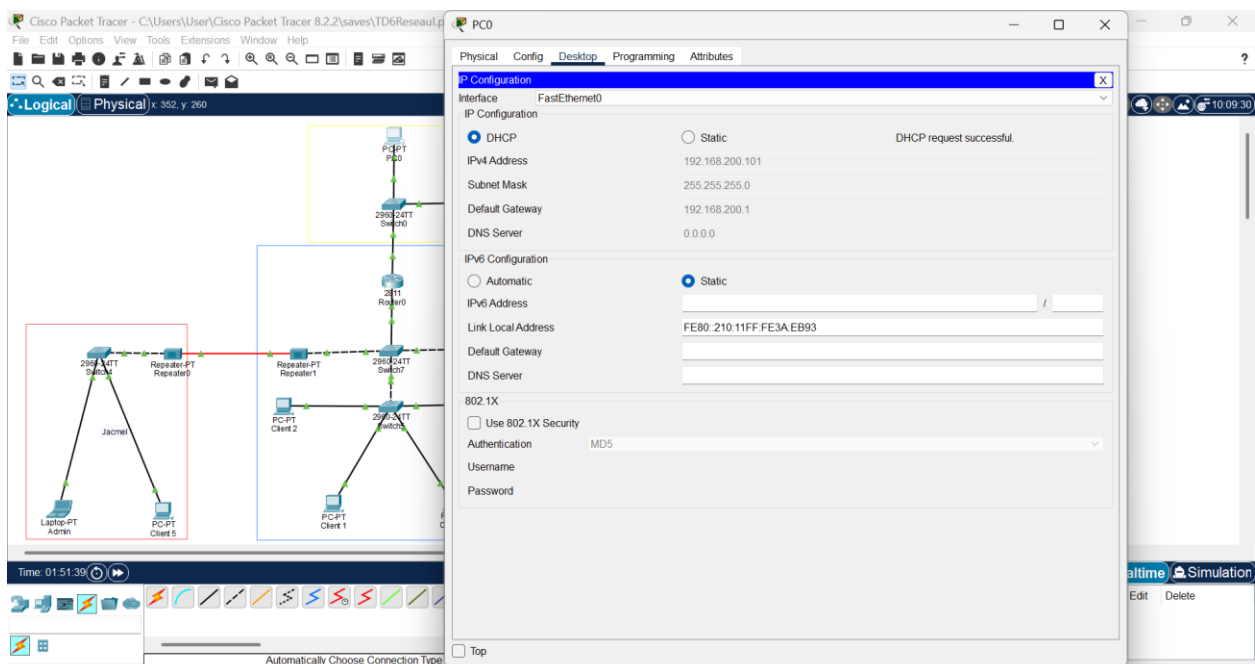

C'est bien vérifier les hôtes des réseaux sont en communication

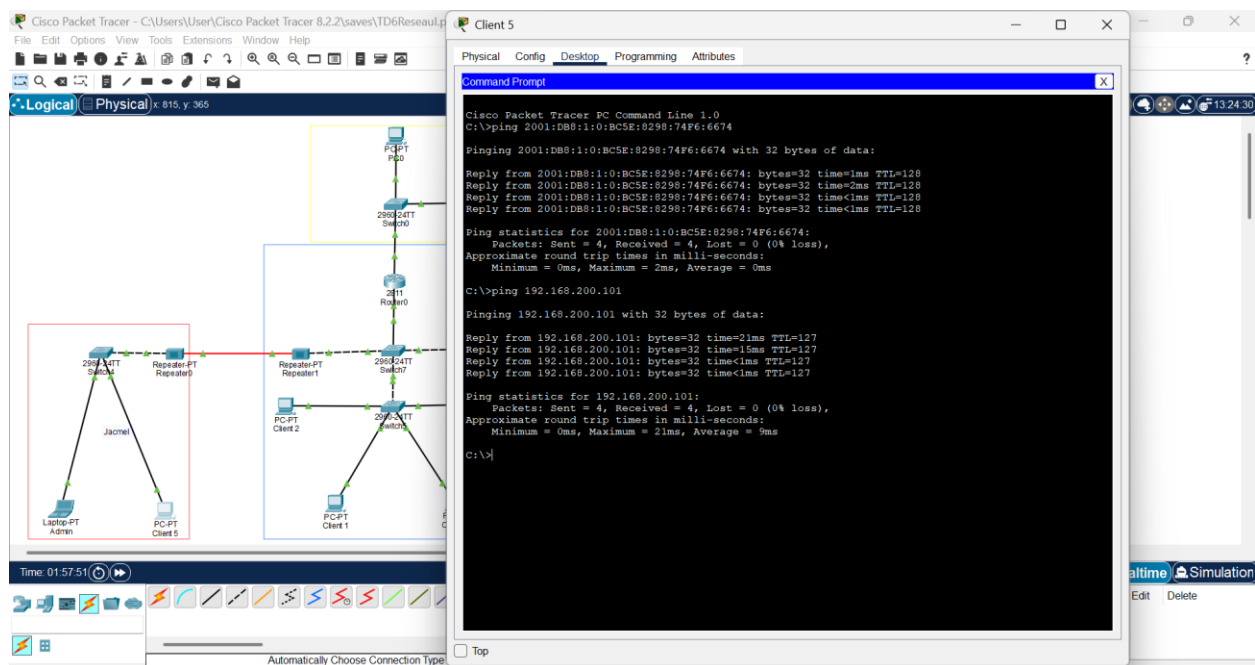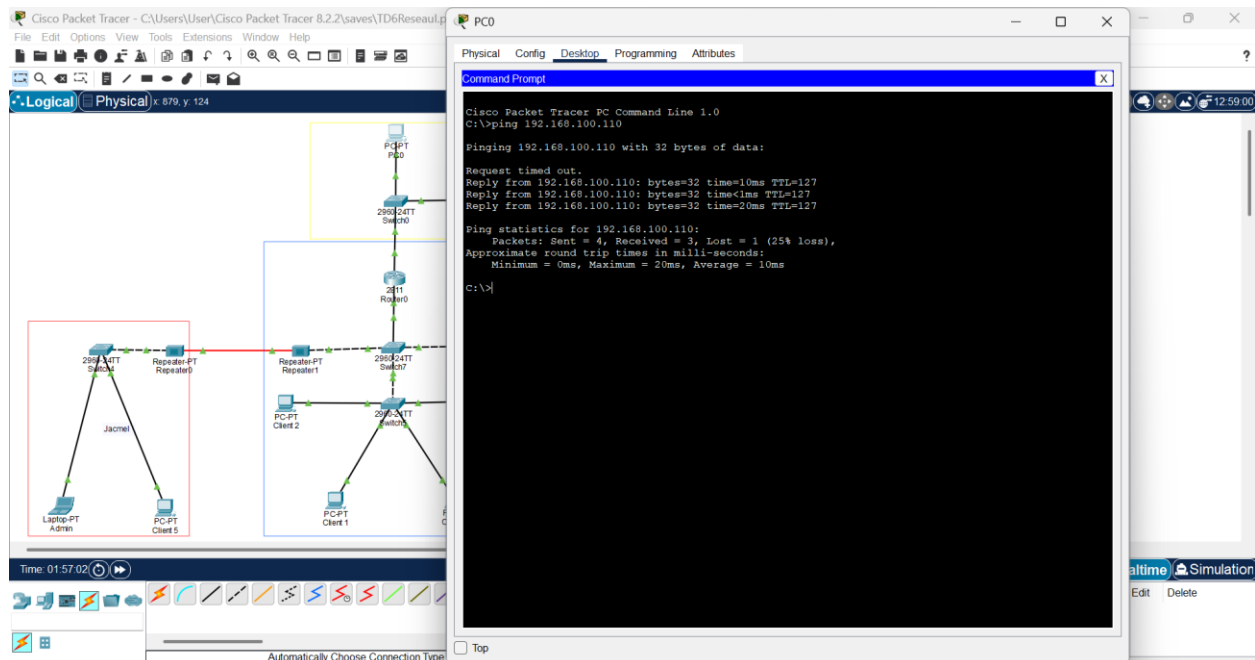

2. b) Ici je reproduit une topologie en configurant les services DHCPv6, en utilisant le routeur comme serveur DHCP afin d'attribuer automatiquement les adresses IP aux différents hôtes du réseau.

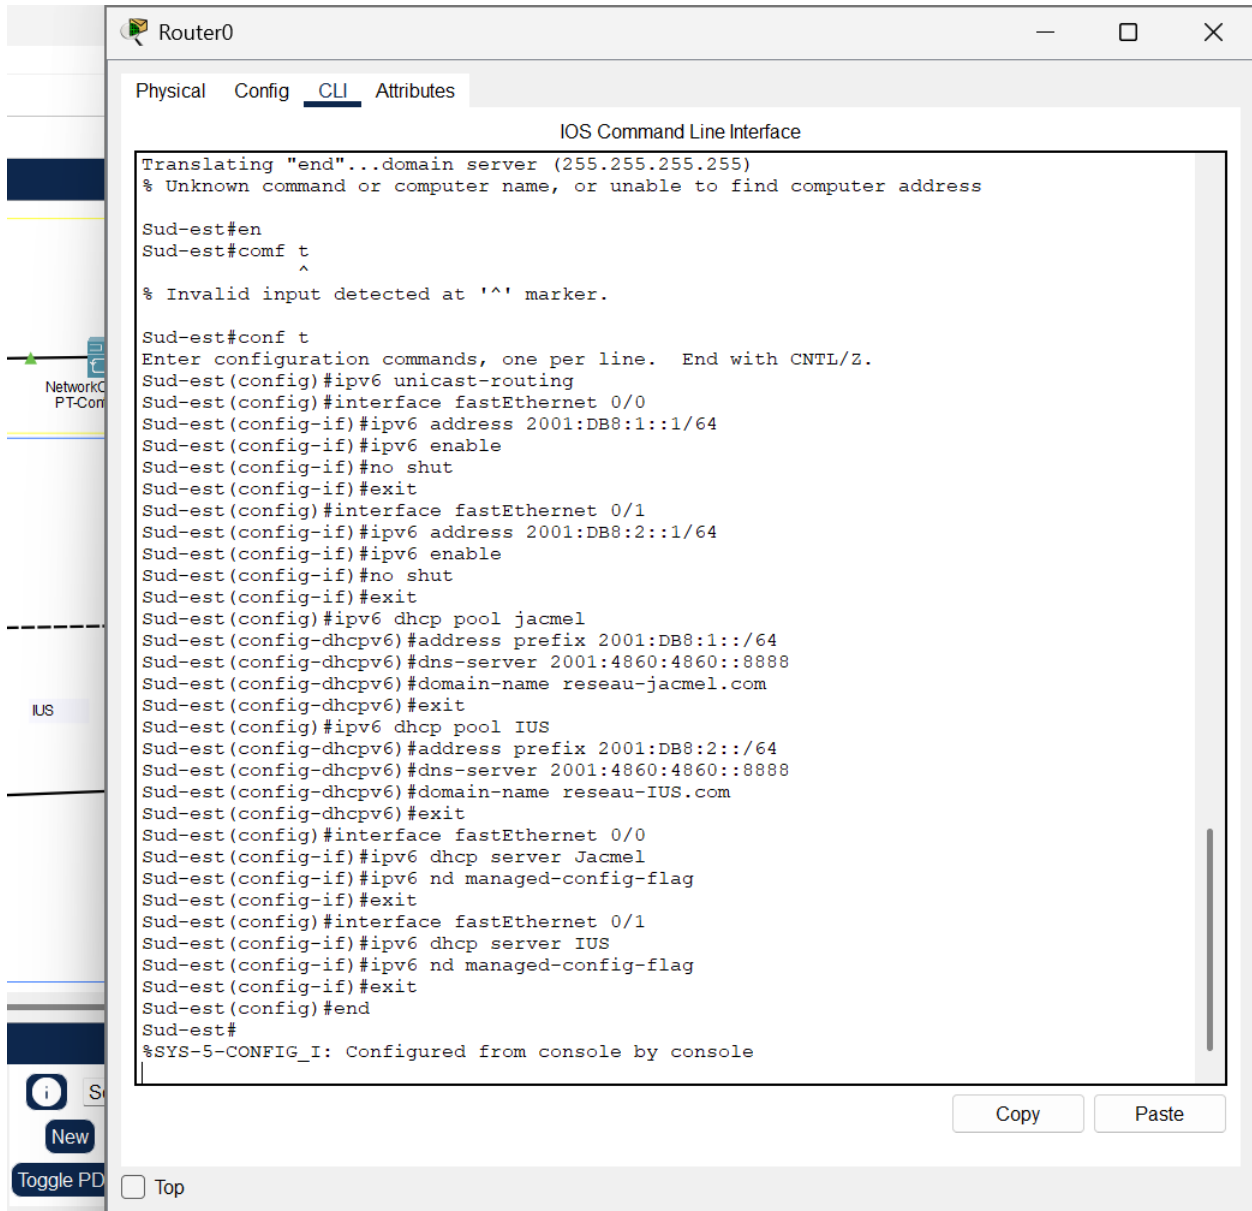

```
Router0
Physical Config CLI Attributes
IOS Command Line Interface
Translating "end"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address

Sud-est#en
Sud-est#conf t
^
% Invalid input detected at '^' marker.

Sud-est#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Sud-est(config)#ipv6 unicast-routing
Sud-est(config)#interface fastEthernet 0/0
Sud-est(config-if)#ipv6 address 2001:DB8:1::1/64
Sud-est(config-if)#ipv6 enable
Sud-est(config-if)#no shut
Sud-est(config-if)#exit
Sud-est(config)#interface fastEthernet 0/1
Sud-est(config-if)#ipv6 address 2001:DB8:2::1/64
Sud-est(config-if)#ipv6 enable
Sud-est(config-if)#no shut
Sud-est(config-if)#exit
Sud-est(config)#ipv6 dhcp pool jacmel
Sud-est(config-dhcpv6)#address prefix 2001:DB8:1::/64
Sud-est(config-dhcpv6)#dns-server 2001:4860:4860::8888
Sud-est(config-dhcpv6)#domain-name reseau-jacmel.com
Sud-est(config-dhcpv6)#exit
Sud-est(config)#ipv6 dhcp pool IUS
Sud-est(config-dhcpv6)#address prefix 2001:DB8:2::/64
Sud-est(config-dhcpv6)#dns-server 2001:4860:4860::8888
Sud-est(config-dhcpv6)#domain-name reseau-IUS.com
Sud-est(config-dhcpv6)#exit
Sud-est(config)#interface fastEthernet 0/0
Sud-est(config-if)#ipv6 dhcp server Jacmel
Sud-est(config-if)#ipv6 nd managed-config-flag
Sud-est(config-if)#exit
Sud-est(config)#interface fastEthernet 0/1
Sud-est(config-if)#ipv6 dhcp server IUS
Sud-est(config-if)#ipv6 nd managed-config-flag
Sud-est(config-if)#exit
Sud-est(config)#end
Sud-est#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

Toggle PD ☐ Top

Ça marche automatiquement.

The top screenshot shows a Cisco Packet Tracer network diagram with a central 2911 Router0 connected to two 2960 24TT Switches. The left switch is connected to a Laptop-PT Admin and a PC-PT Client 5. The right switch is connected to a PC-PT Client 1 and a PC-PT Client 2. A 2950 24TT Switch is also connected to the right switch. The Client 1 configuration window is open, showing the following settings:

IP Configuration	
Interface	FastEthernet0
IP Configuration	
☒ DHCP	☐ Static
IPv4 Address	192.168.100.118
Subnet Mask	255.255.255.0
Default Gateway	192.168.100.1
DNS Server	0.0.0.0
DHCP request successful.	
IPv6 Configuration	
☒ Automatic	☐ Static
IPv6 Address	2001:DB8:1:0:260:2FFF:FEDD:7BD6
Link Local Address	FE80::260:2FFF:FEDD:7BD6
Default Gateway	FE80::200:CFF:FE6E:7601
DNS Server	
IPv6 request successful.	
802.1X	
☐ Use 802.1X Security	
Authentication	MD5
Username	
Password	

The bottom screenshot shows the same Cisco Packet Tracer network diagram. The Client 5 configuration window is open, showing the following settings:

IP Configuration	
Interface	FastEthernet0
IP Configuration	
☒ DHCP	☐ Static
IPv4 Address	192.168.100.110
Subnet Mask	255.255.255.0
Default Gateway	192.168.100.1
DNS Server	0.0.0.0
DHCP request successful.	
IPv6 Configuration	
☒ Automatic	☐ Static
IPv6 Address	2001:DB8:1:0:7EB:C082:B2F0:A47E
Link Local Address	FE80::260:70FF:FE82:9C82
Default Gateway	FE80::200:CFF:FE6E:7601
DNS Server	2001:4860:4860:8888
IPv6 request successful.	
802.1X	
☐ Use 802.1X Security	
Authentication	MD5
Username	
Password	

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x: 667, y: 572

Time: 02:11:16

Automatically Choose Connection Type

Admin

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.1.11

Subnet Mask 255.255.255.0

Default Gateway 192.168.100.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static ipv6 request successful.

IPv6 Address 2001:DB8:1:0:25DE:EE76:D0E3:C251 / 64

Link Local Address FE80::202:17FF:FECB:597B

Default Gateway FE80::200:CFF:FE6E:7601

DNS Server 2001:4860:4860:8888

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x: 603, y: 705

Time: 02:12:16

Automatically Choose Connection Type

Client 1

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.100.117

Subnet Mask 255.255.255.0

Default Gateway 192.168.100.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static ipv6 request successful.

IPv6 Address 2001:DB8:1:0:D297:B663:A8C1:9A3F / 64

Link Local Address FE80::260:2FFF:FEDD:7BD6

Default Gateway FE80::200:CFF:FE6E:7601

DNS Server 2001:4860:4860:8888

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x 1000, y 597

Time: 02:12:58

Client 3

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IPv4 Address 192.168.100.101

Subnet Mask 255.255.255.0

Default Gateway 192.168.100.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static ipv6 request successful.

IPv6 Address 2001:DB8:1:0:BC5E:8298:74F6:6674 / 64

Link Local Address FE80::2E0:B0FF:FE80:405C

Default Gateway FE80::200:CFF:FE8E:7601

DNS Server 2001:4860:4860:8888

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x 2513, y 684

Time: 02:13:25

PC0

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 192.168.200.101

Subnet Mask 255.255.255.0

Default Gateway 192.168.200.1

DNS Server 0.0.0.0

IPv6 Configuration

☒ Automatic ☐ Static

IPv6 Address 2001:DB8:2:0:14F5:F8C0:DC9C:CE0A / 64

Link Local Address FE80::210:11FF:FE3A:EB93

Default Gateway FE80::200:CFF:FE8E:7602

DNS Server 2001:4860:4860:8888

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x 815, y 50

Time: 02:19:54

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.100.110

Pinging 192.168.100.110 with 32 bytes of data:
Request timed out.
Reply from 192.168.100.110: bytes=32 time=10ms TTL=127
Reply from 192.168.100.110: bytes=32 time<1ms TTL=127
Reply from 192.168.100.110: bytes=32 time=20ms TTL=127

Ping statistics for 192.168.100.110:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 20ms, Average = 10ms
C:\>ping 2001:DB8:1:0:D297:B663:ABC1:9A3F

Pinging 2001:DB8:1:0:D297:B663:ABC1:9A3F with 32 bytes of data:
Reply from 2001:DB8:1:0:D297:B663:ABC1:9A3F: bytes=32 time<1ms TTL=127
Reply from 2001:DB8:1:0:D297:B663:ABC1:9A3F: bytes=32 time<1ms TTL=127
Reply from 2001:DB8:1:0:D297:B663:ABC1:9A3F: bytes=32 time<1ms TTL=127
Reply from 2001:DB8:1:0:D297:B663:ABC1:9A3F: bytes=32 time<1ms TTL=127

Ping statistics for 2001:DB8:1:0:D297:B663:ABC1:9A3F:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\>
```

alttime Simulation Edit Delete

Cisco Packet Tracer - C:\Users\User\Cisco Packet Tracer 8.2.2\saves\TD6Reseau.p

File Edit Options View Tools Extensions Window Help

Logical Physical x 824, y 368

Time: 02:22:05

Client 2

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 2001:DB8:2:0:14F5:F8C0:DC9C:CE0A

Pinging 2001:DB8:2:0:14F5:F8C0:DC9C:CE0A with 32 bytes of data:
Reply from 2001:DB8:2:0:14F5:F8C0:DC9C:CE0A: bytes=32 time<1ms TTL=127
Reply from 2001:DB8:2:0:14F5:F8C0:DC9C:CE0A: bytes=32 time<1ms TTL=127
Reply from 2001:DB8:2:0:14F5:F8C0:DC9C:CE0A: bytes=32 time<1ms TTL=127
Reply from 2001:DB8:2:0:14F5:F8C0:DC9C:CE0A: bytes=32 time<1ms TTL=127

Ping statistics for 2001:DB8:2:0:14F5:F8C0:DC9C:CE0A:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
```

alttime Simulation Edit Delete

Objectif du TD :

- Comprendre et configurer DHCP en réseau multi-LAN.
- Mettre en place un serveur DHCP centralisé ou sur routeur.
- Relayer les requêtes DHCP entre réseaux.
- Vérifier l'attribution automatique des IP.
- Maîtriser l'adressage IPv6 et DHCPv6.
- Configurer DHCPv6 sur routeur ou réseau local.
- Tester la communication IPv6 entre réseaux.