
POWER01

Total X:X

Roboparty

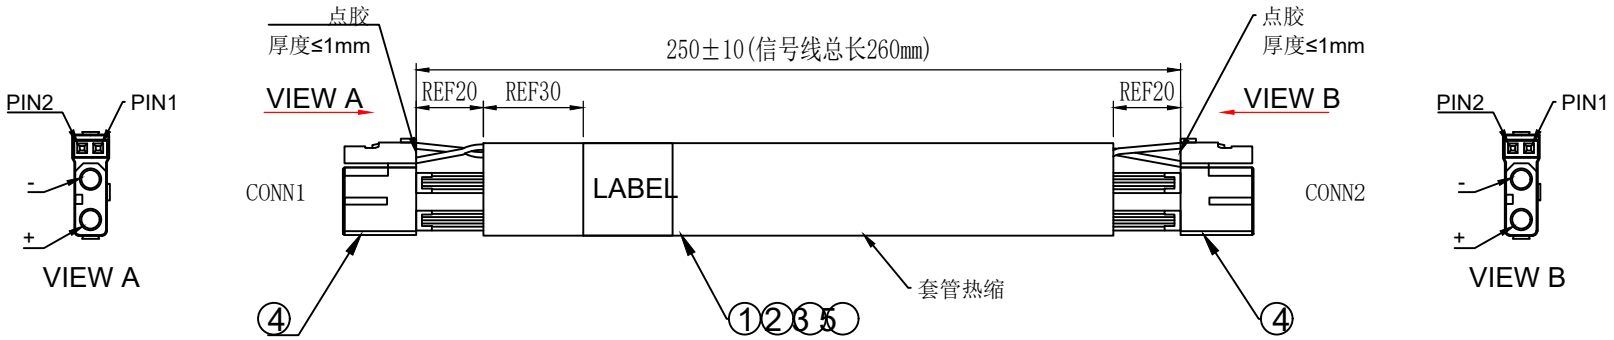

Pin definition					
CONN 1	CONN 2	COLOR	SIGNAL	REMARK	
+	+	红	+	8股28awg 合焊	
-	-	黑	-	8股28awg 合焊	
1	1	蓝		双绞	信号线总长 260mm
2	2	绿			

LABEL

Body-Power01

SHX-YYMMDD-批次流水号

日
月
年

Note:

1. Environmental Requirements:Subject to compliance (RoHS)
2. The "*" symbol on the drawing is the key dimension.
3. Test Conditions:Voltage is 300V, Insulation Resistance is 20MΩ, On-Resistance is 3Ω Max, Test Time 0.01 S.

Bill of Materials					
NO	Product name	Description	Qty	Vendor	Remark
1	WIRE	UL1569 28AWG 红, L=250MM	8PCS	XINYA	
2	WIRE	UL1569 28AWG 黑, L=250MM	8PCS	XINYA	
3	WIRE	SR-SHX010(28AWG双绞网线 蓝/绿)	260MM	SHS	
4	CONN	XT30U(2+2)-F	2PCS	AMASS	
5	TUBE	φ10.0超薄热缩套管, 黑色	A/R	WOER	

REV	DESCRIPTION	DATE

REVISIONS

X. ±1.0	X° . ±
.X±0.2	.X° ±
.XX±0.1	.XX° ±
.XXX±	.XXX° ±

APPROVED: *VINCENT*

CHECKED: *VINCENT*

ENGINEER: *LIWEIDONG*

DRAWING: *LIWEIDONG*

SHS Technology

P/N:

DWG No:

C.P/N: Body-Power01

REV	UNIT	Client Version：
1	m/m	DATE2026-05-27

