




PB0 (MOSI/OC0A)

PB1 (MISO/OC0B)

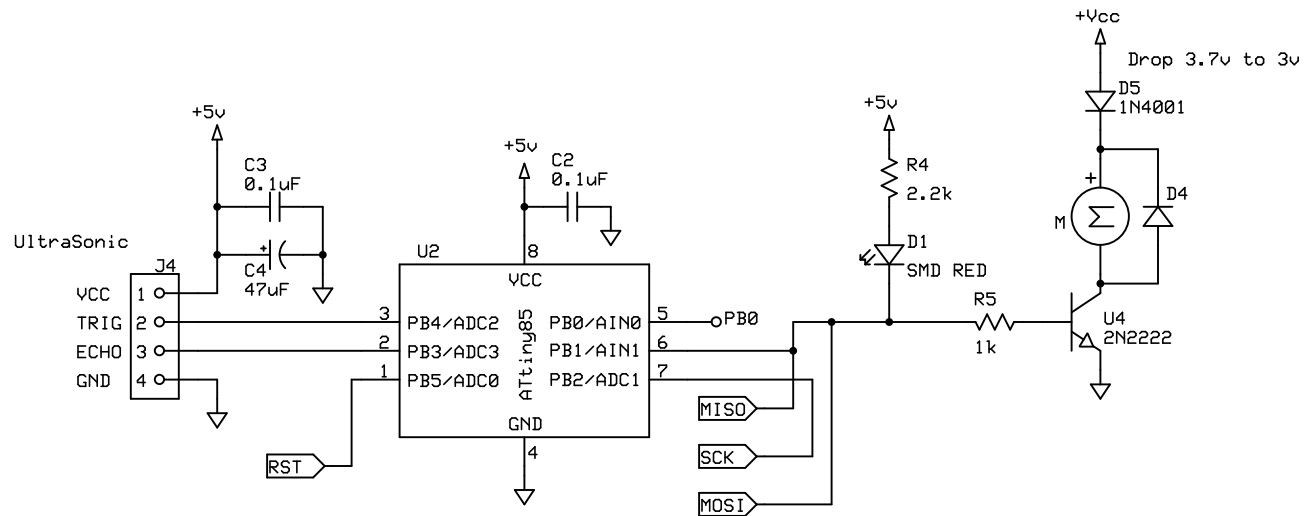

#### NOTES

Power: 3ma @ 5V 20MHz  
 ATtiny85 4.5v - 5.5v  
 I/O sink/source 20ma  
 Solder LiPo battery to back of board  
 Use 110mA to 170mA battery

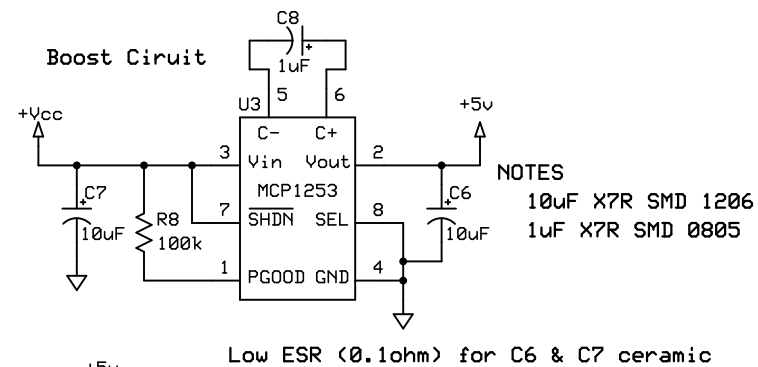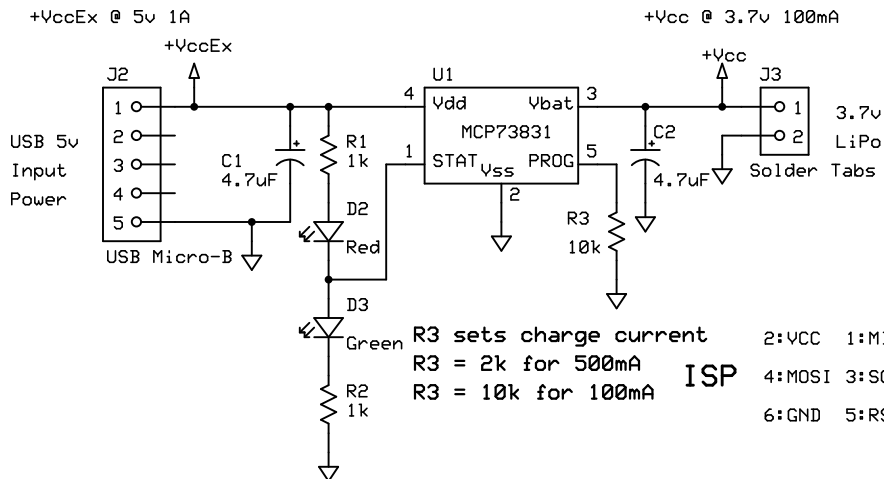

#### NOTES

10uF X7R SMD 1206  
 1uF X7R SMD 0805

Low ESR (<0.1ohm) for C6 & C7 ceramic

Pearson Consulting

Range Helper

N.D. 'Chip' Pearson

Rev 1.1

11/30/2018

Page 1 of 1