Agilent E5061A/E5062A ENA Series

ENA Series RF Network Analyzers

Programmer's Guide

Fourth Edition

FIRMWARE REVISIONS

This manual applies directly to instruments that have the firmware revision A.03.00.
For additional information about firmware revisions, see Appendix A.

⁙ Agilent Technologies

Manufacturing No. E5061-90032

February 2007

Notices

The information contained in this document is subject to change without notice.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated to another language without the prior written consent of Agilent Technologies.

Microsoft®,MS-DOS®,Windows®,Visual C++®,Visual Basic®,VBA® and Excel® are registered

UNIX is a registered trademark in U.S. and other countries, licensed exclusively through X/Open Company Limited.

Portions ©Copyright 1996, Microsoft Corporation. All rights reserved.

© Copyright 2004, 2005, 2006, 2007 Agilent Technologies

Manual Printing History

The manual's printing date and part number indicate its current edition. The printing date changes when a new edition is printed. (Minor corrections and updates that are incorporated at reprint do not cause the date to change.) The manual part number changes when extensive technical changes are incorporated.

February 2004   First Edition (part number: E5061-90002)

September 2005   Second Edition (part number: E5061-90012, changes for firmware version A.02.00)

June 2005   Third Edition (part number: E5061-90022, changes for firmeware version A.02.10)

February 2007   Fourth Edition (part number: E5061-90032, changes for firmeware version A.03.00)

Typeface Conventions

Bold	Boldface type is used when a term is defined. For example: **icons** are symbols.
Italic	Italic type is used for emphasis and for titles of manuals and other publications.
[Key]	Indicates the hardkey whose key label is Key.
[Key] - **Item**	Indicates a series of key operations in which you press the **[Key]** key, select (highlight) the item called **Item** on the displayed menu using the **[↓]** key and so on, and then press the **[Enter]** key.

Sample Program Disk

A sample program disk (Agilent part number: E5061-180x0) is furnished with this manual. The disk contains the sample programs used in this manual.

The customer shall have the personal, non-transferable rights to use, copy, or modify SAMPLE PROGRAMS in this manual for the customer's internal operations. The customer shall use the SAMPLE PROGRAMS solely and exclusively for their own purposes and shall not license, lease, market, or distribute the SAMPLE PROGRAMS or modification of any part thereof.

Agilent Technologies shall not be liable for the quality, performance, or behavior of the SAMPLE PROGRAMS. Agilent Technologies especially disclaims any responsibility for the operation of the SAMPLE PROGRAMS to be uninterrupted or error-free. The SAMPLE PROGRAMS are provided AS IS.

AGILENT TECHNOLOGIES DISCLAIMS ANY IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Agilent Technologies shall not be liable for any infringement of any patent, trademark, copyright, or other proprietary right by the SAMPLE PROGRAMS or their use. Agilent Technologies does not warrant that the SAMPLE PROGRAMS are free from infringements of such rights of third parties. However, Agilent Technologies will not knowingly infringe or deliver software that infringes the patent, trademark, copyright, or other proprietary right of a third party.

Documentation Map

The following manuals are available for the Agilent E5061A/E5062A.

*   *User's Guide* **(Part Number E5061-900x0, attached to Option ABA)**

    This manual describes most of the basic information needed to use the E5061A/E5062A. It provides a function overview, detailed operation procedure for each function (from preparation for measurement to analysis of measurement results), measurement examples, specifications, and supplemental information. For programming guidance on performing automatic measurement with the E5061A/E5062A, please see the *Programming Manual*.

*   *Installation and Quick Start Guide* **(Part Number E5061-900x1, attached to Option ABA)**

    This manual describes installation of the instrument after it is delivered and the basic procedures for applications and analysis. Refer to this manual when you use the E5061A/E5062A for the first time.

*   *Programmer's Guide* **(Part Number E5061-900x2, attached to Option ABA)**

    This manual provides programming information for performing automatic measurement with the E5061A/E5062A. It includes an outline of remote control, procedures for detecting measurement start (trigger) and end (sweep end), application programming examples, a command reference, and related information.

*   *VBA Programmer's Guide* **(Part Number E5061-900x3, attached to Option ABA)**

    This manual describes programming information for performing automatic measurement with internal controller. It includes an outline of VBA programming, some sample programming examples, a COM object reference, and related information.

*   *Option 100 Fault Location and Structural Return Loss Measurement User's Guide Supplement* **(Part Number E5061-900x4, attached to Option 100)**

    This manual describes information for using the fault location and structual return loss measurement functions.

NOTE The number position shown by "x" in the part numbers above indicates the edition number. This convention is applied to each manual, CD-ROM (for manuals), and sample programs disk issued.

Contents

Contents

Contents

Contents

Contents

Contents

Contents

Contents

Contents

Contents

Contents

Contents

1   Making Effective Use of This Manual

This chapter describes the contents of this guide.Using this chapter with the table of contents helps you to retrieve description of a subject you wish to understand as well as to obtain an overview of this guide.Also see the latter part of this chapter for brief description of usage of this guide, focusing on searching commands.

Contents of This Manual

This is a programming guide with Agilent E5061A/E5062A.

This guide describes programming method mainly aiming at learning how to write a program that remotely controls the E5061A/E5062A using SCPI commands, focusing on sample usage with the HTBasic.

Controlling the E5061A/E5062A using the built-in VBA is not covered by this guide; it is described in *VBA Programmer's Guide*. For using the E5061A/E5062A VBA, see *VBA Programmer's Guide*.

Description in this guide assumes that the reader has learned manual operation of the E5061A/E5062A.Thus, this guide does not describe each feature of the E5061A/E5062A in detail. For detailed information on each feature, see *User's Guide*.

The chapter-by-chapter contents of this manual are as follows.

Chapter 1, "Making Effective Use of This Manual."

This chapter describes the contents of this guide.Using this chapter with the table of contents helps you to retrieve description of a subject you wish to understand as well as to obtain an overview of this guide.Also see the latter part of this chapter for brief description of usage of this guide, focusing on searching commands.

Chapter 2, "Overview of Remote Control."

This chapter provides an overview of the remote control system and the SCPI commands.

Chapter 3, "Setting Up the Analyzer."

This chapter describes how to configure measurement conditions and how to configure the way the instrument displays measurement results on the LCD.

Chapter 4, "Performing a Calibration."

This chapter describes how to obtain the calibration coefficients and perform error correction and how to define the calibration kit required to obtain the calibration coefficients.

Chapter 5, "Making a Measurement."

This chapter describes how to trigger the instrument to start a new measurement cycle and how to detect the end of a measurement cycle.

Chapter 6, "Analyzing Data."

This chapter describes how to use markers and analysis command.

Chapter 7, "Reading/Writing Measurement Data."

This chapter provides an overview of the Agilent E5061A/E5062A's internal data processing flow and describes how to read and write measurement results (internal data array).

Chapter 8, "Limit Test."

This chapter describes how to use the Limit Test feature to perform a limit test and determine the pass/fail status of the measured data.

Chapter 9, "Saving and Recalling (File Management)."

This chapter describes how to save and recall instrument status and measurement results onto/from the files. Here also covered is managing files.

Chapter 10, "Communication with External Instruments Using Handler I/O Port."

This chapter provides necessary information for communicating with external instruments (for example, a handler in a production line) using the handler I/O port equipped with the Agilent E5061A/E5062A.

Chapter 11, "Working with Automatic Test Systems."

This chapter describes useful features when the Agilent E5061A/E5062A is integrated with the automatic test system.

Chapter 12, "Sample Application Programs."

This chapter introduces several sample programs for basic measurement, measurement with a system using the handler I/O, and controlling the instrument over LAN.

Chapter 13, "SCPI Command Reference."

This chapter describes the SCPI command reference for the Agilent E5061A/E5062A. It describes the commands using their abbreviated format in alphabetical order. If you want to look up commands by softkeys, refer to the User's Guide.

Appendix A, "Manual Changes."

This appendix contains the information required to adapt this manual to earlier versions or configurations of the Agilent E5061A/E5062A than that indicated by the current printing date of this manual. The information in this manual applies directly to the E5061A/E5062A model that has the serial number prefix listed on the title page of this manual.

Appendix B, "Status Reporting System."

This appendix describes the status reporting system of the Agilent E5061A/E5062A.

Appendix C, "Error Messages."

The Agilent E5061A/E5062A provides error messages to indicate its operating status. This appendix describes the error messages of the E5061A/E5062A in order of error number.

How To Use This Manual

Chapters 3 to 9 provide task-based descriptions of SCPI commands that are useful for programming and explain how you can use them. These chapters contain explanations and sample program listings that you can use to develop your custom programs. For more information on individual commands, see Chapter 13, "SCPI Command Reference."

Looking up SCPI commands

Chapter 13 "SCPI Command Reference" contains a complete reference of SCPI commands. You can look up a particular SCPI command in any of the following ways:

Lookup by Abbreviated Command Name

> The command reference is organized alphabetically according to the abbreviated name used as the title for each command's description.

Lookup by Full Command Name

> You can use the index at the end of the manual to find full command names along with the page numbers where they appear.

NOTE   Some SCPI commands supported by the E5061A/E5062A have optional syntax elements. In the command reference conventions, these elements are enclosed between square brackets ([]) or printed in lowercase letters. See "Syntax" on page 194 for more information.

Using sample programs

This manual comes with a sample program disk, which contains the source files of the sample programs used in the manual. The disk is DOS-formatted and the files are saved in ASCII format.

Loading a sample program

To load a sample program into the HTBasic interpreter, use the GET command. For example, you can load setup.bas, one of the sample programs, by the following procedure:

In the HTBasic screen, type the following command and press the Return key.

```
GET "setup.bas"
```

Looking up a sample program

To look up the description of a sample program, see the listings under "Sample program" in the index.

2 Overview of Remote Control

This chapter provides an overview of the remote control system and the SCPI commands.

Types of remote control system

Depending on the system controller and the interface, you can configure 4 types of remote control system as shown in the table below.

System controller	Interface	Overview
External controller (external computer such as PC and workstation)	GPIB (talker/listener mode)	System to control the E5061A/E5062A and other devices connected via GPIB from the external controller. For more information, refer to "GPIB remote control system" on page 25.
	LAN	System to control the E5061A/E5062A and other devices connected via LAN from the external controller. For more information, refer to "LAN remote control system" on page 27.
E5061A/E5062A	____	System to control the E5061A/E5062A itself using built-in E5061A/E5062A VBA. For more information, refer to *VBA Programmers Guide*.
	GPIB (system controller mode)	System to control the E5061A/E5062A itself and external devices connected via GPIB using built-in E5061A/E5062A VBA. For more information, refer to *VBA Programmers Guide*.

GPIB remote control system

What is GPIB?
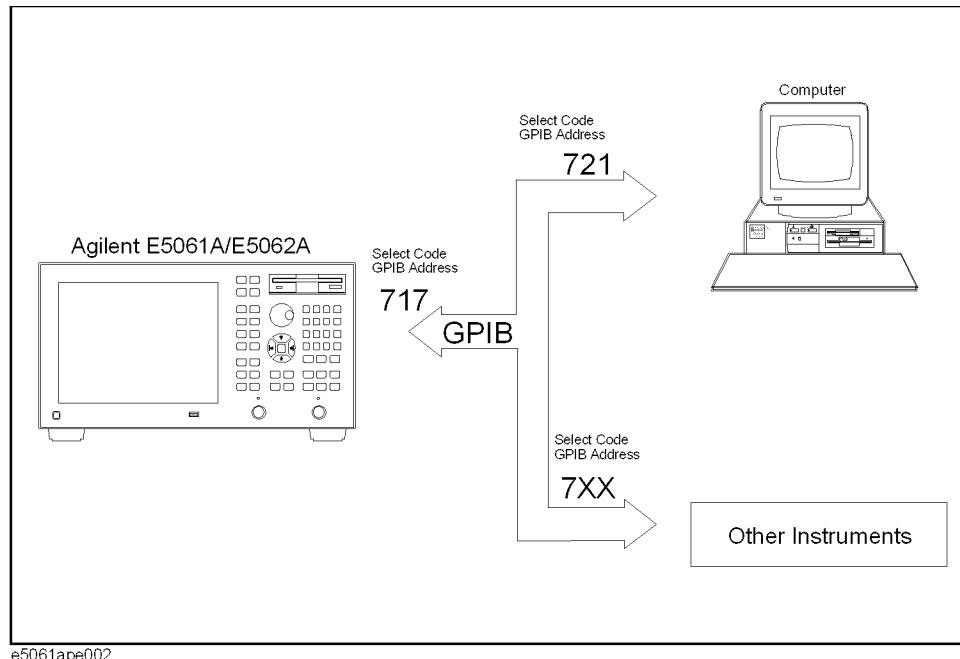
GPIB (General Purpose Interface Bus) is an interface standard for connecting computers and peripherals, which supports the following international standards: IEEE 488.1, IEC-625, IEEE 488.2, and JIS-C1901. The GPIB interface allows you to control the Agilent E5061A/E5062A from an external computer. The computer sends commands and instructions to the E5061A/E5062A and receives data sent from the E5061A/E5062A via GPIB.

System configuration

Use GPIB cables to connect between the E5061A/E5062A, the external controller (computer), and peripherals. Figure 2-1 shows the overview of the system configuration of the GPIB remote control system.

Figure 2-1   **Configuration of the GPIB remote control system**

e5061ape002

Required Equipment
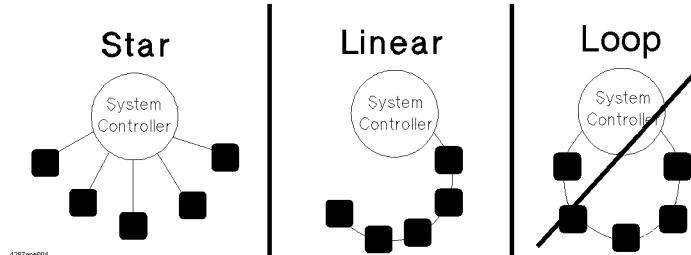
1. E5061A/E5062A

2. External controller (computer)

   Use a personal computer or workstation equipped with the GPIB interface. You need to install software to control this instrument via GPIB into the external controller (for example, HTBasic and Agilent VEE).

3. Other devices (other instruments and/or peripherals that serve your purpose)

4. GPIB cables for connecting the E5061A/E5062A, the external controller, and other devices

Scale of system you can construct

• You can connect up to 15 devices in a single GPIB system.

• The length of cables to connect between devices must be 4 m or less. The total length of connecting cables in a single GPIB system must be 2 m × the number of connected devices (including the controller) or less. You cannot construct the system in which the total cable length exceeds 20 m.

• The number of connectors connected to an individual device must be 4 or less. If you connect 5 or more connectors, excessive force is applied to the connector part, which may result in failure.

• You can choose the device connection topology from start, linear, and combined. Loop connection is not supported.

Device selector

The device selector is a unique value assigned to each device that is used by the controller to select the control target (to send/receive messages) among devices connected on the GPIB remote control system.

The device selector consists of a select code (usually, 7) and a GPIB address. For example, when the select code is 7 and the GPIB address is 17, the device selector is 717. The select code must be set for each system. The GPIB address must be set to a unique value for each device, which is used to identify devices on the same system. In the description and sample programs in this manual, it is assumed that the device selector is set to 717.

Setting the GPIB address of the E5061A/E5062A

[System] - **GPIB Setup** - **Talker/Listener Address**
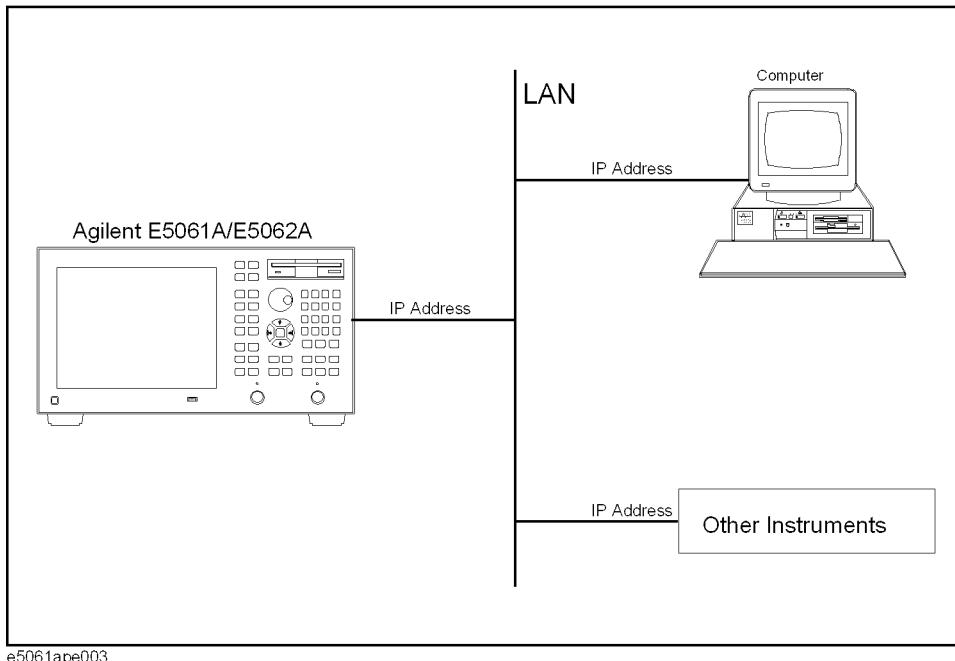
LAN remote control system

The LAN (Local Area Network) remote control system provides two methods: controlling the E5061A/E5062A using the SICL-LAN server and controlling the E5061A/E5062A using the telnet server.

System configuration

Use a LAN cable to connect between the E5061A/E5062A and the external controller (computer). Figure 2-2 shows the overview of the system configuration of the LAN remote control system.

Figure 2-2   **Configuration of the LAN remote control system**

e5061ape003

Required Equipment

1. E5061A/E5062A

2. External controller (personal computer or workstation that can be connected to LAN and Agilent I/O Library is installed into)

3. Other devices (other instruments and/or peripherals that serve your purpose)

4. LAN cable for connecting the E5061A/E5062A with the external controller

Preparing the E5061A/E5062A

Before controlling the E5061A/E5062A via LAN, you need to configure the network function. For detailed information on the procedure, refer to *User's Guide*.

Control over SICL-LAN server

In the control system using the SICL-LAN server, communication between the external controller (client) and the E5061A/E5062A (server) is performed using the SICL-LAN protocol. Communication is performed using SICL (Standard Instrument Control Library). You can control the E5061A/E5062A by programming using SICL or VISA with the C language in the UNIX environment, or Visual C++, Visual Basic, or VEE in the Windows environment.

Preparing the E5061A/E5062A

To communicate with the external controller, follow these steps to turn on the SICL-LAN server of the E5061A/E5062A in advance.

Step 1. Turn on the SICL-LAN server of the E5061A/E5062A.

[System] - Misc Setup - Network Setup - SICL-LAN Server [ON]

Step 2. Set the GPIB address of the E5061A/E5062A for control with the SICL-LAN server. "XX" represents an address number.

[System] - Misc Setup - Network Setup - SICL-LAN Address [XX]
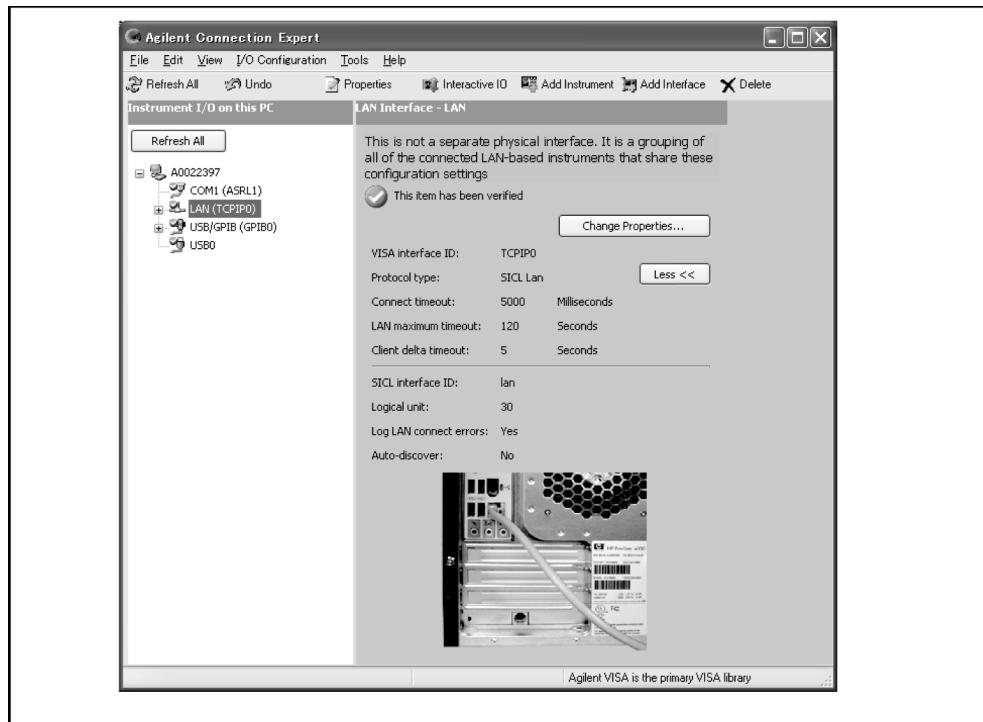
NOTE   You need to restart the E5061A/E5062A firmware after changing the on/off setting or address setting of the SICL-LAN server.

Preparing the external controller

In order to establish communication to the E5061A/E5062A using the TCP/IP protocol, you need to set the I/O interface of the external controller in advance. This section shows the setting procedure when using the external controller in the Windows environment.

NOTE   You must install the Agilent I/O Libraries in advance.

Use Agilent I/O Libraries M.01.01 or Agilent I/O Libraries Suite 14 or later.

For further information on the I/O Libraries, see the Agilent I/O Libraries Manual.

The Agilent I/O Libraries may not be available for certain external controllers or OS versions. For further details, refer to the Help guidance for the Agilent I/O Libraries.
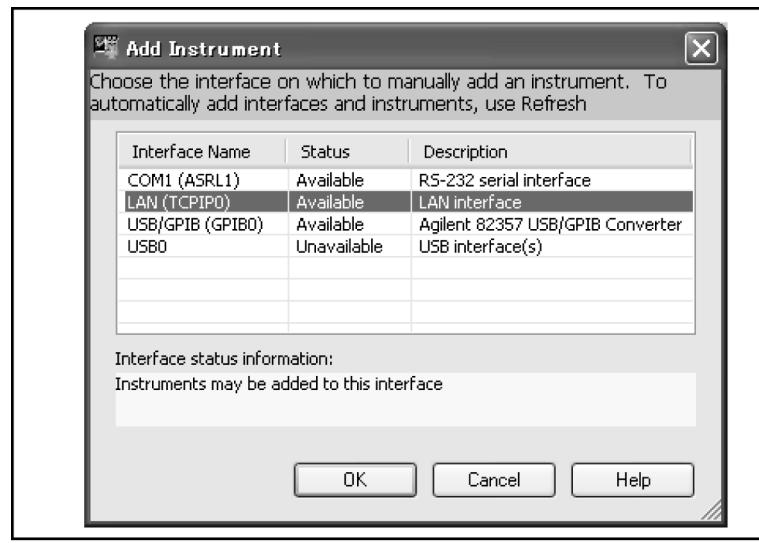
Step 1. From your PC's Start menu, click Program - Agilent I/O Libraries Suite - Agilent Connection Expert to open the Agilent Connection Expert setting screen.

e5061ape4001

Step 2. In the Agilent Connection Expert setting screen, select **LAN(TCPIP0) in the Instrument I/O on this PC** frame, and then select **I/O Configuration** - **Add Instrument** on the menu**.**
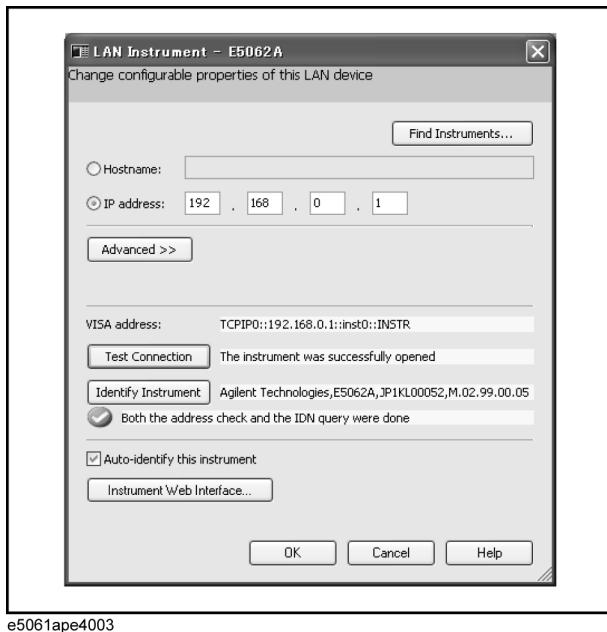
Step 3. In the Add Instrument screen, press **OK** as LAN has been selected.

e5061ape4002
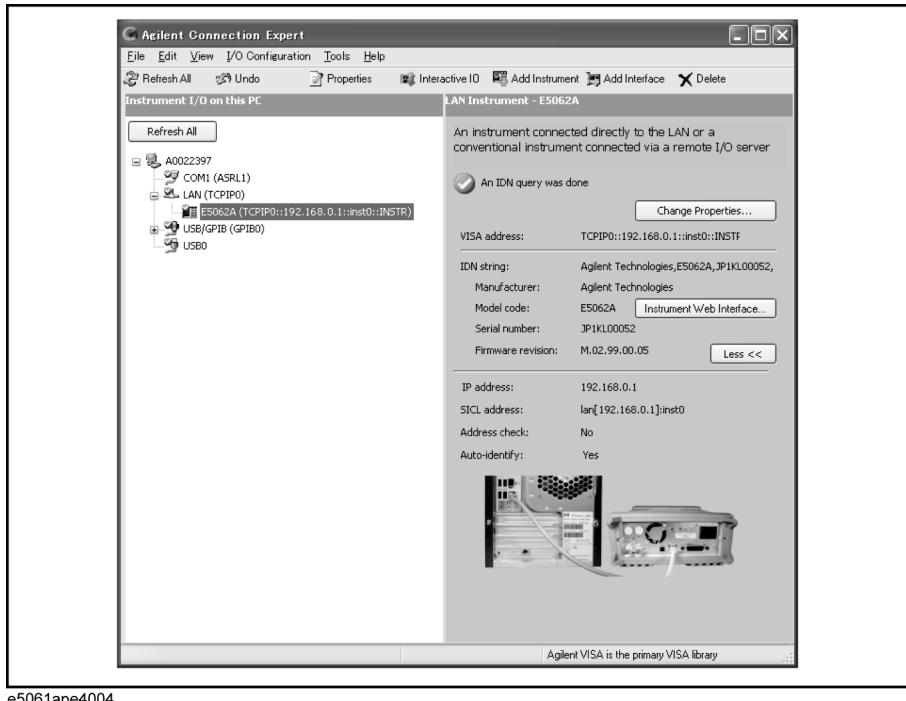
Step 4. In the LAN Instrument Properties screen, set up the IP address of the E5061A/E5062A and click **OK**.You can change settings as necessary. For details, refer to the Agilent I/O Libraries Suite manual.

e5061ape4003

Step 5. In the Agilent Connection Expert screen, check that the E5061A/E5062A has been added under **LAN(TCPIP0)** in the **Instrument I/O on this PC** frame.

e5061ape4004

Control using C or Visual Basic

You can control the E5061A/E5062A by programming using SICL with the C language in the UNIX environment, or Visual C++ or Visual Basic in the Windows environment.

For more information on the control method, see a sample program using the VBA macro of Microsoft Excel described in "Controlling Using SICL-LAN Server" on page 176.

Control using Agilent VEE
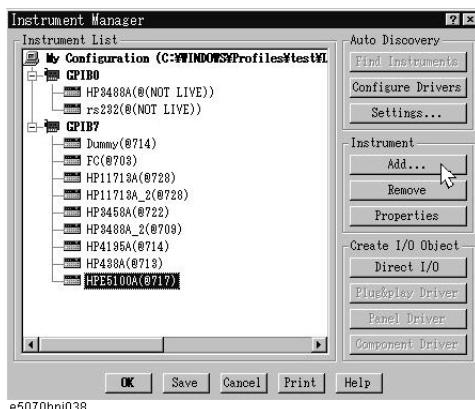
Agilent VEE allows you to control the E5061A/E5062A via the I/O interface. The following example shows how to control the E5061A/E5062A that is set as follows: the address of the SICL-LAN server is 17 and the IP address is 1.10.100.50.

NOTE   When using Agilent VEE for PC, use Agilent VEE Pro 6 for Windows or later.

Step 1. On the Agilent EVE's **I/O** menu, click **Instrument Manager...**.

Step 2. In the Instrument Manager setting screen, click **Add...**.

e5070bpj038

Step 3. The Instrument Properties setting screen appear. Make the settings as follows: Name (1 in the figure below): **SICL_LAN** (you can specify any name), Interface (2 in the figure below): **GPIB**, and Address (3 in the figure below): **917** (for the E5061A/E5062A, fixed to 9. 17 is the address of the SICL-LAN server). Then, click Gateway: **This host**. The Select or Enter Gateway setting screen appears. Enter the IP address or host name of the E5061A/E5062A (4 in the figure below).

e5070bpj039
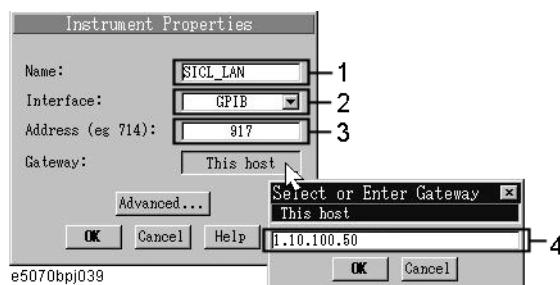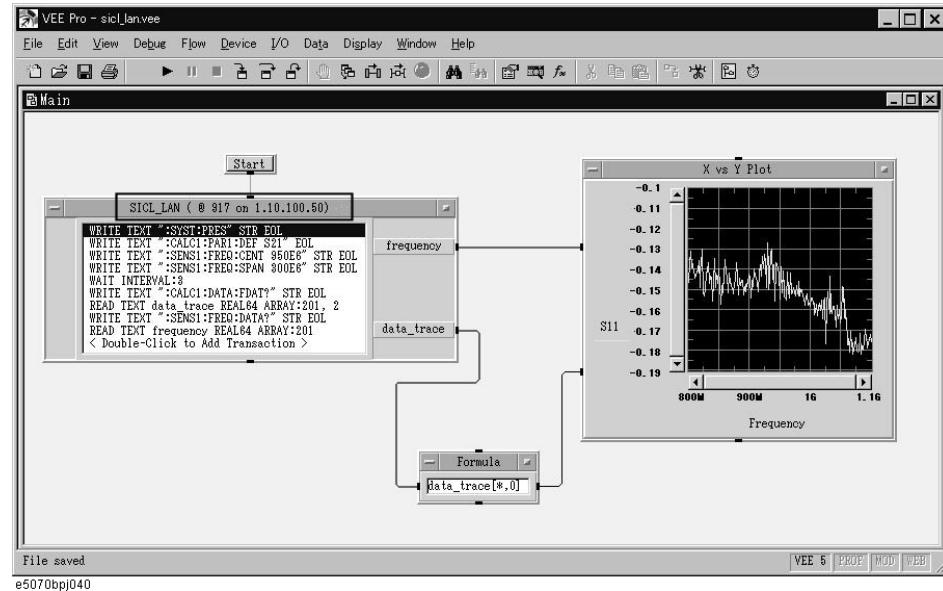
Figure 2-3 shows an example of control using the I/O interface that has been set in the above procedure.

Figure 2-3 **Example of control using Agilent VEE**

e5070bpj040

Control over telnet server

In the control system over telnet server, communications are performed through connection between the sockets provided by the processes of the external controller and the E5061A/E5062A to establish a network path between them.

A socket is an endpoint for network connection; port 23 and port 5025 are provided for the sockets for the E5061A/E5062A. Port 23 is provided for conversational control using telnet (user interface program for the TELNET protocol) and port 5025 for control from a program.

Preparing the E5061A/E5062A

To communicate with the external controller, follow these steps to turn on the telnet server of the E5061A/E5062A in advance.

[System] - Misc Setup - Network Setup - Telnet Server [ON]

Conversational control using telnet (using port 23)

You can use telnet to perform conversational control by sending SCPI commands to the E5061A/E5062A on a message-by-message basis. For telnet, the socket of port 23 is used for communications.
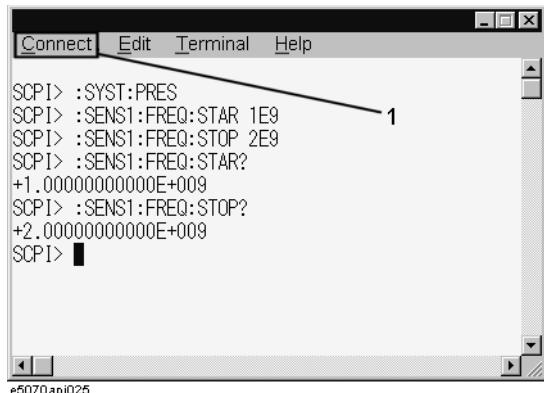
In this example, in order to show you the control procedure using telnet, you control the E5061A/E5062A (IP address: 1.10.100.50 and host name: e5061a) from the external controller in the Windows environment.

Step 1. Open the MS-DOS command prompt screen.

Step 2. At the MS-DOS prompt, type telnet 1.10.100.50 or telnet e5061a and press the return key.

Step 3. The telnet screen opens.

Step 4. Type a command and press the return key; it is sent to the E5061A/E5062A and executed. If you enter a command that queries some data, the query response is displayed below the line you have entered the command.

Figure 2-4 shows the screen after using the :SYST:PRES command on page 479 to reset, the :SENS{1-4}:FREQ:STAR command on page 418 and :SENS{1-4}:FREQ:STOP command on page 419 commands to set the sweep start value and stop value to 1 GHz and 2 GHz respectively, and checking the settings.

Figure 2-4   **Example of control using telnet**

e5070apj025

Step 5. Select Disconnect from the Connect menu in the telnet screen (1 in Figure 2-4) to break the connection to the E5061A/E5062A and select Exit from the Edit menu to exit the telnet. (In other environment such as the UNIX environment, press] while holding down the control key. The telnet prompt appears. At the telnet prompt, type quit and press the return key. The connection to the E5061A/E5062A breaks and telnet finishes.)

Control from a program (using port 5025)

When controlling the E5061A/E5062A from a program on the external controller, use the socket of port 5025 for connection.

NOTE   Some functions such as service requests that are available in the GPIB remote control system are not available in control over telnet server.

Control using C or Visual Basic

You can control the E5061A/E5062A by socket programming using the C language in the UNIX environment, or Visual C++ or Visual Basic in the Windows environment.

For socket programming, the library for network connection on the TCP/IP protocol is required. For the UNIX environment, BSD (Berkeley Software Distribution) Sockets API is available; for the Windows environment, WinSock (WinSock1.1 and WinSock2.0) created by porting BSD Sockets to Windows and expanding it is available.
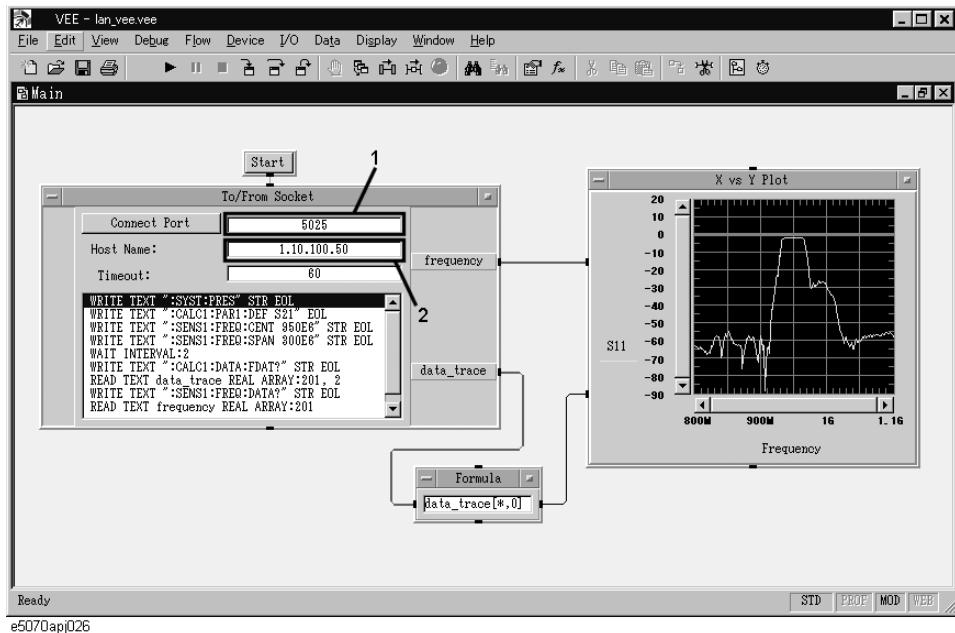
For more information on the control method, see a sample program for control using WinSock described in "Controlling Using Telnet Server" on page 184.

Agilent Control using VEE

Agilent VEE allows you to control the E5061A/E5062A through the connection to the socket of port 5025 using To/From Socket. Figure 2-5 shows an example (when the IP address of the E5061A/E5062A is 1.10.100.50). Enter 5025 in the field to specify the port for connection (1 in Figure 2-5) and enter the IP address or host name of the E5061A/E5062A in the filed to specify the host name (2 in Figure 2-5).

Figure 2-5   **Example of control using Agilent VEE**

e5070apj026

Sending SCPI command messages

Types and structure of commands

The SCPI commands available for the E5061A/E5062A are classified into 2 groups as follows.

E5061A/E5062A commands

Commands specific to the E5061A/E5062A. They cover all measurement functions that the E5061A/E5062A has and some general-purpose functions. The commands in this group are arranged in a hierarchical structure called the command tree (see "Command tree" on page 486). Each command consists of character strings (mnemonics) indicating each hierarchical level and colon (:) separators between hierarchical levels.

IEEE common commands

Commands to cover general-purpose functions defined in IEEE488.2 that are available commonly to instruments that support this standard. The commands in this group have an asterisk (*) at the beginning. For the commands in this group, there is no hierarchical structure.

Concepts of the command tree
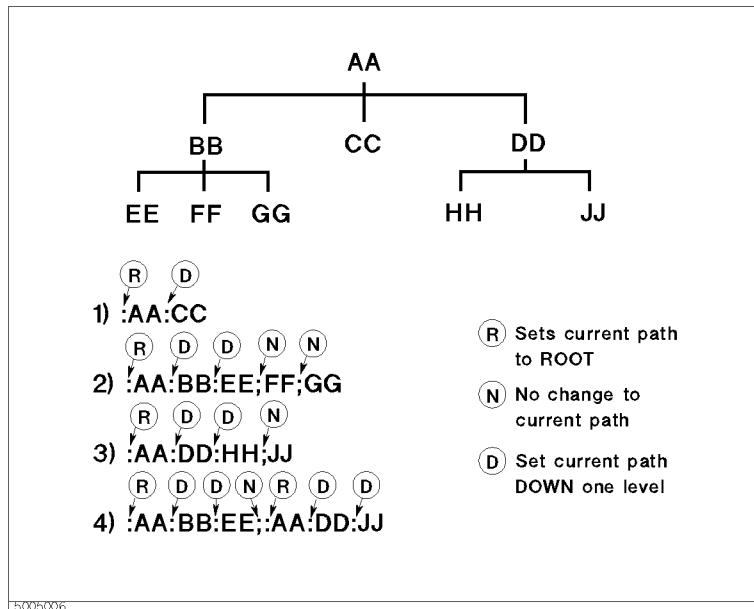
The commands at the top of the command tree are called "root command" or simply "root." To access lower level commands in the tree, you need to specify a specific path like a directory path in the DOS file system. After power-on or reset, the current path is set to the root. Special characters in messages change the path setting as described below.

Message terminator   A message terminator such as the <new line> character sets the current path to the root.

Colon (:)   A colon between 2 command mnemonics lowers the level of the current path in the command tree. A colon used as the first character of a command specifies the command mnemonic that follows as the root-level command.

Semicolon (;)   A semicolon does not change the current path and separates 2 commands in the same message.

Figure 2-6 shows an example of how to use colons and semicolons to efficiently access commands in the command tree.

Figure 2-6　　　　Using colons and semicolons

Grammar of messages

This section describes the grammar to send program messages via GPIB. Program messages are messages that the user sends to the instrument from the external controller to control the instrument. A program message consists of 1 or more commands and their necessary parameters.

Upper/lower case sensitivity

Upper/lower case insensitive.

Program message terminator

A program message must be terminated with one of the 3 program message terminators: <new line>, <^END>, or <new line><^END>. <^END> indicates that EOI on the GPIB interface becomes active at the instant when the immediately previous data byte is sent. For example, the OUTPUT command of HTBasic automatically sends the message terminator after the last data byte.

Parameters

A space (ASCII code: 32) is required between a command and its first parameter. When sending several parameters in a single command, separate each parameter with a comma (,).

Message including several commands

When sending 2 or more commands in a single message, separate each command with a semicolon (;). The following example shows how to send the ***CLS** command and the **:STAT:PRES** command in a single message using HTBasic.

```
OUTPUT 717;"*CLS;:STAT:PRES"
```

Remote mode

The E5061A/E5062A does not provide remote mode. Therefore, even if you send a GPIB command, it never enters into remote mode automatically. There is no local key to release remote mode.

If you need to prevent misoperation during remote control due to entry from the front panel or mouse, lock the input devices using the following commands.

- :SYST:KLOC:KBD command on page 477
- :SYST:KLOC:MOUS command on page 478

3 Setting Up the Analyzer

This chapter describes how to configure measurement conditions and how to configure the way the instrument displays measurement results on the LCD.

Selecting the Active Channel/Trace

You can configure the E5061A/E5062A using various commands. Some commands require you to specify, and deal only with, a particular channel or trace while other commands do not require you to do so.

Those commands that do not require you to specify a particular channel or trace apply to currently active channels and traces. Before issuing such a command, therefore, you must make the appropriate channels and traces active.

To make a channel active, use the following command:

•   :DISP:WIND{1-4}:ACT on page 318

NOTE   Only the currently displayed channels can be an active channel. Therefore, you must display the desired channels using :DISP:SPL command on page 315 before you can make them active.

To make a trace active, use the following command:

•   :CALC{1-4}:PAR{1-4}:SEL on page 286

NOTE   Only the currently displayed traces can be an active trace. Therefore, you must display the desired traces using :CALC{1-4}:PAR:COUN command on page 284 before you can make them active.

Configuring Measurement Conditions

Setting the Number of Traces

When you set the number of traces, that setting determines the upper limit trace number; for example, if the setting is 3, traces 1 through 3 will be displayed. To set the number of traces, use the following command:

- :CALC{1-4}:PAR:COUN on page 284

NOTE   Only the currently displayed traces can be an active trace. Therefore, you must set the number of traces appropriately before you can make them active.

Selecting Measurement Parameters

To select the measurement parameter (S parameter) for each trace, use the following command:

- :CALC{1-4}:PAR{1-4}:DEF on page 285

Setting the Sweep Condition (Stimulus)

How you can set the sweep condition depends on the sweep type. You can choose between the following four sweep types:

- Liner sweep

- Log sweep

- Segment sweep

- Power sweep

To select one of the above sweep types, use the following command:

- :SENS{1-4}:SWE:TYPE on page 428

Turning On/Off of Stimulus Signal Output

To turn on/off the stimulus signal output, use the following commands. For example, if the power output is automatically turned off due to the power trip feature, remove the cause of the overinput and turn on the stimulus signal output by executing the following command. You cannot perform measurement until you turn on the stimulus signal output.

- :OUTP on page 365

Configuring Linear Sweep Settings

To set the sweep range, use the following commands:

Start value	:SENS{1-4}:FREQ:STAR on page 418
Stop value	:SENS{1-4}:FREQ:STOP on page 419
Center value	:SENS{1-4}:FREQ:CENT on page 415

3. Setting Up the Analyzer

Span value	:SENS{1-4}:FREQ:SPAN on page 417

To set the number of measurement points, use the following command:

• :SENS{1-4}:SWE:POIN on page 425

To set the measurement time, use the following commands:

Measurement time	:SENS{1-4}:SWE:TIME on page 426
Turning on/off auto setting	:SENS{1-4}:SWE:TIME:AUTO on page 427

To set the sweep delay time, use the following command:

• :SENS{1-4}:SWE:DEL on page 424

To set the IF bandwidth, use the one of the following commands (both provide the same function):

• :SENS{1-4}:BAND on page 372

• :SENS{1-4}:BWID on page 373

Setting Power Level

When the instrument is equipped with the power range expansion function (Option 250, 275, 1E1), you select the power range using the following command:

• :SOUR{1-4}:POW:ATT on page 432

To set the power level, use the following command:

• :SOUR{1-4}:POW on page 431

To select whether to output the same power level (the set value for port 1) or different power level for each port, use the following command:

• :SOUR{1-4}:POW:PORT:COUP on page 434

• :SOUR{1-4}:POW:PORT{1-2} on page 435

To set the correction of power level attenuation proportional to the frequency (power slope feature), use the following command:

• :SOUR{1-4}:POW:SLOP:STAT on page 437

• :SOUR{1-4}:POW:SLOP on page 436

Configuring Segment Sweep Settings

When you opt to use segment sweep, you can set all items (in the segment sweep table) using a single command:

• :SENS{1-4}:SEGM:DATA on page 421

Alternatively, you can configure the segment sweep settings based on the data contained in a CSV file by issuing the following command:

• :MMEM:LOAD:SEGM on page 351

Also, you can save the contents of the current segment sweep table to a file by issuing the following command:

• :MMEM:STOR:SEGM on page 362

For more information on how to save and load the segment sweep table, refer to "Saving and recalling the segment sweep table."

Configuring Power Sweep Settings

To set the sweep range, use the following commands:

Start value	:SOUR{1-4}:POW:STAR on page 439
Stop value	:SOUR{1-4}:POW:STOP on page 440
Center value	:SOUR{1-4}:POW:CENT on page 433
Span value	:SOUR{1-4}:POW:SPAN on page 438

To set the fixed frequency (CW frequency), use the following command:

• :SENS{1-4}:FREQ on page 414

To set the number of points, the sweep time, the sweep delay time, and the IF bandwidth, use the same commands as for the linear/log sweep.

Configuring Averaging Settings

To configure the smoothing settings, use the following commands:

On/off	:SENS{1-4}:AVER on page 370
Averaging factor	:SENS{1-4}:AVER:COUN on page 371
Clear (Restart)	:SENS{1-4}:AVER:CLE on page 370

Setting the System Z0

NOTE This function is available with the firmware version 3.01 or greater.

To set the system characteristic impedance (Z0), use the following command:

• :SENS:CORR:IMP on page 369

Configuring Display Settings

Setting the Layout of Windows and Graphs

You can split the E5061A/E5062A's LCD screen into multiple windows that display channel-specific result information, and can select the window layout from a number of variations. In addition, you can place on screen a segment sweep table or echo window (which you can use to display messages from your custom program).

Selecting the Window Layout (Channel Display Mode)

One window displays the results for a single channel. You cannot have a single window display the results from more than one channel. This means that setting the window layout determines the number of channels displayed on screen.

To select one of the 14 different window layouts shown in Figure 3-1, use the following command:

- :DISP:SPL on page 315

Selecting the Graph Layout (Trace Display Mode)

You can place a number of trace graphs in each window, and can select one of the pre-defined graph layouts. The number of graphs differ depending on your selected graph layout. If the number of graphs is equal to or larger than the number of traces (set by the :CALC{1-4}:PAR:COUN command on page 284 command), each graph always displays one trace. On the other hand, if the number of graphs is smaller than the number of traces, some of the graphs display two or more traces. Graph 1 is populated with trace 1, graph 2 with trace 2, and so on. Traces whose numbers exceed the last graph's number will populate graph 1, graph 2, and so on.

To select one of the 14 different graph layouts shown in Figure 3-1, use the following command:

- :DISP:WIND{1-4}:SPL on page 323

Maximizing a Window and Graphs
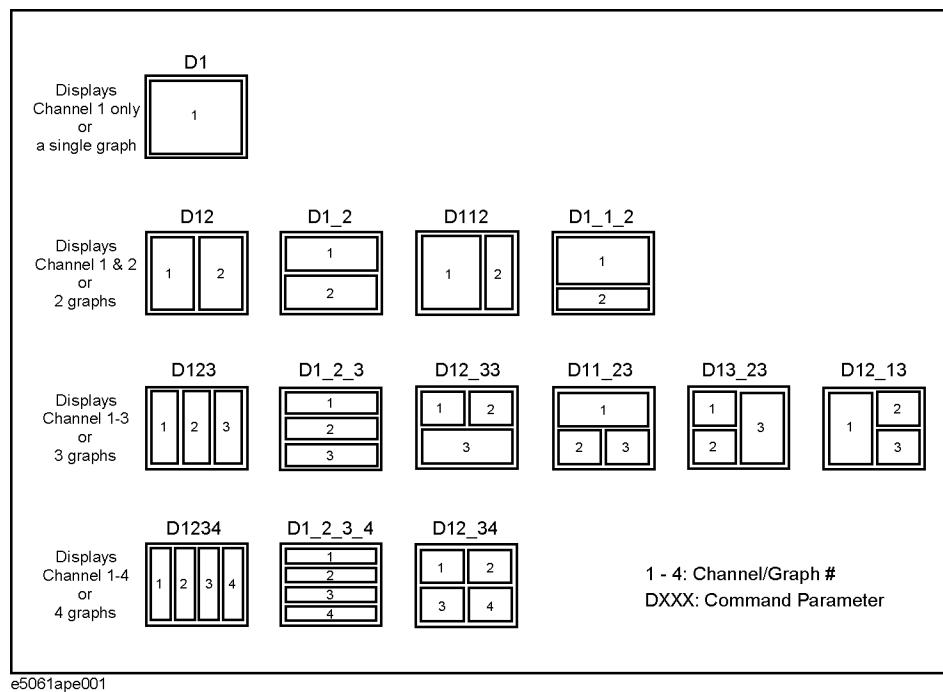
When you have multiple windows displayed, you can maximize the active channel window so that it covers the entire screen area. To maximize a window, use the following command:

- :DISP:MAX on page 314

Similarly, when you have multiple traces displayed, you can maximize the active trace so that it extends throughout the entire window. To maximize a trace, use the following command:

- :DISP:WIND{1-4}:MAX on page 322

Figure 3-1　　　　　**Window/graph layouts and command parameters**

e5061ape001

Showing/Hiding a Table or Echo Window

You can have the following items displayed at the bottom of the LCD screen.

• Segment sweep table

• Limit table

• Marker list table

• Echo window (a window you can use to display messages from your custom program)

To show or hide each of the above items, use the following command:

• :DISP:TABL on page 316

You can have two or more of the above items displayed at a time. The screen displays only the item selected using the following command:

• :DISP:TABL:TYPE on page 317

Showing/Hiding Softkey Labels

You can show or hide the softkey labels placed alongside the right-hand edge of the LCD screen. To show or hide the softkey labels, use the following command:

• :DISP:SKEY on page 314

Configuring Trace Display Settings

Selecting Which Traces to Display

Each trace has two different representations: data and memory traces. You can show or hide the data and memory traces independently of each other. To show or hide the data or memory traces, use the following commands:

Data trace	:DISP:WIND{1-4}:TRAC{1-4}:STAT on page 329
Memory trace	:DISP:WIND{1-4}:TRAC{1-4}:MEM on page 328

To copy the data trace to the memory trace, use the following command:

• :CALC{1-4}:MATH:MEM on page 281

Configuring Cross-Trace Math Operations

You can perform math operations performed between the data and memory traces and have the results displayed as the data trace. To perform cross-trace math operations, use the following command:

• :CALC{1-4}:MATH:FUNC on page 281

Configuring Smoothing Settings

To turn on or off smoothing, use the following command:

• :CALC{1-4}:SMO on page 293

The smoothing aperture is expressed as a percentage with respect to the sweep range. To set the smoothing aperture, use the following command:

• :CALC{1-4}:SMO:APER on page 294

Selecting the Data Format

You can select the following data format:

❏ Rectangular display formats

   • Log magnitude format
   • Phase format
   • Group delay format
   • Linear magnitude format
   • SWR format
   • Real format
   • Imaginary format
   • Expanded phase format
   • Positive phase format

❏ Imaginary format
❏ Expanded phase format

To select the measurement parameter data format, use the following command:

• :CALC{1-4}:FORM on page 219

Configuring the Display Scale

Depending on the measurement parameter data format, you can configure the display scale in one of the following two ways:

Rectangular display formats:

When you are using one of rectangular display formats (Logarithmic magnitude/Phase/ Group delay/Linear magnitude/SWR/Real/Imaginary/Expanded phase/Positive phase), you can configure the display scale by setting the following four items:

Number of divisions	:DISP:WIND{1-4}:Y:DIV on page 336
Scale per division	:DISP:WIND{1-4}:TRAC{1-4}:Y:PDIV on page 330
Reference graticule line	:DISP:WIND{1-4}:TRAC{1-4}:Y:RPOS on page 332
Reference graticule line value	:DISP:WIND{1-4}:TRAC{1-4}:Y:RLEV on page 331

NOTE　　The number of divisions is a channel-wide setting (shared among all traces) while the remaining three settings are trace-specific.

You can show or hide graticule label (the label on the left-hand side of the graticule lines) by issuing the following command:

- :DISP:WIND{1-4}:LAB on page 321

Smith Chart/Polar formats:

When you are using one of Smith chart/Polar formats, you can only set the full scale value (the outermost circle's value) using the following command:

- :DISP:WIND{1-4}:TRAC{1-4}:Y:PDIV on page 330

Auto Scale

You can use Auto Scale to automatically set the display scale. This feature works by automatically adjusting the reference division line value and the scale value per division when you are using one of rectangular display formats; or the full scale value when you are using one of Smith chart/Polar formats.

To perform Auto Scale, use the following command:

- :DISP:WIND{1-4}:TRAC{1-4}:Y:AUTO on page 329

Printing a Message in the Echo Window

You can print a message in the echo window by issuing the following command:

• :DISP:ECHO on page 311

You can clear any message displayed in the echo window by issuing the following command:

• :DISP:ECHO:CLE on page 311

Turning On or Off Display Update

To turn on or off the update of the LCD screen, use the following command:

• :DISP:ENAB on page 312

Showing/Hiding Frequencies

To show or hide frequencies on the LCD screen, use the following command:

• :DISP:ANN:FREQ on page 304

Showing or Hiding the Title

To show or hide the title, use the following command:

• :DISP:WIND{1-4}:TITL on page 324

To define the title string that appears in the title display area, use the following command:

• :DISP:WIND{1-4}:TITL:DATA on page 324

Configuring Date/Time Display

To show or hide the current date and time on the left-hand side of the instrument status bar, use the following command:

• :DISP:CLOC on page 305

To set the date and time, use the following command:

• :SYST:DATE on page 475
• :SYST:TIME on page 482

Turning On or Off the LCD Backlight

To turn on or off the LCD backlight, use the following command (note that turning off the backlight makes the screen unreadable):

• :SYST:BACK on page 472

Setting display colors

Selecting display mode

You can select the display mode of the LCD display from 2 modes: normal display (background: black) or inverted display (background: white).

To select the display mode, use the following command:

- :DISP:IMAG on page 313

Setting display color for each item

To set the display colors, use the following commands:

Data trace	:DISP:COL{1-2}:TRAC{1-4}:DATA on page 309
Memory trace	:DISP:COL{1-2}:TRAC{1-4}:MEM on page 310
Graph	:DISP:COL{1-2}:GRAT{1-2} on page 307
Limit test	:DISP:COL{1-2}:LIM{1-2} on page 308
Background	:DISP:COL{1-2}:BACK on page 306

Resetting display colors to factory state

You can reset the display colors in normal display and inverted display to the preset factory state.

To reset the display colors, use the following command:

- :DISP:COL{1-2}:RES on page 308

Saving and Loading the Settings

You can save the settings for measurement conditions and screen display to a file along with other instrument settings, and can later load them from the file.

Once you have saved the measurement condition and screen display settings to a file, you can later load them whenever necessary; you can quickly modify the settings loaded from a file to create new settings without having to issue many commands.

To save the current settings to a file, use the following command:

- :MMEM:STOR on page 353

To load the settings from a file, use the following command:

- :MMEM:LOAD on page 345

For more information on how to save and load the settings, refer to "Saving and recalling instrument status."

Sample Program

Example 3-1 is a sample program that demonstrates how to configure measurement conditions. You can find the source file of this program, named setup.htb, on the sample program disk.

The sample program puts the instrument into the preset state, configures it as shown in Table 3-1, and saves the settings to a file named "Ex_3_1.sta".

Table 3-1   **Target settings in Example 3-1**

Item			Setting
Window Layout			Channel 1 in the upper window (2/3 of the screen height) and channel 2 in the lower window (1/3 of the screen height)
Channel 1	Sweep type		Segment
	Sweep range		See Table 3-2.
	Number of measurement points		
	IF bandwidth		
	Power		
	Number of traces		4
	Graph Layout		Four graphs at upper left, upper right, lower left, and lower right.
	Trace 1	Measurement parameter	S11
		Data format	Smith chart (Lin)
		Full-scale value	2
	Trace 2	Measurement parameter	S21
		Data format	Log magnitude
		Reference division line number	9
		Reference division line value	2
		Scale per division	10 dBm
	Trace 3	Measurement parameter	S12
		Data format	Log magnitude
		Reference division line number	9
		Reference division line value	2
		Scale per division	10 dBm
	Trace 4	Measurement parameter	S22
		Data format	Smith chart (Lin)
		Full-scale value	2

Table 3-1   **Target settings in Example 3-1**

Item			Setting
Channel 2	Sweep type		Linear
	Sweep range	Center value	1.9 GHz
		Span value	500 MHz
	Number of measurement points		101
	IF bandwidth		30 kHz
	Power		0 dBm
	Number of traces		4
	Graph Layout		Two graphs at left and right
	Trace 1	Measurement parameter	S21
		Data format	Log magnitude
		Reference division line number	9
		Reference division line value	2
		Scale per division	10 dBm
	Trace 2	Measurement parameter	S22
		Data format	Smith chart (Lin)
		Full-scale value	2

Table 3-2   **Segment table for channel 1**

Segment Number	Start value	Stop value	Number of measurement points	IF bandwidth	Power
1	1.7 GHz	1.9 GHz	21	30 kHz	0 dBm
2	1.9 GHz	2 GHz	101	10 kHz	-10 dBm
3	2 GHz	2.2 GHz	21	30 kHz	0 dBm

3. Setting Up the Analyzer

The program is described in detail below:

Line 70	Assigns a GPIB address to the I/O pass.
Line 90	Stores the number of channel 1's sweep segments into the Segm variable.
Lines 100 to 150	These lines store the start and stop values for channel 1's segments 1 through 3 into the Star1(*) and Stop1(*) variables, respectively.
Lines 160 to 170	These lines store channel 2's center and span values into the Star2 and Stop2 variables, respectively.
Lines 180 to 210	These lines store the number of points for channel 1's segments 1 through 3 into the Nop1(*) variable, and the number of measurement points for channel 2 into the Nop2 variable.
Lines 220 to 250	These lines store the IF bandwidth for channel 1's segments 1 through 3 into the If_bw1(*) variable, and the IF bandwidth for channel 2 into the If_bw2 variable.
Lines 260 to 290	These lines store the power for channel 1's segments 1 through 3 into the Pow1(*) variable, and the power for channel 2 into the Pow2 variable.
Lines 300 to 310	These lines store the number of channel'1 traces into the Num_of_tr1 variable, and the number of channel 2's traces into the Num_of_tr2 variable.
Lines 320 to 330	These lines store channel 1's graph layout into the Allocate1$ variable, and channel 2's graph layout into the Allocate2$ variable.
Lines 340 to 390	These lines store the measurement parameters for channel 1's traces 1 through 4 into the Para1$(*) variable, and the measurement parameters for channel 2's traces 1 through 2 into the Para2$(*) variable.
Lines 400 to 450	These lines store the data formats for channel 1's traces 1 through 4 into the Fmt1$(*) variable, and the data formats for channel 2's traces 1 through 2 into the Fmt2$(*) variable.
Lines 460 to 480	These lines store the reference division line numbers for channel 1's traces 2 through 3 into the Ref_pos1(*) variable, and the reference division line numbers for channel 2's trace 1 into the Ref_pos2(*) variable.
Lines 490 to 510	These lines store the reference division line values for channel 1's traces 2 through 3 into the Ref_lev1(*) variable, and the reference division line values for channel 2's trace 1 into the Ref_lev2(*) variable.
Lines 520 to 570	These lines store the data formats for channel 1's traces 1 through 4 into the Fmt1$(*) variable, and the data formats for channel 2's traces 1 through 2 into the Fmt2$(*) variable.
Line 580	Stores the name of the file into the File$ variable.
Line 600	Puts the instrument into preset state.
Line 620	Places the window for channel 1 in the upper part of the LCD screen, and the window for channel 2 in the lower part.
Lines 630 to 640	These lines turn on Continuous Activation mode for channels 1 and 2.

Line 680   Sets channel 1's sweep type to "segment".

Lines 690 to 730   These lines set up the segment table for channel 1.

                                 Line 600: Sends the command that sets up the segment table along with the parameter header ("5,0,1,1,0,0" causes the IF bandwidth and power to be set on a segment by segment basis; Segm represents the number of segments).

                                 Lines 700 to 730: Send the data for the start and stop values, number of points, IF bandwidth, and power (Star1, Stop1, Nop1, If_bw1, Pow1) on a segment by segment basis.

Lines 750 to 760   For channel 1, these lines set the number of traces to Num_of_tr1 and the graph layout to Allocate1$.

Lines 770 to 890   For channel 1, the program iterates the following loop while incrementing i from 1 to Num_of_tr1 for each trace.

                                 Line 780: Sets the measurement parameter to Para1$(i).

                                 Line 790: Makes trace(i) active.

                                 Line 800: Sets the data format to Fmt1$(i).

                                 Line 830: If the data format is Smith chart or polar, this line sets the full-scale value to Scale1(i).

                                 Lines 850 to 870: If the data format is neither Smith chart nor polar, these lines set the reference division line number to Ref_pos1(i), the reference division line value to Ref_lev1(i), and the scale per division to Scale1(i).

Line 930   Sets channel 2's sweep type to "linear".

Lines 940 to 980   For channel 2, these lines set the center value to Cent2, the span value to Span2, the number of measurement points to Nop2, the IF bandwidth to If_bw2, and the power to Pow2.

Lines 1000 to 1010   For channel 2, these lines set the number of traces to Num_of_tr2 and the graph layout to Allocate2$.

Lines 1020 to 1140   For channel 2, the program iterates the following loop while incrementing i from 1 to Num_of_tr2 for each trace.

                                 Line 1030: Sets the measurement parameter to Para2$(i).

                                 Line 1040: Makes trace(i) active.

                                 Line 1050: Sets the data format to Fmt2$(i).

                                 Line 1080: If the data format is Smith chart or polar, this line sets the full-scale value to Scale2(i).

                                 Lines 1100 to 1120: If the data format is neither Smith chart nor polar, these lines set the reference division line number to Ref_pos2(i), the reference division line value to Ref_lev2(i), and the scale per division to Scale2(i).

Line 1160   Saves the settings of the E5061A/E5062A under the file name File$.

Example 3-1   **Configuring Measurement Conditions (setup.htb)**

```
10      DIM Allocate1$[9],Allocate2$[9],File$[20]
20      DIM Para1$(1:4)[9],Para2$(1:2)[9],Fmt1$(1:4)[9],Fmt2$(1:2)[9]
30      REAL Star1(1:3),Stop1(1:3),Pow1(1:3),Cent2,Span2,Pow2
40      REAL Ref_rev1(1:4),Ref_rev2(1:2),Scale1(1:4),Scale2(1:2)
50      INTEGER Segm,Nop1(1:3),Nop2,Num_of_tr1,Num_of_tr2
60      INTEGER Ref_pos1(1:4),Ref_pos2(1:2),I
70      ASSIGN @Agte507x TO 717
80      !
90      Segm=3              ! Number of Segment Ch.1      : 3
100     Star1(1)=1.7E+9     ! Start Frequency Ch.1 Segm.1: 1.7 GHz
110     Star1(2)=1.9E+9     !                      Segm.2: 1.9 GHz
120     Star1(3)=2.E+9      !                      Segm.3: 2 GHz
130     Stop1(1)=1.9E+9     ! Stop Frequency  Ch.1 Segm.1: 1.9 GHz
140     Stop1(2)=2.E+9      !                      Segm.2: 2 GHz
150     Stop1(3)=2.2E+9     !                      Segm.3: 2.2 GHz
160     Cent2=1.9E+9        ! Center Frequency Ch.2      : 1.9 GHz
170     Span2=5.00E+8       ! Span            Ch.2       : 500 MHz
180     Nop1(1)=21          ! Number          Ch.1 Segm.1: 21
190     Nop1(2)=101         !   of Points          Segm.2: 101
200     Nop1(3)=21          !                      Segm.3: 21
210     Nop2=101            !                 Ch.2       : 101
220     If_bw1(1)=5.0E+4    ! IF Bandwidth    Ch.1 Segm.1: 50 kHz
230     If_bw1(2)=1.0E+4    !                      Segm.2: 10 kHz
240     If_bw1(3)=5.0E+4    !                      Segm.3: 50 kHz
250     If_bw2=7.0E+4       !                 Ch.2       : 70 kHz
260     Pow1(1)=0           ! Power           Ch.1 Segm.1: 0 dBm
270     Pow1(2)=-10         !                      Segm.2: -10 dBm
280     Pow1(3)=0           !                      Segm.3: 0 dBm
290     Pow2=0              !                 Ch.2       : 0 dBm
300     Num_of_tr1=4        ! Number          Ch.1       : 4
310     Num_of_tr2=2        !   of Traces     Ch.2       : 2
320     Allocate1$="D12_34" ! Allocate Traces Ch.1       : D12_34
330     Allocate2$="D12"    !                 Ch.2       : D12
340     Para1$(1)="S11"     ! Measurement     Ch.1 Trace1: S11
350     Para1$(2)="S21"     !   Parameter          Trace2: S21
360     Para1$(3)="S12"     !                      Trace3: S12
370     Para1$(4)="S22"     !                      Trace4: S22
380     Para2$(1)="S21"     !                 Ch.2 Trace1: S21
390     Para2$(2)="S22"     !                      Trace2: S22
400     Fmt1$(1)="SLIN"     ! Data Format     Ch.1 Trace1:
Smith(Lin/Phase)
410     Fmt1$(2)="MLOG"     !                      Trace2: Log Mag
420     Fmt1$(3)="MLOG"     !                      Trace3: Log Mag
430     Fmt1$(4)="SLIN"     !                      Trace4: Smith(Lin/Phase)
440     Fmt2$(1)="MLOG"     !                 Ch.2 Trace1: Log Mag
450     Fmt2$(2)="SLIN"     !                      Trace2: Smith(Lin/Phase)
460     Ref_pos1(2)=9       ! Reference       Ch.1 Trace2: 9
470     Ref_pos1(3)=9       !   Position           Trace3: 9
480     Ref_pos2(1)=9       !                 Ch.2 Trace1: 9
490     Ref_lev1(2)=0       ! Reference Level Ch.1 Trace2: 0 dBm
500     Ref_lev1(3)=0       !                      Trace3: 0 dBm
510     Ref_lev2(1)=0       !                 Ch.2 Trace1: 0 dBm
520     Scale1(1)=2         ! Scale           Ch.1 Trace1: 2
530     Scale1(2)=10        !                      Trace2: 10 dBm
540     Scale1(3)=10        !                      Trace3: 10 dBm
```

```
550    Scale1(4)=2           !                            Trace4: 2
560    Scale2(1)=10          !                    Ch.2 Trace1: 10 dBm
570    Scale2(2)=2           !                            Trace2: 2
580    File$="Ex_3_1.sta"    ! Save File Name              : Ex_3_1.sta
590    !
600    OUTPUT @Agte507x;":SYST:PRES"
610    !
620    OUTPUT @Agte507x;":DISP:SPL D1_1_2"
630    OUTPUT @Agte507x;":INIT1:CONT ON"
640    OUTPUT @Agte507x;":INIT2:CONT ON"
650    !
660    ! Channel 1
670    !
680    OUTPUT @Agte507x;":SENS1:SWE:TYPE SEGM"
690    OUTPUT @Agte507x;":SENS1:SEGM:DATA 5,0,1,1,0,0,";Segm;",";
700    FOR I=1 TO Segm-1
710      OUTPUT
@Agte507x;Star1(I);",";Stop1(I);",";Nop1(I);",";If_bw1(I);",";Pow1(I);",
";
720      NEXT I
730      OUTPUT
@Agte507x;Star1(Segm);",";Stop1(Segm);",";Nop1(Segm);",";If_bw1(Segm);",
";Pow(Segm)
740    !
750    OUTPUT @Agte507x;":CALC1:PAR:COUN ";Num_of_tr1
760    OUTPUT @Agte507x;":DISP:WIND1:SPL "&Allocate1$
770    FOR I=1 TO Num_of_tr1
780      OUTPUT @Agte507x;":CALC1:PAR"&VAL$(I)&":DEF "&Para1$(I)
790      OUTPUT @Agte507x;":CALC1:PAR"&VAL$(I)&":SEL"
800      OUTPUT @Agte507x;":CALC1:FORM "&Fmt1$(I)
810      SELECT Fmt1$(I)
820        CASE "SLIN","SLOG","SCOM","SMIT","SADM","PLIN","PLOG","POL"
830          OUTPUT @Agte507x;":DISP:WIND1:TRAC"&VAL$(I)&":Y:PDIV
";Scale1(I)
840        CASE ELSE
850          OUTPUT @Agte507x;":DISP:WIND1:TRAC"&VAL$(I)&":Y:RPOS
";Ref_pos1(I)
860          OUTPUT @Agte507x;":DISP:WIND1:TRAC"&VAL$(I)&":Y:RLEV
";Ref_rev1(I)
870          OUTPUT @Agte507x;":DISP:WIND1:TRAC"&VAL$(I)&":Y:PDIV
";Scale1(I)
880      END SELECT
890    NEXT I
900    !
910    ! Channel 2
920    !
921    PAUSE
930    OUTPUT @Agte507x;":SENS2:SWE:TYPE LIN"
940    OUTPUT @Agte507x;":SENS2:FREQ:CENT ";Cent2
950    OUTPUT @Agte507x;":SENS2:FREQ:SPAN ";Span2
960    OUTPUT @Agte507x;":SENS2:SWE:POIN ";Nop2
970    OUTPUT @Agte507x;":SENS2:BAND ";If_bw2
980    OUTPUT @Agte507x;":SOUR2:POW ";Pow2
990    !
1000   OUTPUT @Agte507x;":CALC2:PAR:COUN ";Num_of_tr2
1010   OUTPUT @Agte507x;":DISP:WIND2:SPL "&Allocate2$
1020   FOR I=1 TO Num_of_tr2
1030     OUTPUT @Agte507x;":CALC2:PAR"&VAL$(I)&":DEF "&Para2$(I)
```

3. Setting Up the Analyzer

```
1040      OUTPUT @Agte507x;":CALC2:PAR"&VAL$(I)&":SEL"
1050      OUTPUT @Agte507x;":CALC2:FORM "&Fmt2$(I)
1060      SELECT Fmt2$(I)
1070        CASE "SLIN","SLOG","SCOM","SMIT","SADM","PLIN","PLOG","POL"
1080          OUTPUT @Agte507x;":DISP:WIND2:TRAC"&VAL$(I)&":Y:PDIV
";Scale2(I)
1090        CASE ELSE
1100          OUTPUT @Agte507x;":DISP:WIND2:TRAC"&VAL$(I)&":Y:RPOS
";Ref_pos2(I)
1110          OUTPUT @Agte507x;":DISP:WIND2:TRAC"&VAL$(I)&":Y:RLEV
";Ref_rev2(I)
1120          OUTPUT @Agte507x;":DISP:WIND2:TRAC"&VAL$(I)&":Y:PDIV
";Scale2(I)
1130      END SELECT
1140    NEXT I
1150    !
1160    OUTPUT @Agte507x;":MMEM:STOR """&File$&""""
1170    END
```

4　Performing a Calibration

This chapter describes how to obtain the calibration coefficients and perform error correction and how to define the calibration kit required to obtain the calibration coefficients.

Calibration

You need to execute calibration to eliminate error elements related to measurement and perform accurate measurement.

Performing a Calibration (Obtaining the Calibration Coefficients)

Selecting a Calibration Kit

To select a calibration kit, use the following command:

• :SENS{1-4}:CORR:COLL:CKIT on page 375

Selecting a Calibration Type

The calibration coefficients are calculated based on the selected calibration type. Before you can calculate the calibration coefficients, therefore, you must select the appropriate calibration type using the following command.

Calibration type		Command
Response	OPEN	:SENS{1-4}:CORR:COLL:METH:OPEN on page 402
	SHORT	:SENS{1-4}:CORR:COLL:METH:SHOR on page 402
	THRU	:SENS{1-4}:CORR:COLL:METH:THRU on page 404
Enhanced Response		:SENS{1-4}:CORR:COLL:METH:ERES on page 399
Full 1-Port		:SENS{1-4}:CORR:COLL:METH:SOLT1 on page 403
Full 2-Port		:SENS{1-4}:CORR:COLL:METH:SOLT2 on page 403

To check the currently selected calibration type, use the following command:

• :SENS{1-4}:CORR:COLL:METH:TYPE? on page 405

Measuring the Calibration Data

To measure the calibration data, use the following command:

Calibration data items	Command
OPEN	:SENS{1-4}:CORR:COLL:OPEN on page 406
SHORT	:SENS{1-4}:CORR:COLL:SHOR on page 407
LOAD	:SENS{1-4}:CORR:COLL:LOAD on page 401
THRU	:SENS{1-4}:CORR:COLL:THRU on page 408
Isolation	:SENS{1-4}:CORR:COLL:ISOL on page 399

NOTE   You cannot run more than one of the commands listed above at a time; if you issue another command before the currently running command completes successfully, the current command will be aborted. When you write a program that issues multiple calibration commands in series, therefore, you should use the *OPC? command on page 198 command or some other means to ensure that no command is executed before the

preceding command completes.

As shown in Table 4-1, the data required to calculate the calibration coefficients differs depending on the selected calibration type.

Table 4-1 **Calibration Types and Required Data**

Calibration type Selected ports are enclosed in parentheses.		Data				
		OPEN	**SHORT**	**LOAD**	**THRU**	**Isolation**
Response	OPEN (a)	a	Not required	[a]	Not required	Not required
	SHORT (a)	Not required	a	[a]	Not required	Not required
	THRU (a-b)	Not required	Not required	Not required	a-b	[a-b]
Enhanced Response (a-b)		b	b	b	a-b	[a-b]
Full 1-Port (a)		a	a	a	Not required	Not required
Full 2-Port (a-b)		a, b	a, b	a, b	a-b, b-a	[a-b], [b-a]

In the data section in the table, the letter m (for example, 1, a) represents the measurement data at port m; m-n (for example, 1-2, a-b) represents the measurement data between response port m and stimulus port n. You can omit data enclosed in brackets.

4. Performing a Calibration

Calculating the Calibration Coefficients

To calculate the calibration coefficients, use the following command:

Calibration type	Command
All calibration types	:SENS{1-4}:CORR:COLL:SAVE on page 407

Before issuing the above command, you must measure all the required calibration data items according to your selected calibration types (see Table 4-1).

Calculating the calibration coefficients clears all calibration data regardless it is used for the calculation. The calibration type selection is also cleared, which results in the state when no calibration type is selected.

Turning On or Off Error Correction

To turn on or off Error Correction, use the following command:

•   :SENS{1-4}:CORR:STAT on page 412

Also, once you have calculated the calibration coefficient using the **:SENS{1-4}:CORR:COLL:SAVE** command, Error Correction is automatically turned on.

Using ECal

An ECal (Electronic Calibration) module allows you to perform full 1/2-port calibration and response (THRU) calibration without having to replacing the standard device.

ECal works by using the calibration kit data contained in the ECal module, instead of the calibration kit data selected on the part of the E5061A/E5062A. This means that you do not have to define or select a calibration kit when using ECal.

NOTE   When two or more ECal modules are connected through the USB port, the system uses the calibration kit data contained in the first ECal module.

To perform ECal, use the following command:

Calibration type	Command
Full 1-Port Calibration	:SENS{1-4}:CORR:COLL:ECAL:SOLT1 on page 397
Full 2-Port Calibration	:SENS{1-4}:CORR:COLL:ECAL:SOLT2 on page 397
Enhanced Response Calibration	:SENS{1-4}:CORR:COLL:ECAL:ERES on page 395
Response Calibration (THRU)	:SENS{1-4}:CORR:COLL:ECAL:THRU on page 398

Simply issuing one of the above commands completes all the tasks necessary for error correction, including measuring the calibration data, calculating the calibration coefficients, and running on the Error Correction feature.

You can control whether to perform isolation measurement during ECal. To turn on or off isolation measurement, use the following command:

• :SENS{1-4}:CORR:COLL:ECAL:ISOL on page 395

NOTE   If the ECal module does not support isolation measurement, the system never performs isolation measurement.

Checking the Applied Calibration Type

When you turn on Error Correction, you can check the calibration type actually applied to each trace. To check the calibration type, use the following command:

• :SENS{1-4}:CORR:TYPE{1-4}? on page 413

NOTE   The above command reads out the same parameter (SOLT3) for both the full 3 port and the simplified full 3-port and therefore they cannot be discriminated. For the same reason, the full 4 port and the simplified full 4 port cannot be discriminated.

Defining Calibration Kits

Selecting a Calibration Kit

To select a calibration kit, use the following command:

- :SENS{1-4}:CORR:COLL:CKIT on page 375

Setting the Calibration Kit Name

To set the name of a calibration kit, use the following command:

- :SENS{1-4}:CORR:COLL:CKIT:LAB on page 376

Standard Definitions

Selecting a Standard Type To select a standard type, use the following command:

- :SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:TYPE on page 393

Setting the Standard Name To set the standard name, use the following command:

- :SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:LAB on page 391

Setting the Standard Value To set the standard value, use the following command:

Item	Command
C0	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:C0 on page 382
C1	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:C1 on page 383
C2	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:C2 on page 384
C3	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:C3 on page 385
L0	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:L0 on page 387
L1	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:L1 on page 388
L2	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:L2 on page 389
L3	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:L3 on page 390
Offset Delay	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:DEL on page 386
Offset Loss	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:LOSS on page 392
Offset Z0	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:Z0 on page 394
Arbitrary Impedance	:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:ARB on page 381

As shown in Table 4-2, you need to set different items depending on the standard type.

Table 4-2   **Settings Specific to Each Standard Type**

Standard Types	C0 to C3	L0 to L3	Offset Delay	Offset Loss	Offset Z0	Arbitrary Impedance
OPEN	√		√	√	√	
SHORT		√	√	√	√	
LOAD			√	√	√	
THRU			√	√	√	
Arbitrary Impedance			√	√	√	√

You need to set the items identified by √ marks in the table above.

Defining a Standard Class Assignment

To select the standard to be applied to the OPEN measurement for each port, use the following command:

•   :SENS{1-4}:CORR:COLL:CKIT:ORD:OPEN on page 378

To select the standard to be applied to the SHORT measurement for each port, use the following command:

•   :SENS{1-4}:CORR:COLL:CKIT:ORD:SHOR on page 379

To select the standard to be applied to the LOAD measurement for each port, use the following command:

•   :SENS{1-4}:CORR:COLL:CKIT:ORD:LOAD on page 377

To select the standard to be applied to the THRU measurement between each pair of ports, use the following command:

•   :SENS{1-4}:CORR:COLL:CKIT:ORD:THRU on page 380

Saving and Loading Calibration Coefficients

You can save calibration coefficients to a file along with other instrument settings, and can later load them from the file.

NOTE	You cannot save, load, read, or write calibration coefficients independently of the other instrument settings.

By default, the system does not save calibration coefficients when it saves instrument settings. To save calibration coefficients, therefore, you must explicitly configure the system to save calibration coefficients by issuing the following command:

- :MMEM:STOR:STYP on page 363

To save calibration coefficients to a file, use the following command:

- :MMEM:STOR on page 353

To load calibration coefficients from a file, use the following command:

- :MMEM:LOAD on page 345

For more information on how to save and load calibration coefficients, refer to "Saving and recalling instrument status."

Sample Program

Calibration

Example 4-1 shows a sample program that demonstrates how to calibrate the instrument. You can find the source file of this program, named cal.htb, on the sample program disk.

The sample program performs calibration with the specified calibration type, and saves the results to a file named "Ex_4_1.sta."

The program is described in detail below:

Line 40	Assigns a GPIB address to the I/O pass.
Line 50	Stores the name of the file (Ex_4_1.sta) into the File$ variable.
Line 60	Stores the channel number (1) into the Ch$ variable.
Line 80	Calls a subprogram named Select_cal_kit to select the calibration kit.
Line 110	Allows the user to return to the entry start line and re-enter the data if an error (such as an invalid entry) occurs while selecting the calibration type number.
Lines 130 to 210	These lines display the list of supported calibration types, and prompts the user to choose one of the items by typing in the appropriate number.
Line 220	Converts the entered value into an integer and stores it into the Cal_type variable.
Line 230	Returns to the entry start line if an invalid value is contained in Cal_type.
Lines 260 to 420	These lines call a subprogram named Select_port to select the appropriate port based on the value of Cal_type, and then perform calibration.

    Lines 280 to 290: If Cal_type = 1, the program calls a subprogram named Cal_resp to perform response calibration (OPEN) after selecting the port.

    Lines 310 to 320: If Cal_type = 2, the program calls the subprogram Cal_resp to perform response calibration (SHORT) after selecting the port.

    Lines 340 to 350: If Cal_type = 3, the program calls a subprogram named Cal_resp_thru to perform response calibration (THRU) after selecting the port.

    Lines 370 to 380: If Cal_type = 4, the program calls a subprogram named Cal_solt to perform full 1-port calibration after selecting the port.

    Lines 400 to 410: If Cal_type = 5, the program calls the subprogram Cal_solt to perform full 2-port calibration after selecting the port.

Lines 440 to 450	These lines configure the system to save calibration coefficients along

with instrument settings, and then save the instrument settings under the file name contained in the File$ variable.

The Select_cal_kit subprogram in lines 500 to 740, which selects the calibration kit, is described below.

Lines 550 to 590	These lines retrieve the names of all the calibration kits and stores them into the Cal_kit_lbl$(*) variable.
Line 600	Allows the user to return to the entry start line and re-enter the data if an error (such as an invalid entry) occurs while entering the number that identifies the calibration kit.
Lines 620 to 680	Displays the list of supported calibration kits, and prompts the user to choose one of the items by typing in the appropriate number.
Line 690	Converts the entered value into an integer and stores it into the Cal_kit variable.
Line 700	Returns to the entry start line if an invalid value is contained in Cal_kit.
Line 730	Selects the calibration kit that matches the number contained in the Cal_kit variable.

The Select_port subprogram in lines 780 to 1010, which allows the user to select a port, is described below.

Lines 830 to 840	If the value of Num_of_ports is 2 (2-port), the subprogram determines the port numbers (1, 2) without prompting the user to enter port numbers, and then store the port numbers into the Port(*) variable.
Lines 860 to 990	If the value of Num_of_ports is not 2, the subprogram prompts the user to select as many ports as Num_of_ports.

> Line 870: Allows the user to return to the entry start line and re-enter the data if an error (such as an invalid entry) occurs while entering the port number.
>
> Lines 890 to 910: These lines print the index of the current port and prompt the user to enter the port number.
>
> Lines 920: Converts the entered value into an integer and stores it into the Port(*) variable.
>
> Lines 930 to 960: Return to the entry start line if the port number is beyond the range of 1 to 2 or conflicts with an already selected number.

The Cal_resp subprogram in lines 1050 to 1170, which performs response calibration (OPEN/SHORT), is described below.

Line 1080   Displays the calibration type.

Line 1090   Configures the instrument to perform response calibration (Type$) on the port identified by the Port variable.

Lines 1100 to 1110 These lines prompt the user to connect a Type$ to port Port, and wait for a press of the [Enter] key after the connection.

Lines 1120 to 1140 These lines execute the calibration data measurement command identified by Type$ on port Port, and wait until the measurement completes successfully.

Line 1150   Calculates the calibration coefficients and turns on error correction.

Line 1160   Displays a closing message.

The Cal_resp_thru subprogram in lines 1210 to 1330, which performs response calibration (THRU), is described below.

Line 1240   Displays the calibration type.

Line 1250   Configures the instrument to perform response calibration (THRU) on response port Port 1 and stimulus port Port 2.

Lines 1260 to 1270 These lines prompt the user to connect a THRU standard between the ports identified by Port1 and Port2, and wait for a press of the [Enter] key after the connection.

Lines 1280 to 1300 These lines execute the TURU calibration data measurement command on response port Port1 and stimulus port 2, and wait until the measurement completes successfully.

Line 1310   Calculates the calibration coefficients and turns on error correction.

Line 1320   Displays a closing message.

4. Performing a Calibration

The Cal_solt subprogram in lines 1370 to 1900, which performs full n-port calibration, is described below.

Line 1410   Displays the calibration type.

Lines 1450 to 1490 These lines configure the instrument to perform full Num_of_ports port calibration on the ports identified by Port(1) through Port(Num_of_ports).

Lines 1630 to 1690 These lines make up a loop that iterates while incrementing i from 1 to Num_of_ports.

>   Lines 1540 to 1550: Prompt the user to connect an OPEN standard to port Port(i), and wait for a press of the [Enter] key after the connection.
>
>   Lines 1560 to 1580: Execute the OPEN calibration data measurement command on port Port(i), and wait until the measurement completes successfully.
>
>   Lines 1590 to 1600: Prompt the user to connect a SHORT standard to port Port(i), and wait for a press of the [Enter] key after the connection.
>
>   Lines 1610 to 1630: Execute the SHORT calibration data measurement command on port Port(i), and wait until the measurement completes successfully.
>
>   Lines 1640 to 1650: Prompt the user to connect a LOAD standard to port Port(i), and wait for a press of the [Enter] key after the connection.
>
>   Lines 1660 to 1680: Execute the LOAD calibration data measurement command on port Port(i), and wait until the measurement completes successfully.

Lines 1730 to 1840 These lines make up a loop that iterates while incrementing i from 1 to Num_of_ports-1 and j from i+1 to Num_of_ports.

>   Lines 1750 to 1760: Prompt the user to connect a THRU standard between port Port(i) and port Port(j), and wait for a press of the [Enter] key after the connection.
>
>   Lines 1770 to 1790: Execute the THRU calibration data measurement command on response port Port(i) and stimulus port Port(j), and wait until the measurement completes successfully.
>
>   Lines 1800 to 1820: Execute the THRU calibration data measurement command on response port Port(j) and stimulus port Port(i), and wait until the measurement completes successfully.

Line 1880   Calculates the calibration coefficients and turns on error correction.

Line 1890   Displays a closing message.

Example 4-1   **Calibration (cal.htb)**

```
10      DIM File$[20],Ch$[9],Inp_char$[9]
20      INTEGER Cal_kit,Cal_type,Port(1:2)
30      !
40      ASSIGN @Agte507x TO 717
50      File$="Ex_4_1.sta"
60      Ch$="1"
70      !
80      Select_cal_kit(@Agte507x,Ch$)
90      !
100     CLEAR SCREEN
110     ON ERROR GOTO Type_select
120 Type_select: !
130     PRINT "## Calibration Type Selection ##"
140     PRINT " 1: Response (Open)"
150     PRINT " 2: Response (Short)"
160     PRINT " 3: Response (Thru)"
170     PRINT " 4: Full 1 Port"
180     PRINT " 5: Full 2 Port"
190     PRINT ""
200     PRINT "Input 1 to 5"
210     INPUT "Input number? (1 to 5)",Inp_char$
220     Cal_type=IVAL(Inp_char$,10)
230     IF Cal_type<1 OR Cal_type>5 THEN Type_select
240     OFF ERROR
250     !
260     SELECT Cal_type
270       CASE 1
280         Select_port(1,Port(*))
290         Cal_resp(@Agte507x,Ch$,"OPEN",Port(1))
300       CASE 2
310         Select_port(1,Port(*))
320         Cal_resp(@Agte507x,Ch$,"SHOR",Port(1))
330       CASE 3
340         Select_port(2,Port(*))
350         Cal_resp_thru(@Agte507x,Ch$,Port(1),Port(2))
360       CASE 4
370         Select_port(1,Port(*))
380         Cal_solt(@Agte507x,Ch$,1,Port(*))
390       CASE 5
400         Select_port(2,Port(*))
410         Cal_solt(@Agte507x,Ch$,2,Port(*))
420     END SELECT
430     !
440     OUTPUT @Agte507x;":MMEM:STOR:STYP CST"
450     OUTPUT @Agte507x;":MMEM:STOR """&File$&""""
460     END
470     !============================================
480     ! Calibration Kit Selection Function
490     !============================================
500  SUB Select_cal_kit(@Agte507x,Ch$)
510     DIM Cal_kit_lbl$(1:10)[20],Inp_char$[9]
520     INTEGER Cal_kit,I
530     CLEAR SCREEN
540     !
550     FOR I=1 TO 10
560       OUTPUT @Agte507x;":SENS1:CORR:COLL:CKIT ";I
570       OUTPUT @Agte507x;":SENS1:CORR:COLL:CKIT:LAB?"
580       ENTER @Agte507x;Cal_kit_lbl$(I)
590     NEXT I
600     ON ERROR GOTO Kit_select
610 Kit_select: !
```

4. Performing a Calibration

```
620    PRINT "## Calibration Kit Selection ##"
630    FOR I=1 TO 10
640      PRINT USING "X,2D,A,X,20A";I,":",Cal_kit_lbl$(I)
650    NEXT I
660    PRINT ""
670    PRINT "Input 1 to 10"
680    INPUT "Input number? (1 to 10)",Inp_char$
690    Cal_kit=IVAL(Inp_char$,10)
700    IF Cal_kit<1 OR Cal_kit>10 THEN Kit_select
710    OFF ERROR
720    !
730    OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:CKIT ";Cal_kit
740  SUBEND
750    !==========================================
760    ! Port Selection Function
770    !==========================================
780  SUB Select_port(INTEGER Num_of_ports,INTEGER Port(*))
790    DIM Inp_char$[9]
800    !
810    CLEAR SCREEN
820    IF Num_of_ports=2 THEN
830      Port(1)=1
840      Port(2)=2
850    ELSE
860      PRINT "## Test Ports Selection ##"
870      ON ERROR GOTO Port_select
880      FOR I=1 TO Num_of_ports
890        PRINT "Port("&VAL$(I)&"):";
900  Port_select: !
910        INPUT "Number?",Inp_char$
920        Port(I)=IVAL(Inp_char$,10)
930        IF Port(I)<1 OR Port(I)>2 THEN Port_select
940        FOR J=1 TO I-1
950          IF Port(I)=Port(J) THEN Port_select
960        NEXT J
970        PRINT Port(I)
980      NEXT I
990      OFF ERROR
1000   END IF
1010 SUBEND
1020   !==========================================
1030   ! Response (Open/Short) Calibration Function
1040   !==========================================
1050 SUB Cal_resp(@Agte507x,Ch$,Type$,INTEGER Port)
1060   DIM Buff$[9]
1070   !
1080   PRINT "## Response ("&Type$&") Calibration ##"
1090   OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:METH:"&Type$&" ";Port
1100   PRINT "Set "&Type$&" to Port "&VAL$(Port)&". Then push [Enter]
key."
1110   INPUT "",Buff$
1120   OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:"&Type$&" ";Port
1130   OUTPUT @Agte507x;"*OPC?"
1140   ENTER @Agte507x;Buff$
1150   OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:SAVE"
1160   PRINT "Done"
1170 SUBEND
1180   !==========================================
1190   ! Response (Thru) Calibration Function
1200   !==========================================
1210 SUB Cal_resp_thru(@Agte507x,Ch$,INTEGER Port1,Port2)
1220   DIM Buff$[9]
1230   !
1240   PRINT "## Response (Thru) Calibration ##"
```

```
1250   OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:METH:THRU
";Port1;",";Port2
1260   PRINT "Set THRU between Port "&VAL$(Port1)&" and Port
"&VAL$(Port2)&". Then push [Enter] key."
1270   INPUT "",Buff$
1280   OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:THRU ";Port1;",";Port2
1290   OUTPUT @Agte507x;"*OPC?"
1300   ENTER @Agte507x;Buff$
1310   OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:SAVE"
1320   PRINT "Done"
1330 SUBEND
1340   !==========================================
1350   ! Full n Port Calibration Function
1360   !==========================================
1370 SUB Cal_solt(@Agte507x,Ch$,INTEGER Num_of_ports,INTEGER Port(*))
1380   DIM Buff$[9]
1390   INTEGER I,J
1400   !
1410   PRINT "## Full "&VAL$(Num_of_ports)&" Port Calibration ##"
1420   !
1430   ! Calibration Type Selection
1440   !
1450   OUTPUT
@Agte507x;":SENS"&Ch$&":CORR:COLL:METH:SOLT"&VAL$(Num_of_ports)&" ";
1460   FOR I=1 TO Num_of_ports-1
1470     OUTPUT @Agte507x;Port(I);",";
1480   NEXT I
1490   OUTPUT @Agte507x;Port(Num_of_ports)
1500   !
1510   ! Reflection Measurement
1520   !
1530   FOR I=1 TO Num_of_ports
1540     PRINT "Set OPEN  to Port "&VAL$(Port(I))&". Then push [Enter]
key."
1550     INPUT "",Buff$
1560     OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:OPEN ";Port(I)
1570     OUTPUT @Agte507x;"*OPC?"
1580     ENTER @Agte507x;Buff$
1590     PRINT "Set SHORT to Port "&VAL$(Port(I))&". Then push [Enter]
key."
1600     INPUT "",Buff$
1610     OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:SHOR ";Port(I)
1620     OUTPUT @Agte507x;"*OPC?"
1630     ENTER @Agte507x;Buff$
1640     PRINT "Set LOAD  to Port "&VAL$(Port(I))&". Then push [Enter]
key."
1650     INPUT "",Buff$
1660     OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:LOAD ";Port(I)
1670     OUTPUT @Agte507x;"*OPC?"
1680     ENTER @Agte507x;Buff$
1690   NEXT I
1700   !
1710   ! Transmission Measurement
1720   !
1730   FOR I=1 TO Num_of_ports-1
1740     FOR J=I+1 TO Num_of_ports
1750       PRINT "Set THRU between Port "&VAL$(Port(I))&" and Port
"&VAL$(Port(J))&". Then push [Enter] key."
1760       INPUT "",Buff$
1770       OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:THRU
";Port(I);",";Port(J)
1780       OUTPUT @Agte507x;"*OPC?"
1790       ENTER @Agte507x;Buff$
1800       OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:THRU
```

4. Performing a Calibration

```
";Port(J);",";Port(I)
1810        OUTPUT @Agte507x;"*OPC?"
1820        ENTER @Agte507x;Buff$
1830      NEXT J
1840    NEXT I
1850    !
1860    ! Done
1870    !
1880    OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:SAVE"
1890    PRINT "Done"
1900 SUBEND
```

ECal

Example 4-2 shows a sample program that demonstrates how to use ECal. You can find the source file of this program, named ecal.htb, on the sample program disk.

The sample program performs full 1-port or 2-port calibration using ECal, and saves the results to a file named "Ex_4_2.sta."

The program is described in detail below:

Line 40	Assigns a GPIB address to the I/O pass.
Line 50	Stores the name of the file (Ex_4_2.sta) into the File$ variable.
Line 60	Stores the channel number (1) into the Ch$ variable.
Line 90	Allows the user to return to the entry start line and re-enter the data if an error (such as an invalid entry) occurs while selecting the calibration type number.
Lines 110 to 160	These lines display the list of supported calibration types, and prompt the user to choose one of the items by typing in the appropriate number.
Line 170	Converts the entered value into an integer and stores it into the Cal_type variable.
Line 180	Returns to the entry start line if an invalid value is contained in Cal_type.
Lines 210 to 220	These lines call a subprogram named Select_port to select the appropriate port based on the value of Cal_type, and then perform ECal.
Lines 240 to 250	These lines configure the system to save calibration coefficients along with instrument settings, and then save the instrument settings under the file name contained in the File$ variable.

For more information on the Select_port subprogram (lines 300 to lines 530), refer to the description in Example 4-1.

The Ecal subprogram in lines 570 to 870, which performs ECal, is described below.

Line 610	Displays the calibration type.
Line 630	Clears the error queue.
Lines 660 to 680	If Num_of_ports = 1, the subprogram prompts the user to connect the E5061A/E5062A's port Port(1) with the ECal module, and waits for a press of the [Enter] key after the connection.
Line 690	If Num_of_ports = 1, the subprogram executes the ECal command that performs full 1-port calibration on port Port(1).
Lines 710 to 740	If Num_of_ports = 2, the subprogram prompts the user to connect the E5061A/E5062A's ports Port(1) and Port(2) with the ECal module, and waits for a press of the [Enter] key after the connection.
Line 750	If Num_of_ports = 2, the subprogram executes the ECal command that performs full 2-port calibration on ports Port(1) and Port(2).
Lines 780 to 790	These lines retrieve the error number and error message from the error queue, and then store them into the variables Err_no and Err_msg$, respectively.

NOTE   The ECal command can be combined with the ***OPC?** command to make the program wait until the measurement completes successfully. The sample program executes the **:SYST:ERR?** for the purposes of waiting for the completion of ECal and checking for any errors.

Lines 810 to 830	If Err_no returns a non-zero value (an error value), the program displays the corresponding error message.
Line 850	If Err_no returns 0 (no error), the program displays a closing message.

Example 4-2   **ECal (ecal.htb)**

```
10      DIM File$[20],Ch$[9],Inp_char$[9]
20      INTEGER Cal_kit,Cal_type,Port(1:2)
30      !
40      ASSIGN @Agte507x TO 717
50      File$="Ex_4_2.sta"
60      Ch$="1"
70      !
80      CLEAR SCREEN
90      ON ERROR GOTO Type_select
100 Type_select: !
110     PRINT "## Calibration Type Selection ##"
120     PRINT " 1: Full 1 Port"
130     PRINT " 2: Full 2 Port"
140     PRINT ""
150     PRINT "Input 1 to 2"
160     INPUT "Input number? (1 to 2)",Inp_char$
170     Cal_type=IVAL(Inp_char$,10)
180     IF Cal_type<1 OR Cal_type>2 THEN Type_select
190     OFF ERROR
200     !
210     Select_port(Cal_type,Port(*))
220     Ecal(@Agte507x,Ch$,Cal_type,Port(*))
230     !
240     OUTPUT @Agte507x;":MMEM:STOR:STYP CST"
250     OUTPUT @Agte507x;":MMEM:STOR """&File$&""""
260     END
270     !============================================
280     ! Port Selection Function
290     !============================================
300  SUB Select_port(INTEGER Num_of_ports,INTEGER Port(*))
310     DIM Inp_char$[9]
320     !
330     CLEAR SCREEN
340     IF Num_of_ports=2 THEN
350       Port(1)=1
360       Port(2)=2
370     ELSE
380       PRINT "## Test Ports Selection ##"
390       ON ERROR GOTO Port_select
400       FOR I=1 TO Num_of_ports
410         PRINT "Port("&VAL$(I)&"):";
420 Port_select: !
430         INPUT "Number?",Inp_char$
440         Port(I)=IVAL(Inp_char$,10)
450         IF Port(I)<1 OR Port(I)>2 THEN Port_select
460         FOR J=1 TO I-1
470           IF Port(I)=Port(J) THEN Port_select
480         NEXT J
490         PRINT Port(I)
500       NEXT I
510       OFF ERROR
520     END IF
530  SUBEND
540     !============================================
550     ! Electronic Calibration Function
560     !============================================
570  SUB Ecal(@Agte507x,Ch$,INTEGER Num_of_ports,INTEGER Port(*))
580     DIM Buff$[9],Err_msg$[100]
590     INTEGER Err_no,Port1
600     !
610     PRINT "## Full "&VAL$(Num_of_ports)&" Port ECal ##"
```

4. Performing a Calibration

```
620    !
630    OUTPUT @Agte507x;"*CLS"
640    SELECT Num_of_ports
650      CASE 1
660        PRINT "Connect Port "&VAL$(Port(1))&" to ECal Module."
670        PRINT "Then push [Enter] key."
680        INPUT "",Buff$
690        OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:ECAL:SOLT1 ";Port(1)
700      CASE 2
710        PRINT "Connect Port "&VAL$(Port(1));
720        PRINT " and Port "&VAL$(Port(2))&" to ECal Module."
730        PRINT "Then push [Enter] key."
740        INPUT "",Buff$
750        OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:ECAL:SOLT2
";Port(1);",";Port(2)
760    END SELECT
770    PRINT "Executing ..."
780    OUTPUT @Agte507x;":SYST:ERR?"
790    ENTER @Agte507x;Err_no,Err_msg$
800    IF Err_no<>0 THEN
810      PRINT "Error occurred!!"
820      PRINT "  No:";Err_no,"Description: "&Err_msg$
830      PRINT "ECAL INTERRUPT!!"
840    ELSE
850      PRINT "Done"
860    END IF
870  SUBEND
```

5 Making a Measurement
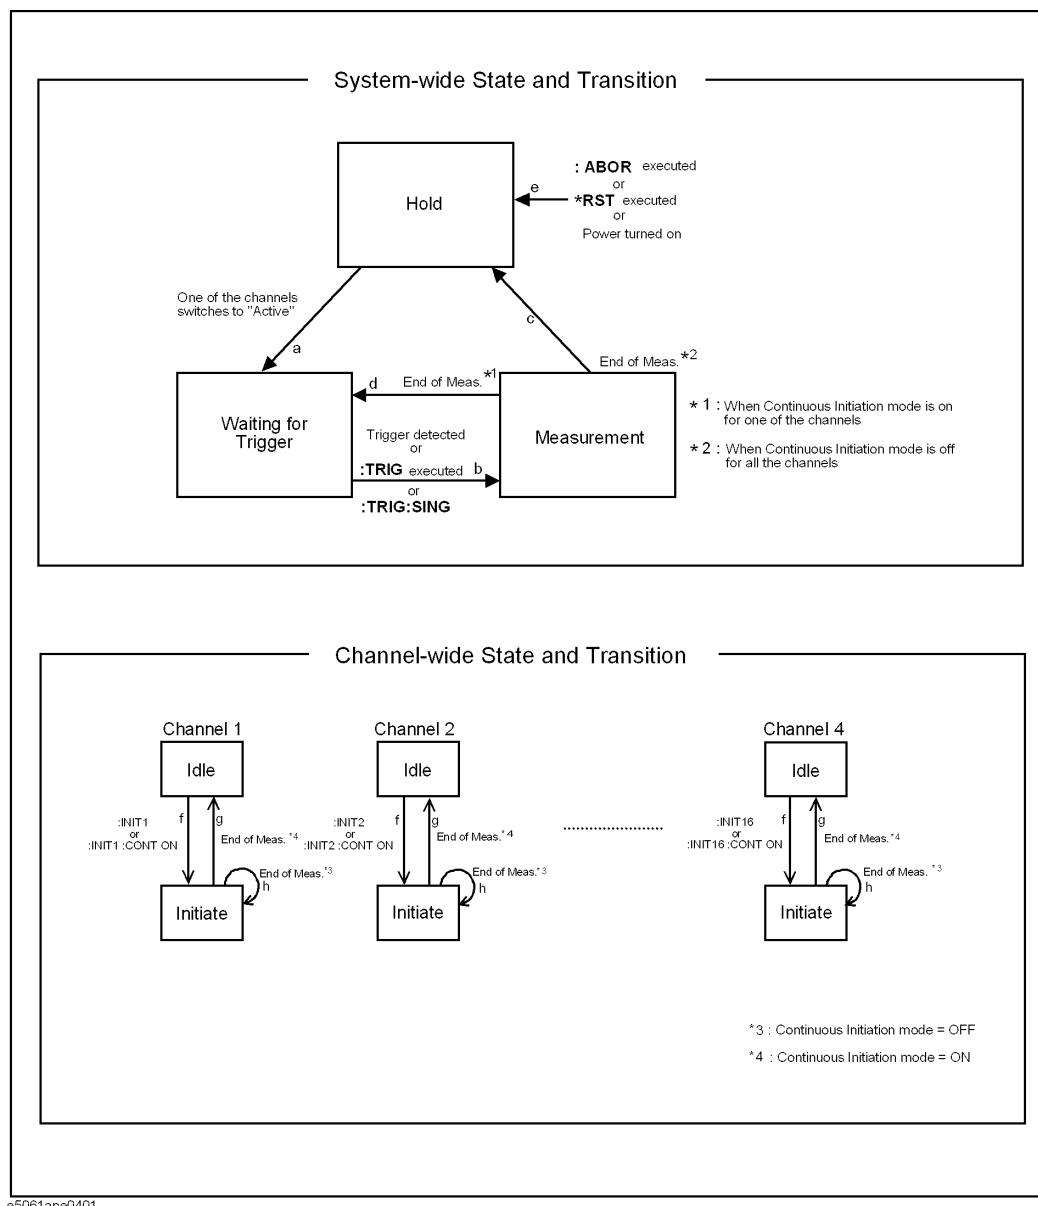
This chapter describes how to trigger the instrument to start a new measurement cycle and how to detect the end of a measurement cycle.

Trigger system

The trigger system is responsible for such tasks as detecting the start of a measurement cycle (triggering) and enabling/disabling measurement on each channel. As shown in Figure 5-1, the trigger system has two types of state: system-wide and channel-wide. The system-wide state can be "Hold", "Waiting for Trigger", or "Measurement" while the channel-wide state can be "Idle" or "Initiate".

Figure 5-1   **Trigger system**

e5061ape0401

The following subsections describe each state and how the trigger system switches among the states.

System-wide state and transition

"Hold" State

The trigger system switches to "Hold" state when one of the following commands has been executed (arrow "e" in Figure 5-1). Also, turning on the power to the instrument puts the trigger system into "Hold" state. When the power is turned on, however, continuous initiation mode is on for channel 1 and the trigger source is set to "Internal"; therefore, the trigger system immediately switches to "Waiting for Trigger" state and subsequently repeats transitions between "Measurement" and "Waiting for Trigger" states.

- :ABOR on page 202
- *RST on page 199

When the trigger system is in "Hold" state and one of the channels switches to "Initiate" state (arrow "f" in Figure 5-1), then the trigger system switches to "Waiting for Trigger" state (arrow "a" in Figure 5-1).

"Waiting for Trigger" State

When the trigger system is in "Waiting for Trigger" state and either the instrument is triggered (i.e., a trigger is detected) or one of the commands is executed, then the trigger system switches to "Measurement" state (arrow "B" in Figure 5-1).

- :TRIG on page 484
- :TRIG:SING on page 484

As shown in the table below, how the instrument is triggered differs depending on which trigger source is specified. To specify the trigger source, use the :TRIG:SOUR command on page 485 command.

Trigger Source	How the instrument is triggered
Internal trigger	The instrument is automatically triggered within itself.
External trigger	The instrument is triggered when a trigger signal is input through the Ext Trig terminal or handler interface.
Bus trigger	The instrument is triggered when the *TRG command on page 201 command is issued.
Manual trigger	The instrument is triggered when you press **[Trigger]** - **Trigger** on the front panel.

"Measurement" State

In "Measurement" state, the instrument waits for the elapse of the sweep delay time (set by the :SENS{1-4}:SWE:DEL command on page 424) and then starts a measurement cycle; this process is performed sequentially on each of those channels that were in "Initiate" state immediately before the transition to this state, in the ascending order of the channel numbers.

When the instrument has finished measuring all the active channels, the trigger system behaves in one of the following ways depending on the setting of continuous initiation mode.

If continuous initiation mode is off for all the channels:

> The trigger system switches to "Hold" state (arrow "c" in Figure 5-1).

If continuous initiation mode is on for one of the channels:

> The trigger system switches to "Waiting for Trigger" state (arrow "d" in Figure 5-1).

Channel-wide state and transition

"Idle" State

A channel switches to "Initiate" state when one of the following commands has been executed (arrow "f" in Figure 5-1).

*   :INIT{1-4} on page 340

*   :INIT{1-4}:CONT on page 341 ("ON" specified)

"Initiate" State

A channel in this state is measured just before the entire system switches to "Measurement" state.

When the instrument has finished measuring a channel, the channel behaves in one of the following ways depending on the setting of continuous initiation mode (set by the :INIT{1-4}:CONT command on page 341 command).

If continuous initiation mode is off: The channel switches to "Idle" state (arrow "g" in Figure 5-1).

If continuous initiation mode is on: The channel remains in "Initiate" state (arrow "h" in Figure 5-1).

Staring a Measurement Cycle (Triggering the instrument)

Configuring the Instrument to Automatically Perform Continuous Measurement

Step 1. Use the :INIT{1-4}:CONT command on page 341 to turn on continuous initiation mode for the channels you want to measure and turn the mode off for any other channels.

Step 2. Issue the :TRIG:SOUR command on page 485 to set the trigger source to Internal trigger.

Starting Measurement on Demand

Step 1. Use the **:INIT{1-4}:CONT** command to turn on continuous initiation mode for the channels you want to measure and turn the mode off for any other channels.

Step 2. Issue the **:TRIG:SOUR** command to set the trigger source to "Bus Trigger".

Step 3. Trigger the instrument at any time you want to perform measurement. An external controller can trigger the instrument using one of the following three commands:

Command	Can the *OPC? command on page 198 command be used to wait for the end of sweep?	Applicable trigger source
*TRG on page 201	No	Bus trigger only
:TRIG on page 484		External trigger Bus trigger Manual trigger
:TRIG:SING on page 484	Yes	

Step 4. To start the next measurement cycle, repeat step 3.

Waiting for the End of Measurement

Using the Status Register

The status of the E5061A/E5062A can be detected through the status registers. This section describes how to detect the end of measurement using the status registers. For the complete description of the status report mechanism, including the specifications of each bit, see Appendix B, "Status Reporting System,".

Measurement status is reported by the operation status condition register (see Table B-3 on page 518). An SRQ (service request) is useful when you create a program that uses the information reported by this register to detect the end of measurement.

To detect the end of measurement via an SRQ, use one of the following commands:
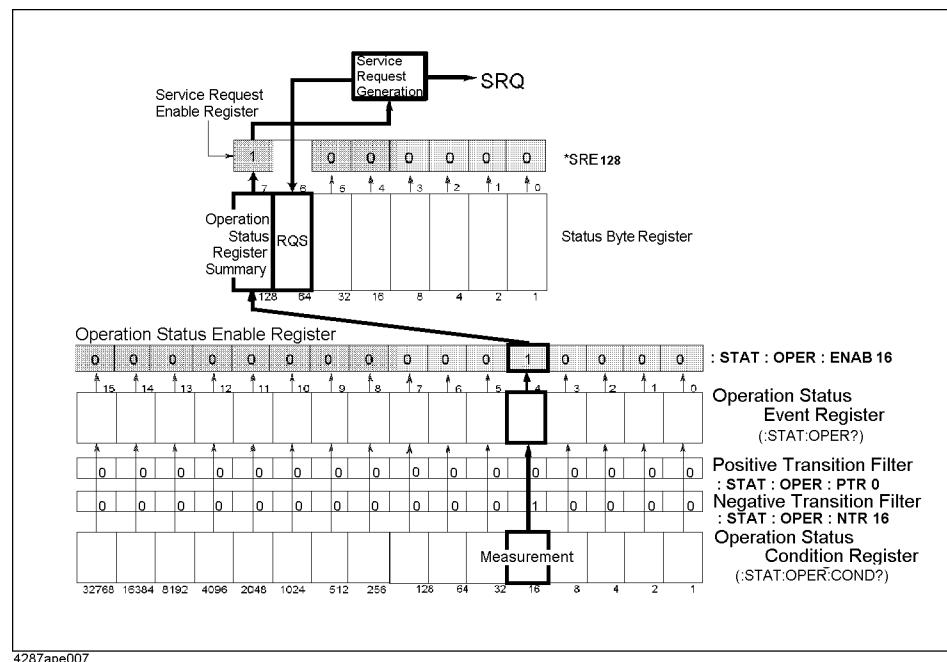
- *SRE on page 200
- :STAT:OPER:ENAB on page 442
- :STAT:OPER:PTR on page 444
- :STAT:OPER:NTR on page 443

Follow these steps:

Step 1. Configure the E5061A/E5062A so that it generates an SRQ when the operation status condition register's bit 4 (a bit that is set to 1 during measurement) is changed from 1 to 0.

Step 2. Trigger the instrument to start a measurement cycle.

Step 3. When an SRQ is generated, the program interrupts the measurement cycle.

Figure 5-2 SRQ generation sequence (at the end of measurement)

4287ape007

Sample Program

Example 5-2 is a sample program that demonstrates how to use an SRQ to detect the end of measurement. You can find the source file of this program, named srq_meas.htb, on the sample program disk.

<table>
<tr><td>**NOTE**</td><td>This sample program correctly runs when the maximum number of channels/traces is set 9 channels/9 traces.</td></tr>
</table>

The sample program sets up the trigger system, configures the instrument to properly generate an SRQ, and then triggers the instrument. When the instrument has generated an SRQ that indicates the end of measurement, the program exits after printing a measurement completion message.

The program is described in detail below:

Line 40	Assigns a GPIB address to the I/O pass.
Lines 60 to 90	These lines store the settings of continuous initiation mode for each channel (on for channels 1 and 2; off for channels 3 through 4) into the array variable Cont_mode$(*).
Lines 110 to 130	These lines turn on or off continuous initiation mode for each channel depending on the value of Cont_mode$(*).
Line 140	Sets the trigger source to "Bus Trigger".
Lines 160 to 170	These lines configure the instrument so that operation status event register's bit 4 is set to 1 only when operation status condition register's bit 4 is changed from 1 to 0 (negative transition).
Lines 180 to 190	These lines enable the operation status event register's bit 4 and status byte register's bit 7.
Lines 200 to 220	These lines clear the status byte register and operation status event register.
Lines 240 to 250	These lines set the branch target for an SRQ interrupt to enable SRQ interrupts.
Lines 260 to 290	These lines trigger the instrument, and waits until the measurement cycle finishes.
Line 300	Displays a measurement completion message.

Example 5-1   **Using an SRQ to Detect the End of Measurement (srq_meas.htb)**

```
10      DIM Cont_mode$(1:4)[9],Buff$[9]
20      INTEGER I
30      !
40      ASSIGN @Agte507x TO 717
50      !
60      Cont_mode$(1)="ON"
70      Cont_mode$(2)="ON"
80      Cont_mode$(3)="OFF"
90      Cont_mode$(4)="OFF"
100     !
110     FOR I=1 TO 4
120       OUTPUT @Agte507x;":INIT"&VAL$(I)&":CONT "&Cont_mode$(I)
130     NEXT I
140     OUTPUT @Agte507x;":TRIG:SOUR BUS"
150     !
160     OUTPUT @Agte507x;":STAT:OPER:PTR 0"
170     OUTPUT @Agte507x;":STAT:OPER:NTR 16"
180     OUTPUT @Agte507x;":STAT:OPER:ENAB 16"
190     OUTPUT @Agte507x;"*SRE 128"
200     OUTPUT @Agte507x;"*CLS"
210     OUTPUT @Agte507x;"*OPC?"
220     ENTER @Agte507x;Buff$
230     !
240     ON INTR 7 GOTO Meas_end
250     ENABLE INTR 7;2
260     OUTPUT @Agte507x;"*TRG"
270     PRINT "Waiting..."
280 Meas_wait:  GOTO Meas_wait
290 Meas_end:  OFF INTR 7
300     PRINT "Measurement Complete"
310     END
```

Using the :TRIG:SING Command

When you trigger the instrument by issuing the :TRIG:SING command on page 484 command, you can use the ***OPC?** command to wait until the measurement cycle completes.

Sample Program

Example 5-2 is a sample program that demonstrates how to use the **:TRIG:SING** command to wait until the measurement cycle completes. You can find the source file of this program, named trg_sing.htb, on the sample program disk.

The sample program uses the **:TRIG:SING** command to start a sweep (measurement) cycle, uses the ***OPC?** command to wait until the measurement cycle completes, then prints a message and exits.

The program is described in detail below:

Line 40	Assigns a GPIB address to the I/O pass.
Lines 60 to 90	These lines store the settings of continuous initiation mode for each channel (on for channels 1 and 2; off for channels 3 through 4) into the array variable Cont_mode$(*).
Lines 110 to 130	These lines turn on or off continuous initiation mode for each channel depending on the value of Cont_mode$(*).
Line 140	Sets the trigger source to "Bus Trigger".
Line 160	Triggers the instrument to start a sweep cycle.
Lines 170 to 180	These lines execute the ***OPC?** command and wait until the command returns 1 (i.e., the measurement cycle completes).
Line 200	Displays a measurement completion message.

Example 5-2   **Using the :TRIG:SING Command to Wait until the End of Measurement (trg_sing.htb)**

```
10      DIM Cont_mode$(1:4)[9],Buff$[9]
20      INTEGER I
30      !
40      ASSIGN @Agte507x TO 717
50      !
60      Cont_mode$(1)="ON"
70      Cont_mode$(2)="ON"
80      Cont_mode$(3)="OFF"
90      Cont_mode$(4)="OFF"
100     !
110     FOR I=1 TO 4
120       OUTPUT @Agte507x;":INIT"&VAL$(I)&":CONT "&Cont_mode$(I)
130     NEXT I
140     OUTPUT @Agte507x;":TRIG:SOUR BUS"
150     !
160     OUTPUT @Agte507x;":TRIG:SING"
170     OUTPUT @Agte507x;"*OPC?"
180     ENTER @Agte507x;Buff$
190     !
200     PRINT "Measurement complete"
210     END
```

Using Wait Time

Before creating your program, actually measure the time between the start and end of the measurement cycle. Then code your program so that the controller waits for the actually measured time using the appropriate command (for example, the WAIT command for HTBasic). This is a straightforward method, but care must be taken: an incorrect wait time could result in an unexpected error.

6   Analyzing Data

This chapter describes how to use markers and analysis command.

Retrieving Measurement Results at Specified Points

Markers allow you to retrieve measurement results at your specified points. You can use up to eight markers for each trace, and you can move them to any point on the trace. In addition to the regular markers, you can use a reference marker.

Showing/Hiding Markers

To show or hide markers including the reference marker, use the following command:

- :CALC{1-4}:MARK{1-10} on page 263

NOTE   You can move markers or retrieve the data at a marker even when the markers are hidden.

NOTE   The display of the reference marker is turned on or off when you turn on or off Reference Marker mode.

Turning On or Off Reference Marker Mode

Turning on Reference Marker mode provides relative marker values with respect to the reference marker (by deducting the value at the reference marker from the value at a particular marker).

To turn on or off Reference Marker mode, use the following command:

- :CALC{1-4}:MARK:REF on page 262

Setting (Changing) and Retrieving Stimulus Value at Marker Positions

To set (or change along the frequency axis) the stimulus value at a particular marker or the reference maker or retrieve the current stimulus value, use the following command:

- :CALC{1-4}:MARK{1-10}:X on page 279

When Reference Marker mode is on, the stimulus value at a regular marker is a relative stimulus value obtained by deducting the stimulus value at the reference marker from the actual stimulus value at that particular marker.

Retrieving Measurement Results at Marker Positions

To retrieve the measurement results (response values) at a particular marker or the reference marker, use the following command:

- :CALC{1-4}:MARK{1-10}:Y? on page 280

When Reference Marker mode is on, the response value at a regular marker is a relative value obtained by deducting the response value at the reference marker from the actual response value at that particular marker.

Searching for Positions That Match Specified Criteria

You can search for a position that matches your specified criteria using the Marker Search feature or analysis command.

Using Marker Search

NOTE   Marker Search is available whether the markers are shown or hidden.

Setting the Search Range

You can use either the entire sweep range or a user-defined range for the marker search range, using the following command:

• :CALC{1-4}:MARK:FUNC:DOM on page 245

When you opt to use a user-defined range, use the following command to set the range:

Start value (lower limit value)	:CALC{1-4}:MARK:FUNC:DOM:STAR on page 247
Stop value (upper limit value)	:CALC{1-4}:MARK:FUNC:DOM:STOP on page 248

You can also select whether to specify the marker search range independently for each trace, using the following command.

• :CALC{1-4}:FUNC:DOM:COUP on page 223

Selecting a Search Type

Marker Search allows you to choose from the following eight search types:

❑ Maximum value
❑ Minimum value
❑ Peak (3 types)

   • Maximum peak (for a positive peak), minimum peak (for a negative peak)
   • Peak nearest to the left-hand side of the marker position
   • Peak nearest to the right-hand side of the marker position

❑ Target (3 types)

   • Peak nearest to the marker position
   • Target nearest to the left-hand side of the marker position
   • Target nearest to the right-hand side of the marker position

To select a search type, use the following command:

• :CALC{1-4}:MARK{1-10}:FUNC:TYPE on page 274

Defining a Peak

You can define a peak by specifying the lower limit for the peak excursion value and polarity (positive or negative peak). The peak excursion value is the difference between the positive peak and the minimum value on either side (or between the negative peak and the maximum value on either side). For more information about the peak excursion value, see *User's Guide*.

To define a peak, use the following command:

lower limit for the peak excursion value	:CALC{1-4}:MARK{1-10}:FUNC:PEXC on page 269
polarity	:CALC{1-4}:MARK{1-10}:FUNC:PPOL on page 270

Defining a Target

You can define a target by specifying the target value (response value) and transitional direction (positive or negative value change).

To define a target, use the following command:

Target value	:CALC{1-4}:MARK{1-10}:FUNC:TARG on page 271
Transitional direction	:CALC{1-4}:MARK{1-10}:FUNC:TTR on page 273

Performing Marker Search

To perform Marker Search, use the following command:

• :CALC{1-4}:MARK{1-10}:FUNC:EXEC on page 268

To turn on or off the Search Tracking feature, which performs Marker Search every time the trace is updated, use the following command:

• :CALC{1-4}:MARK{1-10}:FUNC:TRAC on page 272

Retrieving Search Results

Performing Marker Search moves the marker to the points that matches the search criteria, so you can obtain the search results by retrieving the marker value. For information on how to retrieve marker values, refer to "Setting (Changing) and Retrieving Stimulus Value at Marker Positions" on page 90 and "Retrieving Measurement Results at Marker Positions" on page 90.

Using the Analysis Command

You can use the analysis command to perform search and analysis.

Setting the Search (Analysis) Range

You can use either the entire sweep range or a user-defined range as the search (analysis) range, using the following command:

•   :CALC{1-4}:FUNC:DOM on page 222

When you opt to use a user-defined range, use the following command to set the range:

Start value (lower limit value)	:CALC{1-4}:FUNC:DOM:STAR on page 224
Stop value (upper limit value)	:CALC{1-4}:FUNC:DOM:STOP on page 225

You can also select whether to specify the marker search (analysis) range independently for each trace, using the following command.

•   :CALC{1-4}:FUNC:DOM:COUP on page 223

Selecting the Search (Analysis) Type

The analysis command allows you to choose from the following five search types:

❑   Maximum value
❑   Minimum value
❑   Maximum peak (for a positive peak), minimum peak (for a negative peak)
❑   All peaks
❑   All targets

In addition, you can choose from the following three analysis types:

❑   Difference between the maximum and minimum values
❑   Standard deviation
❑   Average

To select the search (analysis) type, use the following command:

•   :CALC{1-4}:FUNC:TYPE on page 231

Defining a Peak

You can define a peak by specifying the lower limit for the peak excursion value and polarity (positive or negative peak). The peak excursion value is the difference between the positive peak and the minimum value on either side (or between the negative peak and the maximum value on either side). For more information about the peak excursion value, see *User's Guide*.

To define a peak, use the following command:

lower limit for the peak excursion value	:CALC{1-4}:FUNC:PEXC on page 226
Polarity	:CALC{1-4}:FUNC:PPOL on page 228

Defining a Target

You can define a target by specifying the target value (response value) and transitional direction (positive or negative value change).

To define a target, use the following command:

Target value	:CALC{1-4}:FUNC:TARG on page 229
Transitional direction	:CALC{1-4}:FUNC:TTR on page 230

Performing Search (Analysis)

To perform search (analysis), use the following command:

- :CALC{1-4}:FUNC:EXEC on page 225

Retrieving Search (Analysis) Results

To retrieve search (analysis) results, use the following command:

- :CALC{1-4}:FUNC:DATA? on page 221

The number of the data items contained in search (analysis) results differ depending on the search (analysis) type and the number of points found by the search operation. To retrieve the number of data items, use the following command:

- :CALC{1-4}:FUNC:POIN? on page 227

Sample Program

Example 6-2 is a sample program that demonstrates how to search for peaks using the Marker Search feature and analysis command. You can find the source file of this program, named search.htb, on the sample program disk.

This program works in two steps: it uses Marker Search to search for the maximum positive peak and displays the results; it then uses analysis command to search for all positive peaks and displays the results.

The program is described in detail below:

Line 50	Assigns a GPIB address to the I/O pass.
Line 60	Stores a peak excursion value of 0.5 into the Excursion variable.
Lines 80 to 120	These lines configure the system to generate an SRQ when it cannot perform Bandwidth Search due to an error.
Lines 130 to 140	These lines set the branch target for an SRQ interrupt to enable SRQ interrupts.
Line 180	Sets the active trace to trace 1.
Line 190	Sets the search type for marker 1 to Peak.
Lines 200 to 210	These lines set the Excursion variable to the peak excursion value for the peak search of marker 1 and set the polarity to Positive Peak.
Line 220	Performs Peak Search, and moves marker 1 to the maximum positive peak.
Lines 230 to 240	These lines retrieve the frequency at marker 1.
Lines 250 to 260	These lines retrieve the response value at marker 1.
Lines 270 to 290	These lines display the results of searching for the maximum positive peak.
Line 330	Sets the analysis range to the entire sweep range.
Line 340	Sets the search type of the analysis command to All Peaks.
Lines 350 to 360	These lines set the Excursion variable to the peak excursion value for the peak search of the analysis command and set the polarity to Positive Peak.
Line 370	Searches for all peaks.
Lines 380 to 390	These lines retrieve the number of data pairs contained in the search results, and stores that number into the Point variable.
Line 400	Resizes the Result array based on the value of the Point variable.
Lines 380 to 390	These lines retrieve the response values and frequencies for all peaks.
Lines 430 to 470	These lines display the results of searching for all peaks.
Lines 490 to 530	These lines define an error handler that retrieves and displays the number and message of an error that has occurred.

Example 6-1   **Peak Search (search.htb)**

```
10      DIM Buff$[9],Img$[50],Err_msg$[100]
20      REAL Excursion,Freq,Resp,Result(1:100,1:2)
30      INTEGER Poin,Err_no
40      !
50      ASSIGN @Agte507x TO 717
60      Excursion=.5
70      !
80      OUTPUT @Agte507x;"*ESE 60"
90      OUTPUT @Agte507x;"*SRE 32"
100     OUTPUT @Agte507x;"*CLS"
110     OUTPUT @Agte507x;"*OPC?"
120     ENTER @Agte507x;Buff$
130     ON INTR 7 GOTO Err
140     ENABLE INTR 7;2
150     !
160     PRINT "Maximum Peak Search using Marker 1"
170     !
180     OUTPUT @Agte507x;":CALC1:PAR1:SEL"
190     OUTPUT @Agte507x;":CALC1:MARK1:FUNC:TYPE PEAK"
200     OUTPUT @Agte507x;":CALC1:MARK1:FUNC:PEXC ";Excursion
210     OUTPUT @Agte507x;":CALC1:MARK1:FUNC:PPOL POS"
220     OUTPUT @Agte507x;":CALC1:MARK1:FUNC:EXEC"
230     OUTPUT @Agte507x;":CALC1:MARK1:X?"
240     ENTER @Agte507x;Freq
250     OUTPUT @Agte507x;":CALC1:MARK1:Y?"
260     ENTER @Agte507x;Resp
270     Img$="8A,MD.4DE,2X,MD.6DE"
280     PRINT "        Frequency      Response"
290     PRINT USING Img$;"Peak:   ",Freq,Resp
300     !
310     PRINT "All Peaks Search using Command"
320     !
330     OUTPUT @Agte507x;":CALC1:FUNC:DOM OFF"
340     OUTPUT @Agte507x;":CALC1:FUNC:TYPE APE"
350     OUTPUT @Agte507x;":CALC1:FUNC:PEXC ";Excursion
360     OUTPUT @Agte507x;":CALC1:FUNC:PPOL POS"
370     OUTPUT @Agte507x;":CALC1:FUNC:EXEC"
380     OUTPUT @Agte507x;":CALC1:FUNC:POIN?"
390     ENTER @Agte507x;Poin
400     REDIM Result(1:Poin,1:2)
410     OUTPUT @Agte507x;":CALC1:FUNC:DATA?"
420     ENTER @Agte507x;Result(*)
430     Img$="4A,2D,2A,MD.4DE,2X,MD.6DE"
440     PRINT "        Frequency      Response"
450     FOR I=1 TO Poin
460       PRINT USING Img$;"Peak",I,": ",Result(I,2),Result(I,1)
470     NEXT I
480     GOTO No_err
490 Err: OFF INTR 7
500     OUTPUT @Agte507x;";:SYST:ERR?"
510     ENTER @Agte507x;Err_no,Err_msg$
520     PRINT "Error occurred!!"
530     PRINT "  No:";Err_no,"Description: "&Err_msg$
540 No_err: OFF INTR 7
550     END
```

Bandwidth Search

The E5061A/E5062A has a feature called Bandwidth Search. This feature searches for the cutoff points on both right- and left-hand sides of the marker position on the trace.

❑ Bandwidth ($BW = high - low$)

❑ Center frequency ($cent = \dfrac{high + low}{2}$)

❑ Q value ($Q = \dfrac{cent}{BW}$)

❑ Loss (response value at the marker position)

Where $high$ is the right-hand cutoff point frequency; low is the left-hand cutoff point frequency.

Setting the Bandwidth Definition Value

Bandwidth Search finds a point whose response value is different, by the amount defined as the bandwidth definition value, than the response value at the marker position, and identifies that point as the cutoff point.

To set the bandwidth definition value, use the following command:

• :CALC{1-4}:MARK{1-10}:BWID:THR on page 266

Retrieving Bandwidth Search Results

Once you have moved the marker to the appropriate position using Marker Search or some other feature, you can retrieve the results of Bandwidth Search using the following command:

• :CALC{1-4}:MARK{1-10}:BWID:DATA? on page 265

Also, you can use the following command to control whether to display the results of Bandwidth Search on the LCD:

• :CALC{1-4}:MARK:BWID on page 243

NOTE   You can retrieve the results of Bandwidth Search even after you have turned off the display of markers or the results of Bandwidth Search.

Sample Program

Example 6-2 shows a sample program that demonstrates how to perform Bandwidth Search. You can find the source file of this program, named bandwid.htb, on the sample program disk.

The sample program moves the marker to the maximum value position, then retrieves and displays the results of Bandwidth Search.

The program is described in detail below:

Line 50   Assigns a GPIB address to the I/O pass.

Line 60   Stores a bandwidth definition value of 3 into the Threshold variable.

Lines 80 to 120	These lines configure the system to generate an SRQ when it cannot perform Bandwidth Search due to an error.
Lines 130 to 140	These lines set the branch target for an SRQ interrupt to enable SRQ interrupts.
Line 160	Sets the search type for marker 1 to Peak.
Lines 170 to 180	These lines use the Marker Search feature to move the marker to the maximum value position.
Line 190	Sets the bandwidth definition value to Threshold.
Lines 200	Sends the command to retrieve the results of Bandwidth Search.
Lines 210	Waits 0.5 seconds to prevent the retrieve before an SRQ is generated if an error occurs on Bandwidth Search.
Lines 220	Retrieves the results of Bandwidth Search.
Lines 240 to 280	These lines display the results of Bandwidth Search.
Lines 310 to 350	These lines define an error handler that retrieves and displays the number and message of an error that has occurred.

Example 6-2   **Bandwidth Search (bandwid.htb)**

```
10     DIM Buff$[9],Err_msg$[100]
20     REAL Threshold,Bwid,Cent,Q,Loss
30     INTEGER Err_no
40     !
50     ASSIGN @Agte507x TO 717
60     Threshold=-3
70     !
80     OUTPUT @Agte507x;"*ESE 60"
90     OUTPUT @Agte507x;"*SRE 32"
100    OUTPUT @Agte507x;"*CLS"
110    OUTPUT @Agte507x;"*OPC?"
120    ENTER @Agte507x;Buff$
130    ON INTR 7 GOTO Err
140    ENABLE INTR 7;2
150    !
160    OUTPUT @Agte507x;":CALC1:PAR1:SEL"
170    OUTPUT @Agte507x;":CALC1:MARK1:FUNC:TYPE MAX"
180    OUTPUT @Agte507x;":CALC1:MARK1:FUNC:EXEC"
190    OUTPUT @Agte507x;":CALC1:MARK1:BWID:THR ";Threshold
200    OUTPUT @Agte507x;":CALC1:MARK1:BWID:DATA?"
210    WAIT .5
220    ENTER @Agte507x;Bwid,Cent,Q,Loss
230    !
240    PRINT "## Bandwidth Search ##"
250    PRINT "Bandwidth       : ",Bwid
260    PRINT "Center Frequency: ",Cent
270    PRINT "Q               : ",Q
280    PRINT "Loss            : ",Loss
290    !
300    GOTO No_err
310 Err: OFF INTR 7
320    OUTPUT @Agte507x;";:SYST:ERR?"
330    ENTER @Agte507x;Err_no,Err_msg$
340    PRINT "Error occurred!!"
350    PRINT "  No:";Err_no,"Description: "&Err_msg$
360 No_err: OFF INTR 7
370    END
```

Notch search

The E5061A/E5062A provides the notch search function. This function searches for points that meet the conditions on the trace, initiated at the marker position and sweeping the trace rightward, and calculates the following items.

❏ Bandwidth($BW = high - low$)

❏ Center frequency ($cent = \dfrac{high + low}{2}$)

❏ Q value ($Q = \dfrac{cent}{BW}$)

❏ Loss (response value at the marker position)

Where, $high$ is the right-hand cutoff point frequency, and low is the eft-hand cutoff point frequency.

Setting the notch definition value

The notch search function finds a point whose response value is different, by the amount defined as the notch definition value, than the response value at the marker position, and identifies that point as the cutoff point.

To set the notch definition value, use the following command:

• :CALC{1-4}:MARK{1-10}:BWID:THR on page 266

Reading out the notch search result

Once you have moved the marker to the appropriate position using the marker search function or some other function, you can retrieve the notch search result using the following command:

• :CALC{1-4}:MARK{1-10}:NOTC:DATA? on page 276

Also, you can use the following command to control whether to display the notch search result on the LCD:

• :CALC{1-4}:MARK:NOTC on page 261

NOTE   You can retrieve the notch search result regardless of whether the marker display and the notch search result display is on/off.

Statistical Analysis

The E5061A/E5062A provides a mechanism that analyzes trace statistics. You can analyze the following statistics:

❏ Average

❏ Standard deviation

❏ Difference between the maximum and minimum values

To retrieve the results of statistical analysis, use the following command:

• :CALC{1-4}:MARK:MATH:STAT:DATA? on page 260

Also, you can use the following command to control whether to display the results of statistical analysis on the LCD:

• :CALC{1-4}:MARK:MATH:STAT on page 259

NOTE You can retrieve the results of statistical analysis even after you have turned off the display of the results of statistical analysis.

Alternatively, you can use the analysis command to analyze the trace statistics. When you use the analysis command, you can analyze the trace data in a specific range as well as the trace data throughout the entire sweep range. For information how to use the analysis command, refer to "Using the Analysis Command" on page 93.

Analyzing impedance

By turning on the parameter conversion function, you can convert the measurement result of the S parameter to the following parameters.

❑ Equivalent impedance in reflection measurement

❑ Equivalent impedance in transmission measurement

❑ Equivalent admittance in reflection measurement

❑ Equivalent admittance in transmission measurement

❑ Inverse of S-parameter (1/S)

To turn ON/OFF the parameter conversion function, use the following command:

• :CALC{1-4}:CONV on page 211

To select the parameter to which you want to convert the measurement result, use the following command:

• :CALC{1-4}:CONV:FUNC on page 212

7 Reading/Writing Measurement Data

This chapter provides an overview of the Agilent E5061A/E5062A's internal data processing flow and describes how to read and write measurement results (internal data array).

Data Transfer Format

When you transfer data using the one of the following commands, you can choose among ASCII transfer format, IEEE 64-bit floating point binary transfer format and IEEE 32-bit floating point binary transfer format.

NOTE   The instrument always uses the ASCII transfer format when you transfer data without using any of the following commands.

- :CALC{1-4}:DATA:FDAT on page 215
- :CALC{1-4}:DATA:FMEM on page 216
- :CALC{1-4}:DATA:SDAT on page 217
- :CALC{1-4}:DATA:SMEM on page 218
- :CALC{1-4}:FUNC:DATA? on page 221
- :CALC{1-4}:LIM:DATA on page 233
- :CALC{1-4}:LIM:REP? on page 242
- :SENS{1-4}:FREQ:DATA? on page 416
- :SENS{1-4}:SEGM:DATA on page 421

To set the data transfer format, use the following command:

- :FORM:DATA on page 338

NOTE   Executing the :SYST:PRES command on page 479 or *RST command on page 199 does not affect the current setting of the data transfer format.

ASCII Transfer Format

When you select the ASCII transfer format as the data transfer format, numbers are transferred as ASCII bytes, each of which corresponds to one of the formats shown below. Note that numbers are separated from one another with a comma (,) in accordance with the IEEE 488.2 specification.
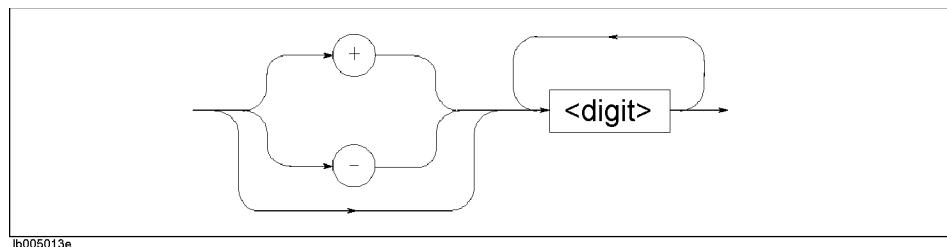
NOTE   Numeric data strings vary in length. Keep this in mind when you extract some data from retrieved numeric data strings in your program.

*   Integer format

    Figure 7-1 shows this format. Numbers are expressed as integers. For example, 201 is expressed as "+201" or "201."

Figure 7-1   **Integer format**

Ib005013e
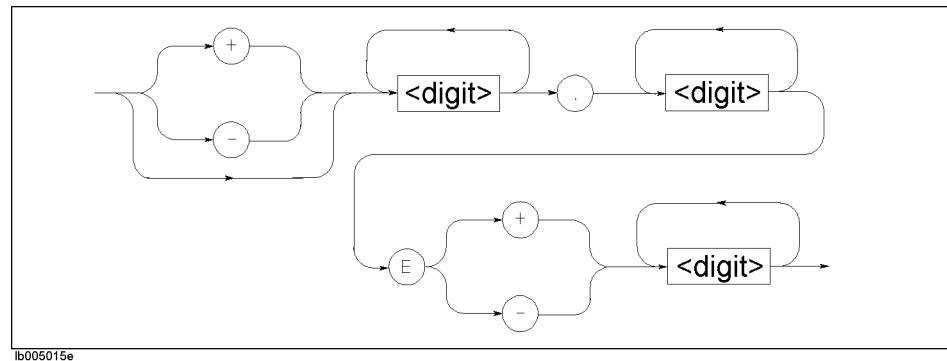
*   Floating-point number format

    Figure 7-2 shows this format. Numbers are expressed with floating points. For example, 1000 is expressed as "+1.00000000000+003".

Figure 7-2   **Floating-point number format**

Ib005015e

Binary Transfer Format
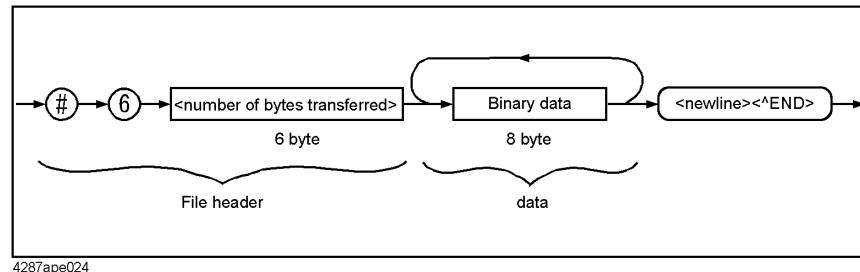
You can select the binary transfer format from the IEEE 64-bit floating point format or the IEEE 32-bit floating point format depending on the controller you use.

IEEE 64-bit floating point format

When you select the IEEE 64-bit floating point binary transfer format as the data transfer format, numbers are transferred in the format shown in Figure 7-3.

Figure 7-3   **Binary transfer format**
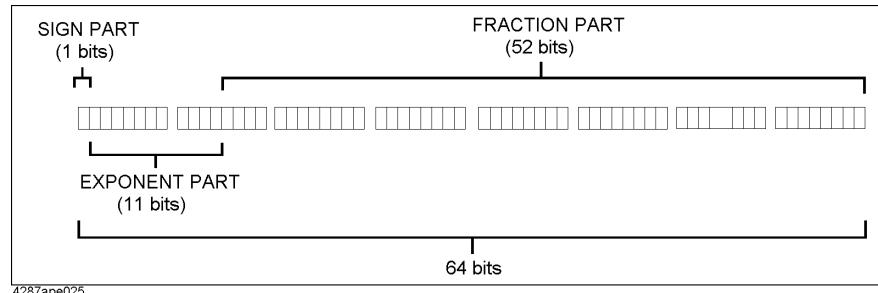
4287ape024

This data transfer format uses a header that consists of a sharp character (#), a number of 6 (which indicates the byte size of the <number of bytes transferred> part), and the <number of bytes transferred> part in this order. The header is followed by the binary data (each number consists of 8 bytes and the total is the byte size indicated by <number of bytes transferred>) and the message terminator <new line>^END.

The binary data is expressed in the IEEE 754 64-bit floating-point number format shown in Figure 7-4.

Figure 7-4   **64-bit floating point format**
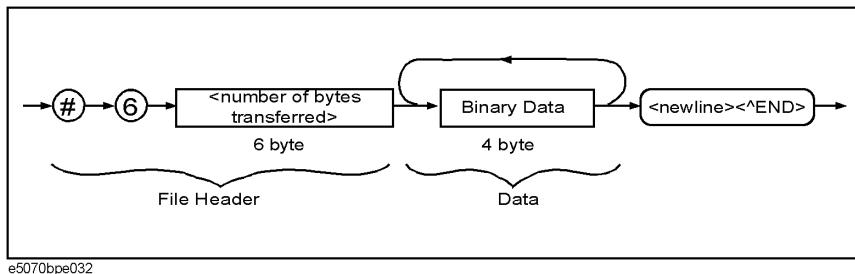
4287ape025

IEEE 32-bit floating point format

When you select the IEEE 32-bit floating point binary transfer format as the data transfer format, numbers are transferred in the format shown in Figure 7-5.

Figure 7-5   **IEEE 32-bit floating point binary transfer format**
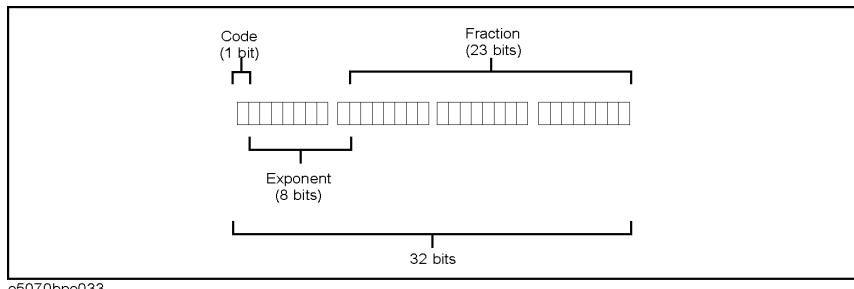
e5070bpe032

This data transfer format uses a header that consists of a sharp character (#), a number of 6 (which indicates the byte size of the <number of bytes transferred> part), and the <number of bytes transferred> part in this order. The header is followed by the binary data (each number consists of 4 bytes and the total is the byte size indicated by <number of bytes transferred>) and the message terminator <new line>^END.

The binary data is expressed in the IEEE 754 32-bit floating-point number format shown in Figure 7-6.

Figure 7-6   **32-bit floating point data**

e5070bpe033

Byte order

When you opt to perform binary transfer, you can configure the instrument to transfer the bytes of the data in one of the following two byte orders:

NORMal   Transfer begins with the byte that contains the MSB (most significant bit); that is, the leftmost byte in Figure 7-4 and Figure 7-6.

SWAPped   Transfer begins with the byte that contains the LSB (least significant bit); that is, the rightmost byte in Figure 7-4 and Figure 7-6.

To set the byte order, use the following command:

• :FORM:BORD on page 337

NOTE   Executing the :SYST:PRES command on page 479 or *RST command on page 199 does not affect the current setting of the byte order.
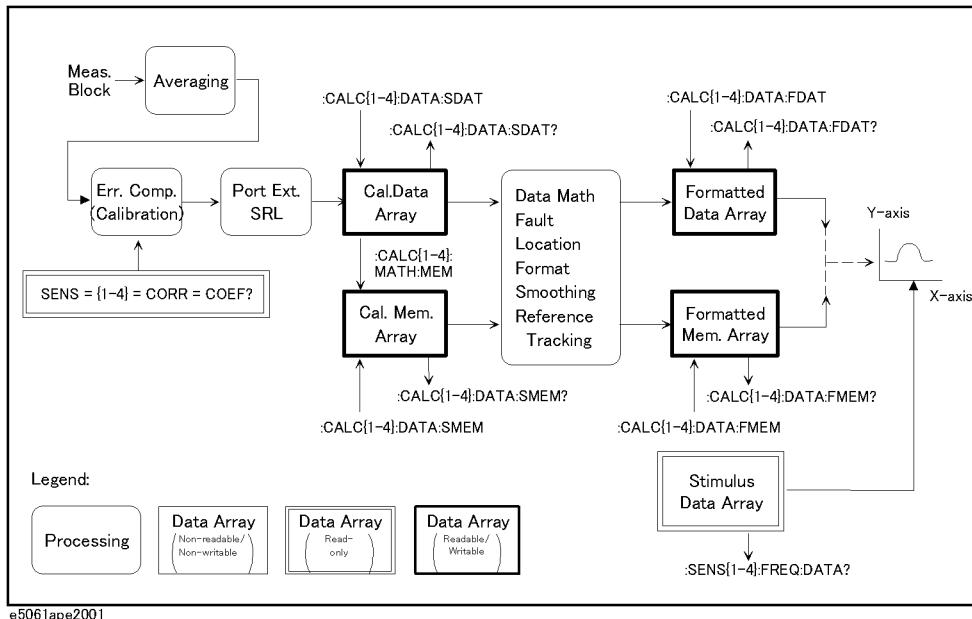
Internal data processing

Data flow

Figure 7-7 provides an overview of the E5061A/E5062A's internal data processing flow. For more information on the data processing flow, refer to "*User's Guide*."

Figure 7-7　　　　**E5061A/E5062A's data processing flow**

e5061ape2001

Internal data arrays

Corrected data arrays

A corrected data array contains the corrected data obtained by performing error correction, port extension compensation (calibration), Fixture Simulator operations on the raw measured data of S parameter specified for each trace of each channel. Each data element is stored as a complex number (Re/Im).

The instrument retains 16 corrected data arrays at maximum, each of which is associated with one of the 4 traces contained in one of the 4 channels 4×4 = 16). To read/write one of the corrected data arrays, use the following command:

• :CALC{1-4}:DATA:SDAT on page 217

Corrected memory arrays

When the :CALC{1-4}:MATH:MEM command on page 281 command is executed on a particular corrected data array, its copy is stored into the corrected memory array corresponding to that corrected data array.

The instrument retains 16 corrected memory arrays at maximum, each of which is

associated with one of the 4 traces contained in one of the 4 channels 4×4 = 16). To read/write one of the corrected data arrays, use the following command:

- :CALC{1-4}:DATA:SMEM on page 218

Formatted data array

A formatted data array contains the formatted data (values to be displayed) obtained by performing data math operations, measurement parameter conversion, and smoothing on a particular corrected data array. Regardless of the data format, it contains two data elements per measurement point as shown in the following table:

Table 7-1   **Data elements and data formats**

Data format[1]	Data element (primary value)	Data element (secondary value)
log magnitude	log magnitude	Always 0
Phase	Phase	Always 0
Group delay	Group delay	Always 0
Smith chart (Lin)	Liner magnitude	Phase
Smith chart (Log)	log magnitude	Phase
Smith chart (Re/Im)	Real part of a complex number	Imaginary part of a complex number
Smith chart (R+jX)	Resistance	Reactance
Smith chart (G+jB)	Conductance	Susceptance
Polar (Lin)	Liner magnitude	Phase
Polar (Log)	log magnitude	Phase
Polar (Re/Im)	Real part of a complex number	Imaginary part of a complex number
Liner magnitude	Liner magnitude	Always 0
SWR	SWR	Always 0
Real number	Real part of a complex number	Always 0
Imaginary number	Imaginary part of a complex number	Always 0
Expanded phase	Expanded phase	Always 0
Positive phase	Positive phase	Always 0

*1. To set this, use the :CALC{1-4}:FORM command on page 219 command.

The instrument retains 16 formatted data arrays at maximum, each of which is associated with one of the 4 traces contained in one of the 4 channels 4×4 = 16). To read/write one of the formatted data arrays, use the following command:

- :CALC{1-4}:DATA:FDAT on page 215

Formatted memory arrays

A formatted memory array contains the formatted data (values to be displayed) obtained by performing data math operations, measurement parameter conversion, and smoothing on a particular corrected memory array.

The instrument retains 16 formatted memory arrays at maximum, each of which is associated with one of the 4 traces contained in one of the 4 channels 4×4 = 16). To read/write one of the formatted memory arrays, use the following command:

- :CALC{1-4}:DATA:FMEM on page 216

Stimulus data arrays

A stimulus data array contains the stimulus values for all measurement points.

The instrument retains 4 stimulus data arrays at maximum, each of which is associated with one of the 4 channels. Stimulus data arrays are read-only. To retrieve one of the stimulus data arrays, use the following command:

- :SENS{1-4}:FREQ:DATA? on page 416

Calibration coefficient arrays

A calibration coefficient array contains the calibration coefficients calculated based on the results of measurement performed with standard devices.

The instrument retains 4 calibration coefficient arrays at maximum, each of which is associated with one of the 4 channels. No commands are available that read or write calibration coefficient arrays.

Retrieving Measurement Results

"Internal data arrays" on page 108 allow you to retrieve all measurement results throughout a particular trace. Alternatively, markers allow you to retrieve measurement results at your specified points. For information on how to retrieve marker values, refer to "Retrieving Measurement Results at Marker Positions" on page 90.

Retrieving Internal Data Arrays

You can chose between the ASCII and binary data transfer formats when you retrieve internal data arrays. For more information, refer to "Data Transfer Format" on page 104.

Example 7-1 and Example 7-2 show sample programs that demonstrate how to retrieve formatted data arrays. The sample program in Example 7-1 uses the ASCII transfer format while the sample in Example 7-2 uses the binary transfer format. You can find the source files of these programs, named read_asc.htb and read_bin.htb, on the sample program disk.

Each of the sample programs holds the sweep on channel 1, then retrieves and displays the stimulus array for channel 1 and the formatted data array for trace 1.

The program in Example 7-1 is described in detail below:

Line 50	Assigns a GPIB address to the I/O pass.
Lines 70 to 90	These lines set channel 1's active trace to trace 1 and hold the sweep.
Lines 100 to 110	These lines retrieve the number of points in channel 1 and stores that number into the Nop variable.
Line 120	Resizes the Fdata and Freq arrays based on the value of the Nop variable (the number of points).
Line 160	Sets the data transfer format to ASCII.
Lines 180 to 190	These lines retrieve the formatted data array for the active trace (trace 1) in channel 1, and store the data into the Fdata array.
Lines 200 to 210	These lines retrieve the stimulus array for channel 1 and stores the data into the Freq variable.
Lines 250 to 260	These lines retrieve the data format for the active trace (trace 1) in channel 1, and store it into the Fmt$ array.
Lines 270 to 400	The lines display each point along with one measured value and a frequency if the Fmt$ is "MLOG", "PHAS", "GDEL", "MLIN", "SWR", "REAL", "IMAG", or "UPH"; or along with two measured values and a frequency if Fmt$ returns any other string.

Example 7-1   **Using the ASCII Transfer Format to Retrieve Internal Data Arrays (read_asc.htb)**

```
10      REAL Fdata(1:1601,1:2),Freq(1:1601)
20      DIM Img$[30]
30      INTEGER Nop,I
40      !
50      ASSIGN @Agte507x TO 717
60      !
70      OUTPUT @Agte507x;":CALC1:PAR1:SEL"
80      OUTPUT @Agte507x;":INIT1:CONT OFF"
90      OUTPUT @Agte507x;":ABOR"
100     OUTPUT @Agte507x;":SENS1:SWE:POIN?"
110     ENTER @Agte507x;Nop
120     REDIM Fdata(1:Nop,1:2),Freq(1:Nop)
130     !
140     ! Reading out in ASCII transfer format
150     !
160     OUTPUT @Agte507x;":FORM:DATA ASC"
170     !
180     OUTPUT @Agte507x;":CALC1:DATA:FDAT?"
190     ENTER @Agte507x;Fdata(*)
200     OUTPUT @Agte507x;":SENS1:FREQ:DATA?"
210     ENTER @Agte507x;Freq(*)
220     !
230     ! Displaying
240     !
250     OUTPUT @Agte507x;":CALC1:FORM?"
260     ENTER @Agte507x;Fmt$
270     SELECT Fmt$
280       CASE "MLOG","PHAS","GDEL","MLIN","SWR","REAL","IMAG","UPH"
290         Img$="MD.4DE,2X,MD.6DE"
300         PRINT " Frequency      Data"
310         FOR I=1 TO Nop
320           PRINT USING Img$;Freq(I),Fdata(I,1)
330         NEXT I
340       CASE ELSE
350         Img$="MD.4DE,2X,MD.6DE,2X,MD.6DE"
360         PRINT " Frequency      Data1          Data2"
370         FOR I=1 TO Nop
380           PRINT USING Img$;Freq(I),Fdata(I,1),Fdata(I,2)
390         NEXT I
400     END SELECT
410     !
420     END
```

The program in Example 7-2 is described in detail below:

Lines 50 to 60	Assigns a GPIB address to the I/O pass.
Lines 80 to 100	These lines set channel 1's active trace to trace 1 and hold the sweep.
Lines 110 to 120	These lines retrieve the number of points in channel 1 and store that number into the Nop variable.
Line 130	Resizes the Fdata and Freq arrays based on the value of the Nop variable (the number of points).
Line 170	Sets the data transfer format to binary.
Lines 190 to 200	These lines retrieve the data header.
Line 210	Retrieves the formatted data array for the active trace (trace 1) in channel 1, and stores the data into the Fdata array.

NOTE   Because binary data must be read without being formatted, the program uses an I/O path (@Binary) that is configured to support the retrieval of unformatted data. This applies to line 250 as well.

Line 220	Reads the message terminator at the end of the data.
Lines 230 to 240	These lines retrieve the data header.
Line 250	Retrieves the stimulus array for channel 1 and stores the data into the Freq variable.
Line 260	Reads the message terminator at the end of the data.
Lines 300 to 310	These lines retrieve the data format for the active trace (trace 1) in channel 1, and store it into the Fmt$ array.
Lines 320 to 450	The lines display each point along with one measured value and a frequency if the Fmt$ is "MLOG", "PHAS", "GDEL", "MLIN", "SWR", "REAL", "IMAG", or "UPH"; or along with two measured values and a frequency if Fmt$ returns any other string.

Example 7-2   **Using the Binary Transfer Format to Retrieve Internal Data Arrays (read_bin.htb)**

```
10      REAL Fdata(1:1601,1:2),Freq(1:1601)
20      DIM Buff$[9],Img$[30]
30      INTEGER Nop,I
40      !
50      ASSIGN @Agte507x TO 717
60      ASSIGN @Binary TO 717;FORMAT OFF
70      !
80      OUTPUT @Agte507x;":CALC1:PAR1:SEL"
90      OUTPUT @Agte507x;":INIT1:CONT OFF"
100     OUTPUT @Agte507x;":ABOR"
110     OUTPUT @Agte507x;":SENS1:SWE:POIN?"
120     ENTER @Agte507x;Nop
130     REDIM Fdata(1:Nop,1:2),Freq(1:Nop)
140     !
150     ! Reading out in binary transfer format
160     !
170     OUTPUT @Agte507x;":FORM:DATA REAL"
180     !
190     OUTPUT @Agte507x;":CALC1:DATA:FDAT?"
200     ENTER @Agte507x USING "#,8A";Buff$
210     ENTER @Binary;Fdata(*)
220     ENTER @Agte507x USING "#,1A";Buff$
230     OUTPUT @Agte507x;":SENS1:FREQ:DATA?"
240     ENTER @Agte507x USING "#,8A";Buff$
250     ENTER @Binary;Freq(*)
260     ENTER @Agte507x USING "#,1A";Buff$
270     !
280     ! Displaying
290     !
300     OUTPUT @Agte507x;":CALC1:FORM?"
310     ENTER @Agte507x;Fmt$
320     SELECT Fmt$
330       CASE "MLOG","PHAS","GDEL","MLIN","SWR","REAL","IMAG","UPH"
340         Img$="MD.4DE,2X,MD.6DE"
350         PRINT " Frequency      Data"
360         FOR I=1 TO Nop
370           PRINT USING Img$;Freq(I),Fdata(I,1)
380         NEXT I
390       CASE ELSE
400         Img$="MD.4DE,2X,MD.6DE,2X,MD.6DE"
410         PRINT " Frequency      Data1          Data2"
420         FOR I=1 TO Nop
430           PRINT USING Img$;Freq(I),Fdata(I,1),Fdata(I,2)
440         NEXT I
450     END SELECT
460     !
470     END
```

Entering Data into a Trace

You can change the data/memory trace on the LCD by writing the new data into the "Formatted data array" on page 109/"Formatted memory arrays" on page 110.

When you write data into formatted data/memory array, you can choose either the ASCII or binary transfer format (see "Data Transfer Format" on page 104).

Example 7-3 and Example 7-4 show sample programs that demonstrate how to write data into formatted data arrays. The sample program in Example 7-3 uses the ASCII transfer format while the sample in Example 7-4 uses the binary transfer format. You can find the source files of these programs, named write_a.htb and write_b.htb, on the sample program disk.

Each of the sample programs holds the sweep on channel 1, retrieves the data from a specified file (a file saved measurement data using the :MMEM:STOR:FDAT command on page 356 command), and populates trace 1 for channel 1 with the retrieved data.

The program in Example 7-3 is described in detail below:

Line 50	Assigns a GPIB address to the I/O pass.
Line 70	Passes control to a subprogram named Inp_file_name, which lets the user input a file name, and then stores the returned file name into the File$ variable. For more information on the Inp_file_name subprogram, refer to the description in Example 7-4.
Lines 90 to 110	These lines set channel 1's active trace to trace 1 and hold the sweep.
Lines 130 to 140	These lines retrieve the number of points in channel 1 and stores that number into the Nop variable.
Line 150	Resizes the Fdata array based on the value of the Nop variable (the number of points).
Line 170	This line points to the statement block to be executed if an error occurs in retrieving data from the file (for example, if no file matches File$).
Lines 180 to 260	These lines retrieve the formatted data from the file identified by File$, and store the data into the Fdata array.
Line 280	Sets the data transfer format to ASCII.
Line 300	Writes Fdata into the formatted data array for the active trace (trace 1) in channel 1.
Lines 340 to 380	This statement block is executed if an error occurs in retrieving data from the file.

Example 7-3   **Using the ASCII Transfer Format to Write Formatted Data Arrays (write_a.htb)**

```
10      REAL Freq,Fdata(1:1601,1:2)
20      DIM File$[300]
30      INTEGER Nop
40      !
50      ASSIGN @Agte507x TO 717
60      !
70      CALL Inp_file_name(File$)
80      !
90      OUTPUT @Agte507x;":CALC1:PAR1:SEL"
100     OUTPUT @Agte507x;":INIT1:CONT OFF"
110     OUTPUT @Agte507x;":ABOR"
120     !
130     OUTPUT @Agte507x;":SENS1:SWE:POIN?"
140     ENTER @Agte507x;Nop
150     REDIM Fdata(1:Nop,1:2)
160     !
170     ON ERROR GOTO File_error
180     ASSIGN @File TO File$
190     ENTER @File USING "K";Buff$
200     ENTER @File USING "K";Buff$
210     ENTER @File USING "K";Buff$
220     FOR I=1 TO Nop
230      ENTER @File USING "19D,2X,19D,2X,19D";Freq,Fdata(I,1),Fdata
(I,2)
240     NEXT I
250     ASSIGN @File TO *
260     OFF ERROR
270     !
280     OUTPUT @Agte507x;":FORM:DATA ASC"
290     !
300     OUTPUT @Agte507x;":CALC1:DATA:FDAT ";Fdata(*)
310     !
320     GOTO Prog_end
330     !
340 File_error: OFF ERROR
350     PRINT "############ ERROR ############"
360     PRINT File$&" is NOT exist."
370     PRINT "              or"
380     PRINT File$&" has UNSUITABLE data."
390     !
400 Prog_end: END
410     !===========================================
420     ! File Name Input Function
430     !===========================================
440  SUB Inp_file_name(Inp_name$)
450    DIM Inp_char$[9]
460    ON ERROR GOTO Inp_start
470 Inp_start: !
480    PRINT "Input File Name!"
490    INPUT "Name?",Inp_name$
500    PRINT "Input Name: "&Inp_name$
510    INPUT "OK? [Y/N]",Inp_char$
520    IF UPC$(Inp_char$)<>"Y" THEN Inp_start
530    OFF ERROR
540  SUBEND
```

The program in Example 7-4 is described in detail below:

Lines 50 to 60	Assigns a GPIB address to the I/O pass.
Line 70	Passes control to a subprogram named Inp_file_name, which lets the user input a file name, and then stores the returned file name into the File$ variable.
Lines 90 to 110	These lines set channel 1's active trace to trace 1 and hold the sweep.
Lines 130 to 140	These lines retrieve the number of points in channel 1 and stores that number into the Nop variable.
Line 150	Resizes the Fdata array based on the value of the Nop variable (the number of points).
Line 170	This line points to the statement block to be executed if an error occurs in retrieving data from the file (for example, if no file matches File$).
Lines 180 to 260	These lines retrieve the formatted data from the file identified by File$, and store the data into the Fdata array.
Line 280	Sets the data transfer format to binary.
Line 290	Creates the data header and stores it into the Header$ variable.
Line 300	Sends the command that writes data into the formatted data array for the active trace (trace 1) in channel 1, following it with the data header (Header$).
Line 310	Sends the data itself (Fdata), following it with a message terminator.

NOTE   Because binary data must be written without being formatted, the program uses an I/O path (@Binary) that is configured to support writing unformatted data.

Lines 340 to 380	This statement block is executed if an error occurs in retrieving data from the file.

The Inp_file_name subprogram in lines 440 to 540, which is used to enter a save filename, is described below.

Line 460	Allows the user to return to the entry start line and re-enter the data if an error (such as an invalid entry) occurs while entering the target file name.
Lines 480 to 490	These lines prompt the user to enter the target file name. The program does not continue till the user actually enters the file name.
Lines 500 to 510	These lines display the entered file name and waits for a confirmation entry (y/n key).
Line 520	Returns to the entry start line if the key the user pressed in line 870 is not the y key.

Example 7-4　　　**Using the Binary Transfer Format to Write Formatted Data Arrays (write_b.htb)**

```
10      REAL Freq,Fdata(1:1601,1:2)
20      DIM File$[300],Header$[10]
30      INTEGER Nop
40      !
50      ASSIGN @Agte507x TO 717
60      ASSIGN @Binary TO 717;FORMAT OFF
70      CALL Inp_file_name(File$)
80      !
90      OUTPUT @Agte507x;":CALC1:PAR1:SEL"
100     OUTPUT @Agte507x;":INIT1:CONT OFF"
110     OUTPUT @Agte507x;":ABOR"
120     !
130     OUTPUT @Agte507x;":SENS1:SWE:POIN?"
140     ENTER @Agte507x;Nop
150     REDIM Fdata(1:Nop,1:2)
160     !
170     ON ERROR GOTO File_error
180     ASSIGN @File TO File$
190     ENTER @File USING "K";Buff$
200     ENTER @File USING "K";Buff$
210     ENTER @File USING "K";Buff$
220     FOR I=1 TO Nop
230      ENTER @File USING "19D,2X,19D,2X,19D";Freq,Fdata(I,1),Fdata
(I,2)
240     NEXT I
250     ASSIGN @File TO *
260     OFF ERROR
270     !
280     OUTPUT @Agte507x;":FORM:DATA REAL"
290     Header$="#6"&IVAL$(8*2*Nop,10)
300     OUTPUT @Agte507x;":CALC1:DATA:FDAT ";Header$;
310     OUTPUT @Binary;Fdata(*),END
320     GOTO Prog_end
330     !
340 File_error: OFF ERROR
350     PRINT "########### ERROR ###########"
360     PRINT File$&" is NOT exist."
370     PRINT "            or"
380     PRINT File$&" has UNSUITABLE data."
390     !
400 Prog_end: END
410     !============================================
420     ! File Name Input Function
430     !============================================
440  SUB Inp_file_name(Inp_name$)
450    DIM Inp_char$[9]
460    ON ERROR GOTO Inp_start
470 Inp_start: !
480    PRINT "Input File Name!"
490    INPUT "Name?",Inp_name$
500    PRINT "Input Name: "&Inp_name$
510    INPUT "OK? [Y/N]",Inp_char$
520    IF UPC$(Inp_char$)<>"Y" THEN Inp_start
530    OFF ERROR
540  SUBEND
```

8 Limit Test

This chapter describes how to use the Limit Test feature to perform a limit test and determine the pass/fail status of the measured data.

Performing a Limit Test

Configuring Limit Lines

The Limit Test feature of the E5061A/E5062A allows you to create up to 100 upper/lower limit lines on each trace and then determine the pass/fail status of the measured data.

When you manually configure limit lines, you must add each segment (limit line) to the limit table, and define various conditions that apply to the specific segment. On the other hand, when you use an external controller to configure limit lines, you can use the following command to define all the segment conditions (all limit lines) in the active table trace at once.

- :CALC{1-4}:LIM:DATA on page 233

Alternatively, you can configure limit lines based on the data contained in a CSV file by issuing the following command:

- :MMEM:LOAD:LIM on page 348

Also, you can save the contents of the current limit table to a file by issuing the following command:

- :MMEM:STOR:LIM on page 358

Showing/Hiding Limit Lines

To turn on or off limit lines, use the following command:

- :CALC{1-4}:LIM:DISP on page 235

Even when limit lines are hidden, the system performs limit test if the Limit Test feature is on.

To show or hide the part that is not used for evaluation, use the following command:

- :CALC{1-4}:LIM:DISP:CLIP on page 236

Turning On or Off the Limit Test Feature

To turn on or off the Limit Test feature, use the following command:

- :CALC{1-4}:LIM on page 232

Showing/Hiding "Fail"

To turn on or off the "Fail" which is displayed at the center of the window when the test result for the channel is "fail," use the following command:

- :DISP:FSIG on page 313

Obtaining Test Results

You can obtain the test results by issuing a result retrieval command or through the status register. For detailed information on the status register, see Appendix B, "Status Reporting System."

Test Results at Each Measurement Point

Using Commands That Retrieve Test Results

You can obtain the test results at each measurement point by retrieving the stimulus value at failed measurement points. To retrieve failed measurement points, use the following command:

Stimulus value	:CALC{1-4}:LIM:REP? on page 242
Number of measurement points	:CALC{1-4}:LIM:REP:POIN? on page 242

Using the Status Register

You cannot use the status register to obtain the test results at each measurement point.

Test Results for Each Trace

Using Commands That Retrieve Test Results

You can retrieve the test result for each trace (i.e., the trace-wide result that combines the results for all measurement points in a particular trace) by issuing the following command:

• :CALC{1-4}:LIM:FAIL? on page 237

Using the Status Register

The condition register and event register under the questionable limit channel {1-4} status register provide fourteen bits that correspond to traces 1 to 4 and contain the test results (0:Pass, 1:Fail) for the respective traces; for example, you can obtain the test result for trace 1 from bit 1, and that for trace 4 from bit 4.

Every bit of the condition register is set to 0 when a measurement cycle is started. Upon completion of measurement, those bits that correspond to failed traces are set to 1.

If the corresponding bit of the positive transition filter sets to 1 (preset value), each bit of the event register is set to 1 when the corresponding bit of the condition register changes from 0 to 1 (indicating that the corresponding trace failed the test).

To retrieve the registers, use the following command:

Questionable limit channel{1-16} status register	
Condition register	:STAT:QUES:LIM:CHAN{1-4}:COND? on page 455
Event register	:STAT:QUES:LIM:CHAN{1-4}? on page 455

Test Results for Each Channel

Using Commands That Retrieve Test Results

No commands are available that allow you to directly retrieve the test result for each channel (i.e., the channel-wide result that combines the results for all traces in a particular channel).

Using the Status Register

The questionable limit status event register provides fourteen bits that correspond to channels 1 to 4 and contain the test results (0:Pass, 1:Fail) for the respective channels; for example, you can obtain the test result for channel 1 from bit 1, and that for channel 4 from bit 4. .

Every bit of the condition register is set to 0 after the event registers are cleared by *CLS command on page 196. Upon completion of measurement, if the channel-wide test result that combines the results for all traces[1] in a channel is "fail", the corresponding bit of the condition register is set to 1.
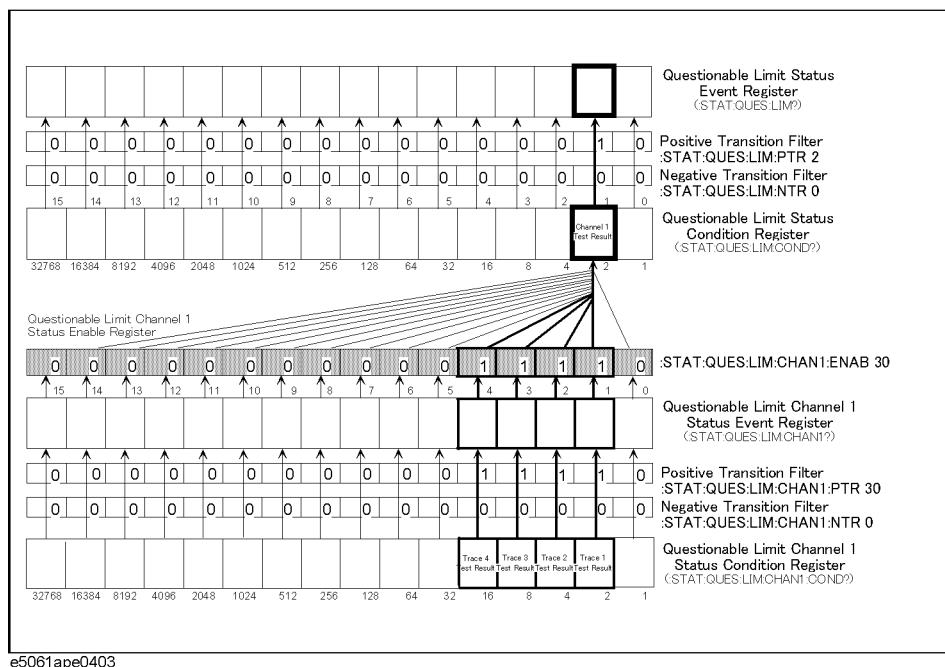
If the corresponding bit of the positive transition filter sets to 1 (preset value), every bit of the event register is set to 1 when the corresponding bit of the condition register changes from 0 to 1.

To retrieve the registers, use the following command:

Questionable limit status register	
Condition register	:STAT:QUES:LIM:COND? on page 459
Event register	:STAT:QUES:LIM? on page 455

---

[1]. This is when the registers are set as preset values. You can configure the enable registers and transition filters under the questionable limit channel {1-16} status register so that the condition register's bits reflect the result that combines the results for a limited set of traces, rather than for all the traces.

Figure 8-1   **Obtaining the test results for a channel (channel 1 in this example) using the status register**

e5061ape0403

Overall Test Result

Using Commands That Retrieve Test Results

No commands are available that allow you to directly retrieve the overall test result that combine the test results for all channels.

Using the Status Register

Each of the condition register and event register under the questionable status event register provides bit 10, from which you can obtain the overall test result (0:Pass, 1:Fail).

The condition register's bit 10 is set to 0 after the event registers are cleared by ***CLS** command on page 196. Upon completion of measurement, this bit is set to 1 if the overall test result that combines the results for all channels[1] is "fail".
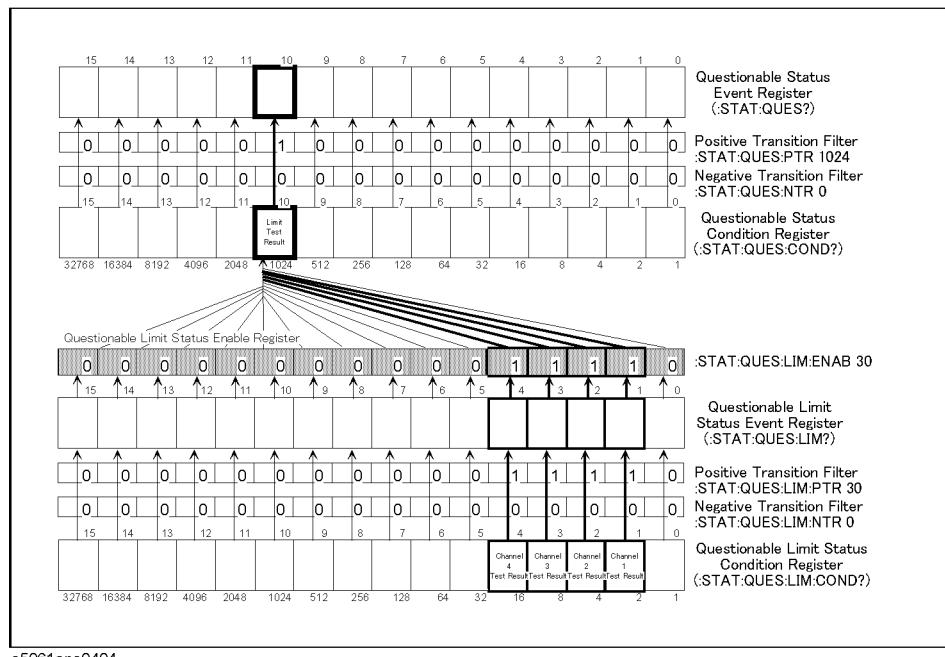
If the positive transition filter's bit 10 sets to 1 (preset value), the event register's bit 10 is set to 1 when the condition register's bit 10 changes from 0 to 1.

To retrieve the condition register and event register under the questionable status register, use the following command:

Condition register	:STAT:QUES:COND? on page 453
Event register	:STAT:QUES? on page 445

Figure 8-2   **Obtaining the overall test result using the status register**

e5061ape0404

---

[1]. This is when the registers are set as preset values. You can configure the enable registers and transition filters under the questionable limit status register so that the condition register's bit 10 reflects the result that combines the results for a limited set of channels, rather than for all the channels.

Sample Program

Example 8-1 shows a sample program that demonstrates how to perform limit tests. You can find the source file of this program, named lim_test.htb, on the sample program disk.

The sample program creates a limit table as shown in Table 8-1 and Table 8-2; turns on the Limit Test feature; performs one cycle of measurement; then displays the test results.

Table 8-1   **Limit table for trace 1**

No.	Type	Begin Stimulus	End Stimulus	Begin Response	End Response
1	MAX	847.5 MHz	905.0 MHz	-55.0 dB	-55.0 dB
2	MIN	935.0 MHz	960.0 MHz	-3.5 dB	-3.5 dB
3	MAX	935.0 MHz	960.0 MHz	0 dB	0 dB
4	MAX	980.0 MHz	1047.5 MHz	-25.0 dB	-25.0 dB

Table 8-2   **Limit table for trace 2**

No.	Type	Begin Stimulus	End Stimulus	Begin Response	End Response
1	MAX	847.5 MHz	925.0 MHz	0 dB	0 dB
2	MIN	935.0 MHz	960.0 MHz	-9.5 dB	-9.5 dB
3	MAX	970.0 MHz	1047.5 MHz	0 dB	0 dB

The program is described in detail below:

Line 50	Assigns a GPIB address to the I/O pass.
Lines 70 to 120	These lines store the sweep center value, sweep span value, trace 1 measurement parameter, trace 2 measurement parameter, trace 1 data format, and trace 2 data format into the variables Cent, Span, Param1$, Param2$, Fmt1$, and Fmt2$, respectively.
Line 150	Stores the number of segments in trace 1 limit table into the Num_of_seg1 variable.
Lines 160 to 390	These lines store the settings in trace 1 limit table into the Lim1(*) variable.
Line 410	Stores the number of segments in trace 2 limit table into the Num_of_seg2 variable.
Lines 420 to 590	These lines store the settings in trace 2 limit table into the Lim2(*) variable.
Lines 610 to 620	These lines configure the sweep range for channel 1's sweep range using the center and span values contained in the Cent and Span values.
Lines 630 to 660	These lines configure channel 1 so that it contains 2 traces, displays graphs in two windows tiled horizontally (i.e., with the screen split into the upper and lower halves), uses a bus trigger source, and works in continuous activation mode.

8. Limit Test

Line 700	Sets channel 1's active trace to trace 1.
Lines 720 to 730	These lines store trace 1's measurement parameter and data format into the variables Param1$ and Fmt1$, respectively.
Lines 750 to 810	These lines set up the limit table for trace 1.

> Line 750: Sends the command that sets up a limit table along with the Num_of_seg1 variable that contains the number of segments.
>
> Lines 770 to 790: Sends five data items (type, start point stimulus value, end point stimulus value, start point response value, and end point response value) for each segment.

Lines 820 to 830	These lines turns on the display of limit lines and the Limit Test feature for trace 1.
Line 870	Sets channel 1's active trace to trace 2.
Lines 890 to 900	These lines set trace 2's measurement parameter and data format to Param2$ and Fmt2$, respectively.
Lines 920 to 980	These lines set up the limit table for trace 2.
Lines 990 to 1000	These lines turns on the display of limit lines and the Limit Test feature for trace 2.
Lines 1040 to 1060	These lines set, under the questionable limit channel 1 status register, the enable register and positive transition filter to 6 (0000000000000110 in binary notation) while setting the negative transition filter to 0 so that the questionable limit status condition register's bit 1 is set to 1 when the test result that combines the results for trace 1 and trace 2 is "fail".

NOTE   The sample program provides an example of explicitly configuring the register bits so that they reflect the test result that only covers trace 1 and trace 2. However, because the results for traces 3 to 9 will never be "fail" as long as the Limit Test feature is disabled for those traces, the register bits would reflect the test result that is limited to traces 1 and 2 even if you did not change the default setting.

Lines 1070 to 1080	These lines set transition filters so that the questionable limit status event register's bit 1 is set to 1 when the questionable limit status condition register's bit 1 changes from 0 to 1.
Line 1090	Clears the questionable limit status event register and questionable limit channel 1 status event register.
Lines 1110 to 1130	These lines trigger the instrument, and waits until the sweep cycle completes.
Lines 1170 to 1190	These lines retrieve the value of the questionable limit status event register, and store the setting of bit 1 of the value into Ch1_judge.
Lines 1200 to 1230	These lines retrieve the value of the questionable limit channel 1 status event register, and store the settings of bit 1 and bit 2 of the value into Tr1_judge and Tr2_judge, respectively.
Line 1280	Displays a message indicating that the DUT has passed the limit test if the test result for channel 1 is "Pass" (i.e., if Ch1_judge returns 0).
Lines 1300 to 1660	These lines are executed if the test result for channel 1 is "Fail" (i.e., if

Ch1_judge returns 1).

Line 1300: Notifies the user that the limit test result is "Fail".

Line 1320: Displays a message indicating that trace 1 has passed the limit test if the test result for trace 1 is "Pass" (i.e., if Tr1_judge returns 0).

Lines 1340 to 1470: These lines are executed if the test result for trace 1 is "Fail" (i.e., if Tr1_judge returns 1). The lines notify the user that the test result for trace 1 is "Fail", then retrieve and display the frequencies at the failed measurement points on trace 1.

Line 1340: Notifies the user that the limit test result for trace 1 is "Pass".

Line 1380: Sets channel 1's active trace to trace 2.

Lines 1390 to 1410: These lines retrieve the number of failed measurement points on trace 1 and, based on that number, resize the array that will contain retrieved frequencies.

Lines 1420 to 1470: These lines retrieve and display the frequencies at the failed measurement points on trace 1.

Line 1500: Displays a message indicating that trace 2 has passed the limit test if the test result for trace 2 is "Pass" (i.e., if Tr2_judge returns 0).

Lines 1520 to 1650: If the test result for trace 2 is "Fail" (i.e., if Tr2_judge returns 1), these lines notify the user that trace 2 has failed to pass the limit test, and then retrieve and display the frequencies at the failed measurement points on trace 2.

8. Limit Test

Example 8-1   **Limit Test (lim_test.htb)**

```
10      DIM Param1$[9],Param2$[9],Fmt1$[9],Fmt2$[9],Buff$[9]
20      REAL Cent,Span,Lim1(1:4,1:5),Lim2(1:3,1:5),Fail_data(1:1601)
30      INTEGER Num_of_seg1,Num_of_seg2,Segment,Column,Fail_point
40      !
50      ASSIGN @Agte507x TO 717
60      !
70      Cent=9.475E+8
80      Span=2.00E+8
90      Param1$="S21"
100     Param2$="S11"
110     Fmt1$="MLOG"
120     Fmt2$="MLOG"
130     !
140     ! == Trace 1 Limit Line ==
150     Num_of_seg1=4          ! Number of segments: 4
160     ! -- Segment 1 --
170     Lim1(1,1)=1            ! Type          : Maximum
180     Lim1(1,2)=8.475E+8     ! Frequency Start: 847.5 MHz
190     Lim1(1,3)=9.050E+8     !          Stop : 905.0 MHz
200     Lim1(1,4)=-55          ! Response  Start: -55 dBm
210     Lim1(1,5)=-55          !          Stop : -55 dBm
220     ! -- Segment 2 --
230     Lim1(2,1)=2            ! Type          : Minimum
240     Lim1(2,2)=9.350E+8     ! Frequency Start: 935.0 MHz
250     Lim1(2,3)=9.600E+8     !          Stop : 960.0 MHz
260     Lim1(2,4)=-3.5         ! Response  Start: -3.5 dBm
270     Lim1(2,5)=-3.5         !          Stop : -3.5 dBm
280     ! -- Segment 3 --
290     Lim1(3,1)=1            ! Type          : Maximum
300     Lim1(3,2)=9.350E+8     ! Frequency Start: 935.0 MHz
310     Lim1(3,3)=9.600E+8     !          Stop : 960.0 MHz
320     Lim1(3,4)=0            ! Response  Start: 0 dBm
330     Lim1(3,5)=0            !          Stop : 0 dBm
340     ! -- Segment 4 --
350     Lim1(4,1)=1            ! Type          : Maximum
360     Lim1(4,2)=9.800E+8     ! Frequency Start: 980.0 MHz
370     Lim1(4,3)=1.0475E+9    !          Stop : 1047.5 MHz
380     Lim1(4,4)=-25          ! Response  Start: -25 dBm
390     Lim1(4,5)=-25          !          Stop : -25 dBm
400     ! == Trace 2 Limit Line ==
410     Num_of_seg2=3          ! Number of segments: 3
420     ! -- Segment 1 --
430     Lim2(1,1)=1            ! Type          : Maximum
440     Lim2(1,2)=8.475E+8     ! Frequency Start: 847.5 MHz
450     Lim2(1,3)=9.250E+8     !          Stop : 925.0 MHz
460     Lim2(1,4)=0            ! Response  Start: 0 dBm
470     Lim2(1,5)=0            !          Stop : 0 dBm
480     ! -- Segment 2 --
490     Lim2(2,1)=1            ! Type          : Maximum
500     Lim2(2,2)=9.350E+8     ! Frequency Start: 935.0 MHz
510     Lim2(2,3)=9.600E+8     !          Stop : 960.0 MHz
520     Lim2(2,4)=-9.5         ! Response  Start: -9.5 dBm
530     Lim2(2,5)=-9.5         !          Stop : -9.5 dBm
540     ! -- Segment 3 --
550     Lim2(3,1)=1            ! Type          : Maximum
```

```
560    Lim2(3,2)=9.700E+8     ! Frequency Start: 970.0 MHz
570    Lim2(3,3)=1.0475E+9    !          Stop : 1047.5 MHz
580    Lim2(3,4)=0            ! Response  Start: 0 dBm
590    Lim2(3,5)=0            !           Stop : 0 dBm
600    !
610    OUTPUT @Agte507x;":SENS1:FREQ:CENT ";Cent
620    OUTPUT @Agte507x;":SENS1:FREQ:SPAN ";Span
630    OUTPUT @Agte507x;":CALC1:PAR1:COUN 2"
640    OUTPUT @Agte507x;":DISP:WIND1:SPL D1_2"
650    OUTPUT @Agte507x;":TRIG:SOUR BUS"
660    OUTPUT @Agte507x;":INIT1:CONT ON"
670    !
680    ! Trace 1
690    !
700    OUTPUT @Agte507x;":CALC1:PAR1:SEL"
710    !
720    OUTPUT @Agte507x;":CALC1:PAR1:DEF "&Param1$
730    OUTPUT @Agte507x;":CALC1:FORM "&Fmt1$
740    !
750    OUTPUT @Agte507x;":CALC1:LIM:DATA ";Num_of_seg1;
760    FOR Segment=1 TO Num_of_seg1
770      FOR Column=1 TO 5
780        OUTPUT @Agte507x;",";Lim1(Segment,Column);
790      NEXT Column
800    NEXT Segment
810    OUTPUT @Agte507x;""
820    OUTPUT @Agte507x;":CALC1:LIM:DISP ON"
830    OUTPUT @Agte507x;":CALC1:LIM ON"
840    !
850    ! Trace 2
860    !
870    OUTPUT @Agte507x;":CALC1:PAR2:SEL"
880    !
890    OUTPUT @Agte507x;":CALC1:PAR2:DEF "&Param2$
900    OUTPUT @Agte507x;":CALC1:FORM "&Fmt2$
910    !
920    OUTPUT @Agte507x;":CALC1:LIM:DATA ";Num_of_seg2;
930    FOR Segment=1 TO Num_of_seg2
940      FOR Column=1 TO 5
950        OUTPUT @Agte507x;",";Lim2(Segment,Column);
960      NEXT Column
970    NEXT Segment
980    OUTPUT @Agte507x;""
990    OUTPUT @Agte507x;":CALC1:LIM:DISP ON"
1000   OUTPUT @Agte507x;":CALC1:LIM ON"
1010   !
1020   ! Setting status registers
1030   !
1040   OUTPUT @Agte507x;":STAT:QUES:LIM:CHAN1:ENAB 6"
1050   OUTPUT @Agte507x;":STAT:QUES:LIM:CHAN1:PTR 6"
1060   OUTPUT @Agte507x;":STAT:QUES:LIM:CHAN1:NTR 0"
1070   OUTPUT @Agte507x;":STAT:QUES:LIM:PTR 2"
1080   OUTPUT @Agte507x;":STAT:QUES:LIM:NTR 0"
1090   OUTPUT @Agte507x;"*CLS"
1100   !
1110   OUTPUT @Agte507x;":TRIG:SING"
1120   OUTPUT @Agte507x;"*OPC?"
1130   ENTER @Agte507x;Buff$
```

8. Limit Test

```
1140    !
1150    ! Checking test results
1160    !
1170    OUTPUT @Agte507x;":STAT:QUES:LIM?"
1180    ENTER @Agte507x;Reg_val
1190    Ch1_judge=BIT(Reg_val,1)
1200    OUTPUT @Agte507x;":STAT:QUES:LIM:CHAN1?"
1210    ENTER @Agte507x;Reg_val
1220    Tr1_judge=BIT(Reg_val,1)
1230    Tr2_judge=BIT(Reg_val,2)
1240    !
1250    ! Displaying test results
1260    !
1270    IF Ch1_judge=0 THEN
1280      PRINT "## PASS! ##"
1290    ELSE
1300      PRINT "## FAIL! ##"
1310      IF Tr1_judge=0 THEN
1320        PRINT " Trace1(S21): PASS"
1330      ELSE
1340        PRINT " Trace1(S21): FAIL"
1350        !
1360        ! Reading and displaying frequency at failed points
1370        !
1380        OUTPUT @Agte507x;":CALC1:PAR1:SEL"
1390        OUTPUT @Agte507x;":CALC1:LIM:REP:POIN?"
1400        ENTER @Agte507x;Fail_point
1410        REDIM Fail_data(1:Fail_point)
1420        OUTPUT @Agte507x;":CALC1:LIM:REP?"
1430        ENTER @Agte507x;Fail_data(*)
1440        PRINT "  Frequency:"
1450        FOR I=1 TO Fail_point
1460          PRINT USING "3X,MD.4DE";Fail_data(I)
1470        NEXT I
1480      END IF
1490      IF Tr2_judge=0 THEN
1500        PRINT " Trace2(S11): PASS"
1510      ELSE
1520        PRINT " Trace2(S11): FAIL"
1530        !
1540        ! Reading and displaying frequency at failed points
1550        !
1560        OUTPUT @Agte507x;":CALC1:PAR2:SEL"
1570        OUTPUT @Agte507x;":CALC1:LIM:REP:POIN?"
1580        ENTER @Agte507x;Fail_point
1590        REDIM Fail_data(1:Fail_point)
1600        OUTPUT @Agte507x;":CALC1:LIM:REP?"
1610        ENTER @Agte507x;Fail_data(*)
1620        PRINT "  Frequency:"
1630        FOR I=1 TO Fail_point
1640          PRINT USING "3X,MD.4DE";Fail_data(I)
1650        NEXT I
1660      END IF
1670    END IF
1680    END
```

9   Saving and Recalling (File Management)

This chapter describes how to save and recall instrument status and measurement results onto/from the files. Here also covered is managing files.

Saving and Recalling File

Specifying file

When running a command for saving, recalling, and managing files, use a filename with extension to specify a particular file. Specify "A:" in the beginning of the file name, when specifying a file on the flexible disk. Also, when specifying a file name with directory, use "/" (slash) or "\" (backslash) as a delimiter.

Saving and recalling instrument status

You can save the instrument state using one of the following 2 methods:

❏ Saving the entire instrument state into a file
❏ Saving the state for each channel into registers A to D (volatile memory)

Selecting content to be saved

When saving the instrument status into a file or register, the content to be saved can be selected among the following 4 options:

❏ Instrument status only (see *Users Guide* for setting items to be saved)
❏ Instrument status and calibration coefficient array.
❏ Instrument status, corrected data/memory array (measurement data)
❏ Instrument status, calibration coefficient array, and corrected data/memory array (measurement data)

To select a content to be saved, use the following command:

•   :MMEM:STOR:STYP on page 363

Selecting Content to be Saved

To select whether to save the setting of all channels/traces or that of the displayed channels/traces, use the following command:

•   :MMEM:STOR:SALL on page 361

Saving and recalling entire instrument status

To save the entire instrument status into a file, use the following command:

•   :MMEM:STOR on page 353

Recalling a file saved with the above command can reproduce the status when it was saved. To recall the settings from a file, use the following command:

•   :MMEM:LOAD on page 345

Auto recall

The file saved with the name autorec.sta or A:autorec.sta will be automatically recalled the E5061A/E5062A is powered ON.

Saving state for each channel into a register

For the active channel, when you want to save the instrument state specific to that channel only into one of registers A to D, use the following command:

• :MMEM:STOR:CHAN on page 354

Recalling an instrument state saved in a register can reproduce it as the state of the active channel. To recall a register, use the following command:

• :MMEM:LOAD:CHAN on page 346

NOTE   It is possible to recall a file from a different channel where it was saved.

The contents in the registers are lost when you turn OFF the power. You can delete (clear) the contents of all the registers using the following command.

• :MMEM:STOR:CHAN:CLE on page 354

Saving measurement data

Measurement data (in a formatted data array) can be saved in the file with CSV (Comma Separated Value) format.

To save measurement data on a file, use the following command:

• :MMEM:STOR:FDAT on page 356

Executing the above command will save the measurement data of the active trace.Note that the data save using the above command cannot be recalled from the E5061A/E5062A.

Saving the images on the LCD screen

Images displayed on the LCD screen can be saved on a file in the bitmap (.bmp) or portable network graphics (.png) format.

To save screen image on a file, use the following command:

• :MMEM:STOR:IMAG on page 357

Executing the above command will save the screen image when the command is invoked.

NOTE   Note that this gives different result than operation from the front panel where screen image is saved at the time **[Capture]** key is pressed.

Saving and recalling the segment sweep table

Segment sweep table can be saved in the file with CSV (Comma Separated Value) format.

To save segment sweep table on a file, use the following command:

- :MMEM:STOR:SEGM on page 362

Executing the above command will save the segment sweep table for the active channel.

Recalling the file saved using the above command can reproduce the segment sweep table on the active channel.

To recall the settings from a file, use the following command:

- :MMEM:LOAD:SEGM on page 351

NOTE   It is possible to recall a file from a different channel where it was saved. Note that recalling operation is not guaranteed for the file that might have been modified with editor.

Saving and recalling the limit table

Limit table can be saved in the file with CSV (Comma Separated Value) format. To save limit table on a file, use the following command:

- :MMEM:STOR:LIM on page 358

Executing the above command will save the limit table for the active trace of the active channel.

Recalling the file saved using the above command can reproduce the limit table on the active trace of the active channel. To recall the settings from a file, use the following command:

- :MMEM:LOAD:LIM on page 348

NOTE   It is possible to recall a file from a different channel or trace where it was saved. Note that recalling operation is not guaranteed for the file that might have been modified with editor.

Saving/loading (importing) the VBA program

Saving

Only the VBA project file can be saved using command.

To save the VBA project that is opened on the VBA editor on the file, use the following command.

- :MMEM:STOR:PROG on page 359

Loading (importing)

To load the VBA project to the VBA editor, or to import the module/form file, use the following command.

- :MMEM:LOAD:PROG on page 349

Executing above command will load/import the file according to its extension as follows:

Extension	File type
vba	VBA Project
bas	Standard module
frm	User Forms
cls	Class Modules

9. Saving and Recalling
(File Management)

Sample program

Example 9-1 shows a sample program that demonstrates how to save a file. You can find the source file of this program, named file_sav.bas, on the sample program disk.

This program saves selected content on a file with a specified name.

The program is described in detail below:

Line 40	Assigns a GPIB address to the I/O pass.
Line 60	Allows the user to return to the entry start line and re-enter the data if an error (such as an invalid entry) occurs while entering the number that identifies the content to be saved.
Lines 80 to 180	These lines display the list of options for content to be saved, and prompt the user to choose one of the items by typing in the appropriate number.
Line 190	Converts the entered value into an integer and stores it into the Content variable.
Line 200	Returns to the entry start line if an invalid value is contained in Content.
Line 230	Passes control to a subprogram named Inp_file_name, which lets the user input a file name for saving, and then stores the returned file name into the File$ variable.
Lines 270 to 280	If Content is equal to 1, these lines set the content to be saved as the instrument status to "instrument status only", and store the state with the file name which is combined the File$ variable with the extension ".sta".
Lines 300 to 310	If Content is equal to 2, these lines set the content to be saved as the instrument status to "instrument status and calibration coefficient", and store the state with the file name which is combined the File$ variable with the extension ".sta".
Lines 330 to 340	If Content is equal to 3, these lines set the content to be saved as the instrument status to "instrument status and measurement data", and store the state with the file name which is combined the File$ variable with the extension ".sta".
Lines 360 to 370	If Content is equal to 4, these lines set the content to be saved as the instrument status to "instrument status, calibration coefficient, and measurement data", and store the state with the file name which is combined the File$ variable with the extension ".sta".
Line 390	If Content is equal to 5, and store the state with the file name which is combined the File$ variable with the extension ".csv".
Line 410	If Content is equal to 6, and store the image data of the LCD screen with the file name which is combined the File$ variable with the extension ".bmp".

The Inp_file_name subprogram in lines 480 to 590, which is used to enter a save filename, is described below.

Line 500   Allows the user to return to the entry start line and re-enter the data if an error (such as an invalid entry) occurs while entering the target file name.

Lines 520 to 540   These lines prompt the user to enter the target file name. The program does not continue till the user actually enters the file name.

Lines 550 to 560   These lines display the entered file name and waits for a confirmation entry (y/n key).

Line 570   Returns to the entry start line if the key the user pressed in line 560 is not the y key.

Example 9-1   **Saving file (file_sav.htb)**

```
10      DIM File$[300],Inp_char$[30]
20      INTEGER Content
30      CLEAR SCREEN
40      ASSIGN @Agte507x TO 717
50      !
60      ON ERROR GOTO Content_select
70 Content_select:  !
80      PRINT "## Save Content Selection ##"
90      PRINT "Select Content"
100     PRINT " 1: State (State only)"
110     PRINT " 2: State (State & Cal)"
120     PRINT " 3: State (State & Trace)"
130     PRINT " 4: State (State & Cal & Trace)"
140     PRINT " 5: Trace Data (CSV)"
150     PRINT " 6: Screen"
160     PRINT ""
170     PRINT "Input 1 to 6"
180     INPUT "Number?",Inp_char$
190     Content=IVAL(Inp_char$,10)
200     IF Content<1 OR Content>6 THEN Content_select
210     OFF ERROR
220     !
230     CALL Inp_file_name(File$)
240     !
250     SELECT Content
260       CASE 1
270         OUTPUT @Agte507x;":MMEM:STOR:STYP STAT"
280         OUTPUT @Agte507x;":MMEM:STOR """&File$&".sta"""
290       CASE 2
300         OUTPUT @Agte507x;":MMEM:STOR:STYP CST"
310         OUTPUT @Agte507x;":MMEM:STOR """&File$&".sta"""
320       CASE 3
330         OUTPUT @Agte507x;":MMEM:STOR:STYP DST"
340         OUTPUT @Agte507x;":MMEM:STOR """&File$&".sta"""
350       CASE 4
360         OUTPUT @Agte507x;":MMEM:STOR:STYP CDST"
370         OUTPUT @Agte507x;":MMEM:STOR """&File$&".sta"""
380       CASE 5
390         OUTPUT @Agte507x;":MMEM:STOR:FDAT """&File$&".csv"""
400       CASE 6
```

9. Saving and Recalling (File Management)

```
410         OUTPUT @Agte507x;":MMEM:STOR:IMAG """&File$&".bmp"""
420    END SELECT
430    !
440    END
450    !==========================================
460    ! File Name Input Function
470    !==========================================
480  SUB Inp_file_name(Inp_name$)
490    DIM Inp_char$[9]
500    ON ERROR GOTO Inp_start
510 Inp_start: !
520    PRINT "## File Name Input ##"
530    PRINT "Input Save File Name (without Extension)"
540    INPUT "Name?",Inp_name$
550    PRINT "Input Name: "&Inp_name$
560    INPUT "OK? [Y/N]",Inp_char$
570    IF UPC$(Inp_char$)<>"Y" THEN Inp_start
580    OFF ERROR
590  SUBEND
```

Managing Files

Creating directory (folder)

To create a directory (folder), use the following command:

- :MMEM:MDIR on page 352

Deleting file (directory)

To delete a file or a directory, use the following command:

- :MMEM:DEL on page 344

Copying file

To copy a file, use the following command:

- :MMEM:COPY on page 343

Transferring files

File transfer from the external controller to the E5061A/E5062A can be possible by reading data from a file on the controller and then writing them to the file on the E5061A/E5062A.

- :MMEM:TRAN on page 364

Also, file transfer from the E5061A/E5062A to the external controller can be possible by reading data from a file on the E5061A/E5062A using the commands as query and then writing them to the file on the controller.

Retrieving data from storage

To retrieve information for the storage that is built in the E5061A/E5062A (usage, property of file located in a specified directory), use the following command;

- :MMEM:CAT? on page 342

Sample program

Example 9-1 shows a sample program for transferring files between the external controller and the E5061A/E5062A. You can find the source file of this program, named file_xfr.bas, on the sample program disk.

This program reads out data from a specified file on the external controller (or the E5061A/E5062A), then write them to a specified file on the E5061A/E5062A(or the external controller).

The program is described in detail below:

Line 40	Assigns a GPIB address to the I/O pass.
Lines 60 to 130	These line allow the user to return to the entry start line and re-enter the data if an error (such as an invalid entry) occurs while entering the number that indicates the transfer direction. Then, these line display the list of transfer directions and prompt the user to input a selected number.
Lines 80 to 130	These lines display the list of transfer directions, and prompt the user to choose one of the items by typing in the appropriate number.
Lines 140 to 150	Converts the entered value into an integer and stores it into the Direction variable. Returns to the entry start line if an invalid value is contained in Direction.
Lines 180 to 210	These lines obtain the name of the source file for copying from the user input, store it into the Src_file$ variable, and display the value of Src_file$.
Lines 180 to 210	These lines obtain the name of the source file for copying from the user input, store it into the Src_file$ variable, and display the value of Src_file$.
Lines 230 to 270	If Direction is equal to 2 (from the external controller to the E5061A/E5062A), these lines obtain the size of the source file for copying, store it into the Src_size_char$, and display the value of Src_size_char$.
Lines 290 to 320	These lines obtain the name of the destination file for copying from the user input, store it into the Dst_file$ variable, and display the value of Dst_file$.
Line 350	If Direction is equal to 1 (from the E5061A/E5062A to the external controller), these lines use the subprogram Copy_to_contr to transfer (copy) a file with the name Src_file$ on the E5061A/E5062A to a file with the name Dst_file$ on the external controller.
Line 370	If Direction is equal to 2, these lines use the subprogram Copy_to_e507x to transfer (copy) a file with the name Src_file$ on the external controller to a file with the name Dst_file$ on the E5061A/E5062A.

Copy_to_contr, a subprogram for transferring files from the E5061A/E5062A to the external controller that appears in lines 440 to 1000, is described below.

Lines 490 to 520	If any file with the name File$ already exists, these lines delete the file and newly create a file with the name File$.
Line 530	Assigns a destination file for copying to the I/O pass.

Line 540   This line stores a maximum number of transferred data (in bytes) per one transfer, that is 24 KByte to meet the size limitation of string arrays in the HTBasic, into Max_bsize variable.

Lines 560 to 600 These lines configure the system to generate an SRQ when it cannot find a source file for copying due to an error.

Lines 620 to 630 These lines set the branch target for an SRQ interrupt to enable SRQ interrupts.

Lines 640 to 650 These lines display a message showing that the transfer has started, and execute commands for reading data from a file on the E5061A/E5062A.

Lines 670 to 680 These lines read the header symbol (#) in a block data, read number of digits (characters) indicating the size of data in bytes, then store it into Digit$ variable.

Line 690   This line creates a format for reading characters in Digit$.

Line 700   This line reads the data size in byte and stores it into Src_size_char$ variable.

Line 720   This line converts Src_size_char$ to a real number and stores it into Src_size variable.

Lines 730 to 870 These lines repeat the procedures below until Src_size reaches 0.

> Lines 740 to 780: If Src_size is greater than Max_bsize, these lines assign the value of the Max_bsize to Block_size variable (transferred data in bytes). If Src_size is equal or less than Max_bsize, assign the value of Src_size to Block_size.

> Line 800 This line defines Dat$ string variable with the size as large as Block_size and reserves memory area.

> Line 810 This line creates a format for reading characters as many as Block_size characters.

> Line 820 This line reads data from the file on the E5061A/E5062A, then stores them into Dat$.

> Line 830 This line writes the contents of Dat$ to the file on the external controller.

> Lines 840 to 860 These lines free the memory area for Dat$ and subtract Block_size from Src_size.

Lines 890 to 900 These lines display a message showing the completion of transfer, then read a message terminator at the end of the data.

Lines 940 to 980 These lines define an error handler that retrieves and displays the number and message of an error that has occurred.

Copy_to_e507x, a subprogram for transferring files from the external controller to the E5061A/E5062A that appears in lines 1040 to 1540, is described below.

Lines 1090 to 1110 Assigns a destination file for copying to the I/O pass.

Line 1120   This line stores a maximum number of transferred data (in bytes) per one transfer, that is 24 KByte, into Max_bsize variable.

Lines 1140 to 1160 Clears the error queue.

Line 1180	Displays a measurement start message.
Lines 1190 to 1200	These lines create the header part indicating that data will be sent as many as Src_size_char$ bytes, then send the header part of the command and its parameters for writing the data to the file on the E5061A/E5062A.
Line 1220	This line converts Src_size_char$ to a real number and stores it into Src_size variable.
Lines 1230 to 1370	These lines repeat the procedures below until Src_size reaches 0.

> Lines 1240 to 1280: If Src_size is greater than Max_bsize, these lines assign the value of the Max_bsiize to Block_size variable (transferred data in bytes). If Src_size is equal or less than Max_bsize, assign the value of Src_size to Block_size.
>
> Line 1300 This line defines Dat$ string variable with the size as large as Block_size and reserves memory area.
>
> Line 1310 This line creates a format for reading characters as many as Block_size characters.
>
> Line 1320 This line reads data from the file on the external controller, then stores them into Dat$.
>
> Line 1330 This line writes the contents of Dat$ to the file on the E5061A/E5062A.
>
> Lines 1340 to 1360 These lines free the memory area for Dat$ and subtract Block_size from Src_size.

Line 1390	This line sends a message terminator at the end of data.
Lines 1420 to 1430	These lines retrieve the error number and error message from the error queue, and then store them into the variables Err_no and Err_msg$, respectively.
Lines 1440 to 1490	If Err_no is equal to 0 (no error occurred), these lines display the message indicating completion of transfer, and if Err_no is not equal to 0 (an error occurred), display Err_no along with Err_msg$.
Lines 1510 to 1520	These lines handle the case with no source file for copying is found.

Example 9-2   **File transfer (file_xfr.htb)**

```
10      DIM Src_file$[50],Dst_file$[50],Src_size_char$[50],Inp_char$[30]
20      INTEGER Direction
30      ASSIGN @Agte507x TO 717
40      !
50      CLEAR SCREEN
60      ON ERROR GOTO Direct_select
70 Direct_select:  !
80      PRINT "####  File Transfer ####"
90      PRINT " 1: E507x -> Controller"
100     PRINT " 2: Controller -> E507x"
110     PRINT ""
120     PRINT "Input 1 or 2"
130     INPUT "Number?",Inp_char$
140     Direction=IVAL(Inp_char$,10)
150     IF Direction<1 OR Direction>2 THEN Direct_select
160     OFF ERROR
170     !
180     PRINT ""
190     PRINT " Input source file name.        ";
200     INPUT "Name?",Src_file$
210     PRINT ": "&Src_file$
220     !
230     IF Direction=2 THEN
240       PRINT " Input source file size.         ";
250       INPUT "Size[Byte]?",Src_size_char$
260       PRINT ": "&Src_size_char$&"[Byte]"
270     END IF
280     !
290     PRINT " Input destination file name.   ";
300     INPUT "Name?",Dst_file$
310     PRINT ": "&Dst_file$
320     PRINT ""
330     !
340     IF Direction=1 THEN
350       Copy_to_contr(@Agte507x,Src_file$,Dst_file$)
360     ELSE
370       Copy_to_e507x(@Agte507x,Src_file$,Src_size_char$,Dst_file$)
380     END IF
390     !
400     END
410     !=============================================
420     ! File Transfer Function (E507x -> Controller)
430     !=============================================
440   SUB Copy_to_contr(@Agte507x,Src_file$,Dst_file$)
450     DIM Img$[32],Src_size_char$[10],Buff$[9],Err_msg$[100]
460     INTEGER Max_bsize,Block_size,Err_no
470     REAL Src_size
480     !
490     ON ERROR GOTO Skip_purge
500     PURGE Dst_file$
510 Skip_purge: OFF ERROR
520     CREATE Dst_file$,1
530     ASSIGN @Dst_file TO Dst_file$
540     Max_bsize=24576   ! 24KByte
550     !
560     OUTPUT @Agte507x;"*ESE 60"
570     OUTPUT @Agte507x;"*SRE 32"
580     OUTPUT @Agte507x;"*CLS"
590     OUTPUT @Agte507x;"*OPC?"
600     ENTER @Agte507x;Buff$
610     !
```

9. Saving and Recalling
(File Management)

```
620    ON INTR 7 GOTO Err
630    ENABLE INTR 7;2
640   PRINT "Now Copying: "&Src_file$&"(@E507x) -> "&Dst_file$&"(@Contro
ller)"
650    OUTPUT @Agte507x;":MMEM:TRAN? """&Src_file$&""""
660    WAIT .1
670    ENTER @Agte507x USING "#,A";Buff$
680    ENTER @Agte507x USING "#,A";Digit$
690    Img$="#,"&Digit$&"A"
700    ENTER @Agte507x USING Img$;Src_size_char$
710    !
720    Src_size=VAL(Src_size_char$)
730    WHILE Src_size>0
740      IF Src_size>Max_bsize THEN
750        Block_size=Max_bsize
760      ELSE
770        Block_size=Src_size
780      END IF
790      !
800      ALLOCATE Dat$[Block_size]
810      Img$="#,"&VAL$(Block_size)&"A"
820      ENTER @Agte507x USING Img$;Dat$
830      OUTPUT @Dst_file USING Img$;Dat$
840      DEALLOCATE Dat$
850      !
860      Src_size=Src_size-Block_size
870    END WHILE
880    !
890    PRINT "Done"
900    ENTER @Agte507x USING "#,A";Buff$
910    ASSIGN @Dst_file TO *
920    !
930    GOTO Skip_error
940 Err: OFF INTR 7
950    OUTPUT @Agte507x;";:SYST:ERR?"
960    ENTER @Agte507x;Err_no,Err_msg$
970    PRINT "Error occurred!!"
980    PRINT "  No:";Err_no,"Description: "&Err_msg$
990 Skip_error: OFF INTR 7
1000 SUBEND
1010    !============================================
1020    ! File Transfer Function (Controller -> E507x)
1030    !============================================
1040 SUB Copy_to_e507x(@Agte507x,Src_file$,Src_size_char$,Dst_file$)
1050    DIM Img$[32],Header$[10],Buff$[9],Err_msg$[100]
1060    INTEGER Max_bsize,Block_size,Err_no
1070    REAL Src_size
1080    !
1090    ON ERROR GOTO File_error
1100    ASSIGN @Src_file TO Src_file$
1110    OFF ERROR
1120    Max_bsize=24576   ! 24KByte
1130    !
1140    OUTPUT @Agte507x;"*CLS"
1150    OUTPUT @Agte507x;"*OPC?"
1160    ENTER @Agte507x;Buff$
1170    !
1180   PRINT "Now Copying: "&Src_file$&"(@Controller) -> "&Dst_file$&"(@
E507x)"
1190    Header$="#"&VAL$(LEN(Src_size_char$))&Src_size_char$
1200    OUTPUT @Agte507x;":MMEM:TRAN """&Dst_file$&""","&Header$;
1210    !
1220    Src_size=VAL(Src_size_char$)
1230    WHILE Src_size>0
```

```
1240    IF Src_size>Max_bsize THEN
1250      Block_size=Max_bsize
1260    ELSE
1270      Block_size=Src_size
1280    END IF
1290    !
1300    ALLOCATE Dat$[Block_size]
1310    Img$="#,"&VAL$(Block_size)&"A"
1320    ENTER @Src_file USING Img$;Dat$
1330    OUTPUT @Agte507x USING Img$;Dat$
1340    DEALLOCATE Dat$
1350    !
1360    Src_size=Src_size-Block_size
1370  END WHILE
1380  !
1390  OUTPUT @Agte507x;"",END
1400  ASSIGN @Src_file TO *
1410  !
1420  OUTPUT @Agte507x;";:SYST:ERR?"
1430  ENTER @Agte507x;Err_no,Err_msg$
1440  IF Err_no=0 THEN
1450    PRINT "Done"
1460  ELSE
1470    PRINT "Error occurred!!"
1480    PRINT "  No:";Err_no,"Description: "&Err_msg$
1490  END IF
1500  GOTO Skip_error
1510 File_error:OFF ERROR
1520   PRINT "File name NOT found!"
1530 Skip_error:!
1540 SUBEND
```

10 Communication with External Instruments Using Handler I/O Port

This chapter provides necessary information for communicating with external instruments (for example, a handler in a production line) using the handler I/O port equipped with the Agilent E5061A/E5062A.

Handler I/O Port Overview
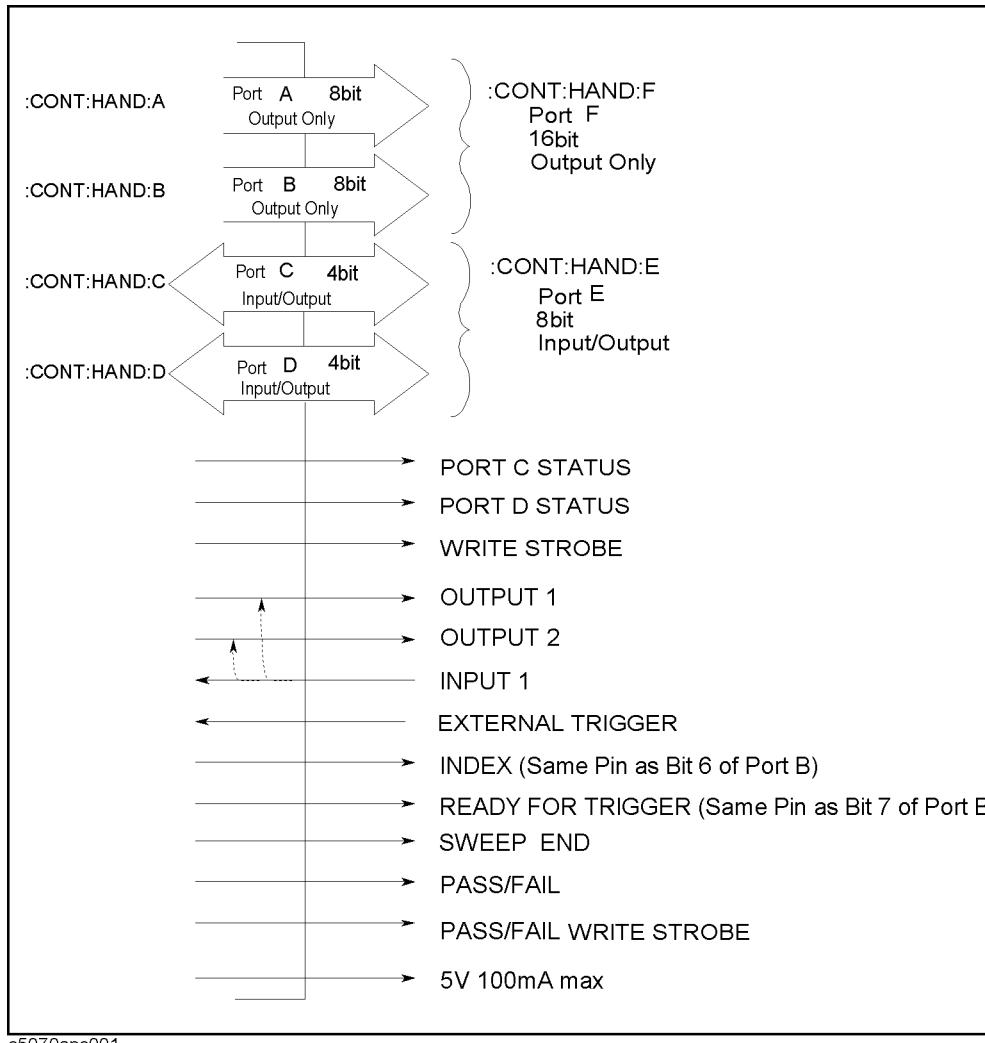
The E5061A/E5062A handler I/O port provides four independent parallel ports for data I/O associated with several control signal lines and the power line. All signals operate in TTL logic.

The data I/O ports are configured with 2 pairs of 8 bit output port and 2 pairs of 4 bit bi-directional port. Also those ports can cooperate to provide a maximum 16-bit-width output port or a maximum 8-bit-width input port.

The I/O signals operate on the negative logic basis. The control signal lines consist of various control output data, including completion of measurement or control signal for handshaking. Figure 10-1 outlines the I/O ports and control signal lines.

Figure 10-1   **Handler I/O port overview**
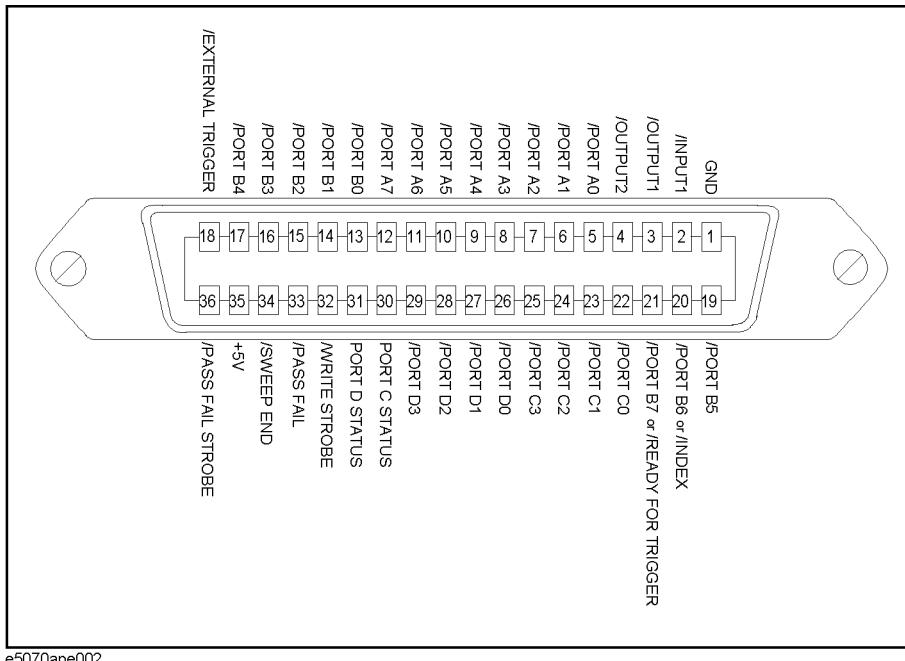
e5070ape001

I/O Signal Pin Layout and Description

Figure 10-2 illustrates the layout of the I/O signal pins on the handler interface connector while Table 10-1 on page 150 briefly describes those signals.

Figure 10-2   **Handler interface connector pin layout**

e5070ape002

NOTE   A slash (/) symbol preceding signal names means that they are negative logic (active low).

Table 10-1   **Description of the handler interface I/O signals**

Pin number	Signal name	Input/Output	Description
1	GND	——	Ground.
2	/INPUT1	Input	When this port receives a negative pulse, /OUTPUT1 and /OUTPUT2 are changed to the Low level.
3	/OUTPUT1	Output	Changes to the Low level when /INPUT1 receives a negative pulse.A command can be available for altering the Low/High level logic.
4	/OUTPUT2	Output	Changes to the Low level when /INPUT1 receives a negative pulse.A command can be available for altering the Low/High level logic.
5	/PORT A0	Output	Bit 0 of the port A (8 bit parallel output port)
6	/PORT A1	Output	Bit 1 of the port A.
7	/PORT A2	Output	Bit 2 of the port A.
8	/PORT A3	Output	Bit 3 of the port A.
9	/PORT A4	Output	Bit 4 of the port A.
10	/PORT A5	Output	Bit 5 of the port A.
11	/PORT A6	Output	Bit 6 of the port A.
12	/PORT A7	Output	Bit 7 of the port A.
13	/PORT B0	Output	Bit 0 of the port B (8 bit parallel output port)
14	/PORT B1	Output	Bit 1 of the port B.
15	/PORT B2	Output	Bit 2 of the port B.
16	/PORT B3	Output	Bit 3 of the port B.
17	/PORT B4	Output	Bit 4 of the port B.
18	/EXTERNAL TRIGGER	Input	An external trigger signal. When the trigger source is set to the "External," this port generates a trigger in respond to the trailing edge of a negative pulse.
19	/PORT B5	Output	Bit 5 of the port B.
20[*1]	/PORT B6	Output	Bit 6 of the port B.
	/INDEX		Indicates that analog measurement is complete.The /INDEX signal changes to the Low level when analog measurement (all sweeps of all channels) is complete. When the handler receives the signal, it assumes that it is ready to connect the next DUT.However, no measurement data is available until data calculation completes.
21[*2]	/PORT B7	Output	Bit 7 of the port B.
	/READY FOR TRIGGER		Indicates that the instrument is ready for triggering.This signal is changed to the Low level when the instrument is ready for receiving a trigger signal.

Table 10-1   **Description of the handler interface I/O signals**

Pin number	Signal name	Input/Output	Description
22	/PORT C0	Input/Output	Bit 0 of the port C (4 bit parallel I/O port)
23	/PORT C1	Input/Output	Bit 1 of the port C.
24	/PORT C2	Input/Output	Bit 2 of the port C.
25	/PORT C3	Input/Output	Bit 3 of the port C.
26	/PORT D0	Input/Output	Bit 0 of the port D (4 bit parallel I/O port)
27	/PORT D1	Input/Output	Bit 1 of the port D.
28	/PORT D2	Input/Output	Bit 2 of the port D.
29	/PORT D3	Input/Output	Bit 3 of the port D.
30	PORT C STATUS	Output	Port C status signal.This signal is changed to the High level when the port C is configured to output port. It is changed to the Low level when the port is configured to input port.
31	PORT D STATUS	Output	Port D status signal.This signal is changed to the High level when the port D is configured to output port. It is changed to the Low level when the port is configured to input port.
32	/WRITE STROBE	Output	A output port write strobe signal.When data is present (that is, output level changes) on any of the output ports, this signal provides a negative pulse.
33	/PASS FAIL	Output	A limit test result[3] signal.This signal changes to the High level when limit test, bandwidth test, or ripple test results return FAIL. It changes to the Low level when all limit test results return PASS.
34	/SWEEP END	Output	A sweep completion signal.When measurement (all sweeps of all channels) and data calculation are completed, this signal provides this signal provides a negative pulse.
35	+5V	Output	Provides +5V DC power supply for external instruments.
36	/PASS FAIL STROBE	Output	Limit test result write strobe signal.When limit test result is present on /PASS FAIL, this signal provides a negative pulse.

*1. This signal provides various functions depending upon the setting of
   :CONT:HAND:IND:STAT command on page 302.
*2. This signal provides various functions depending upon the setting of
   :CONT:HAND:RTR:STAT command on page 303.
*3. The overall test result that combine the test results for all traces in all channels.

Inputting/Outputting Data

The E5061A/E5062A handler I/O port provides the ports for data I/O shown in Table 10-2.

Table 10-2   **I/O port**

Port Name	Usage	Data Structure
Port A	Output	A7 A6 A5 A4 A3 A2 A1 A0 8 bits
Port B	Output	B7 B6 B5 B4 B3 B2 B1 B0 8 bits
Port C	Input/Output	C3 C2 C1 C0 4 bits
Port D	Input/Output	D3 D2 D1 D0 4 bits
Port E	Input/Output	D3 D2 D1 D0 C3 C2 C1 C0 8 bits
Port F	Output	B7 B6 B5 B4 B3 B2 B1 B0 A7 A6 A5 A4 A3 A2 A1 A0 16 bits

Specifying signal direction of port

Signal direction (input/output) can be changed for the ports C, D, and D as shown in Table 10-2. Thus, before the ports are used, the directions should be determined according to their usage.

To specify the signal direction for the ports C and D, use the following command.Direction for the port E depends on the setting for the ports C and D.

Port Name	Command
Port C	:CONT:HAND:C:MODE on page 297
Port D	:CONT:HAND:D:MODE on page 299

Reading data input to port

When the ports C, D, or E is configured to input ports, binary data represented with High(0)/Low(1) of each bit of the port will be read as decimal data.

To retrieve the data, use the following command as query:

Port Name	Command
Port C	:CONT:HAND:C on page 296
Port D	:CONT:HAND:D on page 298
Port E	:CONT:HAND:E on page 300

Data output to port

To the ports A through F (the ports C, D, and E should be configured to output ports), binary data (decimal data when output data is specified with a command) represented with High(0)/Low(1) of each bit of the port can be output.

To output data, use the following command.

Port Name	Command
Port A	:CONT:HAND:A on page 295
Port B	:CONT:HAND:B on page 295
Port C	:CONT:HAND:C on page 296
Port D	:CONT:HAND:D on page 298
Port E	:CONT:HAND:E on page 300
Port F	:CONT:HAND:F on page 301

NOTE   The bit 6 of the data outputted by **:CONT:HAND:B** command (the bit 14 of the data outputted by **:CONT:HAND:F** command) is ignored when outputting the /INDEX signal is turned on.

The bit 7 of the data outputted by **:CONT:HAND:B** command (the bit 15 of the data outputted by **:CONT:HAND:F** command) is ignored when outputting the /READY FOR TRIGGER signal is turned on.

Preset states at power-on

The handler I/O port is set at power-on as follows (not affected at reset).

Port A	High (All Bits)
Port B	High (All Bits)
Port C	Input
Port D	Input
PORT C STATUS	Low
PORT D STATUS	Low
/OUTPUT1	High
/OUTPUT2	High
/SWEEP END	High
/PASS FAIL	High

Timing Chart

Figure 10-3 shows a timing chart for each timing signal output covering from the start of measurement (pulse input to /EXTERNAL TRIGGER) until the end of measurement.
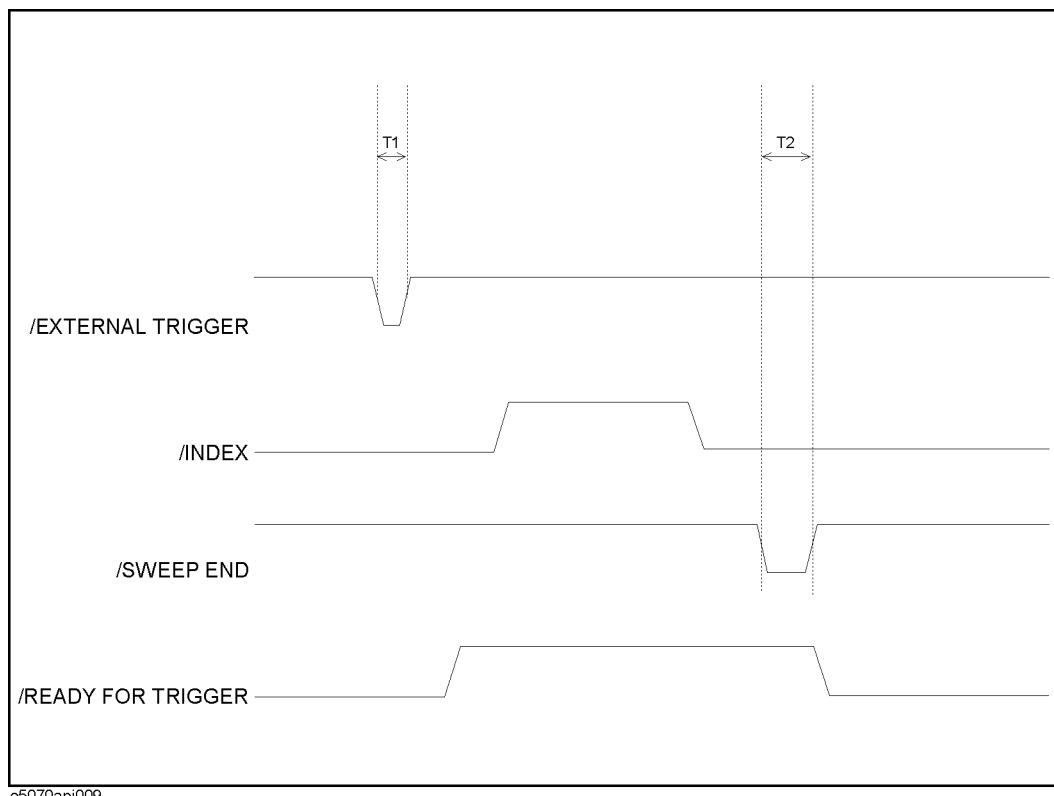
Table 10-3   Values of T1 through T2 in Figure 10-3 (typical)

		Minimum value	Typical Value	Maximum value
T1	Pulse width of /EXTERNAL TRIGGER	1 μs[1]	—	—
T2	Pulse width of /SWEEP END	10 μs	12 μs	—

*1. When a trigger signal is input from the handler I/O port.

Figure 10-3   Timing chart of /EXTERNAL TRIGGER, /INDEX, /SWEEP END and /READY FOR TRIGGER

e5070apj009

/INDEX and /READY FOR TRIGGER signals are outputted when outputting of these signals are turned on using the following commands.

/INDEX	:CONT:HAND:C:MODE on page 297
/READY FOR TRIGGER	:CONT:HAND:D:MODE on page 299

Figure 10-4 shows the timing chart for data output and write strobe signal output to the ports A through F.

Table 10-4   **Values of T1 through T2 in Figure 10-4 (typical)**

T1	Response time of write strobe signal	1 μs
T2	Pulse width of write strobe signal	1 μs

Figure 10-4   **Timing chart of data output and write strobe signal**

e5070ape010
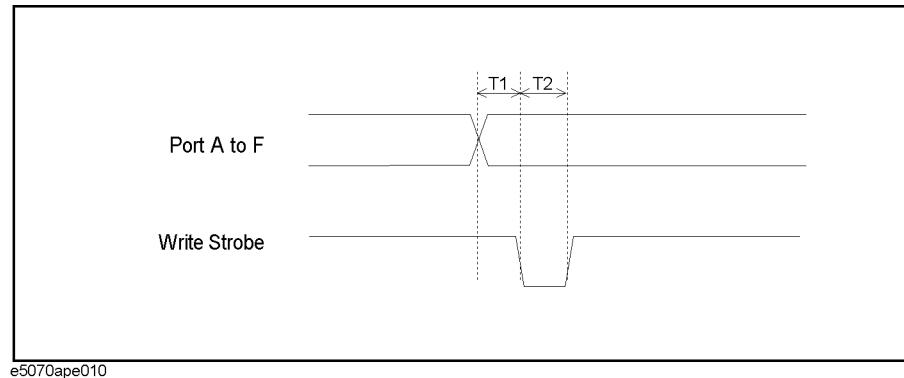
Figure 10-5 shows a timing chart of limit test result output (/PASS FAIL signal output) and /PASS FAIL write strobe signal output.

Timing chart of limit test result contains ripple test and bandwidth test.
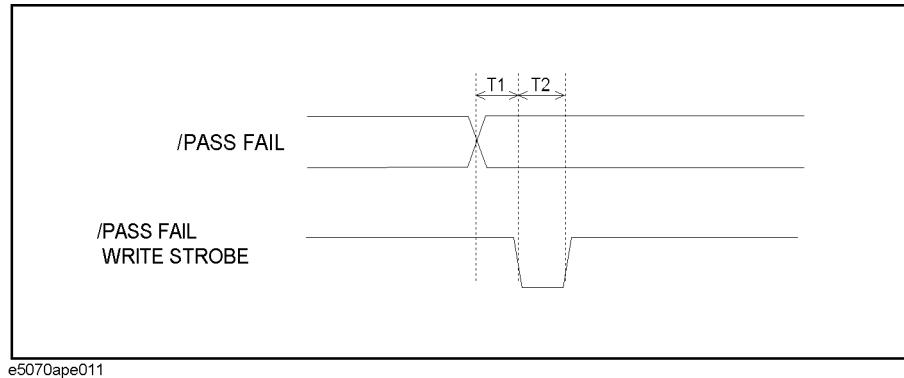
Table 10-5   **Values of T1 through T2 in Figure 10-5 (typical)**

T1	Response time of /PASS FAIL write strobe	1 μs
T2	Pulse width of /PASS FAIL write strobe	1 μs

Figure 10-5   **Timing chart of limit test result output and write strobe signal**

e5070ape011

Figure 10-6 shows a timing chart of a pulse input to INPUT1, /OUTPUT1 signal output, and /OUTPUT2 signal output.
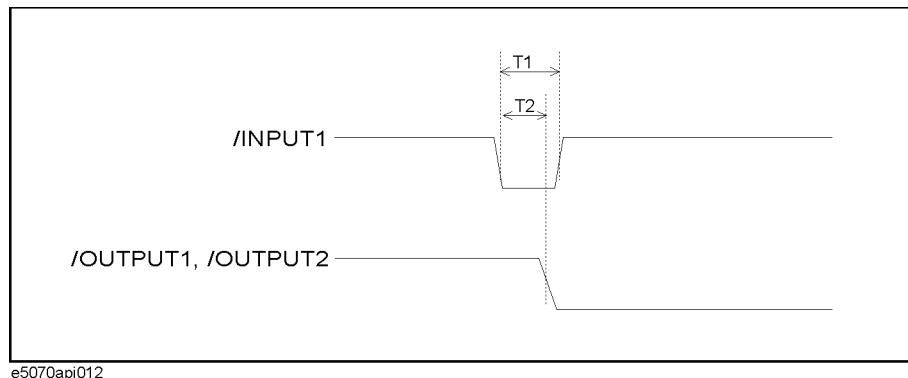
Table 10-6   **Values of T1 through T2 in Figure 10-6 (typical)**

		Minimum value	Maximum value
T1	Pulse width of /INPUT1	1 μs	—
T2	Response time of /OUTPUT1, /OUTPUT2	0.4 μs	0.6 μs

Figure 10-6   **Timing chart of /INPUT1 and /OUTPUT1, /OUTPUT2**

e5070apj012

Electrical Characteristics

Input signal

All input signals are TTL compatible. Table 10-7 shows the electrical characteristics of input signals. Figure 10-7 shows the circuit diagram of input signals.
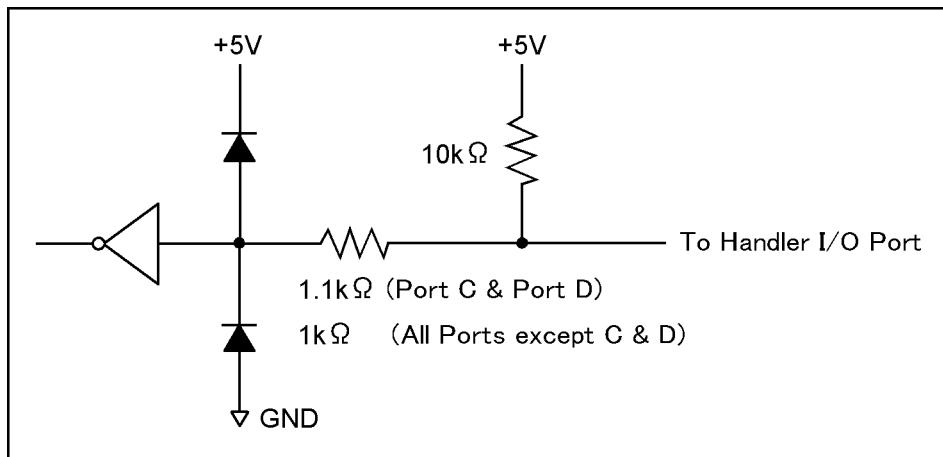
Table 10-7   **Electrical characteristics of input signals (typical)**

Maximum rate input voltage		-0.5 V to 5.5 V
Input voltage	High level	2.0 V to 5.0 V
	Low level	0 V to 0.5 V

Figure 10-7   **Circuit diagram or input signals**

e5070ape027

Output signal

All output signals are TTL compatible. Table 10-8 shows the electrical characteristics of output signals. Figure 10-8 shows the circuit diagram of output signals.
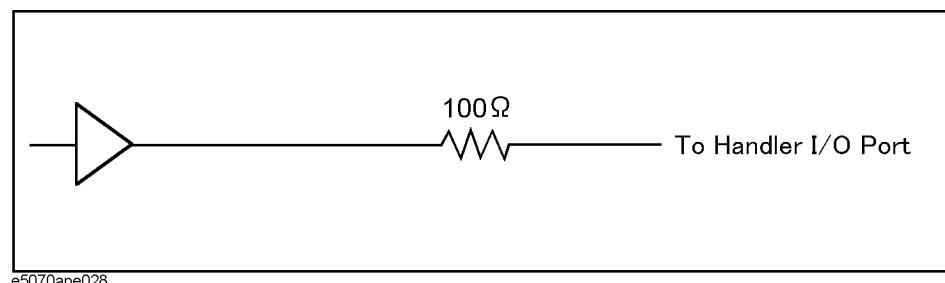
Table 10-8   **Electrical characteristics of output signals (typical)**

Maximum rate output current		-10 mA to 10 mA
Output current	High level	-5 mA
	Low level	3 mA
Output voltage	High level	2.0 V to 3.3 V (when output current is from -5 mA to 0 mA) 3.20 V (when output current is -1 mA) 2.75 V (when output current is -5 mA)
	Low level	0 V to 0.8 V (when output current is from 0 mA to 3 mA) 0.25 V[*1] (when output current is 1 mA) 0.55 V (when output current is 3 mA)

*1. Notice that, in case of C0 to C3 (port C) and D0 to D3 (port D), output voltage is 0.30 V.

Figure 10-8   **Circuit diagram of output signals**

e5070ape028

Power supply (+5 V)

Table 10-9 shows electrical characteristics of +5 V power supply for external instruments.

Table 10-9   **Electrical characteristics of +5 V power supply (typical)**

Output voltage	4.5 V to 5.5 V
Maximum output current	100 mA

Sample Program

Example 10-1 provides a sample program that communicates with an external instrument through the handler I/O port.You can find the source file of this program, named hander.htb, on the sample program disk.

This program outputs 5 (sets bit 2 and bit 0 to Low, and the other bits to High) to the port A of the handler I/O port, then waits until the bit 3 of the port C is set to Low.

The program is described in detail below:

Line 40	Assigns a GPIB address to the I/O pass.
Lines 60 to 70	These lines store the output data on the port A (binary) and bit location (bit 3) into Out_data_bin$ and Flag_bit variables, respectively.
Line 90	This line configures the port C to input port.
Lines 100 to 110	These lines enable /INDEX and /READY FOR TRIGGER signals.
Lines 130 to 140	These lines convert Out_data_bin$ to a decimal value and set it to the port A.
Lines 160 to 200	These lines repeat reading data from the port C until Flag_bit becomes TRUE.

Example 10-1   **Communicating with external instruments (handler.htb)**

```
10      INTEGER Out_data,In_data,Bit_stat
20      DIM Out_data_bin$[9]
30      !
40      ASSIGN @Agte507x TO 717
50      !
60      Out_data_bin$="00000101"
70      Flag_bit=3
80      !
90      OUTPUT @Agte507x;":CONT:HAND:C:MODE INP"
100     OUTPUT @Agte507x;":CONT:HAND:IND:STAT ON"
110     OUTPUT @Agte507x;":CONT:HAND:RTR:STAT ON"
120     !
130     Out_data=IVAL(Out_data_bin$,2)
140     OUTPUT @Agte507x;":CONT:HAND:A ";Out_data
150     !
160     REPEAT
170       OUTPUT @Agte507x;":CONT:HAND:C?"
180       ENTER @Agte507x;In_data
190       Bit_stat=BIT(In_data,Flag_bit)
200     UNTIL Bit_stat=1
210     END
```

11   Working with Automatic Test Systems

This chapter describes useful features when the Agilent E5061A/E5062A is integrated with
the automatic test system.

Preventing Erroneous Key Operation on the Front Panel (Key Lock Feature)

When no operation is required from the front panel controls, the mouse, or the keyboard, disabling those input devices can prevent from any erroneous operation, which might be caused by accidentally touching such devices.

To turn on or off Key Locking, use the following command:

Locking the front panel controls and the keyboard.	:SYST:KLOC:KBD on page 477
Locking the mouse and the touch screen.	:SYST:KLOC:MOUS on page 478

Improving Command Processing Speed

SCPI commands should be processed in shorter time to improve throughput, when those commands are frequently executed (for example, reading out trace for each measurement).

With E5061A/E5062A, processing time for SCPI commands can be improved by decreasing refresh rate of the LCD display.

Measurement results (trace) need not to be updated

When the measurement trace needs not to be updated, turn off the update of the LCD display. This improves processing speed of SCPI commands and eliminates updating time of the screen.

To turn off the update of the LCD display, use the following command:

- :DISP:ENAB command on page 312

Measurement results (trace) need to be updated

When the measurement trace needs to be updated, processing speed of SCPI commands can be improved by controlling the update timing of the LCD display:

Step 1. Execute all SCPI commands that are required before measurement, including commands setting conditions.

Step 2. Turning Off the update of the LCD display.

Step 3. Perform the measurement.

Step 4. Execute the commands for reading out measurement result or analyzing the result. Note that reading out the result in binary format will accelerate data transfer.

Step 5. Execute the following command to update the LCD display once.

- :DISP:UPD command on page 318

Step 6. Return to the step 3.

Sample program

Example 11-2shows a sample program where the command processing time are improved by controlling the update timing of the LCD display.You can find the source file of this program, named cont_upd.htb, on the sample program disk.

This sample program correctly runs when the maximum number of channels/traces is set 9 channels/9 traces.

This program sets necessary measurement conditions then turn off the update of the LCD display. Next, it performs measurement, reads out the result, and update the screen once.This program repeats this measurement procedure ten times.

The program is described in detail below:

Lines 50 to 60   Assigns a GPIB address to the I/O pass.

Lines 80 to 110   These lines set the sweep type to linear sweep, the sweep center value to 950 MHz, the sweep span value to 100 MHz, and the number of measurement points to 201, respectively.

Lines 120 to 160   These lines set the trigger source to bus trigger, turn on Continuous Activation mode for channel 1, turn the mode off for channels 2 through 4.

Lines 180 to 190   These lines display the window for channel 1 only, and arrange two graphs tiled horizontally.

Lines 210 to 270   These lines set the number of traces for channel 1 to 2, the measurement parameter and its data format for trace 1 to S21 and Log Mag, and those for trace 2 to S11 and Log Mag, respectively.

Line 290   This line turns Off the update of the LCD screen.

Line 300   This line sets the data transfer format to binary.

Lines 320 to 540   These lines repeat the following procedure ten times.

1. Lines 330 to 350 These lines trigger the instrument, and waits until the measurement cycle finishes.

2. Lines 390 to 430: Reads out the formatted data array of trace 1 in channel 1.

3. Lines 450 to 490: Reads out the formatted data array of trace 2 channel 1.

4. Line 530 This line updates the LCD screen once.

Example 11-1   **Controlling the update timing of LCD display(cont_upd.htb)**

```
10      REAL Trace1(1:201,1:2),Trace2(1:201,1:2)
20      DIM Buff$[9],Img$[30]
30      INTEGER Nop,I
40      !
50      ASSIGN @Agte507x TO 717
60      ASSIGN @Binary TO 717;FORMAT OFF
70      !
80      OUTPUT @Agte507x;":SENS1:SWE:TYPE LIN"
90      OUTPUT @Agte507x;":SENS1:FREQ:CENT 950E6"
100     OUTPUT @Agte507x;":SENS1:FREQ:SPAN 100E6"
110     OUTPUT @Agte507x;":SENS1:SWE:POIN 201"
120     OUTPUT @Agte507x;":TRIG:SOUR BUS"
130     OUTPUT @Agte507x;":INIT1:CONT ON"
140     FOR I=2 TO 4
150       OUTPUT @Agte507x;":INIT"&VAL$(I)&":CONT OFF"
160     NEXT I
170     !
180     OUTPUT @Agte507x;":DISP:SPL D1"
190     OUTPUT @Agte507x;":DISP:WIND1:SPL D1_2"
200     !
210     OUTPUT @Agte507x;":CALC1:PAR:COUN 2"
220     OUTPUT @Agte507x;":CALC1:PAR1:DEF S21"
230     OUTPUT @Agte507x;":CALC1:PAR1:SEL"
240     OUTPUT @Agte507x;":CALC1:FORM MLOG"
250     OUTPUT @Agte507x;":CALC1:PAR2:DEF S11"
260     OUTPUT @Agte507x;":CALC1:PAR2:SEL"
270     OUTPUT @Agte507x;":CALC1:FORM MLOG"
280     !
290     OUTPUT @Agte507x;":DISP:ENAB OFF"
300     OUTPUT @Agte507x;":FORM:DATA REAL"
310     !
320     FOR I=1 TO 10
330       OUTPUT @Agte507x;":TRIG:SING"
340       OUTPUT @Agte507x;"*OPC?"
350       ENTER @Agte507x;Buff$
360       !
370       ! Read Trace Data
380       !
390       OUTPUT @Agte507x;":CALC1:PAR1:SEL"
400       OUTPUT @Agte507x;":CALC1:DATA:FDAT?"
410       ENTER @Agte507x USING "#,8A";Buff$
420       ENTER @Binary;Trace1(*)
430       ENTER @Agte507x USING "#,1A";Buff$
440       !
450       OUTPUT @Agte507x;":CALC1:PAR2:SEL"
460       OUTPUT @Agte507x;":CALC1:DATA:FDAT?"
470       ENTER @Agte507x USING "#,8A";Buff$
480       ENTER @Binary;Trace2(*)
490       ENTER @Agte507x USING "#,1A";Buff$
500       !
510       ! Update Display
520       !
530       OUTPUT @Agte507x;":DISP:UPD"
540     NEXT I
550     END
```

Detecting Occurrence of an Error

Using the status reporting system

The status of the E5061A/E5062A can be detected through the status registers.This section describes how to detect the end of measurement using the status registers. For the complete description of the status report mechanism, including the specifications of each bit, see Appendix B, "Status Reporting System,".

Occurrence of an error will be present in the standard event status register. An SRQ (service request) is useful when you create a program that uses the information reported by this register to detect occurrence of an error.

To detect the end of sweep via an SRQ, use one of the following commands:
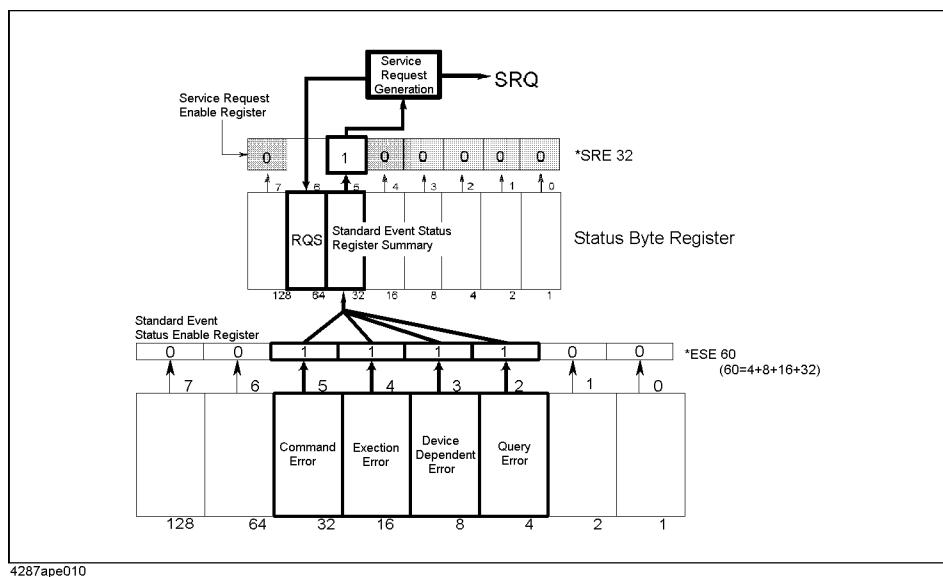
- *SRE on page 200

- *ESE on page 197

Follow these steps:

Step 1. Set the E5061A/E5062A so that it generates an SRQ when any of the error occurrence bit is set to 1 in the standard event status register.

Step 2. When an SRQ is generated, the program interrupts the measurement cycle.

Figure 11-1   **SRQ generation sequence (when an error occurs)**

4287ape010

Using the error queue

An error queue holds the number for the error and the error message.Reading the error queue allows the user to verify the error that has been occurred.To retrieve the content of error queue, use the following command:

- :SYST:ERR? on page 476

The error queue can be used in the following ways:

1. It is used as a branch for error handling. When an error queue is retrieved, it returns 0 as the error number and "No error" as the error message if no errors detected. This can be used for detecting of an error and for branching flow of a program. Also this is useful when you wish to handle a specific error(s). Note that this method will not allow the user to perform any processing in synchronization with an occurrence of an error.

2. When an error is detected using SRQ, the error queue is used to examine the error. Refer to the example in Example 11-2.

Sample program

Example 11-2 is a sample program that demonstrates how to use an SRQ to detect occurrence of an error. You can find the source file of this program, named srq_err.htb, on the sample program disk.

This program sets SRQs then incidentally send an invalid parameter to generate an error, which is handled by this program.In the error handling part, this program examines the error, displays the error number and error message, and display the message indicating the suspend of the program.

Line 40	Assigns a GPIB address to the I/O pass.
Lines 60 to 70	These lines enables the bit 2, 3 4 and 5 in the standard event status register, and set the bit 5 to 1 in the service request enable register.
Lines 80 to 100	These lines clear the status byte register, the standard event status register, and the error queue.
Lines 120 to 130	These lines set the branch target for an SRQ interrupt to enable SRQ interrupts.
Lines 140 to 260	These lines set the measurement parameters and their data formats for trace 1 and 2. An invalid parameter is given to the data format setting for trace 2, causing an error.
Lines 280 to 330	These lines define an error handler that
	Lines 290 to 300: These lines retrieve the error number and error messages for the error from the error queue.
	Lines 310 to 330 These lines displays the message indicating occurrence of the error, the error number, the error message, and the message showing that the program is suspend.
Line 350	Displays a closing message.Note that this message will not display unless this program is re-executed after setting a corrected parameter to the data format setting for trace 2.

Example 11-2   **Error detection using an SRQ (srq_err.bas)**

```
10      DIM Buff$[9],Err_mes$[50]
20      INTEGER Err_no
30      !
40      ASSIGN @Agte507x TO 717
50      !
60      OUTPUT @Agte507x;"*ESE 60"
70      OUTPUT @Agte507x;"*SRE 32"
80      OUTPUT @Agte507x;"*CLS"
90      OUTPUT @Agte507x;"*OPC?"
100     ENTER @Agte507x;Buff$
110     !
120     ON INTR 7 GOTO Err_proc
130     ENABLE INTR 7;2
140     OUTPUT @Agte507x;":CALC1:PAR:COUN 2"
150     PRINT "Trace 1 Meas.Para: S21"
160     PRINT "Trace 1 Format   : Log Mag"
170     OUTPUT @Agte507x;":CALC1:PAR1:DEF S21"
180     OUTPUT @Agte507x;":CALC1:PAR1:SEL"
190     OUTPUT @Agte507x;":CALC1:FORM MLOG"
200     PRINT "Trace 2 Meas.Para: S11"
210     PRINT "Trace 2 Format   : Log Mag"
220     OUTPUT @Agte507x;":CALC1:PAR2:DEF S11"
230     OUTPUT @Agte507x;":CALC1:PAR2:SEL"
240     OUTPUT @Agte507x;":CALC1:FORM LOG"
250     OUTPUT @Agte507x;"*OPC?"
260     ENTER @Agte507x;Buff$
270     GOTO Skip_err_proc
280 Err_proc: OFF INTR 7
290     OUTPUT @Agte507x;";:SYST:ERR?"
300     ENTER @Agte507x;Err_no,Err_mes$
310     PRINT "Error occurred!!"
320     PRINT "  No:";Err_no,"Description: "&Err_mes$
330     PRINT "PROGRAM INTERRUPT!!"
340     GOTO Prog_end
350 Skip_err_proc: PRINT "PROGRAM DONE."
360 Prog_end: END
```

12 Sample Application Programs

This chapter introduces several sample programs for basic measurement, measurement with a system using the handler I/O, and controlling the instrument over LAN.

Basic measurement (measuring a band pass filter)

Example 12-1 provides a sample program that measures a band pass filter.You can find the source file of this program, named meas_bpf.htb, on the sample program disk.

The sample program performs full 2-port calibration using the 85032F calibration kit, measure a band-pass filter (center frequency: 947.5 MHz), and calculates and displays its bandwidth, insertion loss, and so on. This measurement is the same as "Measuring a band pass filter" in *Installation and Quick Start Guide* of the $E5061A/E5062A$. Therefore, for information on the flow of the measurement, the connection of the standard, and so on, refer to the description of *Installation and Quick Start Guide*.

When started, the program displays the message "Set OPEN to Port 1. Then push [Enter] key." Connect the OPEN standard to the port 1 and press **[Enter]** to measure the OPEN calibration data. Likewise, connect the SHORT and the LOAD standards and measure each calibration data.

Next, the program displays the message "Set OPEN to Port 2. Then push [Enter] key." Connect the OPEN standard to the port 2 and press **[Enter]** to measure the OPEN calibration data. Likewise, connect the SHORT and the LOAD standards and measure each calibration data.

Further, the program displays the message "Set THRU between Port 1 and Port 2. Then push [Enter] key." Connect the THRU standard between the ports 1 and 2 and press **[Enter]** to measure the THRU calibration data.

When the calibration is finished, the program displays the message "Set DUT. Then Push [Enter] key." Connect the DUT and press **[Enter]**. This initiates the measurement and display the result as shown in Figure 12-1.

Figure 12-2 shows a sample display of the LCD screen after the program exits execution.

Figure 12-1   **Sample execution result of the program of Example 12-1**

```
## Measurement Result ##
  BW:      3.63757249908E+7
 cent:     9.4836227902E+8
  low:     9.30174417035E+8
 high:     9.66550142015E+8
    Q:      26.0712980976
 loss:     -2.2447956671
```

Figure 12-2   **Sample display of the screen after the program Example 12-1 exits execution**

The program is described in detail below:

Line 50	Assigns a GPIB address to the I/O pass.
Lines 70 to 110	Store the sweep center value (947.5 MHz), the sweep span value (200 MHz), the number of measurement points (401), the IF bandwidth (10 kHz), the power level (-10 dBm) into the variables Center, Span, Nop, If_Bw, and Pow, respectively.
Lines 120 to 160	Stores the number of traces (1), the measurement parameter (S21), the data format (log Mag), the calibration kit number (4: 85032F), and the save file name (State08.sta) into the variables, Num_of_tr, Para$, Fmt$, CalKit, and File$, respectively.
Line 200	Puts the instrument into preset state.
Lines 220 to 260	These lines assign the sweep center value for channel 1 to Center, sweep span value to Span, number of measurement points to Nop, IF bandwidth to If_bw, and power level to Pow, respectively.
Lines 280 to 310	These lines assign the number of trace for channel 1 to Num_of_tr, measurement parameters to Para$, and data format to Fmt$, respectively.
Line 350	Stores the calibration kit number for channel 1 to the CalKit variable.
Lines 360 to 380	These lines specifies ports 1 and 2 to be used and calls the sub program Cal_solt to perform full 2-port calibration for channel 1. For more information on the Cal_solt subprogram, refer to the description in Example 4-1 on page 71.
Lines 420 to 430	Saves the settings of the E5061A/E5062A and the calibration coefficients under the file name File$.
Lines 480 to 490	These lines set the trigger source to the bus trigger and turns on the continuous initiation mode for channel 1.

Lines 510 to 520	These lines prompt the user to connect the DUT and wait for **[Enter]** to be pressed after the DUT is connected.
Lines 540 to 560	These lines trigger the instrument, and waits until the measurement cycle finishes.
Line 580	This line executes auto scale for the trace 1 of channel 1.
Lines 620 to 650	These lines turn on the display of marker 1, move the marker to the position where the stimulus value is equal to Center, read out the response value at the marker and assign the value to the Resp variable.
Lines 670 to 710	These lines configure the system to generate an SRQ when it cannot perform Bandwidth Search due to an error.
Lines 730 to 740	These lines set the branch target for an SRQ interrupt to enable SRQ interrupts.
Lines 750 to 790	Sets the bandwidth definition value to -3 dB and the bandwidth search result display to on, reads out the bandwidth search results (bandwidth, center frequency, Q value, and insertion loss), and stores them into the variables Bwid, Cent, Q, and Loss, respectively.
Lines 830 to 900	These lines define an error handler that retrieves the error number and error messages for the error, then assign 0 to Bwid, Cent and Q, Resp (response value at marker 1) to Loss.
Lines 930 to 940	These lines calculate the 2 (higher and lower) cutoff frequencies from the values in the Bw and Cent variables and stores them into the Cut_l and Cut_h variables.
Lines 980 to 1040	These lines display the measurement results (values of Bwid, Cent, Q, Loss, Cut_l, and Cut_h).
Lines 1060 to 1070	These lines prompt the user to decide to perform another measurement. When **[y]** is pressed followed by **[Enter]** key, the program will return to the part where the DUT is connected and continue measurement.

Example 12-1   **Measurement of band pass filter (meas_bpf.htb)**

```
10      DIM Para$[9],Fmt$[9],File$[20],Buff$[9],Inp_char$[9],Err_msg$[20]
20      REAL Center,Span,If_bw,Pow,Resp,Bwid,Cent,Q,Loss,Cut_l,Cut_h
30      INTEGER Nop,Num_of_tr,Cal_kit,Port(1:4),Err_no
40      !
50      ASSIGN @Agte507x TO 717
60      !
70      Center=9.475E+8      ! Center Freq.      : 947.5 MHz
80      Span=2.00E+8         ! Span              : 200 MHz
90      Nop=401             ! Number of Points : 401
100     If_bw=1.0E+4        ! IF Bandwidth     : 10 kHz
110     Pow=-10             ! Power Level      : -10 dBm
120     Num_of_tr=1         ! Number of Traces : 1
130     Para$="S21"         ! Meas. Parameter  : S21
140     Fmt$="MLOG"         ! Data Format      : Log Mag
150     Cal_kit=4           ! Calibration Kit  : 85032F
160     File$="State08.sta" ! Save File Name   : State08.sta
170     !
180     ! Mesurement Condition
190     !
200     OUTPUT @Agte507x;":SYST:PRES"
210     !
220     OUTPUT @Agte507x;":SENS1:FREQ:CENT ";Center
230     OUTPUT @Agte507x;":SENS1:FREQ:SPAN ";Span
240     OUTPUT @Agte507x;":SENS1:SWE:POIN ";Nop
250     OUTPUT @Agte507x;":SENS1:BAND ";If_bw
260     OUTPUT @Agte507x;":SOUR1:POW ";Pow
270     !
280     OUTPUT @Agte507x;":CALC1:PAR:COUN ";Num_of_tr
290     OUTPUT @Agte507x;":CALC1:PAR1:DEF "&Para$
300     OUTPUT @Agte507x;":CALC1:PAR1:SEL"
310     OUTPUT @Agte507x;":CALC1:FORM "&Fmt$
320     !
330     ! Full 2 Port Calibration (@ Port 1 & Port 2)
340     !
350     OUTPUT @Agte507x;":SENS1:CORR:COLL:CKIT ";Cal_kit
360     Port(1)=1
370     Port(2)=2
380     Cal_solt(@Agte507x,"1",2,Port(*))
390     !
400     ! Save State & Cal
410     !
420     OUTPUT @Agte507x;":MMEM:STOR:STYP CST"
430     OUTPUT @Agte507x;":MMEM:STOR """&File$&""""
440     !
450     ! Measurement
460     !
470     CLEAR SCREEN
480     OUTPUT @Agte507x;":TRIG:SOUR BUS"
490     OUTPUT @Agte507x;":INIT1:CONT ON"
500 Meas_start:!
510     PRINT "Set DUT, then Push [Enter] key"
520     INPUT "",Inp_char$
530     !
540     OUTPUT @Agte507x;":TRIG:SING"
550     OUTPUT @Agte507x;"*OPC?"
560     ENTER @Agte507x;Buff$
570     !
580     OUTPUT @Agte507x;":DISP:WIND1:TRAC1:Y:AUTO"
590     !
600     ! Analysis
610     !
```

12. Sample Application Programs

```
620    OUTPUT @Agte507x;":CALC1:MARK1 ON"
630    OUTPUT @Agte507x;":CALC1:MARK1:X ";Center
640    OUTPUT @Agte507x;":CALC1:MARK1:Y?"
650    ENTER @Agte507x;Resp
660    !
670    OUTPUT @Agte507x;"*ESE 60"
680    OUTPUT @Agte507x;"*SRE 32"
690    OUTPUT @Agte507x;"*CLS"
700    OUTPUT @Agte507x;"*OPC?"
710    ENTER @Agte507x;Buff$
720    !
730    ON INTR 7 GOTO Bw_err
740    ENABLE INTR 7;2
750    OUTPUT @Agte507x;":CALC1:MARK1:BWID:THR -3"
760    OUTPUT @Agte507x;":CALC1:MARK1:BWID ON"
770    OUTPUT @Agte507x;":CALC1:MARK1:BWID:DATA?"
780    WAIT .5
790    ENTER @Agte507x;Bwid,Cent,Q,Loss
800    GOTO Skip_bw_err
810    !
820 Bw_err: OFF INTR 7
830    OUTPUT @Agte507x;";:SYST:ERR?"
840    ENTER @Agte507x;Err_no,Err_msg$
850    PRINT "Error occurred!!"
860    PRINT "  No:";Err_no,"Description: "&Err_msg$
870    Bwid=0
880    Cent=0
890    Q=0
900    Loss=Resp
910    !
920 Skip_bw_err: OFF INTR 7
930    Cut_l=Cent-(Bwid/2)
940    Cut_h=Cent+(Bwid/2)
950    !
960    ! Display
970    !
980    PRINT "## Measurement Result ##"
990    PRINT "   BW:",Bwid
1000   PRINT " cent:",Cent
1010   PRINT "  low:",Cut_l
1020   PRINT " high:",Cut_h
1030   PRINT "    Q:",Q
1040   PRINT " loss:",Loss
1050   !
1060   INPUT "Once more? [Y]es/[N]o",Inp_char$
1070   IF UPC$(Inp_char$)="Y" OR UPC$(Inp_char$)="YES" THEN Meas_start
1080   !
1090   END
1100   !=========================================
1110   ! Full n Port Calibration Function
1120   !=========================================
1130 SUB Cal_solt(@Agte507x,Ch$,INTEGER Num_of_ports,INTEGER Port(*))
1140   DIM Buff$[9]
1150   INTEGER I,J
1160   !
1170   PRINT "## Full "&VAL$(Num_of_ports)&" Port Calibration ##"
1180   !
1190   ! Calibration Type Selection
1200   !
1210   OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:METH:SOLT"&VAL$(Num_of_
ports)&" ";
1220   FOR I=1 TO Num_of_ports-1
1230     OUTPUT @Agte507x;Port(I);",";
1240   NEXT I
```

```
1250   OUTPUT @Agte507x;Port(Num_of_ports)
1260   !
1270   ! Reflection Measurement
1280   !
1290   FOR I=1 TO Num_of_ports
1300     PRINT "Set OPEN  to Port "&VAL$(Port(I))&". Then push [Enter]
key."
1310     INPUT "",Buff$
1320     OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:OPEN ";Port(I)
1330     OUTPUT @Agte507x;"*OPC?"
1340     ENTER @Agte507x;Buff$
1350     PRINT "Set SHORT to Port "&VAL$(Port(I))&". Then push [Enter]
key."
1360     INPUT "",Buff$
1370     OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:SHOR ";Port(I)
1380     OUTPUT @Agte507x;"*OPC?"
1390     ENTER @Agte507x;Buff$
1400     PRINT "Set LOAD  to Port "&VAL$(Port(I))&". Then push [Enter]
key."
1410     INPUT "",Buff$
1420     OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:LOAD ";Port(I)
1430     OUTPUT @Agte507x;"*OPC?"
1440     ENTER @Agte507x;Buff$
1450   NEXT I
1460   !
1470   ! Transmission Measurement
1480   !
1490   FOR I=1 TO Num_of_ports-1
1500     FOR J=I+1 TO Num_of_ports
1510       PRINT "Set THRU between Port "&VAL$(Port(I))&" and Port "&
VAL$(Port(J))&". Then push [Enter] key."
1520       INPUT "",Buff$
1530       OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:THRU ";Port(I);","
;Port(J)
1540       OUTPUT @Agte507x;"*OPC?"
1550       ENTER @Agte507x;Buff$
1560       OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:THRU ";Port(J);","
;Port(I)
1570       OUTPUT @Agte507x;"*OPC?"
1580       ENTER @Agte507x;Buff$
1590     NEXT J
1600   NEXT I
1610   !
1620   ! Done
1630   !
1640   OUTPUT @Agte507x;":SENS"&Ch$&":CORR:COLL:SAVE"
1650   PRINT "Done"
1660 SUBEND
```

Controlling Using SICL-LAN Server

This section describes how to control the E5061A/E5062A using SICL in the Windows environment, with a sample program (a VBA macro for Microsoft Excel) written in Visual Basic. The source file of this program, ctrl_lansicl.xls, is available in the sample program disk.
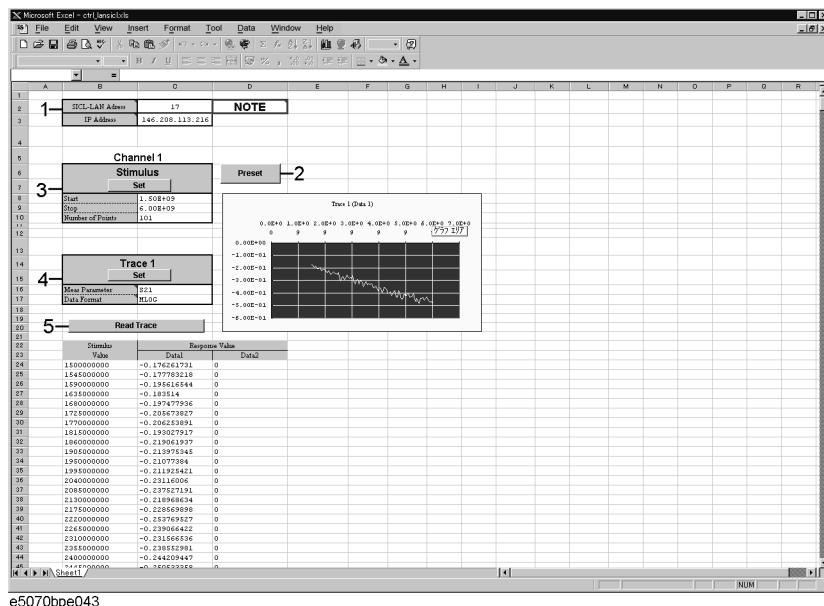
NOTE   To control the $E5061A/E5062A$ using the SICL-LAN server, you need to make preparations described in "Control over SICL-LAN server" on page 28.

Using VBA macro

Opening ctrl_lansicl.xls in Microsoft Excel display a screen as shown in Figure 12-3.

Figure 12-3   **ctrl_lansicl.xls**

e5070bpe043

For how to use each element in Figure 12-3, refer to the following description.

We begin describing the part 1. In the cell to the right of SICL-LAN Address, enter the address of the $E5061A/E5062A$ for control with the SICL-LAN server. This address is **xx**, which has been set with the command **[System] - Misc Setup - Network Setup - SICL-LAN Address [xx]**. Enter the IP address of the $E5061A/E5062A$ in the cell right side of IP Address. This VBA macro will not work properly without appropriate values in the two cells.

Clicking the button labeled as Preset in the part 2 executes the presetting operation.

In the part 3, sweep range (start and stop points) and number of measurement points for channel 1 are set. Clicking the button labeled as Set executes the setting as shown in the setting table.

The part 4 set the measurement parameters and data format for trace 1 in channel 1.

Clicking the button labeled as Set executes the setting as shown in the setting table.

Clicking the button labeled as Read Trace in the part 5 retrieves the formatted data array of trace 1 in channel 1 and displays it in tabular and graphical formats.

Description of operation in VBA macro

Here described is operation of the VBA macro, focusing on the part related to controlling with SICL.

In order to use SICL in your VBA macro, you must declare functions and define variables with a definition file of SICL (for VB). In the VBA macro, ctrl_sicllan.xls, the standard module whose object name is "SICL" is the definition file.
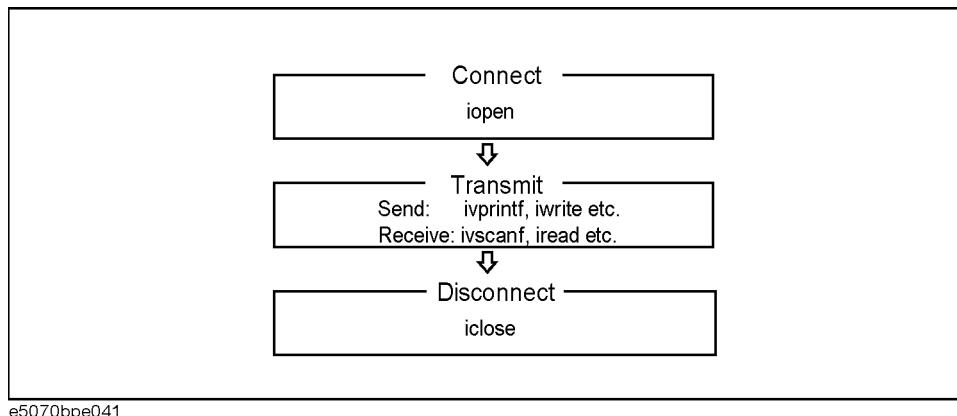
Basic control flow with SICL is shown in Figure 12-4.

NOTE   In this sample program, the **ivprintf** function, the **ivscanf** function, and the **iread** function are used in its communication part; you can use other SICL functions as well. For detail, refer to sicl.hlp (the online help of SICL).

Figure 12-4   **Flow of control using SICL**

e5070bpe041

NOTE   For more information on how to use each function of SICL, refer to the manual of SICL.

Procedures in each step in Figure 12-4 are described below.

Connection

The procedure corresponding to connection is OpenSession (Example 12-2). OpenSession establishes connection to the $E5061A/E5062A$ with the **iopen** function of SICL, using SICL-LAN Address and IP Address entered in the part 1 in Figure 12-3. The **iopen** function takes the address information of the $E5061A/E5062A$ you specify as its parameters.

Syntax   *addr* = iopen(*dev*)

Variable

	addr
Description	Session information (output)
Data type	Integer type

	dev
Description	Address information of the instrument you specify (input)
Data type	Character string type
Grammar	*sicl-name*[*1*][*ip-address*[*2*]]:*interface*[*3*],*sicl-lan-address*[*4*]

*1. The SICL interface name you have set with the Agilent I/O Libraries in external control.
*2. The IP address of the E5061A/E5062A.
*3. For the E5061A/E5062A, specify hpib9.
*4. The address of the E5061A/E5062A for control with the SICL-LAN server.

For example, if the parameter (*dev*) is "lan[128.10.0.3]:hpib9,17," connection is made to the address of **17** of the interface of **hpib9** with the $E5061A/E5062A$ whose IP address is **128.10.0.3** using the external controller whose SICL interface name is **lan**.

Example 12-2   **OpenSession**

```
Function OpenSession() As Integer

  Dim ServAddr As String
  Dim IpAddr As String

  On Error GoTo ErrHandler

  '''Get Sicl-Lan Address
  Sheets("Sheet1").Select
  Range("C2").Select
  ServAddr = ActiveCell.FormulaR1C1

  '''Get Ip Address
  Sheets("Sheet1").Select
  Range("C3").Select
  IpAddr = ActiveCell.FormulaR1C1

  OpenSession = iopen("lan[" & IpAddr & "]:hpib9," & ServAddr)
```

```
  Call itimeout(OpenSession, 10000)
  Exit Function

ErrHandler:
  MsgBox "*** Error : " & Error$
  Call siclcleanup
  End

End Function
```

Sending

The procedure corresponding to sending in communication is OutputSiclLan (Example 12-3). OutputSiclLan uses the **ivprintf** function of SICL to send messages (SCPI commands). The **ivprintf** function takes the session information outputted from the **iopen** function and a program message as its parameters.

Syntax   *Status* = ivprintf(*addr,mes*)

Variable

Table 12-1   **Variable (*Status*)**

	Status
Description	Return value of the function (output)
Data type	Integer type

Table 12-2   **Variable (*addr*)**

	addr
Description	Session information (input)
Data type	Integer type

	mes
Description	Program message (input)[1]
Data type	Character string type

  [1] When sending a program message of a SCPI command, add the message terminator at the end of the message (in Example 12-3, Chr$(10)).

Example 12-3   **OutputSiclLan**

```
Sub OutputSiclLan(addr As Integer, message As String)

  Dim Status As Integer
  Dim actualcnt As Long
  Dim length As Long

  On Error GoTo ErrHandler

  length = Len(message)
```

```
  Status = ivprintf(addr, message & Chr$(10))
  Exit Sub

ErrHandler:
  MsgBox "*** Error : " & Error$
  Call siclcleanup
  End

End Sub
```

Receiving

The procedure corresponding to receiving ASCII format messages in communication is EnterSiclLan (Example 12-4). EnterSiclLan uses the **ivscanf** function of SICL to receive a message in ASCII format and store it into the output variable. The **ivscanf** function takes the session information outputted from the **iopen** function, the format for output, and data to be outputted as its parameters.

Syntax   *Status* = ivscanf(*addr,fmt,ap*)

Variable

	fmt
Description	Format for output (input)
Data type	Character string type

	ap
Description	Data to be outputted (output)
Data type	Character string type

For information on the variable (*Status*) and the variable (*addr*), refer to Table 12-1, "Variable (Status)," on page 179 and Table 12-2, "Variable (addr)," on page 179, respectively.

NOTE   In Visual Basic, variables must be declared as a fixed length string when receiving string data using the **ivscanf** function.

Example 12-4   **EnterSiclLan**

```
Sub EnterSiclLan(addr As Integer, Query As String)


  Dim Status As Integer
  Dim actualcnt As Long
  Dim res As String * 256

  On Error GoTo ErrHandler

  Status = ivscanf(addr, "%t", res)
  Query = Trim(res)
  Exit Sub
```

```
ErrHandler:
  MsgBox "*** Error : " & Error$
  Call siclcleanup
  End

End Sub
```

The procedure corresponding to receiving array data in communication is
EnterSiclLanArrayReal64 (Example 12-5). EnterSiclLanArrayReal64 uses the **iread**
function of SICL to receive array data in the IEEE 64 bit floating point binary transfer
format and store it into the output variable. The **iread** function takes the session
information outputted from the **iopen** function, data to be outputted, the number of data
bytes, the condition to finish reading data, and the number of data bytes actually read out as
its parameters.

Syntax   *Status* = iread(*addr,buf,bufsize,reason,actual*)

Variable

	buf
Description	Data to be outputted (output)
Data type	Character string type

	bufsize
Description	The number of data bytes (input)
Data type	Long integer type

	reason
Description	The condition to finish reading out data (input)
Data type	Integer type

	actual
Description	The number of data bytes actually read out (output)
Data type	Long integer type

For information on the variable (*Status*) and the variable (*addr*), refer to Table 12-1,
"Variable (Status)," on page 179 and Table 12-2, "Variable (addr)," on page 179,
respectively.

Each functional part of EnterSiclLanArrayReal64 is described below.

(1) retrieves the data header.

(2) stores the number of data bytes into the size variable in the header part.

(3) retrieves the formatted data array for trace 1 in channel 1, and stores it into the databuf
variable.

(4) retrieves the message terminator at the end of the data.

Example 12-5   **EnterSiclLanArrayReal64**

```
Function EnterSiclLanArrayReal64(addr As Integer, databuf() As Double)
As Long

  Dim Status As Integer
  Dim actualcnt As Long
  Dim buf As String * 8
  Dim size As Long

  On Error GoTo ErrHandler

  '''Read header info of "#6NNNNNN"
  Status = iread(addr, buf, 8, I_TERM_MAXCNT, actualcnt)
'.................(1)

  size = Val(Mid$(buf, 3, 6))
'.................(2)

  '''Read data
  Status = iread(addr, databuf, size, I_TERM_MAXCNT, actualcnt)
'.................(3)

  '''Read ending LF
  Status = iread(addr, buf, 1, I_TERM_MAXCNT, actualcnt)
'.................(4)

  EnterSiclLanArrayReal64 = size / 8
  Exit Function

ErrHandler:
  MsgBox "*** Error : " & Error$
  Call siclcleanup
  End

End Function
```

Disconnection

The **iclose** function of SICL is used to disconnect communication. The **iclose** function takes the session information outputted from the **iopen** function as its parameter.

Syntax   *Status* = iclose(*addr*)

For information on the variable (*Status*) and the variable (*addr*), refer to Table 12-1, "Variable (Status)," on page 179 and Table 12-2, "Variable (addr)," on page 179, respectively.

Sample control

The E5061A/E5062A can be controlled by executing the above procedures in order, following the control flow in Figure 12-4. This is demonstrated by the procedure Preset (a procedure which is executed when the Preset button is clicked) as described in Example 12-6.

Example 12-6   **Preset**

```
Sub Preset()

  ''' Open Session
  E507x = OpenSession

  '''Presetting the analyzer
  Call OutputSiclLan(E507x, ":SYST:PRES")

  '''Close Session
  Call iclose(E507x)

End Sub
```

12. Sample Application
Programs

Controlling Using Telnet Server
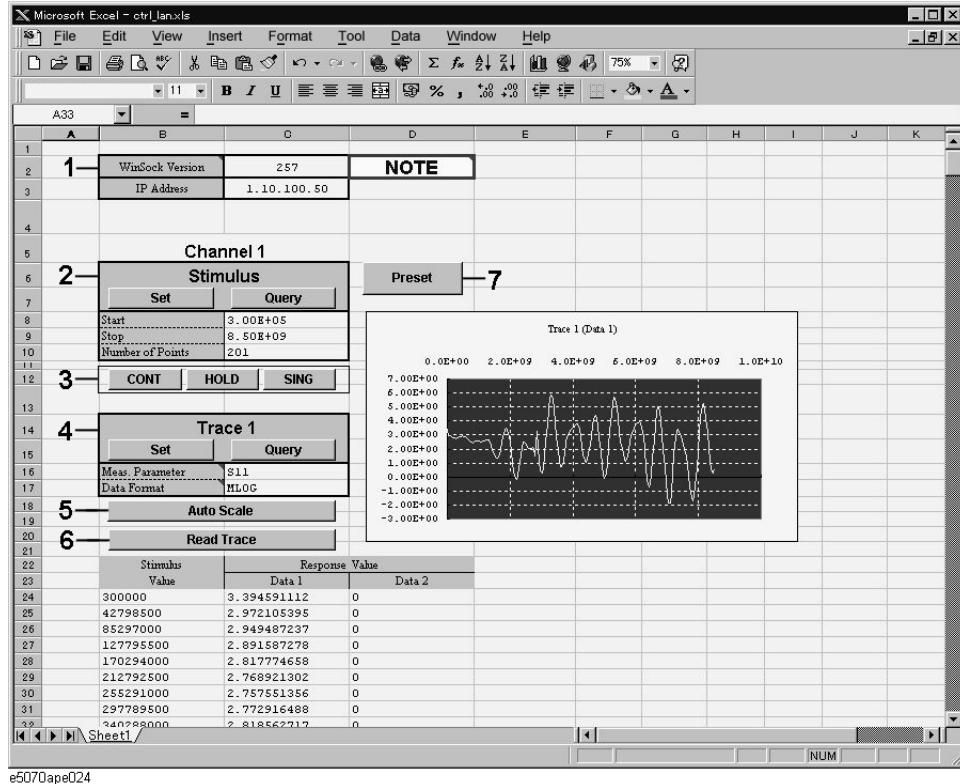
This section describes how to control the E5061A/E5062A using WinSock API in the Windows environment, with a sample program written in Visual Basic (VBA macro). You can find the source file of this program, named ctrl_lan.xls (Microsoft Excel file), on the sample program disk.

Using VBA macro

Opening ctrl_lan.xls in Microsoft Excel display a screen as shown in Figure 12-5.

Figure 12-5   **ctrl_lan.xls**

e5070ape024

For how to use each element in Figure 12-5, refer to the following description.

We begin describing the part 1. Enter the version number of WinSock API in the cell right side of "Winsock Version." The version number is obtained by multiplying 256 by the major version then adding the minor version. For example, when the version of your Winsock API is 1.1, the version number is obtained as follows: 256×1+1=257. Enter the IP address of the E5061A/E5062A in the cell right side of "IP Address." This VBA macro will not work properly without appropriate values in the two cells.

In the part 2, sweep range (start and stop points) and number of measurement points are set. Clicking the button labeled as "Set" executes setting operation as specified with the setting table, while clicking the button labeled as "Query" retrieves the current settings of the E5061A/E5062A.

The part 3 is dedicated to setting the trigger mode.

The part 4 set the measurement parameters and data format for trace 1 in channel 1. Clicking the button labeled as 'Set' executes setting operation as specified with the setting table, while clicking the button labeled as "Query" retrieves the current settings of the E5061A/E5062A.

In the part 5, clicking the button labeled as "Auto Scale" executes auto scaling for trace 1 in channel 1.

Clicking the button labeled as "Read Trace" in the part 6 retrieves the formatted data of trace 1 in channel 1 and displays it in tabular and graphical formats.

Clicking the button labeled as "Preset" executes the presetting operation.

Description of operation in VBA macro

Here described is operation of the VBA macro, focusing on the part related to controlling with WinSock API.

In order to use WinSock API, you must declare functions and define variables with a definition file of WinSock API, as shown in Example 12-7.

Example 12-7   **Definition file of WinSock API**

```
'This is the Winsock API definition file for Visual Basic

'Setup the variable type 'hostent' for the WSAStartup command
Type Hostent
  h_name As Long
  h_aliases As Long
  h_addrtype As String * 2
  h_length As String * 2
  h_addr_list As Long
End Type
Public Const SZHOSTENT = 16


'Set the Internet address type to a long integer (32-bit)
Type in_addr
   s_addr As Long
End Type


'A note to those familiar with the C header file for Winsock
'Visual Basic does not permit a user-defined variable type
'to be used as a return structure.  In the case of the
'variable definition below, sin_addr must
'be declared as a long integer rather than the user-defined
'variable type of in_addr.
Type sockaddr_in
  sin_family As Integer
  sin_port As Integer
  sin_addr As Long
  sin_zero As String * 8
End Type

Public Const WSADESCRIPTION_LEN = 256
Public Const WSASYS_STATUS_LEN = 128
Public Const WSA_DescriptionSize = WSADESCRIPTION_LEN + 1
Public Const WSA_SysStatusSize = WSASYS_STATUS_LEN + 1
```

```
'Setup the structure for the information returned from
'the WSAStartup() function.
Type WSAData
   wVersion As Integer
   wHighVersion As Integer
   szDescription As String * WSA_DescriptionSize
   szSystemStatus As String * WSA_SysStatusSize
   iMaxSockets As Integer
   iMaxUdpDg As Integer
   lpVendorInfo As String * 200
End Type


'Define socket return codes
Public Const INVALID_SOCKET = &HFFFF
Public Const SOCKET_ERROR = -1


'Define socket types
Public Const SOCK_STREAM = 1          'Stream socket
Public Const SOCK_DGRAM = 2           'Datagram socket
Public Const SOCK_RAW = 3             'Raw data socket
Public Const SOCK_RDM = 4             'Reliable Delivery socket
Public Const SOCK_SEQPACKET = 5       'Sequenced Packet socket


'Define address families
Public Const AF_UNSPEC = 0            'unspecified
Public Const AF_UNIX = 1              'local to host (pipes, portals)
Public Const AF_INET = 2              'internetwork: UDP, TCP, etc.
Public Const AF_IMPLINK = 3           'arpanet imp addresses
Public Const AF_PUP = 4               'pup protocols: e.g. BSP
Public Const AF_CHAOS = 5             'mit CHAOS protocols
Public Const AF_NS = 6                'XEROX NS protocols
Public Const AF_ISO = 7               'ISO protocols
Public Const AF_OSI = AF_ISO          'OSI is ISO
Public Const AF_ECMA = 8              'european computer manufacturers
Public Const AF_DATAKIT = 9           'datakit protocols
Public Const AF_CCITT = 10            'CCITT protocols, X.25 etc
Public Const AF_SNA = 11              'IBM SNA
Public Const AF_DECnet = 12           'DECnet
Public Const AF_DLI = 13              'Direct data link interface
Public Const AF_LAT = 14              'LAT
Public Const AF_HYLINK = 15           'NSC Hyperchannel
Public Const AF_APPLETALK = 16        'AppleTalk
Public Const AF_NETBIOS = 17          'NetBios-style addresses
Public Const AF_MAX = 18              'Maximum # of address families


'Setup sockaddr data type to store Internet addresses
Type sockaddr
  sa_family As Integer
  sa_data As String * 14
End Type
Public Const SADDRLEN = 16


'Declare Socket functions

Public Declare Function closesocket Lib "wsock32.dll" (ByVal s As Long)
As Long

Public Declare Function connect Lib "wsock32.dll" (ByVal s As Long, addr
As sockaddr_in, ByVal namelen As Long) As Long
```

```
Public Declare Function htons Lib "wsock32.dll" (ByVal hostshort As Long)
As Integer

Public Declare Function inet_addr Lib "wsock32.dll" (ByVal cp As String)
As Long

Public Declare Function recv Lib "wsock32.dll" (ByVal s As Long, ByVal
buf As Any, ByVal buflen As Long, ByVal flags As Long) As Long

Public Declare Function recvB Lib "wsock32.dll" Alias "recv" (ByVal s As
Long, buf As Any, ByVal buflen As Long, ByVal flags As Long) As Long

Public Declare Function send Lib "wsock32.dll" (ByVal s As Long, buf As
Any, ByVal buflen As Long, ByVal flags As Long) As Long

Public Declare Function socket Lib "wsock32.dll" (ByVal af As Long, ByVal
socktype As Long, ByVal protocol As Long) As Long

Public Declare Function WSAStartup Lib "wsock32.dll" (ByVal
wVersionRequired As Long, lpWSAData As WSAData) As Long

Public Declare Function WSACleanup Lib "wsock32.dll" () As Long

Public Declare Function WSAUnhookBlockingHook Lib "wsock32.dll" () As
Long

Public Declare Sub CopyMemory Lib "kernel32" Alias "RtlMoveMemory"
(hpvDest As Any, hpvSource As Any, ByVal cbCopy As Long)
```
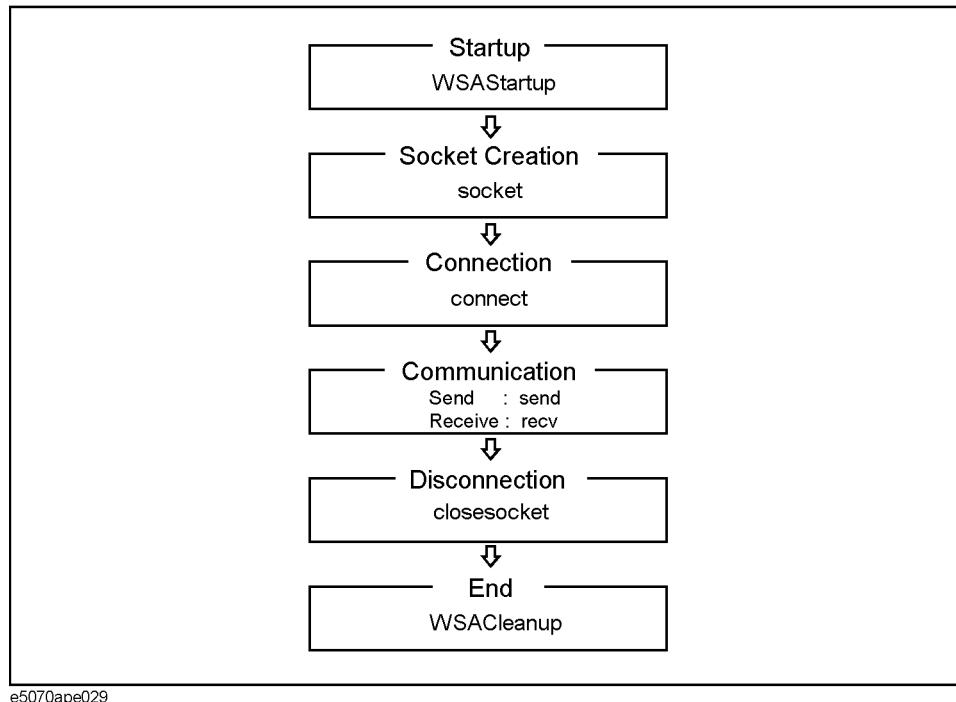
Basic control flow with WinSock API is shown in Figure 12-6.

Figure 12-6   **Control flow with WinSock API**

e5070ape029

Procedures in each step in Figure 12-6 are described below.

Startup

The procedure corresponding to Startup is StartIt (Example 12-8). StartIt launches and initialize $\mathtt{WinSock\ API}$ with **WSAStartup** in $\mathtt{WinSock\ API}$, whose version is in the part 1 of Figure 12-5. The function WSAStartup should be always used when initiating WinSock. This function takes version number (input) and launching information (output) as its parameters.

Example 12-8   **StartIt**

```
Sub StartIt()

    Dim StartUpInfo As WSAData

    'Version 1.1 (1*256 + 1) = 257
    'version 2.0 (2*256 + 0) = 512

    'Get WinSock version
    Sheets("Sheet1").Select
    Range("C2").Select
    version = ActiveCell.FormulaR1C1

    'Initialize Winsock DLL
    x = WSAStartup(version, StartUpInfo)

End Sub
```

Socket Creation and Connection

The procedure for Socket Creation and Connection is OpenSocket (Example 12-9). OpenSocket makes a connection to an instrument associated with the IP address specified with the input parameter Hostname. It uses a socket of the port specified with the input parameter PortNumber. Each functional part of OpenSocket is described below.

In (1), the inet_aadr function of WinSock API is used to convert an IP address delimited by "." to an Internet address.

In (2), a new socket is created with **socket** function of $\mathtt{WinSock\ API}$ and its socket descriptor is obtained. If an error occurs, the control returns to the main program with a message. socket function takes parameters for an address family (input), a socket type (input), and a protocol number (input).

In (3), the socket address is specified. Note that htons, which is used for specifying the port number, is a function of WinSock API. The function converts a 2-byte integer from the Windows byte order (little endian) to the network byte order (big endian).

In (4), a connection to the $\mathtt{E5061A/E5062A}$ is made using **connect** function of $\mathtt{WinSock\ API.}$ If an error occurs, the control returns to the main program with a message. connect function takes parameters for a socket descriptor (input), a socket address (input), and size of the socket address (input).

Example 12-9   **OpenSocket**

```
Function OpenSocket(ByVal Hostname As String, ByVal PortNumber As Intege
r) As Integer

    Dim I_SocketAddress As sockaddr_in
    Dim ipAddress As Long

    ipAddress = inet_addr(Hostname)                          '...........(1)

    'Create a new socket
    socketId = socket(AF_INET, SOCK_STREAM, 0)          '
    If socketId = SOCKET_ERROR Then                     '
        MsgBox ("ERROR: socket = " + Str$(socketId))    '...........(2)
        OpenSocket = COMMAND_ERROR                      '
        Exit Function                                   '
    End If                                              '

    'Open a connection to a server

    I_SocketAddress.sin_family = AF_INET                '
    I_SocketAddress.sin_port = htons(PortNumber)        '...........(3)
    I_SocketAddress.sin_addr = ipAddress                '
    I_SocketAddress.sin_zero = String$(8, 0)            '

    x = connect(socketId, I_SocketAddress, Len(I_SocketAddress))  '
    If socketId = SOCKET_ERROR Then                     '
        MsgBox ("ERROR: connect = " + Str$(x))          '..(4)
        OpenSocket = COMMAND_ERROR                      '
        Exit Function                                   '
    End If                                              '

    OpenSocket = socketId

End Function
```

Communication

The procedure corresponding to Communication is SendCommand (Example 12-10).
SendCommand transmits a message (SCPI command) specified with the input parameter
"command" to the $E5061A/E5062A$ using **send** function of $WinSock\ API$. send
function takes parameters for a socket descriptor (input), a message to be transmitted
(input), message length (input) and a flag (input).

Example 12-10   **SendCommand**

```
Function SendCommand(ByVal command As String) As Integer

    Dim strSend As String

    strSend = command + vbCrLf

    count = send(socketId, ByVal strSend, Len(strSend), 0)

    If count = SOCKET_ERROR Then
        MsgBox ("ERROR: send = " + Str$(count))
        SendCommand = COMMAND_ERROR
        Exit Function
    End If

    SendCommand = NO_ERROR
```

```
End Function
```

The procedure corresponding to a receiving part of communication is RecvAscii (Example 12-11) and other functions. RecvAscii receives a message as ASCII format and stores it in the dataBuf output parameter. Maximum length of the message is specified with the maxLength input parameter. Each functional part of RecvAscii is described below.

In (1), a message (a response to a query for SCPI command) is received from the E5061A/E5062A as a series of characters using **recv** function of WinSock API. If an error occurs, the control returns to the main program with a message. recv function takes parameters for a socket descriptor (input), a message to be received (input), message length (input) and a flag (input).

In (2), it is determined whether each received character is LF (ASCII code: 10). When it is LF, receiving is terminated adding NULL (ASCII code: 0) to the end of dataBuf string and the control returns to the main program.

In (3), number of the last characters that was read out is added to the count value for checking a number of received characters, and append the characters to the end of dataBuf string.

Example 12-11   **RecvAscii**

```
Function RecvAscii(dataBuf As String, ByVal maxLength As Integer) As
Integer

    Dim c As String * 1
    Dim length As Integer

    dataBuf = ""
    While length < maxLength
        DoEvents
        count = recv(socketId, c, 1, 0)             '
        If count < 1 Then                           '
            RecvAscii = RECV_ERROR                  '............(1)
            dataBuf = Chr$(0)                       '
            Exit Function                           '
        End If                                      '

        If c = Chr$(10) Then                        '
            dataBuf = dataBuf + Chr$(0)             '............(2)
            RecvAscii = NO_ERROR                    '
            Exit Function                           '
        End If                                      '

        length = length + count                     '............(3)
        dataBuf = dataBuf + c                       '
    Wend

    RecvAscii = RECV_ERROR

End Function
```

Disconnection

The procedure corresponding to Disconnection is CloseConnection (Example 12-12). CloseConnection disconnects communication and removes a socket using **closesocket** function of WinSock API. closesocket function takes a parameter for a socket descriptor (input).

Example 12-12 **CloseConnection**

```
Sub CloseConnection()

    x = closesocket(socketId)

    If x = SOCKET_ERROR Then
        MsgBox ("ERROR: closesocket = " + Str$(x))
        Exit Sub
    End If

End Sub
```

End

The procedure corresponding to End is EndIt (Example 12-13). EndIt disconnects WinSock API using **WSACleanup** function of WinSock API. The function WSACleanup should be always used when terminating WinSock.

Example 12-13 **EndIt**

```
Sub EndIt()

    'Shutdown Winsock DLL
    x = WSACleanup()

End Sub
```

Example of control

The E5061A/E5062A can be controlled by executing the above procedures in order, following the control flow in Figure 12-6. This is demonstrated by the procedure autoscale (a procedure which is executed when the Auto Scale button is clicked) as described in Example 12-14.

Example 12-14   **autoscale**

```
Sub autoscale()
'
' auto scaling
'
    Call StartIt
    Call get_hostname
    x = OpenSocket(Hostname$, ScpiPort)

    x = SendCommand(":DISP:WIND1:TRAC1:Y:AUTO")

    Call CloseConnection
    Call EndIt

End Sub
```

NOTE   When you execute more than one command by connecting and disconnecting a socket for every command, the sequence of execution may change.

❏ Connection → Command 1 → Command 2 → Disconnection

Commands 1 and 2 are always executed in this sequence.

❏ Connection → Command 1 → Disconnection → Connection → Command 2 → Disconnection

These commands may be in the sequence of Command 2 → command 1.

13   SCPI Command Reference

This chapter describes the SCPI command reference for the Agilent E5061A/E5062A. It describes the commands using their abbreviated format in alphabetical order. If you want to look up commands by softkeys, refer to the User's Guide.

Notational conventions in this command reference

This section describes the rules to read the description of the commands in this chapter.

Syntax

Part with heading "Syntax" describes the syntax to send a command from the external controller to the E5061A/E5062A. A syntax consists of a command part and a parameter part. The separator between the command part and the parameter part is a space.

If there are several parameters, the separator between adjacent parameters is a comma (,). 3 points (…) between commas indicate that parameters in that part are omitted. For example, <numeric 1>,…,<numeric 4> indicates that 4 parameters, <numeric 1>,<numeric 2>, <numeric 3>,<numeric 4>, are required.

String-type parameters, <string>, <string 1>, and so on, must be enclosed in double quotation marks ("). <block> shows block format data.

You can omit the lowercase letters in syntax. For example, ":CALibration:CABLe" can be shortened as ":CAL:CABL."

The definition of symbols used in the syntax is as follows:

<>   Characters enclosed in this pair of symbols are necessary parameters when sending the command.

[]   Part enclosed in this parenthesis pair can be omitted.

{}   Part enclosed in this parenthesis pair indicates that you must select one of the items in this part. Individual items are separated by a vertical bar (|).

For example, ":CALC:CORR:EDEL:TIME 0.1," ":CALCULATE1:SELECTED:CORR:EDEL:TIME 25E-3," and so on are valid for the syntax given below.

Syntax   :CALCulate{[1]|2|3|4|5|6|7|8|9}[:SELected]:CORRection:EDELay:TIME <numeric>

Description

Part with heading "Description" describes how to use the command or the operation when executed.

Parameters

Part with heading "Parameters" describes necessary parameters when sending the command. When a parameter is a value type or a string type enclosed with <>, its description, allowable setup range, preset (factory-set) value, and so on are given; when a parameter is a selection type enclosed with {}, the description of each selection item is given.

Query response

Part with heading "Query response" describes the data format read out when query (reading out data) is available with the command.

Each readout parameter is enclosed with {}. If there are several items within {} separated by the pipe (|), only one of them is read out.

When several parameters are read out, they are separated with a comma (,). Note that, 3 points (…) between commas indicate that the data of that part is omitted. For example, {numeric 1},…,{numeric 4} indicates that 4 data items, {numeric 1}, {numeric 2}, {numeric 3}, and {numeric 4}, are read out.

<newline><^END> after the parameters is the program message terminator.

Related commands

Part with heading "Related commands" describes the commands related to this command.

Equivalent key

Part with heading "Equivalent key" shows the operational procedure of the front panel keys that has the same effect as this command.

[Key]   Indicates that you press the key named Key.

[Key] - **Item**   Indicates a series of key operation in which you press the **[Key]** key, select (highlight) the item called **Item** on the displayed menu using the **[↓]** key and so on, and then press the **[Enter]** key.

13. SCPI Command
Reference

IEEE Common Commands

This section describes the IEEE common commands.

*CLS

Syntax   *CLS

Description   Clears the followings. (No query)

- Error Queue
- Status Byte Register
- Standard Event Status Register
- Operation Status Event Register
- Questionable Status Event Register
- Questionable Limit Status Event Register
- Questionable Limit Channel{1-4} Status Event Register

Example of use
```
10   OUTPUT 717;"*CLS"
```

Equivalent key   No equivalent key is available on the front panel.

*ESE

Syntax *ESE <numeric>

 *ESE?

Description Sets the value of the Standard Event Status Enable Register.

Parameters

	<numeric>
Description	Setup value of the register
Range	0 to 255
Preset value	0
Resolution	1

If the specified parameter is out of the allowable setup range, the result of bitwise AND with 255 (0xff) is set.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;"*ESE 16"
20   OUTPUT 717;"*ESE?"
30   ENTER 717;A
```

Related commands *SRE on page 200

Equivalent key No equivalent key is available on the front panel.

*ESR?

Syntax *ESR?

Description Reads out the value of the Standard Event Status Register. Executing this command clears the register value. (Query only)

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;"*ESR?"
20   ENTER 717;A
```

Equivalent key No equivalent key is available on the front panel.

*IDN?

Syntax	*IDN?
Description	Reads out the product information (manufacturer, model number, serial number, and firmware version number) of the E5061A/E5062A. (Query only)
Query response	{string 1},{string 2},{string 3},{string 4}<newline><^END>

Readout data is as follows:

{string 1}	Manufacturer. Agilent Technologies is always read out.
{string 2}	Model number (example: E5061A).
{string 3}	Serial number (example: JP1KI00101).
{string 4}	Firmware version number (example: 03.00).

Example of use	``` 10 OUTPUT 717;"*IDN?" 20 ENTER 717;A$ ```
Equivalent key	**[System]** - **Firmware Revision**
	[System] - **Service Menu** - **Enable Options** - **Serial Number**

*OPC

Syntax	*OPC
Description	Sets the OPC bit (bit 0) of the Standard Event Status Register at the completion of all pending operations. (No query)
Example of use	``` 10 OUTPUT 717;"*OPC" ```
Equivalent key	No equivalent key is available on the front panel.

*OPC?

Syntax	*OPC?
Description	1 is read out at the completion of all pending operations. (Query only)
Query response	{1}<newline><^END>
Example of use	``` 10 OUTPUT 717;"*OPC?" 20 ENTER 717;A ```
Equivalent key	No equivalent key is available on the front panel.

*OPT?

Syntax   *OPT?

Description   Reads out the identification number of an option installed in the E5061A/E5062A. (Query only)

Query response   {numeric}<newline><^END>

                    If there is no installed option, 0 is read out.

Example of use   10   OUTPUT 717;"*OPT?"
                    20   ENTER 717;A$

Equivalent key   No equivalent key is available on the front panel.

*RST

Syntax   *RST

Description   Performs preset. There is the following difference from the setting state preset with the :SYST:PRES command. (No query)

                    •   The continuous initiation mode of channel 1 is set to OFF.

Example of use   10   OUTPUT 717;"*RST"

Related commands   :SYST:PRES on page 479

                    :INIT{1-4}:CONT on page 341

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

*SRE

Syntax   *SRE <numeric>

                        *SRE?

Description   Sets the value of the Service Request Enable Register.

Parameters

	<numeric>
Description	Setup value of the register
Range	0 to 255
Preset value	0
Resolution	1

If the specified parameter is out of the allowable setup range, the result of bitwise AND with 255 (0xff) is set. Note that bit 6 cannot be set to 1.

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;"*SRE 128"
                        20   OUTPUT 717;"*SRE?"
                        30   ENTER 717;A

Related commands   *ESE on page 197

                        :STAT:OPER:ENAB on page 442

                        :STAT:QUES:ENAB on page 454

Equivalent key   No equivalent key is available on the front panel.

*STB?

Syntax   *STB?

Description   Reads out the value of the Status Byte Register. (Query only)

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;"*STB?"
20    ENTER 717;A
```

Equivalent key No equivalent key is available on the front panel.

*TRG

Syntax   *TRG

Description   If the trigger source is set to GPIB/LAN (set to BUS with the :TRIG:SOUR command),
triggers the E5061A/E5062A waiting for a trigger. (No query)

Example of use
```
10    OUTPUT 717;"*TRG"
```

Related commands :TRIG:SOUR on page 485

Equivalent key No equivalent key is available on the front panel.

*WAI

Syntax   *WAI

Description   Waits for the execution of all commands sent before this command to be completed. (No
query)

Example of use
```
10    OUTPUT 717;"*WAI"
```

Equivalent key No equivalent key is available on the front panel.

13. SCPI Command
Reference

E5061A/E5062A commands

This section describes the commands specific to the E5061A/E5062A.

:ABOR

Syntax :ABORt

Description Aborts the measurement and changes the trigger sequence for all channels to idle state. (No query)

After the change to the idle state, the channels for which the continuous initiation mode is set to ON (set to ON with the :INIT{1-4}:CONT command) change into the initiate state.

For details about the trigger system, refer to "Trigger system" on page 80. (No query)

Example of use
```
10   OUTPUT 717;":ABOR"
```

Related commands :INIT{1-4} on page 340

:INIT{1-4}:CONT on page 341

Equivalent key **[Trigger]** - **Restart**

:CALC{1-4}:BLIM

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:BLIMit[:STATe] {ON|OFF|1|0}

                      :CALCulate{[1]|2|3|4}[:SELected]:BLIMit[:STATe]?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                      :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the bandwidth test function.

Parameters

	Description
ON or 1	Turns ON the bandwidth test function.
OFF or 0 (preset value)	Turns OFF the bandwidth test function.

Query response   {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:BLIM ON"
20    OUTPUT 717;":CALC1:BLIM?"
30    ENTER 717;A
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

                      :CALC{1-4}:BLIM:DB on page 204

                      :CALC{1-4}:BLIM:DISP:MARK on page 205

                      :CALC{1-4}:BLIM:DISP:VAL on page 206

                      :CALC{1-4}:BLIM:FAIL? on page 207

                      :CALC{1-4}:BLIM:MAX on page 208

                      :CALC{1-4}:BLIM:MIN on page 209

                      :CALC{1-4}:BLIM:REP? on page 210

Equivalent key   **[Analysis]** - **Bandwidth Limit** - **BW Test**

13. SCPI Command
Reference

:CALC{1-4}:BLIM:DB

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:BLIMit:DB <numeric>

                         :CALCulate{[1]|2|3|4}[:SELected]:BLIMit:DB?

Description   For channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets the bandwidth threshold value (attenuation from the peak) of the bandwidth test.

Parameters

	<numeric>
Description	Bandwidth N dB points
Range	0 to 5E8
Preset value	3
Unit	dB

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:BLIM:DB 3"
20    OUTPUT 717;":CALC1:BLIM:DB?"
30    ENTER 717;A
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

                             :CALC{1-4}:BLIM on page 203

Equivalent key   **[Analysis]** - **Bandwidth Limit** - **N dB Points**

:CALC{1-4}:BLIM:DISP:MARK

Syntax :CALCulate{[1]|2|3|4}[:SELected]:BLIMit:DISPlay:MARKer {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:BLIMit:DISPlay:MARKer?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the marker display of the bandwidth test.

Parameters

	Description
ON or 1	Turns ON the bandwidth marker.
OFF or 0 (preset value)	Turns OFF the bandwidth marker.

Query response {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:BLIM:DISP:MARK ON"
20    OUTPUT 717;":CALC1:BLIM:DISP:MARK?"
30    ENTER 717;A
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:BLIM on page 203

:CALC{1-4}:BLIM:DISP:VAL on page 206

Equivalent key **[Analysis]** - **Bandwidth Limit** - **BW Marker**

13. SCPI Command
Reference

:CALC{1-4}:BLIM:DISP:VAL

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:BLIMit:DISPlay:VALue {ON|OFF|1|0}

                   :CALCulate{[1]|2|3|4}[:SELected]:BLIMit:DISPlay:VALue?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the bandwidth value display of the bandwidth test.

Parameters

	Description
ON or 1	Turns ON the bandwidth display.
OFF or 0 (preset value)	Turns OFF the bandwidth display.

Query response   {1|0}<newline><^END>

Example of use

```
10    OUTPUT 717;":CALC1:BLIM:DISP:VAL ON"
20    OUTPUT 717;":CALC1:BLIM:DISP:VAL?"
30    ENTER 717;A
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

                             :CALC{1-4}:BLIM on page 203

                             :CALC{1-4}:BLIM:DISP:MARK on page 205

Equivalent key   **[Analysis]** - **Bandwidth Limit** - **BW Display**

:CALC{1-4}:BLIM:FAIL?

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:BLIMit:FAIL?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                :CALC{1-4}:PAR{1-4}:SEL command), reads out the bandwidth test result. (Query only)

Query response {1|0}<newline><^END>

	Description
1	The bandwidth test result is FAIL.
0	The bandwidth test result is PASS.

When the bandwidth limit test is set to OFF, 0 is always read out.

Example of use 10   OUTPUT 717;":CALC1:BLIM:FAIL?"
                20   ENTER 717;A

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

                  :CALC{1-4}:BLIM on page 203

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

:CALC{1-4}:BLIM:MAX

Syntax :CALCulate{[1]|2|3|4}[:SELected]:BLIMit:MAXimum <numeric>

:CALCulate{[1]|2|3|4}[:SELected]:BLIMit:MAXimum?

Description For channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), sets the upper limit value of the bandwidth test.

Parameters

	<numeric>
Description	Maximum bandwidth.
Range	0 to 1E12
Preset value	10 k
Unit	Hz (hertz), dB or second

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:BLIM:MAX 3E5"
20    OUTPUT 717;":CALC1:BLIM:MAX?"
30    ENTER 717;A
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:BLIM on page 203

:CALC{1-4}:BLIM:MIN on page 209

Equivalent key **[Analysis]** - **Bandwidth Limit** - **Max Bandwidth**

:CALC{1-4}:BLIM:MIN

Syntax
:CALCulate{[1]|2|3|4}[:SELected]:BLIMit:MINimum <numeric>

:CALCulate{[1]|2|3|4}[:SELected]:BLIMit:MINimum?

Description
For channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets the lower limit value of the bandwidth test.

Parameters

	<numeric>
Description	Minimum bandwidth.
Range	0 to 1E12
Preset value	300 k
Unit	Hz (hertz), dB or second

Query response
{numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:BLIM:MIN 1E4"
20   OUTPUT 717;":CALC1:BLIM:MIN?"
30   ENTER 717;A
```

Related commands
:CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:BLIM on page 203

:CALC{1-4}:BLIM:MAX on page 208

Equivalent key
[Analysis] - **Bandwidth Limit** - **Min Bandwidth**

13. SCPI Command
Reference

:CALC{1-4}:BLIM:REP?

Syntax :CALCulate{[1]|2|3|4}[:SELected]:BLIMit:REPort[:DATA]?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), reads out the bandwidth value of the bandwidth test.

The data transfer format when this command is executed depends on the setting with the :FORM:DATA command. (Query only)

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:BLIM:REP?"
20   ENTER 717;A
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:FORM:DATA on page 338

:CALC{1-4}:BLIM on page 203

Equivalent key No equivalent key is available on the front panel.

:CALC{1-4}:CONV

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:CONVersion[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:CONVersion[:STATe]?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the parameter conversion function.

Parameters

	Description
ON or 1	Turns ON the parameter conversion function.
OFF or 0 (preset value)	Turns OFF the parameter conversion function.

Query response   {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:CONV ON"
20   OUTPUT 717;":CALC1:CONV?"
30   ENTER 717;A
```

Related commands   :CALC{1-4}:CONV:FUNC on page 212

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Analysis]** - **Conversion** - **Conversion**

13. SCPI Command
Reference

:CALC{1-4}:CONV:FUNC

Syntax :CALCulate{[1]|2|3|4}[:SELected]:CONVersion:FUNCtion {ZREFlection|
ZTRansmit|YREFlection|YTRansmit|INVersion}

:CALCulate{[1]|2|3|4}[:SELected]:CONVersion:FUNCtion?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), select the parameter after conversion using the
parameter conversion function.

Parameters

	Description
ZREFlection (preset value)	Specifies the equivalent impedance in reflection measurement.
ZTRansmit	Specifies the equivalent impedance in transmission measurement.
YREFlection	Specifies the equivalent admittance in reflection measurement.
YTRansmit	Specifies the equivalent admittance in transmission measurement.
INVersion	Specifies the inverse S-parameter.

Query response {ZREF|ZTR|YREF|YTR|INV}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:CONV:FUNC ZTR"
20    OUTPUT 717;":CALC1:CONV:FUNC?"
30    ENTER 717;A$
```

Related commands :CALC{1-4}:CONV on page 211

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key **[Analysis]** - **Conversion** - **Z:Reflection**|**Z:Transmission**|**Y:Reflection**|
Y:Transmission|**1/S**

:CALC{1-4}:CORR:EDEL:TIME

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:CORRection:EDELay:TIME <numeric>

                   :CALCulate{[1]|2|3|4}[:SELected]:CORRection:EDELay:TIME?

Description   Sets the electrical delay time of the active trace of channel 1 (:CALC1) to channel 4
                   (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command).

Parameters

	\<numeric\>
Description	Electrical delay time
Range	-10 to 10
Preset value	0
Unit	s (second)

If the specified parameter is out of the allowable setup range, the minimum value (if the
lower limit of the range is not reached) or the maximum value (if the upper limit of the
range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use   ```
10   OUTPUT 717;":CALC1:CORR:EDEL:TIME 0.2"
20   OUTPUT 717;":CALC1:CORR:EDEL:TIME?"
30   ENTER 717;A
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key     **[Scale]** - **Electrical Delay**

13. SCPI Command
Reference

# :CALC{1-4}:CORR:OFFS:PHAS

Syntax            :CALCulate{[1]|2|3|4}[:SELected]:CORRection:OFFSet:PHASe <numeric>

                 :CALCulate{[1]|2|3|4}[:SELected]:CORRection:OFFSet:PHASe?

Description       Sets the phase offset of the active trace of channel 1 (:CALC1) to channel 4 (:CALC4)
                 (specified with the :CALC{1-4}:PAR{1-4}:SEL command).

Parameters

|              | **<numeric>**                |
| ------------ | ---------------------------- |
| Description  | Phase offset                 |
| Range        | -360 to 360                  |
| Preset value | 0                            |
| Unit         | ° (degree)                   |

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response    {numeric}<newline><^END>

Example of use    10    OUTPUT 717;":CALC1:CORR:OFFS:PHAS 2.5"
                 20    OUTPUT 717;":CALC1:CORR:OFFS:PHAS?"
                 30    ENTER 717;A

Related commands  :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key    **[Scale]** - **Phase Offset**

# :CALC{1-4}:DATA:FDAT

Syntax      :CALCulate{[1]|2|3|4}[:SELected]:DATA:FDATa <numeric1>,…,<numeric NOP×2>

:CALCulate{[1]|2|3|4}[:SELected]:DATA:FDATa?

Description      For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets/reads out the formatted data array. (It is the data array for which processing such as format has been performed for corrected data array. For details, refer to "Formatted data array" on page 109.)

The data transfer format when this command is executed depends on the setting with the :FORM:DATA command.

Parameters

|  | **Description** |
|---|---|
| <numeric n×2-1> | Data (primary value) at the n-th measurement point. |
| <numeric n×2> | Data (secondary value) at the n-th measurement point. Always 0 when the data format is not the Smith chart format or the polar format. |

Where NOP is the number of measurement points and n is an integer between 1 and NOP.

Query response      {numeric 1},…,{numeric NOP×2}<newline><^END>

Example of use
```
10   DIM A(1:201,1:2)
20   OUTPUT 717;":CALC1:DATA:FDAT?"
30   ENTER 717;A(*)
```

Related commands      :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:DATA:FMEM on page 216

:CALC{1-4}:DATA:SDAT on page 217

:FORM:DATA on page 338

Equivalent key      No equivalent key is available on the front panel.

13. SCPI Command Reference

# :CALC{1-4}:DATA:FMEM

Syntax               :CALCulate{[1]|2|3|4}[:SELected]:DATA:FMEMory <numeric 1>,…,<numeric NOP×2>

                     :CALCulate{[1]|2|3|4}[:SELected]:DATA:FMEMory?

Description          For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                     :CALC{1-4}:PAR{1-4}:SEL command), sets/reads out the formatted memory array. (It is
                     the data array for which processing such as format has been performed for corrected
                     memory array. For details, refer to "Formatted memory arrays" on page 110.)

                     The data transfer format when this command is executed depends on the setting with the
                     :FORM:DATA command.

Parameters

|                | Description |
|----------------|-------------|
| <numeric n×2-1> | Data (primary value) at the n-th measurement point. |
| <numeric n×2>  | Data (secondary value) at the n-th measurement point. Always 0 when the data format is not the Smith chart format or the polar format. |

Where NOP is the number of measurement points and n is an integer between 1 and NOP.

Query response       {numeric 1},…,{numeric NOP×2}<newline><^END>

Example of use       ```
10    DIM A(1:201,1:2)
20    OUTPUT 717;":CALC1:DATA:FMEM?"
30    ENTER 717;A(*)
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

                     :CALC{1-4}:DATA:FDAT on page 215

                     :CALC{1-4}:DATA:SMEM on page 218

                     :FORM:DATA on page 338

Equivalent key   No equivalent key is available on the front panel.

:CALC{1-4}:DATA:SDAT

Syntax :CALCulate{[1]|2|3|4}[:SELected]:DATA:SDATa <numeric 1>,…,<numeric NOP×2>

:CALCulate{[1]|2|3|4}[:SELected]:DATA:SDATa?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets/reads out the corrected data array. (It is the data array for which processing such as error correction to measured raw data has been performed. For details, refer to "Corrected data arrays" on page 108.)

The data transfer format when this command is executed depends on the setting with the :FORM:DATA command.

Query response {numeric 1},…,{numeric NOP×2}<newline><^END>

	Description
{numeric n×2-1}	Real part of the data (complex number) at the n-th measurement point.
{numeric n×2}	Imaginary part of the data (complex number) at the n-th measurement point.

Where NOP is the number of measurement points and n is an integer between 1 and NOP.

Example of use
```
10    DIM A(1:201,1:2)
20    OUTPUT 717;":CALC1:DATA:SDAT?"
30    ENTER 717;A(*)
```

Related commands :CALC{1-4}:DATA:SMEM on page 218

:CALC{1-4}:DATA:FDAT on page 215

:FORM:DATA on page 338

Equivalent key No equivalent key is available on the front panel.

:CALC{1-4}:DATA:SMEM

Syntax :CALCulate{[1]|2|3|4}[:SELected]:DATA:SMEMory <numeric 1>,…,<numeric NOP×2>

:CALCulate{[1]|2|3|4}[:SELected]:DATA:SMEMory?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets/reads out the corrected memory array. (It is the copy of the corrected data array when the :CALC{1-4}:MATH:MEM command is executed. For details, refer to "Corrected memory arrays" on page 108.)

The data transfer format when this command is executed depends on the setting with the :FORM:DATA command. (Query only)

Query response {numeric 1},…,{numeric NOP×2}<newline><^END>

	Description
{numeric n×2-1}	Real part of the data (complex number) at the n-th measurement point.
{numeric n×2}	Imaginary part of the data (complex number) at the n-th measurement point.

Where NOP is the number of measurement points and n is an integer between 1 and NOP.

Example of use
```
10    DIM A(1:201,1:2)
20    OUTPUT 717;":CALC1:DATA:SMEM?"
30    ENTER 717;A(*)
```

Related commands :CALC{1-4}:MATH:MEM on page 281

:CALC{1-4}:DATA:SDAT on page 217

:CALC{1-4}:DATA:FMEM on page 216

:FORM:DATA on page 338

Equivalent key No equivalent key is available on the front panel.

:CALC{1-4}:FORM

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:FORMat {MLOGarithmic|PHASe|GDELay| SLINear|SLOGarithmic|SCOMplex|SMITh|SADMittance|PLINear|PLOGarithmic|POLar| MLINear|SWR|REAL| IMAGinary|UPHase|PPHase}

:CALCulate{[1]|2|3|4}[:SELected]:FORMat?

Description   Selects the data format of the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command).

Parameters

	Description
MLOGarithmic (preset value)	Specifies the logarithmic magnitude format.
PHASe	Specifies the phase format.
GDELay	Specifies the group delay format.
SLINear	Specifies the Smith chart format (Lin/Phase).
SLOGarithmic	Specifies the Smith chart format (Log/Phase).
SCOMplex	Specifies the Smith chart format (Real/Imag).
SMITh	Specifies the Smith chart format (R+jX).
SADMittance	Specifies the Smith chart format (G+jB).
PLINear	Specifies the polar format (Lin).
PLOGarithmic	Specifies the polar format (Log).
POLar	Specifies the polar format (Re/Im).
MLINear	Specifies the linear magnitude format.
SWR	Specifies the SWR format.
REAL	Specifies the real format.
IMAGinary	Specifies the imaginary format.
UPHase	Specifies the expanded phase format.
PPHase	Specifies the positive phase format.

Query response {MLOG|PHAS|GDEL|SLIN|SLOG|SCOM|SMIT|SADM|PLIN|PLOG|POL|MLIN|SWR| REAL|IMAG|UPH|PPH}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:FORM SLIN"
20    OUTPUT 717;":CALC1:FORM?"
30    ENTER 717;A$
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Format]** - **Log Mag**|**Phase**|**Group Delay**|**Lin Mag**|**SWR**|**Real**|**Imaginary**|**Expand Phase**| **Positive Phase**

13. SCPI Command Reference

[Format] - **Smith** - **Lin/Phase|Log/Phase|Real/Imag|R+jX|G+jB**

[Format] - **Polor** - **Lin/Phase|Log/Phase|Real/Imag**

:CALC{1-4}:FUNC:DATA?

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:DATA?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                        :CALC{1-4}:PAR{1-4}:SEL command), reads out the analysis result of the
                        :CALC{1-4}:FUNC:EXEC command.

                        The data transfer format when this command is executed depends on the setting with the
                        :FORM:DATA command. (Query only)

Query response   {numeric 1},…,{numeric N×2}<newline><^END>

	Description
{numeric n×2-1}	Response value or analysis result of the searched n-th measurement point.
{numeric n×2}	Stimulus value of the searched n-th measurement point. Always set to 0 for the analysis of maximum and minimum values/standard deviation/mean value.

                        Where N is the number of data pairs (can be read out with :CALC{1-4}:FUNC:POIN?
                        command) and n is an integer between 1 and N.

Example of use   10   OUTPUT 717;":CALC1:FUNC:POIN?"
                        20   ENTER 717;A
                        30   REDIM B(1:2*A)
                        40   OUTPUT 717;":CALC1:FUNC:DATA?"
                        50   ENTER 717;B(*)

Related commands   :CALC{1-4}:FUNC:EXEC on page 225

                        :CALC{1-4}:FUNC:POIN? on page 227

                        :CALC{1-4}:PAR{1-4}:SEL on page 286

                        :FORM:DATA on page 338

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

:CALC{1-4}:FUNC:DOM

Syntax

:CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:DOMain[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:DOMain[:STATe]?

Description

For channel 1 (:CALC1) to channel 4 (:CALC4), sets whether to use an arbitrary range when executing the analysis with the :CALC{1-4}:FUNC:EXEC command.

When the trace coupling is off, the active trace is the target to be set.

Parameters

	Description
ON or 1	Specifies an arbitrary range[1].
OFF or 0 (preset value)	Specifies the entire sweep range.

> *1. Use the :CALC{1-4}:FUNC:DOM:STAR command and the
> :CALC{1-4}:FUNC:DOM:STOP command to specify a range.

Query response

{1|0}<newline><^END>

Example of use

```
10   OUTPUT 717;":CALC1:FUNC:DOM ON"
20   OUTPUT 717;":CALC1:FUNC:DOM?"
30   ENTER 717;A
```

Related commands

:CALC{1-4}:FUNC:EXEC on page 225

:CALC{1-4}:FUNC:DOM:COUP on page 223

:CALC{1-4}:FUNC:DOM:STAR on page 224

:CALC{1-4}:FUNC:DOM:STOP on page 225

Equivalent key

No equivalent key is available on the front panel.

:CALC{1-4}:FUNC:DOM:COUP

Syntax
:CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:DOMain:COUPle {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:DOMain:COUPle?

Description
For channel 1 (:CALC1) to channel 4 (:CALC4), specifies whether to set the coupling of the analysis range of the :CALC{1-4}:FUNC:EXEC command for all traces.

Parameters

	Description
ON or 1 (preset value)	Specifies the analysis range with the trace coupling.
OFF or 0	Specifies the analysis range for each trace.

Query response
{1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:FUNC:DOM:COUP OFF"
20    OUTPUT 717;":CALC1:FUNC:DOM:COUP?"
30    ENTER 717;A
```

Related commands
:CALC{1-4}:FUNC:EXEC on page 225

Equivalent key
No equivalent key is available on the front panel.

13. SCPI Command
Reference

:CALC{1-4}:FUNC:DOM:STAR

Syntax
:CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:DOMain:STARt <numeric>

:CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:DOMain:STARt?

Description
For channel 1 (:CALC1) to channel 4 (:CALC4), sets the start value of the analysis range of the :CALC{1-4}:FUNC:EXEC command.

When the trace coupling is off, the active trace is the target to be set.

Parameters

	<numeric>
Description	Start value of the analysis range
Preset value	0
Unit	Hz (hertz), dBm or second

Query response
{numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:FUNC:DOM:STAR 1.7E9"
20    OUTPUT 717;":CALC1:FUNC:DOM:STAR?"
30    ENTER 717;A
```

Related commands
:CALC{1-4}:FUNC:EXEC on page 225

:CALC{1-4}:FUNC:DOM on page 222

:CALC{1-4}:FUNC:DOM:COUP on page 223

:CALC{1-4}:FUNC:DOM:STOP on page 225

Equivalent key
No equivalent key is available on the front panel.

:CALC{1-4}:FUNC:DOM:STOP

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:DOMain:STOP <numeric>

                :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:DOMain:STOP?

Description   For channel 1 (:CALC1) to channel 4 (:CALC4), sets the stop value of the analysis range of the :CALC{1-4}:FUNC:EXEC command.

                When the trace coupling is off, the active trace is the target to be set.

Parameters

	<numeric>
Description	Stop value of the analysis range
Preset value	0
Unit	Hz (hertz), dBm or second

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:FUNC:DOM:STOP 1.8E9"
20    OUTPUT 717;":CALC1:FUNC:DOM:STOP?"
30    ENTER 717;A
```

Related commands :CALC{1-4}:FUNC:EXEC on page 225

                  :CALC{1-4}:FUNC:DOM on page 222

                  :CALC{1-4}:FUNC:DOM:COUP on page 223

                  :CALC{1-4}:FUNC:DOM:STAR on page 224

Equivalent key   No equivalent key is available on the front panel.

:CALC{1-4}:FUNC:EXEC

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:EXECute

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), executes the analysis specified with the :CALC{1-4}:FUNC:TYPE command. (No query)

Example of use
```
10    OUTPUT 717;":CALC1:FUNC:EXEC"
```

Related commands :CALC{1-4}:FUNC:TYPE on page 231

                  :CALC{1-4}:FUNC:DOM on page 222

                  :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   No equivalent key is available on the front panel.

:CALC{1-4}:FUNC:PEXC

Syntax :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:PEXCursion <numeric>

:CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:PEXCursion?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets the lower limit for the peak excursion value when executing the peak search with the :CALC{1-4}:FUNC:EXEC command.

Parameters

	<numeric>
Description	Lower limit for the peak excursion value
Range	0 to 5e8
Preset value	3
Unit	Varies depending on the data format as follows: Logarithmic Magnitude: dB (decibel) Phase, Expand Phase, Positive Phase: ° (degree) Group Delay: s (second) Others: No unit

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:FUNC:PEXC 0.2"
20    OUTPUT 717;":CALC1:FUNC:PEXC?"
30    ENTER 717;A
```

Related commands :CALC{1-4}:FUNC:EXEC on page 225

:CALC{1-4}:FUNC:PPOL on page 228

:CALC{1-4}:FUNC:TYPE on page 231

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key No equivalent key is available on the front panel.

:CALC{1-4}:FUNC:POIN?

Syntax :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:POINts?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), reads out the number of data pairs of the analysis result of the :CALC{1-4}:FUNC:EXEC command.

For the analysis of the mean value or the search of the maximum value, 1 is always read out; for the search of all peaks or the search of all targets, the total number of searched measurement points is read out. (Query only)

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:FUNC:POIN?"
20   ENTER 717;A
```

Related commands :CALC{1-4}:FUNC:EXEC on page 225

:CALC{1-4}:FUNC:DATA? on page 221

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key No equivalent key is available on the front panel.

13. SCPI Command Reference

:CALC{1-4}:FUNC:PPOL

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:PPOLarity {POSitive|
                   NEGative|BOTH}

                   :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:PPOLarity?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                   :CALC{1-4}:PAR{1-4}:SEL command), selects the polarity when performing the peak
                   search with the :CALC{1-4}:FUNC:EXEC command.

Parameters

	Description
POSitive (preset value)	Specifies the positive peak.
NEGative	Specifies the negative peak.
BOTH	Specifies both the positive peak and the negative peak.

Query response   {POS|NEG|BOTH}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:FUNC:PPOL BOTH"
20    OUTPUT 717;":CALC1:FUNC:PPOL?"
30    ENTER 717;A$
```

Related commands   :CALC{1-4}:FUNC:EXEC on page 225

                   :CALC{1-4}:FUNC:PEXC on page 226

                   :CALC{1-4}:FUNC:TYPE on page 231

                   :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   No equivalent key is available on the front panel.

:CALC{1-4}:FUNC:TARG

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:TARGet <numeric>

                    :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:TARGet?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                    :CALC{1-4}:PAR{1-4}:SEL command), selects the target value when performing the
                    target search with the :CALC{1-4}:FUNC:EXEC command.

Parameters

	<numeric>
Description	Target value
Range	-5E8 to 5E8
Preset value	0
Unit	Varies depending on the data format as follows: Logarithmic Magnitude: dB (decibel) Phase, Expand Phase, Positive Phase: ° (degree) Group Delay: s (second) Others: No unit

                    If the specified parameter is out of the allowable setup range, the minimum value (if the
                    lower limit of the range is not reached) or the maximum value (if the upper limit of the
                    range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":CALC1:FUNC:TARG –12.5"
                    20   OUTPUT 717;":CALC1:FUNC:TARG?"
                    30   ENTER 717;A

Related commands   :CALC{1-4}:FUNC:EXEC on page 225

                    :CALC{1-4}:FUNC:TTR on page 230

                    :CALC{1-4}:FUNC:TYPE on page 231

                    :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

:CALC{1-4}:FUNC:TTR

Syntax :CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:TTRansition {POSitive| NEGative|BOTH}

:CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:TTRansition?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), selects the transition type when performing the target search with the :CALC{1-4}:FUNC:EXEC command.

Parameters

	Description
POSitive	Specifies positive.
NEGative	Specifies negative.
BOTH (preset value)	Specifies both positive and negative.

Query response {POS|NEG|BOTH}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:FUNC:TTR NEG"
20    OUTPUT 717;":CALC1:FUNC:TTR?"
30    ENTER 717;A$
```

Related commands :CALC{1-4}:FUNC:EXEC on page 225

:CALC{1-4}:FUNC:TARG on page 229

:CALC{1-4}:FUNC:TYPE on page 231

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key No equivalent key is available on the front panel.

:CALC{1-4}:FUNC:TYPE

Syntax
:CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:TYPE {PTPeak| STDEV|MEAN| MAXimum|MINimum|PEAK|APEak|ATARget}

:CALCulate{[1]|2|3|4}[:SELected]:FUNCtion:TYPE?

Description
For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), selects the type of analysis.

Parameters

	Description
PTPeak (preset value)	Specifies the analysis of the difference between the maximum value and the minimum value (Peak to Peak).
STDEV	Specifies the analysis of the standard deviation.
MEAN	Specifies the analysis of the mean value.
MAXimum	Specifies the search for the maximum value.
MINimum	Specifies the search for the minimum value.
PEAK	Specifies the search for the maximum positive (minimum negative) peak[1].
APEak	Specifies the search for all peaks[1].
ATARget	Specifies the search for all targets[2].

[1]. To specify the conditions of the peak, use the :CALC{1-4}:FUNC:PEXC command and the :CALC{1-4}:FUNC:PPOL command.

[2]. To specify the conditions of the target, use the :CALC{1-4}:FUNC:TARG command and the :CALC{1-4}:FUNC:TTR command.

Query response
{PTP|STDEV|MEAN|MAX|MIN|PEAK|APE|ATAR}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:FUNC:TYPE PEAK"
20   OUTPUT 717;":CALC1:FUNC:TYPE?"
30   ENTER 717;A$
```

Related commands
:CALC{1-4}:FUNC:EXEC on page 225

:CALC{1-4}:FUNC:PEXC on page 226

:CALC{1-4}:FUNC:PPOL on page 228

:CALC{1-4}:FUNC:TARG on page 229

:CALC{1-4}:FUNC:TTR on page 230

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key
No equivalent key is available on the front panel.

13. SCPI Command
Reference

:CALC{1-4}:LIM

Syntax :CALCulate{[1]|2|3|4}[:SELected]:LIMit[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:LIMit[:STATe]?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the limit test function.

Parameters

	Description
ON or 1	Turns ON the limit test.
OFF or 0 (preset value)	Turns OFF the limit test.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:LIM ON"
20   OUTPUT 717;":CALC1:LIM?"
30   ENTER 717;A
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:LIM:DISP on page 235

:DISP:FSIG on page 313

Equivalent key **[Analysis]** - **Limit Test** - **Limit Test**

:CALC{1-4}:LIM:DATA

Syntax

:CALCulate{[1]|2|3|4}[:SELected]:LIMit:DATA <numeric 1>,…,<numeric 1+(N×5)>

:CALCulate{[1]|2|3|4}[:SELected]:LIMit:DATA?

Description

For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets the limit table.

The data transfer format when this command is executed depends on the setting with the :FORM:DATA command.

Parameters

	Description
<numeric 1>	The number of lines. (0 to 100)
<numeric 1+(n×5)-4>	The type of the n-th line. Specify an integer 0 to 2: 0: Off 1: Upper limit line 2: Lower limit line
<numeric 1+(n×5)-3>	The value on the horizontal axis (frequency/power/time) of the start point of the n-th line.
<numeric 1+(n×5)-2>	The value on the horizontal axis (frequency/power/time) of the end point of the n-th line.
<numeric 1+(n×5)-1>	The value on the vertical axis of the start point of the n-th line.
<numeric 1+(n×5)>	The value on the vertical axis of the end point of the n-th line.

Where N is the number of lines (specified with <numeric 1>) and n is an integer between 1 and N.

If you set the number of lines to 0 (clear the limit table), this command needs only <numeric 1> as the parameter.

Query response

{numeric 1},…,{numeric 1+(N×5)}<newline><^END>

Example of use

```
10    DIM B(1:2,1:5)
20    OUTPUT 717;":CALC1:LIM:DATA 2,1,1E9,3E9,0,0,2,1E9,3E9,-3,-3"
30    OUTPUT 717;":CALC1:LIM:DATA?"
40    ENTER 717;A,B(*)

10    OUTPUT 717;":CALC1:LIM:DATA 0"  ! Clear Limit Table
```

Related commands

:CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:LIM on page 232

:CALC{1-4}:LIM:DISP on page 235

:FORM:DATA on page 338

13. SCPI Command
Reference

Equivalent key   **[Analysis]** - **Limit Test** - **Edit Limit Line**

:CALC{1-4}:LIM:DISP

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:LIMit:DISPlay[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:LIMit:DISPlay[:STATe]?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the limit line display.

Parameters

	Description
ON or 1	Turns ON the limit line display.
OFF or 0 (preset value)	Turns OFF the limit line display.

Query response   {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:LIM:DISP ON"
20   OUTPUT 717;":CALC1:LIM:DISP?"
30   ENTER 717;A
```

Related commands   :CALC{1-4}:LIM on page 232

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Analysis]** - **Limit Test** - **Limit Line**

13. SCPI Command
Reference

:CALC{1-4}:LIM:DISP:CLIP

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:LIMit:DISPlay:CLIP {ON|OFF|1|0}

                          :CALCulate{[1]|2|3|4}[:SELected]:LIMit:DISPlay:CLIP?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                          :CALC{1-4}:PAR{1-4}:SEL command), specifies whether to display the part of the limit
                          line(s) that is not used for evaluation.

Parameters

	Description
ON or 1 (preset value)	Displays the clipped limit line(s).
OFF or 0	Displays the entire limit line(s).

Query response   {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:LIM:DISP:CLIP OFF"
20   OUTPUT 717;":CALC1:LIM:DISP:CLIP?"
30   ENTER 717;A
```

Related commands   :CALC{1-4}:LIM on page 232

                          :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Analysis]** - **Limit Test** - **Clip Lines**

:CALC{1-4}:LIM:FAIL?

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:LIMit:FAIL?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                  :CALC{1-4}:PAR{1-4}:SEL command), reads out the limit test result. (Query only)

Query response   {1|0}<newline><^END>

	Description
1	The limit test result is FAIL.
0	The limit test result is PASS.

When the limit test is set to OFF, 0 is always read out.

Example of use
```
10   OUTPUT 717;":CALC1:LIM:FAIL?"
20   ENTER 717;A
```

Related commands :CALC{1-4}:LIM on page 232

                  :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

:CALC{1-4}:LIM:OFFS:AMPL

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:LIMit:OFFSet:AMPLitude <numeric>
                      :CALCulate{[1]|2|3|4}[:SELected]:LIMit:OFFSet:AMPLitude?

Description   For channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                      :CALC{1-4}:PAR{1-4}:SEL command), sets the limit line amplitude offset.

                      The setting of the limit line doesn't change even if the offset value is changed.

Parameters

	<numeric>
Description	The limit line amplitude offset value for the limit test.
Range	-5E8 to 5E8
Preset value	0
Unit	dB

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":CALC1:LIM:OFFS:AMPL –10"
                      20   OUTPUT 717;":CALC1:LIM:OFFS:AMPL?"
                      30   ENTER 717;A

Related commands   :CALC{1-4}:LIM on page 232

                      :CALC{1-4}:LIM:OFFS:MARK on page 239

                      :CALC{1-4}:LIM:OFFS:STIM on page 240

Equivalent key   **[Analysis]** - **Limit Test** - **Limit Line Offsets** - **Amplitude Offset**

:CALC{1-4}:LIM:OFFS:MARK

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:LIMit:OFFSet:MARKer

Description   For channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                        :CALC{1-4}:PAR{1-4}:SEL command), sets the active marker value to amplitude offset
                        using the limit line.

                        The setting of the limit line does not change even if the offset value is changed.

                        When the markers are not displayed, this command does not operate.

Example of use   10   OUTPUT 717;":CALC1:LIM:OFFS:MARK"

Related commands   :CALC{1-4}:LIM on page 232

                        :CALC{1-4}:LIM:OFFS:AMPL on page 238

                        :CALC{1-4}:LIM:OFFS:STIM on page 240

Equivalent key   **[Analysis]** - **Limit Test** - **Limit Line Offsets** - **Marker -> Amplitude Offset**

13. SCPI Command
Reference

:CALC{1-4}:LIM:OFFS:STIM

Syntax :CALCulate{[1]|2|3|4}[:SELected]:LIMit:OFFSet:STIMulus <numeric>

:CALCulate{[1]|2|3|4}[:SELected]:LIMit:OFFSet:STIMulus?

Description For channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), sets the stimulus offset of the limit line.

The setting of the limit line doesn't change even if the offset value is changed.

Parameters

	<numeric>
Description	The stimulus offset value of the limit line.
Range	-1E12 to 1E12
Preset value	0
Unit	Hz (hertz), dBm or second

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:LIM:OFFS:STIM 5E3"
20    OUTPUT 717;":CALC1:LIM:OFFS:STIM?"
30    ENTER 717;A
```

Related commands :CALC{1-4}:LIM on page 232

:CALC{1-4}:LIM:OFFS:AMPL on page 238

:CALC{1-4}:LIM:OFFS:MARK on page 239

Equivalent key **[Analysis]** - **Limit Test** - **Limit Line Offsets** - **Stimulus Offset**

:CALC{1-4}:LIM:REP:ALL?

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:LIMit:REPort:ALL?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                      :CALC{1-4}:PAR{1-4}:SEL command), reads out the bandwidth test results (stimulus
                      value, limit test result, upper limit value, lower limit value of all measurement points).

                      The data transfer format when this command is executed depends on the setting with the
                      :FORM:DATA command. (Query only)

Query Response   {numeric 1},…,{numeric N×4}<newline><^END>

	Description
<numeric n×4-3>	The stimulus value for the measurement point.
<numeric n×4-2>	The limit test result. Specify an integer -1 to 1: 0: Fail 1: Pass -1: No limit
<numeric n×4-1>	The upper limit value at the measurement point. (If there is no limit at this point, reads out 0.)
<numeric n×4>	The lower limit value at the measurement point. (If there is no limit at this point, reads out 0.)

Where N is the number of measurement points (specified with the
:SENS{1-4}:SWE:POIN command) and n is an integer between 1 and N.

Example of use   10   OUTPUT 717;":SENS1:SWE:POIN?"
                      20   ENTER 717;A
                      30   REDIM B(1:4*A)
                      40   OUTPUT 717;":CALC1:LIM:REP:ALL?"
                      50   ENTER 717;B(*)

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

                      :CALC{1-4}:LIM on page 232

                      :CALC{1-4}:LIM:REP? on page 242

                      :CALC{1-4}:LIM:REP:POIN? on page 242

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

:CALC{1-4}:LIM:REP?

Syntax :CALCulate{[1]|2|3|4}[:SELected]:LIMit:REPort[:DATA]?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), reads out the stimulus values (frequency, power level or time) at all the measurement point that failed the limit test.

The data transfer format when this command is executed depends on the setting with the :FORM:DATA command.(Query only)

Query response {numeric 1},...,{numeric N}<newline><^END>

Where N is the number of the measurement points that failed (can be read out with the :CALC{1-4}:LIM:REP:POIN? command).

Example of use
```
10    OUTPUT 717;":CALC1:LIM:REP:POIN?"
20    ENTER 717;A
30    REDIM B(1:A)
40    OUTPUT 717;":CALC1:LIM:REP?"
50    ENTER 717;B(*)
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:FORM:DATA on page 338

:CALC{1-4}:LIM:REP:POIN? on page 242

:CALC{1-4}:LIM on page 232

Equivalent key No equivalent key is available on the front panel.

:CALC{1-4}:LIM:REP:POIN?

Syntax :CALCulate{[1]|2|3|4}[:SELected]:LIMit:REPort:POINts?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), reads out the number of the measurement points that failed the limit test. (Query only)

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:LIM:REP:POIN?"
20    ENTER 717;A
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:LIM on page 232

Equivalent key No equivalent key is available on the front panel.

:CALC{1-4}:MARK:BWID

Syntax
:CALCulate{[1]|2|3|4}[:SELected]:MARKer:BWIDth[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:BWIDth[:STATe]?

Description
For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the bandwidth search result display.

Parameters

	Description
ON or 1	Turns ON the bandwidth search result display.
OFF or 0 (preset value)	Turns OFF the bandwidth search result display.

Query response
{1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:MARK:BWID ON"
20   OUTPUT 717;":CALC1:MARK:BWID?"
30   ENTER 717;A
```

Related commands
:CALC{1-4}:MARK{1-10}:BWID:DATA? on page 265

:CALC{1-4}:MARK{1-10}:BWID:THR on page 266

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key
[Marker Search] - **Bandwidth**

13. SCPI Command Reference

:CALC{1-4}:MARK:COUP

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:COUPle {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:COUPle?

Description For channel 1 (:CALC1) to channel 4 (:CALC4), turns ON/OFF the marker coupling between traces.

Parameters

	Description
ON or 1 (preset value)	Turns ON the marker coupling.
OFF or 0	Turns OFF the marker coupling.

Query response {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK:COUP OFF"
20    OUTPUT 717;":CALC1:MARK:COUP?"
30    ENTER 717;A
```

Equivalent key **[Marker Fctn]** - **Couple**

:CALC{1-4}:MARK:FUNC:DOM

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion:DOMain[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion:DOMain[:STATe]?

Description For channel 1 (:CALC1) to channel 4 (:CALC4), sets whether to use an arbitrary range when executing the marker search.

When the trace coupling is off, the active trace is the target to be set.

Parameters

	Description
ON or 1	Specifies an arbitrary range[1].
OFF or 0 (preset value)	Specifies the entire sweep range.

[1].Use the :CALC{1-4}:MARK:FUNC:DOM:STAR command and the
:CALC{1-4}:MARK:FUNC:DOM:STOP command to specify a range.

Query response {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK:FUNC:DOM ON"
20    OUTPUT 717;":CALC1:MARK:FUNC:DOM?"
30    ENTER 717;A
```

Related commands :CALC{1-4}:MARK{1-10}:FUNC:EXEC on page 268

:CALC{1-4}:MARK:FUNC:DOM:COUP on page 246

:CALC{1-4}:MARK:FUNC:DOM:STAR on page 247

:CALC{1-4}:MARK:FUNC:DOM:STOP on page 248

Equivalent key **[Marker Search]** - **Search Range** - **Search Range [ON/OFF]**

13. SCPI Command Reference

:CALC{1-4}:MARK:FUNC:DOM:COUP

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion:DOMain:COUPle {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion:DOMain:COUPle?

Description For channel 1 (:CALC1) to channel 4 (:CALC4), specifies whether to set the coupling of the marker search range for all traces.

Parameters

	Description
ON or 1 (preset value)	Specifies the search range with the trace coupling.
OFF or 0	Specifies the search range for each trace.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:MARK:FUNC:DOM:COUP OFF"
20   OUTPUT 717;":CALC1:MARK:FUNC:DOM:COUP?"
30   ENTER 717;A
```

Related commands :CALC{1-4}:MARK:FUNC:DOM on page 245

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key **[Marker Search]** - **Search Range** - **Couple**

:CALC{1-4}:MARK:FUNC:DOM:STAR

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion:DOMain:STARt <numeric>

                :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion:DOMain:STARt?

Description   For channel 1 (:CALC1) to channel 4 (:CALC4), sets the start value of the marker search range.

                When the trace coupling is off, the active trace is the target to be set.

Parameters

	<numeric>
Description	The start value of the search range
Preset value	0
Unit	Hz (hertz), dBm or second

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK:FUNC:DOM:STAR 1.7E9"
20    OUTPUT 717;":CALC1:MARK:FUNC:DOM:STAR?"
30    ENTER 717;A
```

Related commands :CALC{1-4}:MARK{1-10}:FUNC:EXEC on page 268

                :CALC{1-4}:MARK:FUNC:DOM on page 245

                :CALC{1-4}:MARK:FUNC:DOM:STOP on page 248

Equivalent key **[Marker Search]** - **Search Range** - **Start**

13. SCPI Command Reference

:CALC{1-4}:MARK:FUNC:DOM:STOP

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion:DOMain:STOP <numeric>

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion:DOMain:STOP?

Description For channel 1 (:CALC1) to channel 4 (:CALC4), sets the stop value of the marker search range.

When the trace coupling is off, the active trace is the target to be set.

Parameters

	<numeric>
Description	The stop value of the search range
Preset value	0
Unit	Hz (hertz), dBm or second

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK:FUNC:DOM:STOP 1.8E9"
20    OUTPUT 717;":CALC1:MARK:FUNC:DOM:STOP?"
30    ENTER 717;A
```

Related commands :CALC{1-4}:MARK{1-10}:FUNC:EXEC on page 268

:CALC{1-4}:MARK:FUNC:DOM on page 245

:CALC{1-4}:MARK:FUNC:DOM:STAR on page 247

Equivalent key **[Marker Search]** - **Search Range** - **Stop**

:CALC{1-4}:MARK:FUNC:MULT:PEXC

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi:PEXCursion <numeric>

                  :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi:PEXCursion?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                  :CALC{1-4}:PAR{1-4}:SEL command), sets the lower limit for the peak excursion value
                  of the multi peak search.

Parameters

	<numeric>
Description	Lower limit for the peak excursion value
Range	0 to 5E8
Preset value	3
Unit	Varies depending on the data format as follows: Logarithmic Magnitude: dB (decibel) Phase, Expand Phase, Positive Phase: ° (degree) Group Delay: s (second) Others: No unit

                  If the specified parameter is out of the allowable setup range, the minimum value (if the
                  lower limit of the range is not reached) or the maximum value (if the upper limit of the
                  range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":CALC1:MARK:FUNC:MULT:PEXC 0.2"
                  20   OUTPUT 717;":CALC1:MARK:FUNC:MULT:PEXC?"
                  30   ENTER 717;A

Related commands :CALC{1-4}:MARK:FUNC:MULT:PPOL on page 250

                  :CALC{1-4}:MARK:FUNC:MULT:TYPE on page 254

                  :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Marker Search]** - **Multi Peak** - **Peak Excursion**

:CALC{1-4}:MARK:FUNC:MULT:PPOL

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi: PPOLarity {POSitive|NEGative|BOTH}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi: PPOLarity?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), selects the polarity of the peak to be searched with the multi peak search.

Parameters

	Description
POSitive (preset value)	Specifies the positive peak.
NEGative	Specifies the negative peak.
BOTH	Specifies both the positive peak and the negative peak.

Query response {POS|NEG|BOTH}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK1:FUNC:MULT:PPOL NEG"
20    OUTPUT 717;":CALC1:MARK1:FUNC:MULT:PPOL?"
30    ENTER 717;A$
```

Related commands :CALC{1-4}:MARK:FUNC:MULT:PEXC on page 249

:CALC{1-4}:MARK:FUNC:MULT:TYPE on page 254

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key **[Marker Search]** - **Multi Peak** - **Peak Polarity**

:CALC{1-4}:MARK:FUNC:MULT:TARG

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi: TARGet <numeric>

                      :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi: TARGet?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                      :CALC{1-4}:PAR{1-4}:SEL command), sets the target value to be searched with the multi
                      target search.

Parameters

	<numeric>
Description	Target value for target search
Range	-5E8 to 5E8
Preset value	0
Unit	Varies depending on the data format as follows: Logarithmic Magnitude: dB (decibel) Phase, Expand Phase, Positive Phase: ° (degree) Group Delay: s (second) Others: No unit

                      If the specified parameter is out of the allowable setup range, the minimum value (if the
                      lower limit of the range is not reached) or the maximum value (if the upper limit of the
                      range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":CALC1:MARK1:FUNC:MULT:TARG –12.5"
                      20   OUTPUT 717;":CALC1:MARK1:FUNC:MULT:TARG?"
                      30   ENTER 717;A

Related commands   :CALC{1-4}:MARK:FUNC:MULT:TTR on page 253

                      :CALC{1-4}:MARK:FUNC:MULT:TYPE on page 254

                      :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Marker Search]** - **Multi Target** - **Target Value**

:CALC{1-4}:MARK:FUNC:MULT:TRAC

Syntax
:CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi: TRACking {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi: TRACking?

Description
For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the search tracking (function to repeat the search for each sweep) of the multi target or peak search.

Parameters

	Description
ON or 1	Turns ON the search tracking.
OFF or 0 (preset value)	Turns OFF the search tracking.

Query response
{1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK1:FUNC:MULT:TRAC ON"
20    OUTPUT 717;":CALC1:MARK1:FUNC:MULT:TRAC?"
30    ENTER 717;A
```

Related commands
:CALC{1-4}:MARK:FUNC:MULT:TYPE on page 254

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key
[Marker Search] - **Tracking**

:CALC{1-4}:MARK:FUNC:MULT:TTR

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi: TTRansition {POSitive|NEGative|BOTH}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi: TTRansition?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), selects the transition type when performing the multi target search.

Parameters

	Description
POSitive	Specifies positive.
NEGative	Specifies negative.
BOTH (preset value)	Specifies both positive and negative.

Query response {POS|NEG|BOTH}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:MARK1:FUNC:MULT:TTR NEG"
20   OUTPUT 717;":CALC1:MARK1:FUNC:MULT:TTR?"
30   ENTER 717;A$
```

Related commands :CALC{1-4}:MARK:FUNC:MULT:TARG on page 251

:CALC{1-4}:MARK:FUNC:MULT:TYPE on page 254

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key **[Marker Search]** - **Multi Target** - **Target Transition**

13. SCPI Command
Reference

:CALC{1-4}:MARK:FUNC:MULT:TYPE

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion:MULTi:
:TYPE {MAXimum| MINimum|PEAK|LPEak|RPEak|TARGet|LTARget|RTARget}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:FUNCtion: MULTi
:TYPE?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), selects and turns on the multi search type.

Parameters

	Description
OFF	Turn off the multi search mode
PEAK	Turn on the multi peak search
TARGet	Turn on the multi target search

Query response {OFF|PEAK|TARG}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK1:FUNC:MULT:TYPE PEAK"
20    OUTPUT 717;":CALC1:MARK1:FUNC:MULT:TYPE?"
30    ENTER 717;A$
```

Related commands :CALC{1-4}:MARK:FUNC:MULT:PEXC on page 249

:CALC{1-4}:MARK:FUNC:MULT:PPOL on page 250

:CALC{1-4}:MARK:FUNC:MULT:TARG on page 251

:CALC{1-4}:MARK:FUNC:MULT:TRAC on page 252

:CALC{1-4}:MARK:FUNC:MULT:TTR on page 253

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key **[Marker Search]** - **Multi Peak** - **Search Multi Peak**

[Marker Search] - **Multi Target** - **Search Multi Target**|

:CALC{1-4}:MARK:MATH:FLAT

Syntax

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:MATH:FLATness[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:MATH:FLATness[:STATe]?

Description

For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turn on and off the marker flatness function.

Parameters

	Description
ON or 1	Turns ON the marker flatness.
OFF or 0 (preset value)	Turns OFF the marker flatness.

Query response

{1|0}<newline><^END>

Example of use

```
10    OUTPUT 717;":CALC1:MARK:MATH:FLAT ON"
20    OUTPUT 717;":CALC1:MARK:MATH:FLAT?"
30    ENTER 717;A
```

Related commands

:CALC{1-4}:MARK:MATH:FLAT:DATA? on page 256

Equivalent key

[Marker Fctn] - **Flatness**

:CALC{1-4}:MARK:MATH:FLAT:DATA?

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer:MATH:FLATness:DATA?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), returns marker flatness data.

Query response

	Description
Numeric 1	Span
Numeric 2	Gain
Numeric 3	Slope
Numeric 4	Flatness

{numeric1}{numeric2}{numeric3}{numeric4}<newline><^END>

Example of use   10   OUTPUT 717;":CALC1:MARK:MATH:FLAT:DATA?"
20   ENTER 717;A,B,C,D

Related commands   :CALC{1-4}:MARK:MATH:FLAT on page 255

Equivalent key   No equivalent key is available on the front panel.

:CALC{1-4}:MARK:MATH:FST

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer:MATH:FSTatistics[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:MATH:FSTatistics[:STATe]?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turn on and off the filter statistics.

Parameters

	Description
ON or 1	Turns ON the filter statistics.
OFF or 0 (preset value)	Turns OFF the filter statistics.

Query response   {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK:MATH:FST ON"
20    OUTPUT 717;":CALC1:MARK:MATH:FST?"
30    ENTER 717;A
```

Related commands   :CALC{1-4}:MARK:MATH:FST:DATA? on page 258

Equivalent key   **[Marker Fctn]** - **RF Filter Stats**

:CALC{1-4}:MARK:MATH:FST:DATA?

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer:MATH:FSTatistics:DATA?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                :CALC{1-4}:PAR{1-4}:SEL command), returns filter statistics data.

Query response

	Description
Numeric 1	Loss
Numeric 2	Ripple
Numeric 3	Attenuation

{numeric1}{numeric2}{numeric3}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK:MATH:FST:DATA?"
20    ENTER 717;A,B,C
```

Related commands   :CALC{1-4}:MARK:MATH:FST on page 257

Equivalent key   No equivalent key is available on the front panel.

:CALC{1-4}:MARK:MATH:STAT

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:MATH:STATistics[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:MATH:STATistics[:STATe]?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turn on and off the marker statistics function.

Parameters

	Description
ON or 1	Turns ON the marker statistics.
OFF or 0 (preset value)	Turns OFF the marker statistics.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:MARK:MATH:STAT ON"
20   OUTPUT 717;":CALC1:MARK:MATH:STAT?"
30   ENTER 717;A
```

Related commands :CALC{1-4}:MARK:MATH:STAT:DATA? on page 260

Equivalent key **[Marker Fctn]** - **Statistics**

:CALC{1-4}:MARK:MATH:STAT:DATA?

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:MATH:STATistics:DATA?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), returns marker statistics data.

Query response

	Description
Numeric 1	Span
Numeric 2	Average
Numeric 3	Standard Deviation
Numeric 4	Peak to Peak

{numeric1}{numeric2}{numeric3}{numeric4}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK:MATH:STAT:DATA?"
20    ENTER 717;A,B,C,D
```

Related commands :CALC{1-4}:MARK:MATH:STAT on page 259

Equivalent key No equivalent key is available on the front panel.

:CALC{1-4}:MARK:NOTC

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:NOTCh[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:NOTCh[:STATe]?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the notch search result display.

Parameters

	Description
ON or 1	Turns ON the notch search result display.
OFF or 0 (preset value)	Turns OFF the notch search result display.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:MARK:NOTC ON"
20   OUTPUT 717;":CALC1:MARK:NOTC?"
30   ENTER 717;A
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:MARK{1-10}:NOTC:DATA? on page 276

:CALC{1-4}:MARK{1-10}:NOTC:THR on page 277

Equivalent key **[Marker Search]** - **Notch**

13. SCPI Command
Reference

:CALC{1-4}:MARK:REF

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer:REFerence[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer:REFerence[:STATe]?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the reference marker mode.

The reference marker mode is turned on or off when you turn on or off the display of the reference marker.

Parameters

	Description
ON or 1	Turns ON the reference marker mode.
OFF or 0 (preset value)	Turns OFF the reference marker mode.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:MARK:REF ON"
20   OUTPUT 717;":CALC1:MARK:REF?"
30   ENTER 717;A
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:MARK{1-10} on page 263

Equivalent key **[Marker]** - **Ref Maker Mode**

:CALC{1-4}:MARK{1-10}

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}[:STATe]?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the display of marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

The display of the reference marker is turned on or off when you turn on or off the reference marker mode.

Parameters

	Description
ON or 1	Turns ON the display of the marker.
OFF or 0 (preset value)	Turns OFF the display of the marker.

Query response   {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:MARK1 ON"
20   OUTPUT 717;":CALC1:MARK1?"
30   ENTER 717;A
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:MARK:REF on page 262

Equivalent key   When turning ON the display of the marker

[Marker] - **Marker 1**|**Marker 2**|**Marker 3**|**Marker 4**|**Ref Marker**

[Marker] - **More Markers** - **Marker 5**|**Marker 6**|**Marker 7**|**Marker 8**|**Marker 9**

NOTE   When performing the operation from the front panel, a marker set to ON is automatically set to the active marker.

When turning OFF the display of the marker

[Marker] - **Clear Marker Menu** - **Marker 1**|**Marker 2**|**Marker 3**|**Marker 4**|**Marker 5**| **Marker 6**|**Marker 7**|**Marker 8**|**Marker 9**|**Ref Marker**

13. SCPI Command Reference

:CALC{1-4}:MARK{1-10}:ACT

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:ACTivate

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10) to the active marker. (No query)

NOTE If you set a marker set to OFF to the active marker, it is automatically set to ON.

Example of use
```
10   OUTPUT 717;":CALC1:MARK1:ACT"
```

Related commands :DISP:WIND{1-4}:ACT on page 318

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key **[Marker]** - **Marker 1**|**Marker 2**|**Marker 3**|**Marker 4**|**Ref Marker**

[Marker] - **More Markers** - **Marker 5**|**Marker 6**|**Marker 7**|**Marker 8**|**Marker 9**

:CALC{1-4}:MARK{1-10}:BWID:DATA?

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:BWIDth:DATA?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                      :CALC{1-4}:PAR{1-4}:SEL command), reads out the bandwidth search result of marker 1
                      (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

                      If the bandwidth search is impossible, an error occurs and the command is ignored. In this
                      case, no query response is obtained. (Query only)

Query response   {numeric 1},{numeric 2},{numeric 3},{numeric 4}<newline><^END>

	Description
{numeric 1}	The bandwidth.
{numeric 2}	The center frequency.
{numeric 3}	The Q value.
{numeric 4}	The loss.

Example of use   10   OUTPUT 717;":CALC1:MARK1:BWID:DATA?"
                      20   ENTER 717;A,B,C,D

Related commands   :CALC{1-4}:MARK:BWID on page 243

                      :CALC{1-4}:MARK{1-10}:BWID:THR on page 266

                      :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   No equivalent key is available on the front panel.

:CALC{1-4}:MARK{1-10}:BWID:THR

Syntax
:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:BWIDth: THReshold <numeric>

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:BWIDth: THReshold?

Description
For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets the bandwidth definition value of marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

Parameters

	\<numeric\>
Description	Bandwidth definition value
Range	-5E8 to 5E8
Preset value	-3

Unit	Varies depending on the data format as follows:
	  Logarithmic Magnitude: dB (decibel)
	  Phase, Expand Phase, Positive Phase: ° (degree)
	  Group Delay: s (second)
	  Others: No unit

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response
{numeric}\<newline\>\<^END\>

Example of use
```
10   OUTPUT 717;":CALC1:MARK1:BWID:THR 6"
20   OUTPUT 717;":CALC1:MARK1:BWID:THR?"
30   ENTER 717;A
```

Related commands
:CALC{1-4}:MARK:BWID on page 243

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key
[Marker Search] - **Bandwidth Value**

:CALC{1-4}:MARK{1-10}:DISC

Syntax
:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:DISCrete {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:DISCrete?

Description
For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the discrete mode (mode in which the marker moves only at the measurement points) with marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

Parameters

	Description
ON or 1	Turn OFF the discrete mode.
OFF or 0 (preset value)	Turns OFF the discrete mode.

Query response
{1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:MARK1:DISC OFF"
20   OUTPUT 717;":CALC1:MARK1:DISC?"
30   ENTER 717;A
```

Equivalent key
[Marker Fctn] - **Discrete**

13. SCPI Command
Reference

:CALC{1-4}:MARK{1-10}:FUNC:EXEC

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion:EXECute

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), executes the search with marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

To specify the type of the search, use the :CALC{1-4}:MARK{1-10}:FUNC:TYPE command. (No query)

Example of use   `10    OUTPUT 717;":CALC1:MARK1:FUNC:EXEC"`

Related commands   :CALC{1-4}:MARK{1-10}:FUNC:TYPE on page 274

:CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:MARK:FUNC:DOM on page 245

Equivalent key   **[Marker Search]** - **Max**|**Min**

[Marker Search] - **Peak** - **Search Peak**|**Search Left**|**Search Right**

[Marker Search] - **Target** - **Search Target**|**Search Left**|**Search Right**

NOTE   When performing the operation from the front panel, you select the search type and execute the search at the same time.

:CALC{1-4}:MARK{1-10}:FUNC:PEXC

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion:
PEXCursion <numeric>

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion:
PEXCursion?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), sets the lower limit for the peak excursion value
of marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

Parameters

	\<numeric\>
Description	Lower limit for the peak excursion value
Range	0 to 5E8
Preset value	3
Unit	Varies depending on the data format as follows: Logarithmic Magnitude: dB (decibel) Phase, Expand Phase, Positive Phase: ° (degree) Group Delay: s (second) Others: No unit

If the specified parameter is out of the allowable setup range, the minimum value (if the
lower limit of the range is not reached) or the maximum value (if the upper limit of the
range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK1:FUNC:PEXC 0.2"
20    OUTPUT 717;":CALC1:MARK1:FUNC:PEXC?"
30    ENTER 717;A
```

Related commands :CALC{1-4}:MARK{1-10}:FUNC:PPOL on page 270

:CALC{1-4}:MARK{1-10}:FUNC:TYPE on page 274

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key **[Marker Search]** - **Peak** - **Peak Excursion**

:CALC{1-4}:MARK{1-10}:FUNC:PPOL

Syntax

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion: PPOLarity {POSitive|NEGative|BOTH}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion: PPOLarity?

Description

For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), selects the polarity of the peak to be searched with marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

Parameters

	Description
POSitive (preset value)	Specifies the positive peak.
NEGative	Specifies the negative peak.
BOTH	Specifies both the positive peak and the negative peak.

Query response

{POS|NEG|BOTH}<newline><^END>

Example of use

```
10   OUTPUT 717;":CALC1:MARK1:FUNC:PPOL NEG"
20   OUTPUT 717;":CALC1:MARK1:FUNC:PPOL?"
30   ENTER 717;A$
```

Related commands

:CALC{1-4}:MARK{1-10}:FUNC:PEXC on page 269

:CALC{1-4}:MARK{1-10}:FUNC:TYPE on page 274

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key

[Marker Search] - **Peak** - **Peak Polarity**

:CALC{1-4}:MARK{1-10}:FUNC:TARG

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion: TARGet
<numeric>

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion: TARGet?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), sets the target value to be searched with marker 1
(:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

Parameters

	<numeric>
Description	Target value for target search
Range	-5E8 to 5E8
Preset value	0
Unit	Varies depending on the data format as follows: Logarithmic Magnitude: dB (decibel) Phase, Expand Phase, Positive Phase: ° (degree) Group Delay: s (second) Others: No unit

If the specified parameter is out of the allowable setup range, the minimum value (if the
lower limit of the range is not reached) or the maximum value (if the upper limit of the
range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:MARK1:FUNC:TARG -12.5"
20   OUTPUT 717;":CALC1:MARK1:FUNC:TARG?"
30   ENTER 717;A
```

Related commands :CALC{1-4}:MARK{1-10}:FUNC:TTR on page 273

:CALC{1-4}:MARK{1-10}:FUNC:TYPE on page 274

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key **[Marker Search]** - **Target** - **Target Value**

13. SCPI Command
Reference

:CALC{1-4}:MARK{1-10}:FUNC:TRAC

Syntax
:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion: TRACking {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion: TRACking?

Description
For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the search tracking (function to repeat the search for each sweep) of marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

Parameters

	Description
ON or 1	Turns ON the search tracking.
OFF or 0 (preset value)	Turns OFF the search tracking.

Query response
{1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK1:FUNC:TRAC ON"
20    OUTPUT 717;":CALC1:MARK1:FUNC:TRAC?"
30    ENTER 717;A
```

Related commands
:CALC{1-4}:MARK{1-10}:FUNC:EXEC on page 268

:CALC{1-4}:MARK{1-10}:FUNC:TYPE on page 274

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key
[Marker Search] - **Tracking**

:CALC{1-4}:MARK{1-10}:FUNC:TTR

Syntax

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion:
TTRansition {POSitive| NEGative|BOTH}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion:
TTRansition?

Description

For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), selects the transition type when performing the
target search with marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker
(:MARK10).

Parameters

	Description
POSitive	Specifies positive.
NEGative	Specifies negative.
BOTH (preset value)	Specifies both positive and negative.

Query response

{POS|NEG|BOTH}<newline><^END>

Example of use

```
10   OUTPUT 717;":CALC1:MARK1:FUNC:TTR NEG"
20   OUTPUT 717;":CALC1:MARK1:FUNC:TTR?"
30   ENTER 717;A$
```

Related commands

:CALC{1-4}:MARK{1-10}:FUNC:TARG on page 271

:CALC{1-4}:MARK{1-10}:FUNC:TYPE on page 274

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key

[Marker Search] - **Target** - **Target Transition**

:CALC{1-4}:MARK{1-10}:FUNC:TYPE

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion
:TYPE {MAXimum| MINimum|PEAK|LPEak|RPEak|TARGet|LTARget|RTARget}

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:FUNCtion
:TYPE?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), selects the search type of marker 1 (:MARK1) to
marker 9 (:MARK9) and reference marker (:MARK10).

Parameters

	Description
MAXimum (preset value)	Specifies the maximum value search.
MINimum	Specifies the minimum value search.
PEAK	Specifies the maximum positive (minimum negative) peak[*1] search.
LPEak	Specifies the peak[*1] search to the left from the marker position.
RPEak	Specifies the peak[*1] search to the right from the marker position.
TARGet	Specifies the search for the target[*2] closest to the current marker position.
LTARget	Specifies the target[*2] search to the left from the marker position.
RTARget	Specifies the target[*2] search to the right from the marker position.

*1. To specify the conditions of the peak, use the :CALC{1-4}:MARK{1-10}:FUNC:PEXC
command and the :CALC{1-4}:MARK{1-10}:FUNC:PPOL command.
*2. To specify the conditions of the target, use the
:CALC{1-4}:MARK{1-10}:FUNC:TARG command and the
:CALC{1-4}:MARK{1-10}:FUNC:TTR command.

Query response {MAX|MIN|PEAK|LPE|RPE|TARG|LTAR|RTAR}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:MARK1:FUNC:TYPE PEAK"
20   OUTPUT 717;":CALC1:MARK1:FUNC:TYPE?"
30   ENTER 717;A$
```

Related commands :CALC{1-4}:MARK{1-10}:FUNC:EXEC on page 268

:CALC{1-4}:MARK{1-10}:FUNC:PEXC on page 269

:CALC{1-4}:MARK{1-10}:FUNC:PPOL on page 270

:CALC{1-4}:MARK{1-10}:FUNC:TARG on page 271

:CALC{1-4}:MARK{1-10}:FUNC:TTR on page 273

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key **[Marker Search]** - **Max**|**Min**

[Marker Search] - **Peak** - **Search Peak**|**Search Left**|**Search Right**

[Marker Search] - **Target** - **Search Target|Search Left|Search Right**

| NOTE | When performing the operation from the front panel, you select the search type and execute the search at the same time. |

13. SCPI Command
Reference

:CALC{1-4}:MARK{1-10}:NOTC:DATA?

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:NOTCh:DATA?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), reads out the notch search result of marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

If the notch search is impossible, an error occurs and the command is ignored.

In this case, no query response is obtained. (Query only)

Query response {value 1},{value 2},{value 3},{value 4}<newline><^END>

	Description
{value 1}	Bandwidth.
{value 2}	Center frequency.
{value 3}	Q value.
{value 4}	Loss.

Example of use
```
10    OUTPUT 717;":CALC1:MARK1:NOTC:DATA?"
20    ENTER 717;A,B,C,D
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:MARK:NOTC on page 261

:CALC{1-4}:MARK{1-10}:NOTC:THR on page 277

Equivalent key No equivalent key is available on the front panel.

:CALC{1-4}:MARK{1-10}:NOTC:THR

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:NOTCh:THReshold <value>

:CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:NOTCh:THReshold?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets the notch definition value of marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

Parameters

	<value>
Description	Notch definition value
Range	-5E8 to 5E8
Preset value	-3
Unit	Varies depending on the data format as follows:Amplitude (MLOG): dB (decibel)
	Phase (PHAS), expanded phase (UPH), positive phase (PPH): ° (degree)
	Group delay (GDEL): s (second)
	Others: No unit

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {value}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MARK1:NOTC:THR 5"
20    OUTPUT 717;":CALC1:MARK1:NOTC:THR?"
30    ENTER 717;A
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:MARK:NOTC on page 261

:CALC{1-4}:MARK{1-10}:NOTC:DATA? on page 276

Equivalent key   **[Marker Search]** - **Notch Value**

:CALC{1-4}:MARK{1-10}:SET

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:SET {STARt|
                STOP|CENTer|RLEVel|DELay}

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                :CALC{1-4}:PAR{1-4}:SEL command), sets the value of the specified item to the value of
                the position of marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker
                (:MARK10).

                Regardless of the ON/OFF of the reference marker mode (specified with the
                :CALC{1-4}:MARK:REF command), the value when the reference marker mode is OFF is
                always set. (No query)

Parameters

	Description
STARt	Sets the sweep start value to the stimulus value at the marker position.
STOP	Sets the sweep stop value to the stimulus value at the marker position.
CENTer	Sets the sweep center value to the stimulus value at the marker position.
RLEVel	Sets the reference line value to the response value at the marker position.
DELay	Sets the electrical delay time value to the group delay value at the marker position.

Example of use   10   OUTPUT 717;":CALC1:MARK1:SET CENT"

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

                   :CALC{1-4}:MARK:REF on page 262

Equivalent key   **[Marker Fctn]** - **Marker -> Start**|**Marker -> Stop**|**Marker -> Center**|**Marker -> Reference**|
                   Marker -> Delay

:CALC{1-4}:MARK{1-10}:X

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:X <numeric>

                            :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:X?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), sets the stimulus value of marker 1 (:MARK1) to
marker 9 (:MARK9) and reference marker (:MARK10).

Parameters

	<numeric>
Description	Stimulus value[1]
Range	Sweep start value to sweep stop value[2]
Preset value	Sweep start value[3]
Unit	Hz (hertz), dBm or second

     [1].When the reference marker mode is ON (ON is specified with the
        :CALC{1-4}:MARK:REF command), it is the value relative to the reference marker.
     [2].When the span value of the sweep range is 0, the range is from 0 to sweep time value.
     [3].When the span value of the sweep range is 0, the unit is 0.

If the specified parameter is out of the allowable setup range, the minimum value (if the
lower limit of the range is not reached) or the maximum value (if the upper limit of the
range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use   `10    OUTPUT 717;":CALC1:MARK1:X 1E9"`
                      `20    OUTPUT 717;":CALC1:MARK1:X?"`
                      `30    ENTER 717;A`

Related commands :CALC{1-4}:MARK{1-10}:Y? on page 280

                       :CALC{1-4}:PAR{1-4}:SEL on page 286

                       :CALC{1-4}:MARK:REF on page 262

Equivalent key   **[Marker]** - **Marker 1|Marker 2|Marker 3|Marker 4|Ref Marker**

                       [Marker] - **More Markers** - **Marker 5|Marker 6|Marker 7|Marker 8|Marker 9**

NOTE   When performing the operation from the front panel, you turn ON the marker and set the
stimulus value at the same time.

13. SCPI Command
Reference

:CALC{1-4}:MARK{1-10}:Y?

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MARKer{[1]|2|3|4|5|6|7|8|9|10}:Y?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), reads out the response value of marker 1 (:MARK1) to marker 9 (:MARK9) and reference marker (:MARK10).

When the reference marker mode is ON (ON is specified with the :CALC{1-4}:MARK:REF command), the readout value is the value relative to the reference marker. (Query only)

Query response {numeric 1},{numeric 2}<newline><^END>

	Description
{numeric 1}	Response value (primary value) at the marker position.
{numeric 2}	Response value (secondary value) at the marker position. Always 0 when the data format is not the Smith chart format or the polar format.

Example of use
```
10    OUTPUT 717;":CALC1:MARK1:Y?"
30    ENTER 717;A,B
```

Related commands :CALC{1-4}:MARK{1-10}:X on page 279

:CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:MARK:REF on page 262

Equivalent key No equivalent key is available on the front panel.

:CALC{1-4}:MATH:FUNC

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MATH:FUNCtion {NORMal| SUBTract|DIVide|ADD|MULTiply}

:CALCulate{[1]|2|3|4}[:SELected]:MATH:FUNCtion?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), selects the data trace display method (math method between measurement data and memory trace data).

The math result according to this setting is displayed on the data trace.

Parameters

	Description
NORMal (preset value)	Specifies *Data* (no math).
DIVide	Specifies *Data* / *Mem*.
MULTiply	Specifies *Data* × *Mem*.
SUBTract	Specifies *Data* - *Mem*.
ADD	Specifies *Data* + *Mem*.

Where *Data* is the measurement data and *Mem* is the data stored in the memory trace.

Query response   {NORM|DIV|MULT|SUBT|ADD}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:MATH:FUNC DIV"
20    OUTPUT 717;":CALC1:MATH:FUNC?"
30    ENTER 717;A$
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Display]** - **Data Math** - **OFF**|**Data / Mem**|**Data * Mem**|**Data** − **Mem**|**Data + Mem**

:CALC{1-4}:MATH:MEM

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MATH:MEMorize

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), copies the measurement data at the execution of the command to the memory trace. (No query)

Example of use
```
10    OUTPUT 717;":CALC1:MATH:MEM"
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Display]** - **Data** –**> Mem**

:CALC{1-4}:MST

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:MSTatistics[:STATe] {ON|OFF|1|0}

                 :CALCulate{[1]|2|3|4}[:SELected]:MSTatistics[:STATe]?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                 :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the statistics value display (the
                 mean vale, the standard deviation, and the difference between the maximum value and the
                 minimum value).

Parameters

	Description
ON or 1	Turns ON the statistics value display.
OFF or 0 (preset value)	Turns OFF the statistics value display.

Query response   {1|0}<newline><^END>

Example of use   10   OUTPUT 717;":CALC1:MST ON"
                 20   OUTPUT 717;":CALC1:MST?"
                 30   ENTER 717;A

Related commands :CALC{1-4}:MST:DATA? on page 283

                 :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Marker Fctn]** - **Statistics**

:CALC{1-4}:MST:DATA?

Syntax :CALCulate{[1]|2|3|4}[:SELected]:MSTatistics:DATA?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), reads out the statistics values (the mean vale, the standard deviation, and the difference between the maximum value and the minimum value) display. (Query only)

Query response {numeric 1},{numeric 2},{numeric 3}<newline><^END>

	Description
{numeric 1}	Mean value
{numeric 2}	Standard deviation
{numeric 3}	Difference between the maximum value and the minimum value (Peak to Peak)

Example of use
```
10   OUTPUT 717;":CALC1:MST:DATA?"
20   ENTER 717;A,B,C
```

Related commands :CALC{1-4}:MST on page 282

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key No equivalent key is available on the front panel.

13. SCPI Command
Reference

:CALC{1-4}:PAR:COUN

Syntax   :CALCulate{[1]|2|3|4}:PARameter:COUNt <numeric>

                      :CALCulate{[1]|2|3|4}:PARameter:COUNt?

Description   Sets the number of traces of channel 1 (:CALC1) to channel 4 (:CALC4).

Parameters

	<numeric>
Description	Number of traces
Range	1 to 4
Preset value	1
Resolution	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":CALC1:PAR:COUN 4"
                      20   OUTPUT 717;":CALC1:PAR:COUN?"
                      30   ENTER 717;A

Equivalent key   **[Display]** - **Num of Traces**

:CALC{1-4}:PAR{1-4}:DEF

Syntax :CALCulate{[1]|2|3|4}:PARameter{[1]|2|3|4}:DEFine {S11|S21|S12|S22}

:CALCulate{[1]|2|3|4}:PARameter{[1]|2|3|4}:DEFine?

Description Sets the measurement parameter of trace 1 (:PAR1) to trace 4 (:PAR4) of channel 1 (:CALC1) to channel 4 (:CALC4).

Parameters

	Description
S11 (preset value)	Specifies S11.
S21	Specifies S21.
S12	Specifies S12.
S22	Specifies S22.

Query response {S11|S21|S12|S22}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:PAR1:DEF S21"
20    OUTPUT 717;":CALC1:PAR1:DEF?"
30    ENTER 717;A$
```

Equivalent key **[Meas]** - **S11**|**S21**|**S12**|**S22**

:CALC{1-4}:PAR{1-4}:SEL

Syntax   :CALCulate{[1]|2|3|4}:PARameter{[1]|2|3|4}:SELect

Description   Sets trace 1 (:PAR1) to trace 4 (:PAR4) of channel 1 (:CALC1) to channel 4 (:CALC4) to the active trace.

You can set only the displayed trace to the active trace. If you execute this command trying to set a not displayed trace to the active trace, an error occurs and the command is ignored. (No query)

Example of use   10   OUTPUT 717;":CALC1:PAR1:SEL"

Related commands   :DISP:WIND{1-4}:ACT on page 318

Equivalent key   **[Trace Prev]** / **[Trace Next]**

:CALC{1-4}:RLIM

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:RLIMit[:STATe] {ON|OFF|1|0}
                 :CALCulate{[1]|2|3|4}[:SELected]:RLIMit[:STATe]?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the ripple test function.

Parameters

	Description
ON or 1	Turns ON the ripple test function.
OFF or 0 (preset value)	Turns OFF the ripple test function.

Query response   {1|0}<newline><^END>

Example of use   10   OUTPUT 717;":CALC1:RLIM ON"
                 20   OUTPUT 717;":CALC1:RLIM?"
                 30   ENTER 717;A

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:RLIM:DATA on page 287

:CALC{1-4}:RLIM:DISP:LINE on page 288

:CALC{1-4}:RLIM:DISP:SEL on page 289

:CALC{1-4}:RLIM:DISP:VAL on page 290

:CALC{1-4}:RLIM:FAIL? on page 291

:CALC{1-4}:RLIM:REP? on page 292

Equivalent key   **[Analysis]** - **Ripple Limit** - **Ripple Limit Test**

:CALC{1-4}:RLIM:DATA

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:RLIMit:DATA <numeric 1>,…,<numeric 1+(N×4)>

:CALCulate{[1]|2|3|4}[:SELected]:RLIMit:DATA?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command), sets the ripple limit table.

The data transfer format when this command is executed depends on the setting with the :FORM:DATA command.

Parameters

	Description
<numeric 1>	The number of ripple limit bands. (0 to 12)
<numeric 1+(n×4)-3>	The type of the n-th ripple limit band. Specify an integer 0 to 1: 0: Off 1: On
<numeric 1+(n×4)-2>	The value on the horizontal axis (frequency/power/time) of the start point of the n-th line.
<numeric 1+(n×4)-1>	The value on the horizontal axis (frequency/power/time) of the end point of the n-th line.
<numeric 1+(n×4)>	The value of maximum ripple (dB) range.

Where N is the number of lines (specified with <numeric 1>) and n is an integer between 1 and N.

If you set the number of lines to 0 (clear the limit table), this command needs only <numeric 1> as the parameter.

Query response   {numeric 1},…,{numeric 1+(N×4)}<newline><^END>

Example of use
```
10    DIM B(1:2,1:4)
20    OUTPUT 717;":CALC1:RLIM:DATA 2,1,1E9,3E9,3,1,5E9,7E9,3"
30    OUTPUT 717;":CALC1:RLIM:DATA?"
40    ENTER 717;A,B(*)

10    OUTPUT 717;":CALC1:RLIM:DATA 0"  ! Clear Ripple Limit Table
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:RLIM on page 286

Equivalent key   **[Analysis]** - **Ripple Limit** - **Edit Ripple Limit** - **Add**

13. SCPI Command
Reference

:CALC{1-4}:RLIM:DISP:LINE

Syntax :CALCulate{[1]|2|3|4}[:SELected]:RLIMit:DISPlay:LINE {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:RLIMit:DISPlay:LINE?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the ripple limit line display.

Parameters

	Description
ON or 1	Turns ON the ripple limit line display.
OFF or 0 (preset value)	Turns OFF the ripple limit line display.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:RLIM:DISP:LINE ON"
20   OUTPUT 717;":CALC1:RLIM:DISP:LINE?"
30   ENTER 717;A
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:RLIM on page 286

:CALC{1-4}:RLIM:DISP:SEL on page 289

:CALC{1-4}:RLIM:DISP:VAL on page 290

Equivalent key **[Analysis]** - **Ripple Limit** - **Ripple Limit**

:CALC{1-4}:RLIM:DISP:SEL

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:RLIMit:DISPlay:SELect <numeric>

                        :CALCulate{[1]|2|3|4}[:SELected]:RLIMit:DISPlay:SELect?

Description   For channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                        :CALC{1-4}:PAR{1-4}:SEL command), sets the ripple limit band for ripple value display.

Parameters

	<numeric>
Description	The ripple limit band.
Range	1 to 12
Preset value	1

Query response   {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:RLIM:DISP:SEL 5"
20   OUTPUT 717;":CALC1:RLIM:DISP:SEL?"
30   ENTER 717;A
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

                        :CALC{1-4}:RLIM on page 286

                        :CALC{1-4}:RLIM:DISP:LINE on page 288

                        :CALC{1-4}:RLIM:DISP:VAL on page 290

Equivalent key   **[Analysis]** - **Ripple Limit** - **Ripple Band**

13. SCPI Command
Reference

:CALC{1-4}:RLIM:DISP:VAL

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:RLIMit:DISPlay:VALue {OFF|ABS|MAR}

:CALCulate{[1]|2|3|4}[:SELected]:RLIMit:DISPlay:VALue?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), selects the display type for the ripple value.

Parameters

	Description
OFF (preset value)	Specifies the display off.
ABS	Specifies the absolute value for display type.
MAR	Specifies the margin for display type.

Query response   {OFF|ABS|MAR}<newline><^END>

Example of use
```
10    OUTPUT 717;":CALC1:RLIM:DISP:VAL ABS"
20    OUTPUT 717;":CALC1:RLIM:DISP:VAL?"
30    ENTER 717;A$
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:RLIM on page 286

:CALC{1-4}:RLIM:DISP:LINE on page 288

:CALC{1-4}:RLIM:DISP:SEL on page 289

Equivalent key   **[Analysis]** - **Ripple Limit** - **Ripple Value** - **OFF** | **Absolute** | **Margin**

:CALC{1-4}:RLIM:FAIL?

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:RLIMit:FAIL?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
                        :CALC{1-4}:PAR{1-4}:SEL command), reads out the ripple test result. (Query only)

Query response   {1|0}<newline><^END>

	Description
1	The ripple test result is FAIL.
0	The ripple test result is PASS.

When the ripple test is set to OFF, 0 is always read out.

Example of use   10   OUTPUT 717;":CALC1:RLIM:FAIL?"
                        20   ENTER 717;A

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

                        :CALC{1-4}:RLIM on page 286

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

:CALC{1-4}:RLIM:REP?

Syntax   :CALCulate{[1]|2|3|4}[:SELected]:RLIMit:REPort[:DATA]?

Description   For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
              :CALC{1-4}:PAR{1-4}:SEL command), reads out the ripple value of the ripple test.

              The data transfer format when this command is executed depends on the setting with the
              :FORM:DATA command. (Query only)

Query response   {numeric 1},…,{numeric 1+N×3}<newline><^END>

	Description
<numeric 1>	Number of ripple limit line (1 to 12)
<numeric 1+(n×3)-2>	Number of ripple limit bands
<numeric 1+(n×3)-1>	Ripple value
<numeric 1+(n×3)>	Results of ripple test
	0: Pass
	1: Fail

              Where N is the number of lines (specified with <numeric 1>) and n is an integer between 1
              and 12.

Example of use   ```
10   DIM B(1:2,1:3)
20   OUTPUT 717;":CALC1:RLIM:REP?"
30   ENTER 717;A,B(*)
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

              :CALC{1-4}:RLIM on page 286

Equivalent key   No equivalent key is available on the front panel.

# :CALC{1-4}:SMO

Syntax :CALCulate{[1]|2|3|4}[:SELected]:SMOothing[:STATe] {ON|OFF|1|0}

:CALCulate{[1]|2|3|4}[:SELected]:SMOothing[:STATe]?

Description For the active trace of channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the
:CALC{1-4}:PAR{1-4}:SEL command), turns ON/OFF the smoothing.

Parameters

|  | **Description** |
|---|---|
| ON or 1 | Turns ON the smoothing. |
| OFF or 0 (preset value) | Turns OFF the smoothing. |

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:SMO:STAT ON"
20   OUTPUT 717;":CALC1:SMO:STAT?"
30   ENTER 717;A
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:CALC{1-4}:SMO:APER on page 294

Equivalent key **[Avg]** - **Smoothing**

# :CALC{1-4}:SMO:APER

Syntax             :CALCulate{[1]|2|3|4}[:SELected]:SMOothing:APERture <numeric>

                       :CALCulate{[1]|2|3|4}[:SELected]:SMOothing:APERture?

Description     Sets the smoothing aperture for channel 1 (:CALC1) to channel 4 (:CALC4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command).

Parameters

|  | **<numeric>** |
|---|---|
| Description | Percentage relative to the sweep span value |
| Range | 0.05 to 25 |
| Preset value | 1.5 |
| Unit | % (percent) |
| Resolution | 1E-14 |

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response    {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":CALC1:SMO:APER 2.5"
20   OUTPUT 717;":CALC1:SMO:APER?"
30   ENTER 717;A
```

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

                               :CALC{1-4}:SMO on page 293

Equivalent key      **[Avg]** - **Smo Aperture**

## :CONT:HAND:A

Syntax                :CONTrol:HANDler:A[:DATA] <numeric>

Description           Outputs data to output port A (A0 to A7) of the handler I/O. Data is outputted as 8-bit binary using A0 as LSB and A7 as MSB. (No query)

For details about the handler I/O, see Chapter 10.

Parameters

|             | **<numeric>** |
|-------------|---------------|
| Description | Output data   |
| Range       | 0 to 255      |
| Resolution  | 1             |

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Example of use        10   OUTPUT 717;":CONT:HAND:A 15"

Equivalent key        No equivalent key is available on the front panel.

## :CONT:HAND:B

Syntax                :CONTrol:HANDler:B[:DATA] <numeric>

Description           Outputs data to output port B (B0 to B7) of the handler I/O. Data is outputted as 8-bit binary using B0 as LSB and B7 as MSB. (No query)

For details about the handler I/O, see Chapter 10.

Parameters

|             | **<numeric>** |
|-------------|---------------|
| Description | Output data   |
| Range       | 0 to 255      |
| Resolution  | 1             |

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Example of use        10   OUTPUT 717;":CONT:HAND:B 15"

Equivalent key        No equivalent key is available on the front panel.

13. SCPI Command
Reference

# :CONT:HAND:C

Syntax        :CONTrol:HANDler:C[:DATA] <numeric>

              :CONTrol:HANDler:C[:DATA]?

Description   When input/output port C of the handler I/O is set to the output port, outputs data to output port C (C0 to C3).

              When input/output port C is set to the input port, reads out data inputted to port C (C0 to C3).

              Data is outputted as 4-bit binary using C0 as LSB and C3 as MSB.

              For details about the handler I/O, see Chapter 10.

Parameters

|  | **<numeric>** |
|---|---|
| Description | Output data/input data |
| Range | 0 to 15 |
| Resolution | 1 |

              If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response    {numeric}<newline><^END>

Example of use    10    OUTPUT 717;":CONT:HAND:C:MODE OUTP"
                  20    OUTPUT 717;":CONT:HAND:C 15"

                  10    OUTPUT 717;":CONT:HAND:C:MODE INP"
                  20    OUTPUT 717;":CONT:HAND:C?"
                  30    ENTER 717;A

Related commands  :CONT:HAND:C:MODE on page 297

Equivalent key    No equivalent key is available on the front panel.

# :CONT:HAND:C:MODE

Syntax          :CONTrol:HANDler:C:MODE {INPut|OUTPut}

                :CONTrol:HANDler:C:MODE?

Description     Sets the input/output direction of port C of the handler I/O.

                For details about the handler I/O, see Chapter 10.

Parameters

|                     | **Description**    |
|---------------------|--------------------|
| INPut (preset value) | Specifies input.   |
| OUTPut              | Specifies output.  |

Query response   {INP|OUTP}<newline><^END>

Example of use
```
10   OUTPUT 717;":CONT:HAND:C:MODE OUTP"
20   OUTPUT 717;":CONT:HAND:C:MODE?"
30   ENTER 717;A$
```

Related commands  :CONT:HAND:C on page 296

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

# :CONT:HAND:D

Syntax
:CONTrol:HANDler:D[:DATA] <numeric>

:CONTrol:HANDler:D[:DATA]?

Description
When input/output port D of the handler I/O is set to the output port, outputs data to output port D (D0 to D3).

When input/output port D is set to the input port, reads out data inputted to port D (D0 to D3).

Data is outputted as 4-bit binary using D0 as LSB and D3 as MSB.

For details about the handler I/O, see Chapter 10.

Parameters

|  | **<numeric>** |
|---|---|
| Description | Output data/input data |
| Range | 0 to 15 |
| Resolution | 1 |

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response
{numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":CONT:HAND:D:MODE OUTP"
20   OUTPUT 717;":CONT:HAND:D 15"

10   OUTPUT 717;":CONT:HAND:D:MODE INP"
20   OUTPUT 717;":CONT:HAND:D?"
30   ENTER 717;A
```

Related commands
:CONT:HAND:D:MODE on page 299

Equivalent key
No equivalent key is available on the front panel.

# :CONT:HAND:D:MODE

Syntax            :CONTrol:HANDler:C:MODE {INPut|OUTPut}

                  :CONTrol:HANDler:C:MODE?

Description       Sets the input/output direction of port D of the handler I/O.

                  For details about the handler I/O, see Chapter 10.

Parameters

|  | **Description** |
|---|---|
| INPut (preset value) | Specifies input. |
| OUTPut | Specifies output. |

Query response    {INP|OUTP}<newline><^END>

Example of use
```
10   OUTPUT 717;":CONT:HAND:D:MODE OUTP"
20   OUTPUT 717;":CONT:HAND:D:MODE?"
30   ENTER 717;A$
```

Related commands  :CONT:HAND:D on page 298

Equivalent key    No equivalent key is available on the front panel.

13. SCPI Command
Reference

# :CONT:HAND:E

Syntax :CONTrol:HANDler:E[:DATA] <numeric>

:CONTrol:HANDler:E[:DATA]?

Description When input/output port E (port C + port D) of the handler I/O is set to the output port, outputs data to output port E.

When input/output port E is set to the input port, reads out data inputted to port E.

Data is outputted as 8-bit binary using C0 as LSB and D3 as MSB.

For details about the handler I/O, see Chapter 10.

Parameters

|  | **<numeric>** |
| --- | --- |
| Description | Output data/input data |
| Range | 0 to 255 |
| Resolution | 1 |

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":CONT:HAND:C:MODE OUTP"
20   OUTPUT 717;":CONT:HAND:D:MODE OUTP"
30   OUTPUT 717;":CONT:HAND:E 128"

10   OUTPUT 717;":CONT:HAND:C:MODE INP"
20   OUTPUT 717;":CONT:HAND:D:MODE INP"
30   OUTPUT 717;":CONT:HAND:E?"
40   ENTER 717;A
```

Related commands :CONT:HAND:C:MODE on page 297

:CONT:HAND:D:MODE on page 299

:CONT:HAND:C on page 296

:CONT:HAND:D on page 298

Equivalent key No equivalent key is available on the front panel.

## :CONT:HAND:F

Syntax                   :CONTrol:HANDler:F[:DATA] <numeric>

Description              Outputs data to output port F (port A + port B) of the handler I/O. Data is outputted as 16-bit binary using A0 as LSB and B7 as MSB. (No query)

For details about the handler I/O, see Chapter 10.

Parameters

|  | **<numeric>** |
|---|---|
| Description | Output data |
| Range | 0 to 65535 |
| Resolution | 1 |

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Example of use          10    OUTPUT 717;":CONT:HAND:F 511"

Related commands        :CONT:HAND:A on page 295

:CONT:HAND:B on page 295

Equivalent key          No equivalent key is available on the front panel.

13. SCPI Command
Reference

# :CONT:HAND:IND:STAT

Syntax      :CONTrol:HANDler[:EXTension]:INDex:STATe {ON|OFF|1|0}

             :CONTrol:HANDler[:EXTension]:INDex:STATe?

Description      Turns ON/OFF outputting the INDEX signal to B6 of the handler I/O.

             For details about the handler I/O, see Chapter 10.

Parameters

| | Description |
|---|---|
| ON or 1 | Turns ON the INDEX signal output. |
| OFF or 0 (preset value) | Turns OFF the INDEX signal output. |

Query response      {1|0}<newline><^END>

Example of use

```
10   OUTPUT 717;":CONT:HAND:IND:STAT ON"
20   OUTPUT 717;":CONT:HAND:IND:STAT?"
30   ENTER 717;A
```

Related commands   :CONT:HAND:RTR:STAT on page 303

Equivalent key   No equivalent key is available on the front panel.

:CONT:HAND:OUTP{1-2}

Syntax   :CONTrol:HANDler:OUTPut{[1]|2}[:DATA] {1|0}

             :CONTrol:HANDler:OUTPut{[1]|2}[:DATA]?

Description   Sets HIGH/LOW of OUTPUT1 (:OUTP1) or OUTPUT2 (:OUTP2) of the handler I/O.

             For details about the handler I/O, see Chapter 10.

Parameters

	Description
1	Specifies LOW.
0	Specifies HIGH.

Query response   {1|0}<newline><^END>

Example of use

```
10   OUTPUT 717;":CONT:HAND:OUTP1 1"
20   OUTPUT 717;":CONT:HAND:OUTP1?"
30   ENTER 717;A
```

Equivalent key   No equivalent key is available on the front panel.

:CONT:HAND:RTR:STAT

Syntax   :CONTrol:HANDler[:EXTension]:RTRigger:STATe {ON|OFF|1|0}

                :CONTrol:HANDler[:EXTension]:RTRigger:STATe?

Description   Turns ON/OFF outputting the READY FOR TRIGGER signal to B7 of the handler I/O.

                For details about the handler I/O, see Chapter 10.

Parameters

	Description
ON or 1	Turns ON the READY FOR TRIGGER signal output.
OFF or 0 (preset value)	Turns OFF the READY FOR TRIGGER signal output.

Query response {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":CONT:HAND:RTR:STAT ON"
20    OUTPUT 717;":CONT:HAND:RTR:STAT?"
30    ENTER 717;A
```

Related commands :CONT:HAND:IND:STAT on page 302

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

:DISP:ANN:FREQ

Syntax
:DISPlay:ANNotation:FREQuency[:STATe] {ON|OFF|1|0}

:DISPlay:ANNotation:FREQuency[:STATe]?

Description
Turns ON/OFF the frequency display on the LCD display.

Parameters

	Description
ON or 1 (preset value)	Turns ON the frequency display.
OFF or 0	Turns OFF the frequency display.

Query response
{1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:ANN:FREQ OFF"
20   OUTPUT 717;":DISP:ANN:FREQ?"
30   ENTER 717;A
```

Equivalent key
[Display] - **Frequency**

:DISP:CCL

Syntax
:DISPlay:CCLear

Description
Clears the error message display on the instrument status bar (at the bottom of the LCD display). (No query)

Example of use
```
10   OUTPUT 717;":DISP:CCL"
```

Equivalent key
All front panel keys.

:DISP:CLOC

Syntax   :DISPlay:CLOCk {ON|OFF|1|0}

                  :DISPlay:CLOCk?

Description   Turns ON/OFF the clock display at the right edge of the instrument status bar (at the bottom of the LCD display).

Parameters

	Description
ON or 1 (preset value)	Turns ON the clock display.
OFF or 0	Turns OFF the clock display.

Query response   {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":DISP:CLOC OFF"
20    OUTPUT 717;":DISP:CLOC?"
30    ENTER 717;A
```

Equivalent key   **[System]** - **Misc Setup** - **Clock Setup** - **Show Clock**

13. SCPI Command Reference

:DISP:COL{1-2}:BACK

Syntax :DISPlay:COLor{[1]|2}:BACK <numeric 1>,<numeric 2>,<numeric 3>

:DISPlay:COLor{[1]|2}:BACK?

Description Sets the background color for normal display (:COL1) and inverted display (:COL2).

Parameters

	<numeric 1>	**<numeric 2>**	**<numeric 3>**
Description	Amount of red	Amount of green	Amount of blue
Range	0 to 5	0 to 5	0 to 5
Resolution	1	1	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric 1},{numeric 2},{numeric 3}<newline><^END>

Example of use
```
10    OUTPUT 717;":DISP:COL:BACK 1,2,3"
20    OUTPUT 717;":DISP:COL:BACK?"
30    ENTER 717;A,B,C
```

Related commands :DISP:COL{1-2}:RES on page 308

Equivalent key **[System]** - **Misc Setup** - **Color Setup** - **Normal|Invert** - **Background**

:DISP:COL{1-2}:GRAT{1-2}

Syntax   :DISPlay:COLor{[1]|2}:GRATicule{[1]|2} <numeric 1>,<numeric 2>,<numeric 3>

                   :DISPlay:COLor{[1]|2}:GRATicule{[1]|2}?

Description   Sets the color of the graticule label and the outer frame line of the graph (:GRAT1) and the color of the grid line of the graph (:GRAT2) for normal display (:COL1) and inverted display (:COL2).

Parameters

	<numeric 1>	<numeric 2>	<numeric 3>
Description	Amount of red	Amount of green	Amount of blue
Range	0 to 5	0 to 5	0 to 5
Resolution	1	1	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric 1},{numeric 2},{numeric 3}<newline><^END>

Example of use   10   OUTPUT 717;":DISP:COL1:GRAT1 1,2,3"
                   20   OUTPUT 717;":DISP:COL1:GRAT1?"
                   30   ENTER 717;A,B,C

Related commands   :DISP:COL{1-2}:RES on page 308

Equivalent key   **[System]** - **Misc Setup** - **Color Setup** - **Normal**|**Invert** - **Graticule Main**|**Graticule Sub**

13. SCPI Command
Reference

:DISP:COL{1-2}:LIM{1-2}

Syntax
:DISPlay:COLor{[1]|2}:LIMit{[1]|2} <numeric 1>,<numeric 2>,<numeric 3>

:DISPlay:COLor{[1]|2}:LIMit{[1]|2}?

Description
Sets the fail display color used for the limit test result (:LIM1) and the color of the limit line (:LIM2) for normal display (:COL1) and inverted display (:COL2).

Parameters

	<numeric 1>	<numeric 2>	<numeric 3>
Description	Amount of red	Amount of green	Amount of blue
Range	0 to 5	0 to 5	0 to 5
Resolution	1	1	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response
{numeric 1},{numeric 2},{numeric 3}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:COL1:LIM1 1,2,3"
20   OUTPUT 717;":DISP:COL1:LIM1?"
30   ENTER 717;A,B,C
```

Related commands
:DISP:COL{1-2}:RES on page 308

Equivalent key
[System] - **Misc Setup** - **Color Setup** - **Normal|Invert** - **Limit Fail|Limit Line**

:DISP:COL{1-2}:RES

Syntax
:DISPlay:COLor{[1]|2}:RESet

Description
Resets the display color settings for all the items to the factory preset state for normal display (:COL1) and inverted display (:COL2). (No query)

Example of use
```
10   OUTPUT 717;":DISP:COL1:RES"
```

Related commands
:DISP:COL{1-2}:BACK on page 306

:DISP:COL{1-2}:GRAT{1-2} on page 307

:DISP:COL{1-2}:LIM{1-2} on page 308

:DISP:COL{1-2}:BACK on page 306

:DISP:COL{1-2}:BACK on page 306

Equivalent key
[System] - **Misc Setup** - **Color Setup** - **Normal|Invert** - **Reset Color** - **OK**

:DISP:COL{1-2}:TRAC{1-4}:DATA

Syntax :DISPlay:COLor{[1]|2}:TRAC{[1]|2|3|4}:DATA <numeric 1>,<numeric 2>,<numeric 3>

:DISPlay:COLor{[1]|2}:TRAC{[1]|2|3|4}:DATA?

Description Sets the color of the data trace of trace 1 (:TRAC1) to trace 4 (:TRAC4) for normal display (:COL1) and inverted display (:COL2).

Parameters

	<numeric 1>	**<numeric 2>**	**<numeric 3>**
Description	Amount of red	Amount of green	Amount of blue
Range	0 to 5	0 to 5	0 to 5
Resolution	1	1	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric 1},{numeric 2},{numeric 3}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:COL1:TRAC1:DATA 1,2,3"
20   OUTPUT 717;":DISP:COL1:TRAC1:DATA?"
30   ENTER 717;A,B,C
```

Related commands :DISP:COL{1-2}:RES on page 308

Equivalent key **[System]** - **Misc Setup** - **Color Setup** - **Normal**|**Invert** - **Data Trace 1**|**Data Trace 2**|**Data Trace 3**|**Data Trace 4**

13. SCPI Command
Reference

:DISP:COL{1-2}:TRAC{1-4}:MEM

Syntax :DISPlay:COLor{[1]|2}:TRAC{[1]|2|3|4}:MEMory <numeric 1>,<numeric 2>,<numeric 3>

:DISPlay:COLor{[1]|2}:TRAC{[1]|2|3|4}:MEMory?

Description Sets the color of the memory trace of trace 1 (:TRAC1) to trace 4 (:TRAC4) for normal display (:COL1) and inverted display (:COL2).

Parameters

	<numeric 1>	**<numeric 2>**	**<numeric 3>**
Description	Amount of red	Amount of green	Amount of blue
Range	0 to 5	0 to 5	0 to 5
Resolution	1	1	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric 1},{numeric 2},{numeric 3}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:COL1:TRAC1:MEM 1,2,3"
20   OUTPUT 717;":DISP:COL1:TRAC1:MEM?"
30   ENTER 717;A,B,C
```

Related commands :DISP:COL{1-2}:RES on page 308

Equivalent key **[System]** - **Misc Setup** - **Color Setup** - **Normal**|**Invert** - **Mem Trace 1**|**Mem Trace 2**|**Mem Trace 3**|**Mem Trace 4**

:DISP:ECHO

Syntax   :DISPlay:ECHO[:DATA] <string>

Description   Displays a character string in the echo window. (No query)

Parameters

	<string>
Description	Character string you want to display
Range	254 characters or less

Example of use   10   OUTPUT 717;":DISP:ECHO ""TEST RESULT"""

Related commands   :DISP:ECHO:CLE on page 311

                      :DISP:TABL on page 316

                      :DISP:TABL:TYPE on page 317

Equivalent key   No equivalent key is available on the front panel.

:DISP:ECHO:CLE

Syntax   :DISPlay:ECHO:CLEar

Description   Clears all character strings displayed in the echo window. (No query)

Example of use   10   OUTPUT 717;":DISP:ECHO:CLE"

Related commands   :DISP:ECHO on page 311

Equivalent key   **[Macro Setup]** - **Clear Echo**

13. SCPI Command
Reference

:DISP:ENAB

Syntax :DISPlay:ENABle {ON|OFF|1|0}

:DISPlay:ENABle?

Description Turns ON/OFF the update of the LCD display.

When the update of the LCD display is OFF, You can update the LCD display once using :DISP:UPD command.

Parameters

	Description
ON or 1 (preset value)	Turns ON the update.
OFF or 0	Turns OFF the update.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:ENAB OFF"
20   OUTPUT 717;":DISP:ENAB?"
30   ENTER 717;A
```

Related commands :DISP:UPD on page 318

Equivalent key **[Display]** - **Update**

:DISP:FSIG

Syntax   :DISPlay:FSIGn {ON|OFF|1|0}

                  :DISPlay:FSIGn?

Description   Turns on or off the Fail display when the limit test fails.

Parameters

	Description
ON or 1 (preset value)	Turns on the Fail display.
OFF or 0	Turns off the Fail display.

Query response   {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:FSIG OFF"
20   OUTPUT 717;":DISP:FSIG?"
30   ENTER 717;A
```

Related commands :CALC{1-4}:LIM on page 232

Equivalent key   **[Analysis]** - **Limit Test** - **Fail Sign**

:DISP:IMAG

Syntax   :DISPlay:IMAGe {NORMal|INVert}

                  :DISPlay:IMAGe?

Description   Selects the display type of the LCD display.

Parameters

	Description
NORMal (preset value)	Specifies the normal display (background color: black).
INVert	Specifies the display in which the color of the normal display is inverted (background color: white).

Query response   {NORM|INV}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:IMAG INV"
20   OUTPUT 717;":DISP:IMAG?"
30   ENTER 717;A$
```

Equivalent key   **[Display]** - **Invert Color**

13. SCPI Command Reference

:DISP:MAX

Syntax :DISPlay:MAXimize {ON|OFF|1|0}

:DISPlay:MAXimize?

Description Turns ON/OFF the window maximization of the active channel (specified with the :DISP:WIND{1-4}:ACT command).

If you turned ON the maximization, only the window of the active channel is maximized on the LCD display and the windows of the other channels are not displayed.

Parameters

	Description
ON or 1	Turns ON the maximization.
OFF or 0 (preset value)	Turns OFF the maximization.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:MAX ON"
20   OUTPUT 717;":DISP:MAX?"
30   ENTER 717;A
```

Related commands :DISP:WIND{1-4}:ACT on page 318

Equivalent key **[Channel Max]**

:DISP:SKEY

Syntax :DISPlay:SKEY[:STATe] {ON|OFF|1|0}

:DISPlay:SKEY[:STATe]?

Description Turns ON/OFF the display of the softkey labels.

Parameters

	Description
ON or 1 (preset value)	Specifies ON.
OFF or 0	Specifies OFF.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:MAX ON"
20   OUTPUT 717;":DISP:MAX?"
30   ENTER 717;A
```

Equivalent key **[Entry Off]** (**[Softkey On/Off]**)

:DISP:SPL

Syntax
:DISPlay:SPLit {D1|D12|D1_2|D112|D1_1_2|D123|D1_2_3|D12_33|D11_23|D13_23|
D12_13| D1234|D1_2_3_4|D12_34}

:DISPlay:SPLit?

Description
Sets the layout of the windows on the LCD display. For details about the window layout, refer to Figure 3-1 on page 45.

Parameters

	Description
D1 (preset value)	Specifies the layout in which the window for channel 1 only is displayed on the entire display.
D12	Specifies the layout in which the window for channel 1 is displayed on the left side of the display area and the window for channel 2 on the right side.
D1_2	Specifies the layout in which the window for channel 1 is displayed in the upper part and the window for channel 2 in the lower part.
D112	Specifies the layout in which the window for channel 1 is displayed on the left side of 2/3 and the window for channel 2 on the right side of 1/3.
D1_1_2	Specifies the layout in which the window for channel 1 is displayed in the upper part of 2/3 and the window for channel 2 in the lower part of 1/3.
D123	Specifies the layout in which the windows for channel 1, 2, and 3 are displayed in the left side, middle part, and right side, respectively.
D1_2_3	Specifies the layout in which the windows for channel 1, 2, and 3 are displayed in the upper part, middle part, and the lower part, respectively.
D12_33	Specifies the layout in which the windows for channel 1, 2, and 3 are displayed in the upper left, upper right, and lower part, respectively.
D11_23	Specifies the layout in which the windows for channel 1, 2, and 3 are displayed in the upper part, lower left, and lower right, respectively.
D13_23	Specifies the layout in which the windows for channel 1, 2, and 3 are displayed in the upper left, lower left, and right side, respectively.
D12_13	Specifies the layout in which the windows for channel 1, 2, and 3 are displayed in the left side, upper right, and lower right, respectively.
D1234	Specifies the layout in which the windows for channel 1, 2, 3 and 4 are displayed by splitting the screen horizontally into four equal parts.
D1_2_3_4	Specifies the layout in which the windows for channel 1, 2, 3 and 4 are displayed by splitting the screen vertically into four equal parts.
D12_34	Specifies the layout in which the windows for channel 1, 2, 3, and 4 are displayed in the upper left, upper right, lower left, and lower right, respectively.

Query response
{D1|D12|D1_2|D112|D1_1_2|D123|D1_2_3|D12_33|D11_23|D13_23|D12_13|D1234|D1_2_3_4| D12_34}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:SPL D1_2"
20   OUTPUT 717;":DISP:SPL?"
30   ENTER 717;A$
```

Related commands
:DISP:WIND{1-4}:SPL on page 323

Equivalent key
[Display] - **Allocate Channels**

13. SCPI Command Reference

:DISP:TABL

Syntax
:DISPlay:TABLe[:STATe] {ON|OFF|1|0}

:DISPlay:TABLe[:STATe]?

Description
Turns ON/OFF the display of the window selected with the :DISP:TABL:TYPE command.

Parameters

	Description
ON or 1	Turns ON the display.
OFF or 0 (preset value)	Turns OFF the display.

Query response
{1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":DISP:TABL ON"
20    OUTPUT 717;":DISP:TABL?"
30    ENTER 717;A
```

Related commands
:DISP:TABL:TYPE on page 317

Equivalent key
[Sweep Setup] - **Edit Segment Table**

[Marker] - **Marker Table**

[Analysis] - **Limit Test** - **Edit Limit Line**

[Macro Setup] - **Echo Window**

NOTE
When performing the operation from the front panel, you select the window and turn ON/OFF the display at the same time.

:DISP:TABL:TYPE

Syntax   :DISPlay:TABLe:TYPE {MARKer|LIMit|SEGMent|ECHO}

              :DISPlay:TABLe:TYPE?

Description   Selects the window whose display is turned ON/OFF with the :DISP:TABL command.

Parameters

	Description
MARKer (preset value)	Specifies the marker table window.
LIMit	Specifies the limit test table window.
SEGMent	Specifies the segment table window.
ECHO	Specifies the echo window.

Query response   {MARK|LIM|SEGM|ECHO}<newline><^END>

Example of use
```
10    OUTPUT 717;":DISP:TABL:TYPE SEGM"
20    OUTPUT 717;":DISP:TABL:TYPE?"
30    ENTER 717;A$
```

Related commands   :DISP:TABL on page 316

Equivalent key   **[Sweep Setup]** - **Edit Segment Table**

                 [Marker] - **Marker Table**

                 [Analysis] - **Limit Test** - **Edit Limit Line**

                 [Macro Setup] - **Echo Window**

NOTE   When performing the operation from the front panel, you select the window and turn ON/OFF the display at the same time.

13. SCPI Command
Reference

:DISP:UPD

Syntax   :DISPlay:UPDate[:IMMediate]

Description   Updates the LCD display once when the update of the LCD display is OFF (OFF is
                       specified with the :DISP:ENAB command). (No query)

Example of use   10   OUTPUT 717;":DISP:UPD"

Related commands   :DISP:ENAB on page 312

Equivalent key   No equivalent key is available on the front panel.

:DISP:WIND{1-4}:ACT

Syntax   :DISPlay:WINDow{[1]|2|3|4}:ACTivate

Description   Sets one of channel 1 (:WIND1) to channel 4 (:WIND4) to the active channel.

                       You can set only the displayed channel to the active channel. If you execute this command
                       trying to set a not displayed channel to the active channel, an error occurs and the
                       command is ignored. (No query)

Example of use   10   OUTPUT 717;":DISP:WIND1:ACT"

Related commands   :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Channel Prev]** / **[Channel Next]**

:DISP:WIND{1-4}:ANN:MARK:ALIG

Syntax

:DISPlay:WINDow{[1]|2|3|4}:ANNotation:MARKer:ALIGn[:STATe] {ON|OFF|1|0}

:DISPlay:WINDow{[1]|2|3|4}:ANNotation:MARKer:ALIGn[:STATe]?

Description

For channel 1 (:WIND1) to channel 4 (:WIND4), turns ON/OFF the alignment mode in which the display positions of the marker values for each trace are aligned relative to trace 1.

Parameters

	Description
ON or 1 (preset value)	Turns ON the alignment mode using trace 1 as the reference.
OFF or 0	Turn OFF the alignment mode.

Query response

{1|0}<newline><^END>

Example of use

```
10   OUTPUT 717;":DISP:WIND1:ANN:MARK:ALIG OFF"
20   OUTPUT 717;":DISP:WIND1:ANN:MARK:ALIG?"
30   ENTER 717;A
```

Equivalent key

[Marker Fctn] - **Annotation Options** - **Align**

13. SCPI Command
Reference

:DISP:WIND{1-4}:ANN:MARK:SING

Syntax :DISPlay:WINDow{[1]|2|3|4}:ANNotation:MARKer:SINGle[:STATe] {ON|OFF|1|0}

:DISPlay:WINDow{[1]|2|3|4}:ANNotation:MARKer:SINGle[:STATe]?

Description For channel 1 (:WIND1) to channel 4 (:WIND4), turns ON/OFF the active trace marker value display.

When set to OFF, the marker values of all displayed traces (markers) are displayed.

Parameters

	Description
ON or 1 (preset value)	Displays the marker value of the active trace only (ON).
OFF or 0	Displays the marker values of all traces (OFF).

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:WIND1:ANN:MARK:SING OFF"
20   OUTPUT 717;":DISP:WIND1:ANN:MARK:SING?"
30   ENTER 717;A
```

Equivalent key **[Marker Fctn]** - **Annotation Options** - **Active Only**

:DISP:WIND{1-4}:LAB

Syntax :DISPlay:WINDow{[1]|2|3|4}:LABel {ON|OFF|1|0}

:DISPlay:WINDow{[1]|2|3|4}:LABel?

Description Turns ON/OFF the display of the graticule label of channel 1 (:WIND1) to channel 4 (:WIND4).

Parameters

	Description
ON or 1 (preset value)	Turns ON the graticule label display.
OFF or 0	Turns OFF the graticule label display.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:WIND1:LAB ON"
20   OUTPUT 717;":DISP:WIND1:LAB?"
30   ENTER 717;A
```

Equivalent key **[Display]** - **Graticule Label**

13. SCPI Command
Reference

:DISP:WIND{1-4}:MAX

Syntax :DISPlay:WINDow{[1]|2|3|4}:MAXimize {ON|OFF|1|0}

:DISPlay:WINDow{[1]|2|3|4}:MAXimize?

Description Turns ON/OFF the maximization of the active trace of channel 1 (:WIND1) to channel 4 (:WIND4) (specified with the :CALC{1-4}:PAR{1-4}:SEL command).

If you turned ON the maximization, only the maximized active trace is displayed in the window and the other traces are not displayed.

Parameters

	Description
ON or 1	Turns ON the maximization.
OFF or 0 (preset value)	Turns OFF the maximization.

Query response {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":DISP:WIND1:MAX ON"
20    OUTPUT 717;":DISP:WIND1:MAX?"
30    ENTER 717;A
```

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

:DISP:MAX on page 314

Equivalent key **[Trace Max]**

:DISP:WIND{1-4}:SPL

Syntax :DISPlay:WINDow{[1]|2|3|4}:SPLit {D1|D12|D1_2|D112|D1_1_2|D123|D1_2_3|

D12_33|D11_23|D13_23|D12_13|D1234|D1_2_3_4|D12_34}

:DISPlay:WINDow{[1]|2|3|4}:SPLit?

Description Sets the graph layout of channel 1 (:WIND1) to channel 4 (:WIND4). For details about the graph layout, refer to Figure 3-1 on page 45.

Parameters

	Description
D1 (preset value)	Specifies the layout in which one graph is displayed in the entire window.
D12	Specifies the layout in which 2 graphs in total are displayed on the left side and right side of the window.
D1_2	Specifies the layout in which 2 graphs in total are displayed in the upper part and lower part of the window.
D112	Specifies the layout in which 2 graphs in total are displayed on the left side of 2/3 and right side of 1/3 of the window.
D1_1_2	Specifies the layout in which 2 graphs in total are displayed in the upper part of 2/3 and lower part of 1/3 of the window.
D123	Specifies the layout in which 3 graphs in total are displayed on the left side, middle part, and right side of the window.
D1_2_3	Specifies the layout in which 3 graphs in total are displayed in the upper part, middle part, and lower part of the window.
D12_33	Specifies the layout in which 3 graphs in total are displayed in the upper left, upper right, and lower part of the window.
D11_23	Specifies the layout in which 3 graphs in total are displayed in the upper part, lower left, and lower right of the window.
D13_23	Specifies the layout in which 3 graphs in total are displayed in the upper left, lower left, and right side of the window.
D12_13	Specifies the layout in which 3 graphs in total are displayed in the left side, upper right, and lower right of the window.
D1234	Specifies the layout in which 4 graphs in total are displayed by splitting the window horizontally into four equal parts.
D1_2_3_4	Specifies the layout in which 4 graphs in total are displayed by splitting the window vertically into four equal parts.
D12_34	Specifies the layout in which 4 graphs in total are displayed in the upper left, upper right, lower left, and lower right of the window.

Query response {D1|D12|D1_2|D112|D1_1_2|D123|D1_2_3|D12_33|D11_23|D13_23|D12_13|D1234|D1_
2_3_4| D12_34}<newline><^END>

Example of use
```
10    OUTPUT 717;":DISP:WIND:SPL D1_2"
20    OUTPUT 717;":DISP:WIND:SPL?"
30    ENTER 717;A$
```

Related commands :DISP:SPL on page 315

Equivalent key **[Display]** - **Allocate Traces**

<div style="text-align: right">13. SCPI Command
Reference</div>

:DISP:WIND{1-4}:TITL

Syntax

:DISPlay:WINDow{[1]|2|3|4}:TITLe[:STATe] {ON|OFF|1|0}

:DISPlay:WINDow{[1]|2|3|4}:TITLe[:STATe]?

Description

Turns ON/OFF the display of the title label of channel 1 (:WIND1) to channel 4 (:WIND4) in the title area.

Parameters

	Description
ON or 1	Turns ON the title label display.
OFF or 0 (preset value)	Turns OFF the title label display.

Query response

```
10    OUTPUT 717;":DISP:WIND1:TITL ON"
20    OUTPUT 717;":DISP:WIND1:TITL?"
30    ENTER 717;A
```

Related commands

:DISP:WIND{1-4}:TITL:DATA on page 324

Equivalent key

[Display] - **Title Label**

:DISP:WIND{1-4}:TITL:DATA

Syntax

:DISPlay:WINDow{[1]|2|3|4}:TITLe:DATA <string>

:DISPlay:WINDow{[1]|2|3|4}:TITLe:DATA?

Description

Sets the title label displayed in the title area of channel 1 (:WIND1) to channel 4 (:WIND4).

Parameters

	<string>
Description	Title label
Range	254 characters or less
Preset value	""

Query response

{string}<newline><^END>

Example of use

```
10    OUTPUT 717;":DISP:WIND1:TITL:DATA ""Title"""
20    OUTPUT 717;":DISP:WIND1:TITL?"
30    ENTER 717;A$
```

Related commands

:DISP:WIND{1-4}:TITL on page 324

Equivalent key

[Display] - **Edit Title Label**

:DISP:WIND{1-4}:TRAC{1-4}:ANN:MARK:POS:X

Syntax   :DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4}:ANNotation:MARKer:POSition:X
                       <value>

                       :DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4}:ANNotationMARKer:POSition:X?

Description   For trace 1 (:TRAC1) through trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4
                       (:WIND4), sets the X-axis position where the marker value is displayed as the percentage
                       of the display area width.

Parameters

	<value>
Description	The X-axis position where the marker value is displayed.
Range	-15 to 100
Preset value	1
Unit	% (percent)
Resolution	1

Query response   {value}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:WIND1:TRAC1:ANN:MARK:POS:X 20"
20   OUTPUT 717;":DISP:WIND1:TRAC1:ANN:MARK:POS:X?"
30   ENTER 717;A
```

Related commands   :DISP:WIND{1-4}:TRAC{1-4}:ANN:MARK:POS:Y on page 326

Equivalent key   **[Marker Fctn]** - **Annotation Options** - **Marker Info X Pos**

:DISP:WIND{1-4}:TRAC{1-4}:ANN:MARK:POS:Y

Syntax
:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4}:ANNotation:MARKer:POSition:Y
<value>

:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4}:ANNotationMARKer:POSition:Y?

Description
For trace 1 (:TRAC1) through trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4 (:WIND4), sets the Y-axis position where the marker value is displayed as the percentage of the display area height.

Parameters

	<value>
Description	Y-axis position where the marker value is displayed.
Range	-15 to 100
Preset value	1
Unit	% (percent)
Resolution	1

Query response
{value}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:WIND1:TRAC1:ANN:MARK:POS:Y 40"
20   OUTPUT 717;":DISP:WIND1:TRAC1:ANN:MARK:POS:Y?"
30   ENTER 717;A
```

Related commands
:DISP:WIND{1-4}:TRAC{1-4}:ANN:MARK:POS:X on page 325

Equivalent key
[Marker Fctn] - **Annotation Options** - **Marker Info Y Pos**

:DISP:WIND{1-4}:TRAC{1-4}:ANN:YAX:MODE

Syntax   :DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4}:ANNotation:YAXis:MODE
                  {AUTO|RELative}

                  :DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4}:ANNotation:YAXis:MODE?

Description   For trace 1 (:TRAC1) through trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4
                  (:WIND4), sets the graticule label display format on the left side of the Y-axis in the
                  rectangular display format.

Parameters

	Description
AUTO (preset value)	Specifies the normal display format.
RELative	Specifies the relative display, based on the reference value.

Query response   {value}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:WIND1:TRAC1:ANN:YAX:MODE REL"
20   OUTPUT 717;":DISP:WIND1:TRAC1:ANN:YAX:MODE?"
30   ENTER 717;A
```

Related commands :DISP:WIND{1-4}:Y:DIV on page 336

                  :DISP:WIND{1-4}:TRAC{1-4}:Y:RLEV on page 331

                  :DISP:WIND{1-4}:TRAC{1-4}:Y:RPOS on page 332

Equivalent key   **[Display]** - **Graticule Label**

13. SCPI Command
Reference

:DISP:WIND{1-4}:TRAC{1-4}:MEM

Syntax :DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :MEMory[:STATe] {ON|OFF|1|0}

:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :MEMory[:STATe]?

Description For trace 1 (:TRAC1) to trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4 (:WIND4), turns ON/OFF the display of the memory trace.

Parameters

	Description
ON or 1	Turns ON the memory trace display.
OFF or 0 (preset value)	Turns OFF the memory trace display.

Query response {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":DISP:WIND1:TRAC1:MEM ON"
20    OUTPUT 717;":DISP:WIND1:TRAC1:MEM?"
30    ENTER 717;A
```

Related commands :DISP:WIND{1-4}:TRAC{1-4}:STAT on page 329

:CALC{1-4}:MATH:MEM on page 281

Equivalent key **[Display]** - **Display** - **Mem** (when the data trace display is OFF)

[Display] - **Display** - **Data & Mem** (when the data trace display is ON)

:DISP:WIND{1-4}:TRAC{1-4}:STAT

Syntax :DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :STATe {ON|OFF|1|0}

:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :STATe?

Description For trace 1 (:TRAC1) to trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4 (:WIND4), turns ON/OFF the display of the data trace.

Parameters

	Description
ON or 1 (preset value)	Turns ON the data trace display.
OFF or 0	Turns OFF the data trace display.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:WIND1:TRAC1:STAT ON"
20   OUTPUT 717;":DISP:WIND1:TRAC1:STAT?"
30   ENTER 717;A
```

Related commands :DISP:WIND{1-4}:TRAC{1-4}:MEM on page 328

Equivalent key **[Display]** - **Display** - **Data** (when the memory trace display is OFF)

[Display] - **Display** - **Data & Mem** (when the memory trace display is ON)

:DISP:WIND{1-4}:TRAC{1-4}:Y:AUTO

Syntax :DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :Y[:SCALe]:AUTO

Description For trace 1 (:TRAC1) to trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4 (:WIND4), executes the auto scale (function to automatically adjust the value of the reference graticule line and the scale per division to display the trace appropriately). (No query)

Example of use `10   OUTPUT 717;":DISP:WIND1:TRAC1:Y:AUTO"`

Related commands :DISP:WIND{1-4}:TRAC{1-4}:Y:PDIV on page 330

:DISP:WIND{1-4}:TRAC{1-4}:Y:RLEV on page 331

Equivalent key **[Scale]** - **Auto Scale**

:DISP:WIND{1-4}:TRAC{1-4}:Y:PDIV

Syntax
:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :Y[:SCALe]:PDIVision <numeric>

:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :Y[:SCALe]:PDIVision?

Description
For trace 1 (:TRAC1) to trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4 (:WIND4): when the data format is not the Smith chart format or the polar format, sets the scale per division; when the data format is the Smith chart format or the polar format, sets the full scale value (the value of the outermost circle).

Parameters

	<numeric>
Description	Scale value
Range	1E-18 to 1E8
Preset value	Varies depending on the data format as follows: Logarithmic Magnitude: 10 Phase, Expand Phase, Positive Phase: 90 Group Delay: 1E-8 Smith, Polar, SWR: 1 Linear Magnitude: 0.1 Real, Imaginary: 0.2
Unit	Varies depending on the data format as follows: Logarithmic Magnitude: dB (decibel) Phase, Expand Phase, Positive Phase: ° (degree) Group Delay: s (second) Others: No unit

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response
{numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:WIND1:TRAC1:Y:PDIV 2.5"
20   OUTPUT 717;":DISP:WIND1:TRAC1:Y:PDIV?"
30   ENTER 717;A
```

Related commands
:DISP:WIND{1-4}:Y:DIV on page 336

:DISP:WIND{1-4}:TRAC{1-4}:Y:RLEV on page 331

:DISP:WIND{1-4}:TRAC{1-4}:Y:RPOS on page 332

Equivalent key
[Scale] - **Scale/Div**

:DISP:WIND{1-4}:TRAC{1-4}:Y:RLEV

Syntax   :DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :Y[:SCALe]:RLEVel <numeric>

                :DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :Y[:SCALe]:RLEVel?

Description   For trace 1 (:TRAC1) to trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4 (:WIND4),
                sets the value of the reference graticule line.

Parameters

	<numeric>
Description	Value of reference graticule line
Range	-5E8 to 5E8
Preset value	0[*1]

Unit	Varies depending on the data format as follows:
	  Logarithmic Magnitude: dB (decibel)
	  Phase, Expand Phase, Positive Phase: ° (degree)
	  Group Delay: s (second)
	  Others: No unit

   *1. When the data format is "SWR," the preset value is 1.

If the specified parameter is out of the allowable setup range, the minimum value (if the
lower limit of the range is not reached) or the maximum value (if the upper limit of the
range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:WIND1:TRAC1:Y:RLEV 1E2"
20   OUTPUT 717;":DISP:WIND1:TRAC1:Y:RLEV?"
30   ENTER 717;A
```

Related commands   :DISP:WIND{1-4}:Y:DIV on page 336

                   :DISP:WIND{1-4}:TRAC{1-4}:Y:PDIV on page 330

                   :DISP:WIND{1-4}:TRAC{1-4}:Y:RPOS on page 332

Equivalent key   **[Scale]** - **Reference Value**

13. SCPI Command
Reference

:DISP:WIND{1-4}:TRAC{1-4}:Y:RPOS

Syntax

:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :Y[:SCALe]:RPOSition <numeric>

:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4} :Y[:SCALe]:RPOSition?

Description

For trace 1 (:TRAC1) to trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4 (:WIND4), specifies a reference graticule line with its number (an integer assigned starting from 0 from the lowest division).

Parameters

	<numeric>
Description	Number of graticule line
Range	0 to the number of divisions[*1]
Preset value	5[*2]
Resolution	1

*1. Set with the :DISP:WIND{1-4}:Y:DIV commands.
*2. When the data format is "Linear Magnitude" or "SWR," the preset value is 1.

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response

{numeric}<newline><^END>

Example of use

```
10    OUTPUT 717;":DISP:WIND1:TRAC1:Y:RPOS 6"
20    OUTPUT 717;":DISP:WIND1:TRAC1:Y:RPOS?"
30    ENTER 717;A
```

Related commands

:DISP:WIND{1-4}:Y:DIV on page 336

:DISP:WIND{1-4}:TRAC{1-4}:Y:PDIV on page 330

:DISP:WIND{1-4}:TRAC{1-4}:Y:RLEV on page 331

Equivalent key

[Scale] - **Reference Position**

:DISP:WIND{1-4}:TRAC{1-4}:Y:TRAC:FREQ

Syntax :DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4}:Y:TRACk:FREQuency <value>

:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4}:Y:TRACk:FREQuency?

Description For trace 1 (:TRAC1) through trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4 (:WIND4), sets a frequency when you want to specify a frequency on trace data as the reference value. Tracking is not performed when the specified frequency lies outside the preset range. When a frequency that does not match any measurement point is specified, interpolation is performed using the preceding and following measurement points, and the resulting value is used as the reference value for tracking.

Parameters

	<value>
Description	Frequency for tracking
Range	-1E12 to 1E12
Preset value	0
Unit	Hz (hertz), dBm, or s (seconds)

Query response {value}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:WIND1:TRAC1:Y:TRAC:FREQ 1E9"
20   OUTPUT 717;":DISP:WIND1:TRAC1:Y:TRAC:FREQ?"
30   ENTER 717;A
```

Related commands :DISP:WIND{1-4}:Y:DIV on page 336

:DISP:WIND{1-4}:TRAC{1-4}:Y:TRAC:MODE on page 334

Equivalent key **[Scale]** - **Reference Tracking** - **Track Frequency**

13. SCPI Command
Reference

:DISP:WIND{1-4}:TRAC{1-4}:Y:TRAC:MODE

Syntax
:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4}:Y:TRACk:MODE
{OFF|PEAK|FREQuency}

:DISPlay:WINDow{[1]|2|3|4}:TRACe{[1]|2|3|4}:Y:TRACk:MODE?

Description
For trace 1 (:TRAC1) and trace 4 (:TRAC4) of channel 1 (:WIND1) to channel 4
(:WIND4), sets the tracking method to offset the trace data after sweep.

Parameters

	Description
OFF (preset value)	Does not perform tracking for trace data.
PEAK	Specifies the peak value as the reference value.
FREQuency	Specifies the specified frequency as the reference value.

Query response
{OFF|PEAK|FREQ}<newline><^END>

Example of use
```
10    OUTPUT 717;":DISP:WIND1:TRAC1:Y:TRAC:MODE PEAK"
20    OUTPUT 717;":DISP:WIND1:TRAC1:Y:TRAC:MODE?"
30    ENTER 717;A
```

Related commands
:DISP:WIND{1-4}:Y:DIV on page 336

:DISP:WIND{1-4}:TRAC{1-4}:Y:TRAC:FREQ on page 333

Equivalent key
[Scale] - **Reference Tracking** - **Tracking**

:DISP:WIND{1-4}:X:SPAC

Syntax   :DISPlay:WINDow{[1]|2|3|4}:X:SPACing {LINear|OBASe}

                        :DISPlay:WINDow{[1]|2|3|4}:X:SPACing?

Description   Selects the display method of the graph horizontal axis of channel 1 (:WIND1) to channel 4 (:WIND4) for segment sweep.

Parameters

	Description
LINear	Specifies the frequency base (linear frequency axis with the minimum frequency at the left edge and the maximum frequency at the right edge).
OBASe (preset value)	Specifies the order base (axis in which the measurement point numbers are positioned evenly in the order of measurement).

Query response   {LIN|OBAS}<newline><^END>

Example of use   10   OUTPUT 717;":DISP:WIND1:X:SPAC OBAS"
                        20   OUTPUT 717;":DISP:WIND1:X:SPAC?"
                        30   ENTER 717;A$

Related commands   :SENS{1-4}:SWE:TYPE on page 428

Equivalent key   **[Sweep Setup]** - **Segment Display**

13. SCPI Command
Reference

:DISP:WIND{1-4}:Y:DIV

Syntax :DISPlay:WINDow{[1]|2|3|4}:Y[:SCALe]:DIVisions <numeric>

:DISPlay:WINDow{[1]|2|3|4}:Y[:SCALe]:DIVisions?

Description Sets the number of divisions of all the graphs of channel 1 (:WIND1) to channel 4 (:WIND4).

The number of graticule line (specified with the :DISP:WIND{1-4}:TRAC{1-4}:Y:RPOS command) depends on this setting.

Parameters

	<numeric>
Description	Divisions
Range	4 to 30
Preset value	10
Resolution	2

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":DISP:WIND1:Y:DIV 12"
20   OUTPUT 717;":DISP:WIND1:Y:DIV?"
30   ENTER 717;A
```

Related commands :DISP:WIND{1-4}:TRAC{1-4}:Y:PDIV on page 330

:DISP:WIND{1-4}:TRAC{1-4}:Y:RLEV on page 331

:DISP:WIND{1-4}:TRAC{1-4}:Y:RPOS on page 332

Equivalent key **[Scale]** - **Divisions**

:FORM:BORD

Syntax

:FORMat:BORDer {NORMal|SWAPped}

:FORMat:BORDer?

Description

When the data transfer format is set to the binary transfer format, sets the transfer order of each byte in data (byte order).

For details about the data transfer format, refer to "Data Transfer Format" on page 104.

Parameters

	Description
NORMal (preset value)	Specifies the byte order in which transfer starts from the byte including MSB (Most Significant Bit).
SWAPped	Specifies the byte order in which transfer starts from the byte including LSB (Least Significant Bit).

Query response

{NORM|SWAP}<newline><^END>

Example of use

```
10    OUTPUT 717;":FORM:BORD SWAP"
20    OUTPUT 717;":FORM:BORD?"
30    ENTER 717;A$
```

Related commands

:FORM:DATA on page 338

Equivalent key

No equivalent key is available on the front panel.

13. SCPI Command Reference

:FORM:DATA

Syntax :FORMat:DATA {ASCii|REAL|REAL32}

:FORMat:DATA?

Description Use the following commands to set the format to transfer data.

- :CALC{1-4}:DATA:FDAT on page 215
- :CALC{1-4}:DATA:FMEM on page 216
- :CALC{1-4}:DATA:SDAT on page 217
- :CALC{1-4}:DATA:SMEM on page 218
- :CALC{1-4}:FUNC:DATA? on page 221
- :CALC{1-4}:LIM:DATA on page 233
- :CALC{1-4}:LIM:REP? on page 242
- :SENS{1-4}:FREQ:DATA? on page 416
- :SENS{1-4}:SEGM:DATA on page 421

For details about the data transfer format, refer to "Data Transfer Format" on page 104.

Parameters

	Description
ASCii (preset value)	Specifies the ASCII transfer format.
REAL	Specifies the IEEE 64-bit floating point binary transfer format.
REAL32	Specifies the IEEE 32-bit floating point binary transfer format.

Query response {ASC|REAL|REAL32}<newline><^END>

Example of use 10   OUTPUT 717;":FORM:DATA REAL"
20   OUTPUT 717;":FORM:DATA?"
30   ENTER 717;A$

Related commands :FORM:BORD on page 337

Equivalent key No equivalent key is available on the front panel.

:HCOP

Syntax   :HCOPy[:IMMediate]

Description   Outputs the display image on the LCD display to the printer connected to the
                  E5061A/E5062A. (No query)

Example of use   ```
10   OUTPUT 717;":HCOP"
```

Related commands :HCOP:ABOR on page 339

                  :HCOP:IMAG on page 339

Equivalent key   **[System]** - **Print**

:HCOP:ABOR

Syntax   :HCOPy:ABORt

Description   Aborts the print output. (No query)

Example of use   ```
10   OUTPUT 717;":HCOP:ABOR"
```

Related commands  :HCOP on page 339

Equivalent key    **[System]** - **Abort Printing**

# :HCOP:IMAG

Syntax            :HCOPy:IMAGe {NORMal|INVert}

                  :HCOPy:IMAGe?

Description       Selects the print color for output to the printer.

Parameters

|                      | **Description**                                               |
|----------------------|---------------------------------------------------------------|
| NORMal               | Specifies printing in close color to the display color.       |
| INVert (preset value)| Specifies printing in the inverted color of the display color.|

Query response    {NORM|INV}<newline><^END>

Example of use    ```
10    OUTPUT 717;":HCOP:IMAG NORM"
20    OUTPUT 717;":HCOP:IMAG?"
30    ENTER 717;A$
```

Related commands :HCOP on page 339

Equivalent key   **[System]** - **Invert Image**

:INIT{1-4}

Syntax   :INITiate{[1]|2|3|4}[:IMMediate]

Description   Changes the state of each channel of channel 1 (:INIT1) to channel 4 (:INIT4) to the startup
                        state in the trigger system.

                        When this command is executed for a channel in the idle state, it goes into the initiate state
                        immediately. Then, after measurement is executed once, it goes back to the idle state.

                        If this command is executed for a channel that is not in the idle state or for which the
                        continuous initiation mode is set to ON (ON is specified with the :INIT{1-4}:CONT
                        command), an error occurs and the command is ignored.

                        For details about the trigger system, refer to "Trigger system" on page 80. (No query)

Example of use   10   OUTPUT 717;":INIT1"

Related commands   :INIT{1-4}:CONT on page 341

Equivalent key   **[Trigger]** - **Single**

:INIT{1-4}:CONT

Syntax   :INITiate{[1]|2|3|4}:CONTinuous {ON|OFF|1|0}

                        :INITiate{[1]|2|3|4}:CONTinuous?

Description   Turns ON/OFF of the continuous initiation mode of channel 1 (:INIT1) to channel 4 (:INIT4) in the trigger system.

                        For details about the trigger system, refer to "Trigger system" on page 80.

Parameters

	Description
ON or 1	Turns ON the continuous initiation mode.
OFF or 0	Turns OFF the continuous initiation mode.

                        Regarding to this setting, only channel 1 is initialized to ON with the :SYST:PRES command; all the channels are initialized to OFF with the *RST command.

Query response   {1|0}<newline><^END>

Example of use   ```
10   OUTPUT 717;":INIT1:CONT OFF"
20   OUTPUT 717;":INIT1:CONT?"
30   ENTER 717;A
```

Related commands        :INIT{1-4} on page 340

Equivalent key          **[Trigger]** - **Continuous** (continuous initiation mode ON)

                        **[Trigger]** - **Hold** (continuous initiation mode OFF)

13. SCPI Command Reference

## :MMEM:CAT?

Syntax          :MMEMory:CATalog? <string 1>

Description     Reads out the following information on the built-in storage device of the E5061A/E5062A.

To read out the information in the root directory (folder), specify "\" (backslash). If you want to specify a directory on the floppy disk drive, you need to add "A:" at the beginning of the file name. Separate directory names with "/" (slash) or "\" (backslash). (Query only)

- Space in use
- Available space
- Name and size of all files (including directories) in the specified directory.

Parameters

| | **<string 1>** |
|---|---|
| Description | Directory name whose information you want to read out |
| Range | 254 characters or less |

Query response  {string 2}<newline><^END>

The format of the readout character string is as follows:

"{used_size},{free_size},{name 1},,{size 1},…,{name N},,{size N}"

Where N is the number of all files in the specified directory and n is an integer between 1 and N.

{used_size}:    Space in use of the built-in storage device (byte)[1].

{free_size}:    Available space of the built-in storage device (byte)[1].

{name n}:       Name of the n-th file (directory).

{size n}:       Size (byte) of the n-th file (directory). Always 0 for directories.

Example of use
```
10   DIM A$[1000]
20   OUTPUT 717;":MMEM:CAT? ""\"""
30   ENTER 717;A$
```

Equivalent key  No equivalent key is available on the front panel.

---

[1]. If you specify a directory on the floppy disk drive, it is the capacity of the floppy disk in the drive.

## :MMEM:COPY

Syntax            :MMEMory:COPY \<string 1\>,\<string 2\>

Description       Copies a file.

Specify the file name with the extension. If you want to specify a file on the floppy disk drive, you need to add "A:" at the beginning of the file name. When you use directory (folder) names and file name, separate them with "/" (slash) or "\" (backslash).

If the specified copy source file does not exist, an error occurs and the command is ignored. Notice that, if a file with the same name as the specified copy destination file name exists, its contents are overwritten. (No query)

Parameters

|              | **\<string 1\>**        | **\<string 2\>**             |
| ------------ | ----------------------- | ---------------------------- |
| Description  | Copy source file name   | Copy destination file name   |
| Range        | 254 characters or less  | 254 characters or less       |

Example of use    `10 OUTPUT 717;":MMEM:COPY ""Test1/State01.sta"",""A:Test1_01.sta"""`

Equivalent key    Practical front key operation is not available.

## :MMEM:DEL

Syntax              :MMEMory:DELete <string>

Description         Deletes an existing file or directory (folder).

When you delete a directory, all the files and directories in it are deleted.

Specify the file name with the extension. If you want to specify a file or directory on the floppy disk drive, you need to add "A:" at the beginning of its name. When you specify a file (directory) under an existing directory, separate them with "/" (slash) or "\" (backslash).

If the specified file or directory does not exist, an error occurs and the command is ignored. (No query)

Parameters

|  | **<string>** |
|---|---|
| Description | File name or directory name you want to delete |
| Range | 254 characters or less |

Example of use      10    OUTPUT 717;":MMEM:DEL ""Test1/State01.sta"""

10    OUTPUT 717;":MMEM:DEL ""A:State01.sta"""

Equivalent key      Practical front key operation is not available.

# :MMEM:LOAD

Syntax          :MMEMory:LOAD[:STATe] <string>

Description     Recalls the specified instrument state file (file with the .sta extension saved with the :MMEM:STOR command).

Specify the file name with the extension. If you want to specify a file on the floppy disk drive, you need to add "A:" at the beginning of the file name. When you use directory names and file name, separate them with "/" (slash) or "\" (backslash).

If the specified file does not exist, an error occurs and the command is ignored. (No query)

Parameters

|             | **<string>**             |
|-------------|--------------------------|
| Description | Instrument state file name |
| Range       | 254 characters or less   |

Example of use   10   OUTPUT 717;":MMEM:LOAD ""Test1/State01.sta"""

10   OUTPUT 717;":MMEM:LOAD ""A:State01.sta"""

Related commands   :MMEM:STOR on page 353

Equivalent key     **[Save/Recall]** - **Recall State**

13. SCPI Command
Reference

# :MMEM:LOAD:CHAN

Syntax                  :MMEMory:LOAD:CHANnel[:STATe] {A|B|C|D}

Description             Recalls the instrument state for an individual channel (saved with the
                        :MMEM:STOR:CHAN command) from the specified register as the setting of the active
                        channel (specified with the :DISP:WIND{1-4}:ACT command).

                        It is possible to recall the register from a different channel where it was saved.

                        If no instrument state has been saved in the specified register, an error occurs and the
                        command is ignored. (No query)

Parameters

|   | Description |
|---|---|
| A | Specifies register A. |
| B | Specifies register B. |
| C | Specifies register C. |
| D | Specifies register D. |

Example of use          10   OUTPUT 717;":MMEM:LOAD:CHAN A"

Related commands        :MMEM:STOR:CHAN on page 354

                        :DISP:WIND{1-4}:ACT on page 318

Equivalent key          **[Save/Recall]** - **Recall Channel** - **A**|**B**|**C**|**D**

## :MMEM:LOAD:CHAN:COEF

Syntax            :MMEMory:LOAD:CHANnel:COEFficient {A|B|C|D}

Description       Recalls the calibration coefficient for an individual channel (saved with the :MMEM:STOR:CHAN:COEF command) from the specified register as the setting of the active channel (specified with the :DISP:WIND{1-4}:ACT command).

It is possible to recall the register from a different channel where it was saved.

If no instrument state has been saved in the specified register, an error occurs and the command is ignored. (No query)

Parameters

|   | **Description** |
|---|---|
| A | Specifies register A. |
| B | Specifies register B. |
| C | Specifies register C. |
| D | Specifies register D. |

Example of use    10    OUTPUT 717;":MMEM:LOAD:CHAN:COEF A"

Related commands

Equivalent key    **[Save/Recall]** - **Recall Channel** - **Cal Only A**|**B**|**C**|**D**

**NOTE**          The calibration coefficient registers A to D are different from the channel state registers A to D. :MMEM:STOR:CHAN command does not affect the calibration coefficient registers.

13. SCPI Command Reference

# :MMEM:LOAD:LIM

Syntax          :MMEMory:LOAD:LIMit <string>

Description     As the limit table for the active trace (specified with the :CALC{1-4}:PAR{1-4}:SEL command) of the active channel (specified with the :DISP:WIND{1-4}:ACT command), recalls the specified limit table file (file with the .csv extension saved with the :MMEM:STOR:LIM command).

Specify the file name with the extension. If you want to specify a file on the floppy disk drive, you need to add "A:" at the beginning of the file name. When you use directory names and file name, separate them with "/" (slash) or "\" (backslash).

If the specified file does not exist, an error occurs and the command is ignored. (No query)

Parameters

| | **<string>** |
|---|---|
| Description | File name of limit table |
| Range | 254 characters or less |

Example of use    10    OUTPUT 717;":MMEM:LOAD:LIM ""Test1/Limit01.csv"""

10    OUTPUT 717;":MMEM:LOAD:LIM ""A:Limit01.csv"""

Related commands  :MMEM:STOR:LIM on page 358

:DISP:WIND{1-4}:ACT on page 318

Equivalent key    **[Analysis]** - **Limit Test** - **Edit Limit Line** - **Import from CSV File**

# :MMEM:LOAD:PROG

Syntax          :MMEMory:LOAD:PROGram <string>

Description     Loads (or imports) a VBA project (a file with the .vba extension), a module (a file with the .bas extension), a user form (a file with the .frm extension) or a class module (a file with the .cls extension).

Specify the file name with the extension. If you want to specify a file on the floppy disk drive, you need to add "A:" at the beginning of the file name. When you use directory names and file name, separate them with "/" (slash) or "\" (backslash).

If the specified file does not exist, an error occurs and the command is ignored. (No query)

Parameters

|             | **<string>**           |
|-------------|------------------------|
| Description | File name              |
| Range       | 254 characters or less |

Example of use

```
10   OUTPUT 717;":MMEM:LOAD:PROG ""Test1/Test1_01.vba"""

10   OUTPUT 717;":MMEM:LOAD:PROG ""A:Test1_01.vba"""
```

Related commands   :MMEM:STOR:PROG on page 359

Equivalent key   **[Macro Setup]** - **Load VBA Project**

13. SCPI Command
Reference

:MMEM:LOAD:RLIM

Syntax   :MMEMory:LOAD:RLIMit <string>

Description   As the ripple limit table for the active trace (specified with the
                       :CALC{1-4}:PAR{1-4}:SEL command) of the active channel (specified with the
                       :DISP:WIND{1-4}:ACT command), recalls the specified ripple limit table file (file with
                       the .csv extension saved with the :MMEM:STOR:RLIM command).

                       Specify the file name with the extension. If you want to specify a file on the floppy disk
                       drive, you need to add "A:" at the beginning of the file name. When you write directory
                       names and the file name, separate them with a "/" (slash) or "\" (backslash).

                       If the specified file does not exist, an error occurs and the command is ignored. (No query)

Parameters

	<string>
Description	File name of the ripple limit table.
Range	254 characters or less

Example of use   10   OUTPUT 717;":MMEM:LOAD:RLIM ""RTest1/Rlim01.csv"""

                       10   OUTPUT 717;":MMEM:LOAD:RLIM ""A:Rlim01.csv"""

Related commands   :MMEM:STOR:RLIM on page 360

                       :DISP:WIND{1-4}:ACT on page 318

                       :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Analysis]** - **Ripple Limit** - **Edit Ripple Limit** - **Import from CSV File**

:MMEM:LOAD:SEGM

Syntax   :MMEMory:LOAD:SEGMent \<string>

Description   As the segment sweep table for the active channel (specified with the
                      :DISP:WIND{1-4}:ACT command), recalls the specified segment sweep table file (a file
                      with the .csv extension saved with the :MMEM:STOR:SEGM command).

                      Specify the file name with the extension. If you want to specify a file on the floppy disk
                      drive, you need to add "A:" at the beginning of the file name. When you use directory
                      names and file name, separate them with "/" (slash) or "\" (backslash).

                      If the specified file does not exist, an error occurs and the command is ignored. (No query)

Parameters

	\<string>
Description	File name of segment sweep table
Range	254 characters or less

Example of use
```
10   OUTPUT 717;":MMEM:LOAD:SEGM ""Test1/Segm01.csv"""
10   OUTPUT 717;":MMEM:LOAD:SEGM ""A:Segm01.csv"""
```

Related commands   :MMEM:STOR:SEGM on page 362

                      :DISP:WIND{1-4}:ACT on page 318

Equivalent key   **[Sweep Setup]** - **Edit Segment Table** - **Import from CSV File**

13. SCPI Command
Reference

:MMEM:MDIR

Syntax   :MMEMory:MDIRectory <string>

Description   Creates a new directory (folder).

If you want to create a directory on the floppy disk drive, you need to add "A:" at the beginning of the directory name. When you create a directory under an existing directory, separate between the directory names with "/" (slash) or "\" (backslash).

If a directory with the same name as the specified directory name exists, an error occurs and the command is ignored. (No query)

Parameters

	<string>
Description	Directory name you want to create
Range	254 characters or less

Example of use

10   OUTPUT 717;":MMEM:MDIR ""Test1"""

10   OUTPUT 717;":MMEM:MDIR ""A:Test1"""

Equivalent key   Practical front key operation is not available.

:MMEM:STOR

Syntax   :MMEMory:STORe[:STATe] <string>

Description   Saves the instrument state (data to be saved specified with the :MMEM:STOR:STYP command) into a file.

Specify the file name with the .sta extension. If you want to specify a file on the floppy disk drive, you need to add "A:" at the beginning of the file name. When you use directory names and file name, separate them with "/" (slash) or "\" (backslash).

Notice that, if a file with the specified file name exists, its contents are overwritten. (No query)

NOTE   The instrument setting file saved with the autorec.sta (or A:autorec.sta) file name is automatically recalled when turning on the E5061A/E5062A.

Parameters

	<string>
Description	File name in which you want to save the instrument state
Range	254 characters or less

Example of use   10   OUTPUT 717;":MMEM:STOR ""Test1/State01.sta"""

                        10   OUTPUT 717;":MMEM:STOR ""A:State01.sta"""

Related commands   :MMEM:LOAD on page 345

                        :MMEM:STOR:STYP on page 363

Equivalent key   **[Save/Recall]** - **Save State**|**Re-Save State**

13. SCPI Command Reference

:MMEM:STOR:CHAN

Syntax   :MMEMory:STORe:CHANnel[:STATe] {A|B|C|D}

Description   Saves the instrument state of the items set for the active channel (specified with the
                      :DISP:WIND{1-4}:ACT command) specific to that channel only into the specified register
                      (volatile memory).

                      Notice that, if an instrument state has been saved already in the specified register, its
                      contents are overwritten. (No query)

Parameters

	Description
A	Specifies register A.
B	Specifies register B.
C	Specifies register C.
D	Specifies register D.

Example of use   10   OUTPUT 717;":MMEM:STOR:CHAN A"

Related commands   :MMEM:LOAD:CHAN on page 346

                      :DISP:WIND{1-4}:ACT on page 318

Equivalent key   **[Save/Recall]** - **Save Channel** - **A**|**B**|**C**|**D**

:MMEM:STOR:CHAN:CLE

Syntax   :MMEMory:STORe:CHANnel:CLEar

Description   Deletes the instrument state for each channel (saved with the :MMEM:STOR:CHAN
                      command) in all the registers. (No query)

Example of use   10   OUTPUT 717;":MMEM:STOR:CHAN:CLE"

Related commands   :MMEM:STOR:CHAN on page 354

Equivalent key   **[Save/Recall]** - **Save Channel** - **Clear States** - **OK**

:MMEM:STOR:CHAN:COEF

Syntax :MMEMory:STORe:CHANnel:COEFficient {A|B|C|D}

Description Saves the calibration coefficient of the active channel (specified with the :DISP:WIND{1-4}:ACT command) into the specified register (volatile memory).

Notice that, if an instrument state has been saved already in the specified register, its contents are overwritten. (No query)

Parameters

	Description
A	Specifies register A.
B	Specifies register B.
C	Specifies register C.
D	Specifies register D.

Example of use 10   OUTPUT 717;":MMEM:STOR:CHAN:COEF A"

Related commands :MMEM:LOAD:CHAN:COEF on page 347

Equivalent key **[Save/Recall]** - **Save Channel** - **Cal Only A**|**B**|**C**|**D**

NOTE The calibration coefficient registers A to D are different from the channel state registers A to D. :MMEM:STOR:CHAN command does not affect the calibration coefficient registers.

13. SCPI Command
Reference

:MMEM:STOR:FDAT

Syntax   :MMEMory:STORe:FDATa <string>

Description   Saves the formatted data array of the active trace (specified with the
                          :CALC{1-4}:PAR{1-4}:SEL command) of the active channel (specified with the
                          :DISP:WIND{1-4}:ACT command) into a file in the CSV format.

                          Specify the file name with the .csv extension. If you want to specify a file on the floppy
                          disk drive, you need to add "A:" at the beginning of the file name. When you use directory
                          names and file name, separate them with "/" (slash) or "\" (backslash).

                          Notice that, if a file with the specified file name exists, its contents are overwritten. (No
                          query)

Parameters

	<string>
Description	File name in which you want to save the formatted data array
Range	254 characters or less

Example of use
```
10    OUTPUT 717;":MMEM:STOR:FDAT ""Result/Trace01.csv"""
10    OUTPUT 717;":MMEM:STOR:FDAT ""A:Trace01.csv"""
```

Related commands   :DISP:WIND{1-4}:ACT on page 318

                          :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Save/Recall]** - **Save Trace Data**

:MMEM:STOR:IMAG

Syntax   :MMEMory:STORe:IMAGe <string>

Description   Saves the display image on the LCD display at the execution of the command into a file in the bitmap (.bmp) or portable network graphics (.png) format.

Specify the file name with the .bmp or .png extension. If you want to specify a file on the floppy disk drive, you need to add "A:" at the beginning of the file name. When you use directory names and file name, separate them with "/" (slash) or "\" (backslash).

Notice that, if a file with the specified file name exists, its contents are overwritten. (No query)

Parameters

	<string>
Description	File name in which you want to save the display image on the LCD display
Range	254 characters or less

Example of use

```
10    OUTPUT 717;":MMEM:STOR:IMAG ""Result/Image01.bmp"""

10    OUTPUT 717;":MMEM:STOR:IMAG ""A:Image01.png"""
```

Equivalent key   **[System]** - **Dump Screen Image**

When performing the operation from the front panel, the image on the LCD display memorized in the volatile memory (clipboard) (the image on the LCD display when the **[Capture]** key is pressed) is saved. Notice that, if no image is memorized in the clipboard, in the same way as the command, the image on the LCD display at the execution is memorized in the clipboard and then it is saved.

13. SCPI Command Reference

:MMEM:STOR:LIM

Syntax   :MMEMory:STORe:LIMit <string>

Description   Saves the limit table for the active trace (specified with the :CALC{1-4}:PAR{1-4}:SEL command) of the active channel (specified with the :DISP:WIND{1-4}:ACT command) into a file in the CSV format.

Specify the file name with the .csv extension. If you want to specify a file on the floppy disk drive, you need to add "A:" at the beginning of the file name. When you use directory names and file name, separate them with "/" (slash) or "\" (backslash).

Notice that, if a file with the specified file name exists, its contents are overwritten. (No query)

Parameters

	<string>
Description	File name in which you want to save the limit table
Range	254 characters or less

Example of use   10   OUTPUT 717;":MMEM:STOR:LIM ""Test1/Limit01.csv"""

10   OUTPUT 717;":MMEM:STOR:LIM ""A:Limit01.csv"""

Related commands :DISP:WIND{1-4}:ACT on page 318

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Analysis]** - **Limit Test** - **Edit Limit Line** - **Export to CSV File**

:MMEM:STOR:PROG

Syntax   :MMEMory:STORe:PROGram <string>

Description   Saves a VBA project opened on the VBA editor into a file.

Specify the file name with the .vba extension. If you want to specify a file on the floppy disk drive, you need to add "A:" at the beginning of the file name. When you use directory names and file name, separate them with "/" (slash) or "\" (backslash).

Notice that, if a file with the specified file name exists, its contents are overwritten. (No query)

Parameters

	<string>
Description	File name in which you want to save the VBA project
Range	254 characters or less

Example of use   10   OUTPUT 717;":MMEM:STOR:PROG ""Test1/Test1_01.vba"""

10   OUTPUT 717;":MMEM:STOR:PROG ""A:Test1_01.vba"""

Related commands   :MMEM:LOAD:PROG on page 349

Equivalent key   **[Macro Setup]** - **Save VBA Project**

:MMEM:STOR:RLIM

Syntax   :MMEMory:STORe:RLIMit <string>

Description   Saves the ripple limit table of the active trace (specified with the
:CALC{1-4}:PAR{1-4}:SEL command) of the active channel (specified with the
:DISP:WIND{1-4}:ACT command) into a file in the CSV format.

Specify the file name with the .sta extension. If you want to specify a file on the floppy
disk drive, you need to add "A:" at the beginning of the file name. When you write
directory names and the file name, separate them with a "/" (slash) or "\" (backslash).

Note that if a file with the specified file name already exists, its contents will be
overwritten. (No query)

Parameters

	<string>
Description	File name used to save the ripple limit table.
Range	254 characters or less

Example of use
```
10   OUTPUT 717;":MMEM:STOR:RLIM ""RTest1/Rlim01.csv"""

10   OUTPUT 717;":MMEM:STOR:RLIM ""A:Rlim01.csv"""
```

Related commands :MMEM:LOAD:RLIM on page 350

:DISP:WIND{1-4}:ACT on page 318

:CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   **[Analysis]** - **Ripple Limit** - **Edit Ripple Limit** - **Export to CSV File**

:MMEM:STOR:SALL

Syntax   :MMEMory:STORe:SALL {ON|OFF|1|0}

                  :MMEMory:STORe:SALL?

Description   Selects whether to save the setting of all channels/traces or that of the displayed channels/traces only as the instrument state to be saved.

Parameters

	Description
ON or 1	Specifies the setting of all channels/traces as the target to be saved.
OFF or 0 (preset value)	Specifies the setting of displayed channels/traces only as the target to be saved.

Query response   {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":MMEM:STOR:SALL ON"
20    OUTPUT 717;":MMEM:STOR:SALL?"
30    ENTER 717;A
```

Related commands :MMEM:STOR on page 353

Equivalent key   **[Save/Recall] - Channel/Trace**

13. SCPI Command
Reference

:MMEM:STOR:SEGM

Syntax   :MMEMory:STORe:SEGMent \<string>

Description   Saves the segment sweep table for the active channel (specified with the
                      :DISP:WIND{1-4}:ACT command) into a file in the CSV format.

                      Specify the file name with the .csv extension. If you want to specify a file on the floppy
                      disk drive, you need to add "A:" at the beginning of the file name. When you use directory
                      names and file name, separate them with "/" (slash) or "\" (backslash).

                      Notice that, if a file with the specified file name exists, its contents are overwritten. (No
                      query)

Parameters

	\<string>
Description	File name in which you want to save the segment sweep table
Range	254 characters or less

Example of use   10   OUTPUT 717;":MMEM:STOR:SEGM ""Test1/Segm01.csv"""

                      10   OUTPUT 717;":MMEM:STOR:SEGM ""A:Segm01.csv"""

Related commands   :MMEM:LOAD:SEGM on page 351

                      :DISP:WIND{1-4}:ACT on page 318

Equivalent key   **[Sweep Setup]** - **Edit Segment Table** - **Export to CSV File**

:MMEM:STOR:STYP

Syntax   :MMEMory:STORe:STYPe {STATe|CSTate|DSTate|CDSTate}

                      :MMEMory:STORe:STYPe?

Description   Selects the contents saved when saving the instrument state into a file with the
                      :MMEM:STOR command.

Parameters

	Description
STATe	Specifies the save of the measurement conditions[1] only.
CSTate (preset value)	Specifies the save of the measurement conditions[1] and the calibration state.
DSTate	Specifies the save of the measurement conditions[1] and the formatted data array.
CDSTate	Specifies the save of the measurement conditions[1], the calibration state, and the formatted data array.

> [1]. For details about the measurement conditions that can be saved, refer to the *User's Guide*.

Query response   {STAT|CST|DST|CDST}<newline><^END>

Example of use
```
10    OUTPUT 717;":MMEM:STOR:STYP CDST"
20    OUTPUT 717;":MMEM:STOR:STYP?"
30    ENTER 717;A$
```

Related commands   :MMEM:STOR on page 353

Equivalent key   **[Save/Recall]** - **Save Type** - **State Only**|**State & Cal**|**State & Trace**|**All**

:MMEM:TRAN

Syntax   :MMEMory:TRANsfer <string>,<block>

:MMEMory:TRANsfer? <string>

Description   Writes/reads data to/from a file on the built-in storage device of the E5061A/E5062A.

By reading out data with this command and writing it to a file on the external controller, file transfer from the E5061A/E5062A to the external controller can be realized. On the other hand, by reading out data from the external controller and writing it to a file on the E5061A/E5062A with this command, file transfer from the external controller to the E5061A/E5062A can be realized.

Specify the file name with the extension. If you want to specify a file on the floppy disk drive, you need to add "A:" at the beginning of the file name. When you use directory names and file name, separate them with "/" (slash) or "\" (backslash).

If a file with the specified file name already exists for writing or if the specified file does not exist for reading out (Query), an error occurs and the command is ignored.

Parameters

	<string>	**<block>**
Description	File name on the E5061A/E5062A	Data written on/read out from the file.
Range	254 characters or less	GPIB: 20 Mbytes or less LAN: 100 Kbytes or less

Query response {block}<newline><^END>

Example of use
```
10    OUTPUT 717;":MMEM:TRAN ""Trace01.csv"",#6012345";Dat$

10    OUTPUT 717;":MMEM:TRAN? ""Trace01.csv"""
20    ENTER 717 USING "#,A";A$
30    ENTER 717 USING "#,A";Digit$
40    Img$="#,"&Digit$&"A"
50    ENTER 717 USING Img$;Byte$
60    Img$=Byte$&"A"
70    ALLOCATE Dat$[VAL(Byte$)]
80    ENTER 717 USING Img$;Dat$
```

Equivalent key No equivalent key is available on the front panel.

:OUTP

Syntax   :OUTPut[:STATe] {ON|OFF|1|0}

                :OUTPut[:STATe]?

Description   Turns on/off of the stimulus signal output. You cannot perform measurement until you turn on the stimulus signal output.

Parameters

	Description
ON or 1 (preset value)	Turns on the stimulus signal output.
OFF or 0	Turns off the stimulus signal output.

Query response {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":OUTP ON"
20   OUTPUT 717;":OUTP?"
30   ENTER 717;A
```

Equivalent key **[Sweep Setup]** - **Power** - **RF Out**

:PROG:CAT?

Syntax   :PROGram:CATalog?

Description   Reads out the list of all executable VBA macros (procedures defined by Public including the VBA project loaded on the VBA editor). (Query only)

Query response {string}<newline><^END>

                The character string in the following format, in which each macro is separated by a comma (.), is read out.

                "{macro 1},{macro 2},…,{macro N}"

                Where N is the total number of VBA macros.

                {macro n}:   VBA macro name (module name.procedure name)

Example of use
```
10   DIM A$[1000]
20   OUTPUT 717;":PROG:CAT?"
30   ENTER 717;A$
```

Equivalent key **[Macro Setup]** - **Select Macro**

13. SCPI Command
Reference

:PROG:NAME

Syntax :PROGram[:SELected]:NAME <string>

:PROGram[:SELected]:NAME?

Description Selects the VBA macro controlled with the :PROG:STAT command.

Selectable VBA macro names can be read out with the :PROG:CAT? command.

Parameters

	<string>
Description	VBA macro name (module name.procedure name)
Range	254 characters or less
Preset value	""

Query response {string}<newline><^END>

Example of use
```
10    OUTPUT 717;":PROG:NAME ""Module1.main"""
20    OUTPUT 717;":PROG:NAME?"
30    ENTER 717;A$
```

Related commands :PROG:CAT? on page 365

:PROG:STAT on page 367

Equivalent key **[Macro Setup]** - **Select Macro**

NOTE When performing the operation from the front panel, you select the VBA macro and execute it at the same time.

:PROG:STAT

Syntax   :PROGram[:SELected]:STATe {STOP|RUN}

                :PROGram[:SELected]:STATe?

Description   Reads out the control/state of the VBA macro selected with the :PROG:STAT command.

Parameters

	Description
STOP (preset value)	Specifies stop.
RUN	Specifies run.

Query response {STOP|RUN}<newline><^END>

Example of use
```
10   OUTPUT 717;":PROG:STAT RUN"
20   OUTPUT 717;":PROG:STAT?"
30   ENTER 717;A$
```

Related commands :PROG:NAME on page 366

Equivalent key **[Macro Break]** (to stop)

                [Macro Setup] - **Select Macro** (to run)

NOTE   When performing the operation from the front panel, you select the VBA macro and execute it at the same time.

13. SCPI Command
Reference

:SENS:CORR:COLL:ECAL:PATH?

Syntax   :SENSe:CORRection:COLLect:ECAL:PATH? <numeric>

Description   Reads out which port of the ECal module is connected with the specified port of the
E5061A/E5062A. (Query only)

Parameters

	<numeric>
Description	Port number
Range	1 to 2
Resolution	1

Query response   {0|1|2|3|4}<newline><^END>

	Description
0	Nothing is connected.
1	Port A is connected.
2	Port B is connected.
3	Port C is connected.
4	Port D is connected.

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:ECAL:PATH? 1"
20    ENTER 717;A
```

Equivalent key   No equivalent key is available on the front panel.

:SENS:CORR:IMP

Syntax   :SENSe:CORRection:IMPedance[:INPut][:MAGNitude] <numeric>

                  :SENSe:CORRection:IMPedance[:INPut][:MAGNitude]?

Description   Sets the system characteristic impedance (Z0) value.

NOTE   This command is available with the firmware version 3.01 or greater.

Parameters

	<numeric>
Description	System Z0 value
Range	1E-3 to 1000
Preset value	50 or 75
Unit	Ω (ohm)
Resolution	0.001

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS:CORR:IMP 75"
20   OUTPUT 717;":SENS:CORR:IMP?"
30   ENTER 717;A
```

Equivalent key   **[Cal]** - **Set Z0**

:SENS{1-4}:AVER:CLE

Syntax   :SENSe{[1]|2|3|4}:AVERage:CLEar

Description   Clears the measurement data used for averaging of channel 1 (:SENS1) to channel 4 (:SENS4). Measurement data before the execution of this command is not used for averaging. (No query)

Example of use   10   OUTPUT 717;":SENS1:AVER:CLE"

Related commands   :SENS{1-4}:AVER on page 370

                     :SENS{1-4}:AVER:COUN on page 371

Equivalent key   **[Avg]** - **Averaging Restart**

:SENS{1-4}:AVER

Syntax   :SENSe{[1]|2|3|4}:AVERage[:STATe] {ON|OFF|1|0}

                     :SENSe{[1]|2|3|4}:AVERage[:STATe]?

Description   Turns ON/OFF the averaging function of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	Description
ON or 1	Turns ON the averaging function.
OFF or 0 (preset value)	Turns OFF the averaging function.

Query response   {1|0}<newline><^END>

Example of use   10   OUTPUT 717;":SENS1:AVER ON"
                     20   OUTPUT 717;":SENS1:AVER?"
                     30   ENTER 717;A

Related commands   :SENS{1-4}:AVER:CLE on page 370

                     :SENS{1-4}:AVER:COUN on page 371

Equivalent key   **[Avg]** - **Averaging**

:SENS{1-4}:AVER:COUN

Syntax   :SENSe{[1]|2|3|4}:AVERage:COUNt <numeric>

                        :SENSe{[1]|2|3|4}:AVERage:COUNt?

Description   Sets the averaging factor of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	<numeric>
Description	Averaging factor
Range	1 to 999
Preset value	16
Resolution	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":SENS1:AVER:COUN 4"
                        20   OUTPUT 717;":SENS1:AVER:COUN?"
                        30   ENTER 717;A

Related commands   :SENS{1-4}:AVER on page 370

                        :SENS{1-4}:AVER:CLE on page 370

Equivalent key   **[Avg]** - **Avg Factor**

13. SCPI Command
Reference

:SENS{1-4}:BAND

Syntax
:SENSe{[1]|2|3|4}:BANDwidth[:RESolution] <numeric>

:SENSe{[1]|2|3|4}:BANDwidth[:RESolution]?

Description
Sets the IF bandwidth of channel 1 (:SENS1) to channel 4 (:SENS4).

This command provides the same function as the :SENS{1-4}:BWID command.

Parameters

	<numeric>
Description	IF bandwidth
Range	10 to 30000
Preset value	30000
Unit	Hz (hertz)
Resolution	In steps of 1 or 3

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response
{numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:BAND 1E3"
20    OUTPUT 717;":SENS1:BAND?"
30    ENTER 717;A
```

Related commands
:SENS{1-4}:BWID on page 373

Equivalent key
[Avg] - **IF Bandwidth**

:SENS{1-4}:BWID

Syntax   :SENSe{[1]|2|3|4}:BWIDth[:RESolution] <numeric>

                :SENSe{[1]|2|3|4}:BWIDth[:RESolution]?

Description   Sets the IF bandwidth of channel 1 (:SENS1) to channel 4 (:SENS4).

                This command provides the same function as the :SENS{1-4}:BAND command.

Parameters

	<numeric>
Description	IF bandwidth
Range	10 to 30000
Preset value	30000
Unit	Hz (hertz)
Resolution	In steps of 1 or 3

                If the specified parameter is out of the allowable setup range, the minimum value (if the
                lower limit of the range is not reached) or the maximum value (if the upper limit of the
                range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS1:BWID 1E3"
20   OUTPUT 717;":SENS1:BWID?"
30   ENTER 717;A
```

Related commands :SENS{1-4}:BAND on page 372

Equivalent key   **[Avg]** - **IF Bandwidth**

:SENS{1-4}:CORR:CLE

Syntax   :SENSe{[1]|2|3|4}:CORRection:CLEar

Description   Clears all callibration coefficient and measured standard data for calibration in the channel
                1 (SENS 1) to channel 4 (SENS 4).

Example of use
```
10   OUTPUT 717;":SENS1:CORR:CLE"
```

Related commands

Equivalent key   **[Cal]** - **Clear All**

13. SCPI Command
Reference

:SENS{1-4}:CORR:COEF?

Syntax   :SENSe{[1]|2|3|4}:CORRection:COEFficient[:DATA]? {ES|ER|ED|EL|ET|EX},<numeric 1>, <numeric 2>

Description   Returns the calibration coefficient for specified channel.

Parameters

	<numeric>
ES	Source match
ER	Reflection tracking
ED	Directivity
EL	Load match
ET	Transmission tracking
EX	Isolation
numeric 1	Response port
numeric 2	Stimulus port

If ES, ER, or ED is used, the response port and the stimulus port must be the same, while EL, ET, or EX is used, the response port and the stimulus port must be different.

Query response   {numeric 1},…,{numeric NOP×2}<newline><^END>

	Description
{numeric n×2-1}	Real part of the data (complex number) at the n-th measurement point.
{numeric n×2}	Imaginary part of the data (complex number) at the n-th measurement point.

Where NOP is the number of measurement points and n is an integer between 1 and NOP.

Example of use
```
10    DIM A(1:201)
20    OUTPUT 717;":SENS1:CORR:COEF? EL,1,2"
30    ENTER 717;A(*)
```

Equivalent key   No equivalent key is available on the front panel.

:SENS{1-4}:CORR:COLL:CKIT

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT[:SELect] \<numeric\>

                  :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT[:SELect]?

Description   Selects the calibration kit of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	\<numeric\>
Description	Number of calibration kit[*1]
Range	1 to 10
Preset value	50 ohm test set: 5, 75 ohm test set: 6
Resolution	1

    *1.The numbers of 1 to 10 assigned from the top to the calibration kit names displayed on
       the softkey labels when performing **[Cal]** - **Cal Kit**.

If the specified parameter is out of the allowable setup range, an error occurs and the
command is ignored.

Query response   {numeric}\<newline\>\<^END\>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT 3"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT?"
30    ENTER 717;A
```

Equivalent key   **[Cal]** - **Cal Kit**

13. SCPI Command
Reference

:SENS{1-4}:CORR:COLL:CKIT:LAB

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:LABel <string>

                    :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:LABel?

Description   Sets a calibration kit name for the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	<string>
Description	Calibration kit name
Range	254 characters or less
Preset value	Varies depending on the calibration kit number as follows: 1: "85033E" 2: "85033D" 3: "85052D" 4: "85032F" 5: "85032B" 6: "85036B/E" 7: "85039B" 8: "85038A/F/M" 9 to 10: "User"

Query response   {string}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:LAB ""MY_KIT"""
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:LAB?"
30    ENTER 717;A$
```

Related commands   :SENS{1-4}:CORR:COLL:CKIT on page 375

Equivalent key   **[Cal]** - **Modify Cal Kit** - **Label Kit**

:SENS{1-4}:CORR:COLL:CKIT:ORD:LOAD

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:ORDer:LOAD <numeric 1>,<numeric 2>

                      :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:ORDer:LOAD? <numeric 1>

Description   For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), selects the standard used for the load measurement of the specified port.

Parameters

	<numeric 1>	**<numeric 2>**
Description	Port number	Standard number
Range	1 to 2	1 to 21
Resolution	1	1

If the specified parameter is out of the allowable setup range, an error occurs and the command is ignored.

Query response   {numeric 2}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:ORD:LOAD 1,9"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:ORD:LOAD? 1"
30    ENTER 717;A
```

Related commands   :SENS{1-4}:CORR:COLL:CKIT on page 375

Equivalent key   **[Cal]** - **Modify Cal Kit** - **Specify CLSs** - **Load** - **Port 1**|**Port 2**

:SENS{1-4}:CORR:COLL:CKIT:ORD:OPEN

Syntax :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:ORDer:OPEN <numeric 1>,<numeric 2>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:ORDer:OPEN? <numeric 1>

Description For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), selects the standard used for the open measurement of the specified port.

Parameters

	<numeric 1>	<numeric 2>
Description	Port number	Standard number
Range	1 to 2	1 to 21
Resolution	1	1

If the specified parameter is out of the allowable setup range, an error occurs and the command is ignored.

Query response {numeric 2}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS1:CORR:COLL:CKIT:ORD:OPEN 1,2"
20   OUTPUT 717;":SENS1:CORR:COLL:CKIT:ORD:OPEN? 1"
30   ENTER 717;A
```

Related commands :SENS{1-4}:CORR:COLL:CKIT on page 375

Equivalent key **[Cal]** - **Modify Cal Kit** - **Specify CLSs** - **Open** - **Port 1**|**Port 2**

:SENS{1-4}:CORR:COLL:CKIT:ORD:SHOR

Syntax

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:ORDer:SHORt <numeric 1>,<numeric 2>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:ORDer:SHORt? <numeric 1>

Description

For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), selects the standard used for the short measurement of the specified port.

Parameters

	<numeric 1>	**<numeric 2>**
Description	Port number	Standard number
Range	1 to 2	1 to 21
Resolution	1	1

If the specified parameter is out of the allowable setup range, an error occurs and the command is ignored.

Query response

{numeric 2}<newline><^END>

Example of use

```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:ORD:SHOR 1,1"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:ORD:SHOR? 1"
30    ENTER 717;A
```

Related commands

:SENS{1-4}:CORR:COLL:CKIT on page 375

Equivalent key

[Cal] - **Modify Cal Kit** - **Specify CLSs** - **Short** - **Port 1**|**Port 2**

13. SCPI Command
Reference

:SENS{1-4}:CORR:COLL:CKIT:ORD:THRU

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:ORDer:THRU <numeric 1>,<numeric 2>, <numeric 3>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:ORDer:THRU? <numeric 1>,<numeric 2>

Description   For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), selects the standard used for the thru measurement between the specified 2 ports.

Parameters

	<numeric 1>	<numeric 2>	<numeric 3>
Description	Port number 1	Port number 2	Standard number
Range	1 to 2	1 to 2	1 to 21
Resolution	1	1	1

For <numeric 1> and <numeric 2>, you must specify a different port number. If you specify the same port number, an error occurs and the command is ignored.

If the specified parameter is out of the allowable setup range, an error occurs and the command is ignored.

Query response   {numeric 3}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS1:CORR:COLL:CKIT:ORD:THRU 1,2,11"
20   OUTPUT 717;":SENS1:CORR:COLL:CKIT:ORD:THRU? 1,2"
30   ENTER 717;A
```

Related commands   :SENS{1-4}:CORR:COLL:CKIT on page 375

Equivalent key   **[Cal]** - **Modify Cal Kit** - **Specify CLSs** - **Thru**

:SENS{1-4}:CORR:COLL:CKIT:RES

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:RESet

Description   Resets the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4) to the factory setting state. (No query)

Example of use
```
10   OUTPUT 717;":SENS1:CORR:COLL:CKIT:RES"
```

Related commands   :SENS{1-4}:CORR:COLL:CKIT on page 375

Equivalent key   **[Cal]** - **Modify Cal Kit** - **Restore Cal Kit**

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:ARB

Syntax
:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:ARBitrary <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:ARBitrary?

Description
For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the value of the arbitrary impedance of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	Arbitrary impedance
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	Ω (ohm)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response
{numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:ARB 50.5"
20   OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:ARB?"
30   ENTER 717;A
```

Equivalent key
[Cal] - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **Arb. Impedance**

13. SCPI Command Reference

---

*1.no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:C0

Syntax

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:C0 <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:C0?

Description

For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the value of the C0 of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	C0
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	fF (femtofarad)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response

{numeric}<newline><^END>

Example of use

```
10   OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:C0 12.3"
20   OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:C0?"
30   ENTER 717;A
```

Equivalent key

[Cal] - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **C0**

---

*1. no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:C1

Syntax :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:C1 <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:C1?

Description For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the value of the C1 of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	C1
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	1E-27 F/Hz (1E-27 farad/hertz)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:C1 12.3"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:C1?"
30    ENTER 717;A
```

Equivalent key **[Cal]** - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **C1**

13. SCPI Command
Reference

---

*1. no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:C2

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:C2 <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:C2?

Description   For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the value of the C2 of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	C2
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	1E-36 F/Hz^2 (1E-36 farad/hertz^2)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:C2 12.3"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:C2?"
30    ENTER 717;A
```

Equivalent key   **[Cal]** - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **C2**

---

*1. no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:C3

Syntax :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:C3 <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:C3?

Description For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the value of the C3 of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	C3
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	1E-45 F/Hz^3 (1E-45 farad/hertz^3)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:C3 12.3"
20   OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:C3?"
30   ENTER 717;A
```

Equivalent key **[Cal]** - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **C3**

13. SCPI Command Reference

*1. no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:DEL

Syntax :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:DELay <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:DELay?

Description For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the value of the offset delay of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	Offset delay
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	s (second)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:DEL 12.3"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:DEL?"
30    ENTER 717;A
```

Equivalent key **[Cal]** - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **Offset Delay**

---

*1. no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:L0

Syntax

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:L0 <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:L0?

Description

For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the value of the L0 of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	L0
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	pH (picohenry)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response

{numeric}<newline><^END>

Example of use

```
10   OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:L0 12.3"
20   OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:L0?"
30   ENTER 717;A
```

Equivalent key

[Cal] - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **L0**

13. SCPI Command Reference

---

*1.no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:L1

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|1
5|16|17|18|19|20|21}:L1 <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|1
5|16|17|18|19|20|21}:L1?

Description   For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the
value of the L1 of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	L1
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	1E-24 H/Hz (1E-24 henry/hertz)

If the specified parameter is out of the allowable setup range, the minimum value (if the
lower limit of the range is not reached) or the maximum value (if the upper limit of the
range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:L1 12.3"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:L1?"
30    ENTER 717;A
```

Equivalent key   **[Cal]** - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **L1**

---

*1. no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:L2

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|1
5|16|17|18|19|20|21}:L2 <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|1
5|16|17|18|19|20|21}:L2?

Description   For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the
value of the L2 of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	L2
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	1E-33 H/Hz^2 (1E-33 henry/hertz^2)

If the specified parameter is out of the allowable setup range, the minimum value (if the
lower limit of the range is not reached) or the maximum value (if the upper limit of the
range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:L2 12.3"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:L2?"
30    ENTER 717;A
```

Equivalent key **[Cal]** - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **L2**

---

*1.no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:L3

Syntax

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:L3 <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:L3?

Description

For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the value of the L3 of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	L3
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	1E-42 H/Hz^3 (1E-42 henry/hertz^3)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response

{numeric}<newline><^END>

Example of use

```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:L3 12.3"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:L3?"
30    ENTER 717;A
```

Equivalent key

[Cal] - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **L3**

---

*1.no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:LAB

Syntax

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:LABel <string>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:LABel?

Description

For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the name of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<string>
Description	Standard name
Range	254 characters or less
Preset value	Varies depending on the calibration kit and the standard.

Query response

{string}<newline><^END>

Example of use

```
10   OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:LAB ""OPEN"""
20   OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:LAB?"
30   ENTER 717;A$
```

Equivalent key

[Cal] - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **Label**

_____

*1. no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:LOSS

Syntax :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:LOSS <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:LOSS?

Description For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the value of the offset loss of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	Offset Loss
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	Ω/s (ohm/second)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:LOSS 12.3"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:LOSS?"
30    ENTER 717;A
```

Equivalent key **[Cal]** - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **Offset Loss**

---

*1.no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:TYPE

Syntax

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:TYPE {OPEN|SHORt|LOAD|THRU|ARBI|NONE}

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:TYPE?

Description

For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the standard type of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	Description
OPEN	Specifies open.
SHORt	Specifies short.
LOAD	Specifies load.
THRU	Specifies thru.
ARBI	Specify arbitrary impedance.
NONE	Specifies DUT of which theoretical values are 0.

Query response

{OPEN|SHORt|LOAD|THRU|ARBI|NONE}<newline><^END>

Example of use

```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:TYPE OPEN"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:TYPE?"
30    ENTER 717;A$
```

Equivalent key

[Cal] - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **STD Type**

13. SCPI Command Reference

---

*1. no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:CKIT:STAN{1-21}:Z0

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:Z0 <numeric>

:SENSe{[1]|2|3|4}:CORRection:COLLect:CKIT:STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21}:Z0?

Description   For the calibration kit selected for channel 1 (:SENS1) to channel 4 (:SENS4), sets the value of the Offset Z0 of the standard1 (:STAN1) to standard 21 (:STAN21).

Parameters

	<numeric>
Description	Offset Z0
Range	-1E18 to 1E18
Preset value	Varies depending on the calibration kit and the standard.
Unit	Ω (ohm)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:Z0 50"
20    OUTPUT 717;":SENS1:CORR:COLL:CKIT:STAN1:Z0?"
30    ENTER 717;A
```

Equivalent key   **[Cal]** - **Modify Cal Kit** - **Define STDs** - **no. name**[1] - **Offset Z0**

---

*1. no: standard number (1 to 21), name: standard name (variable)

:SENS{1-4}:CORR:COLL:ECAL:ERES

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:ECAL:ERES <numeric 1>,<numeric 2>

Description   Executes enhanced response calibration of channel 1 (:SENS1) to channel 4 (:SENS4) using the ECal (Electrical Calibration) module. If you execute this command when the ECal module is not connected, an error occurs and the command is ignored. (No query)

Parameters

	<numeric 1>	**<numeric 2>**
Description	Response port number	Stimulus port number
Range	1 to 2	1 to 2
Resolution	1	1

For each parameter, you must specify a different port number. If you specify the same port number for 2 or more parameters, an error occurs and the command is ignored.

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:ECAL:ERES 1,2"
20    OUTPUT 717;"*OPC?"
30    ENTER 717;A
```

Equivalent key   **[Cal]** - **ECal** - **Enhanced Response -** 2-1(S21)|1-2(S12)

:SENS{1-4}:CORR:COLL:ECAL:ISOL

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:ECAL:ISOLation[:STATe] {ON|OFF|1|0}

                        :SENSe{[1]|2|3|4}:CORRection:COLLect:ECAL:ISOLation[:STATe]?

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), turns ON/OFF the isolation measurement when executing Ecal (Electrical Calibration).

Parameters

	Description
ON or 1	Turns ON the isolation measurement.
OFF or 0 (preset value)	Turns OFF the isolation measurement.

Query response   {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:ECAL:ISOL ON"
20    OUTPUT 717;":SENS1:CORR:COLL:ECAL:ISOL?"
30    ENTER 717;A
```

Related commands   :SENS{1-4}:CORR:COLL:ECAL:SOLT1 on page 397

                        :SENS{1-4}:CORR:COLL:ECAL:SOLT2 on page 397

Equivalent key   **[Cal]** - **ECal** - **Isolation**

:SENS{1-4}:CORR:COLL:ECAL:SOLT1

Syntax :SENSe{[1]|2|3|4}:CORRection:COLLect:ECAL:SOLT1 <numeric>

Description Executes full 1-port calibration of the specified port of channel 1 (:SENS1) to channel 4 (:SENS4) using the ECal (Electrical Calibration) module.

If you execute this command when the ECal module is not connected, an error occurs and the command is ignored. (No query)

Parameters

	<numeric>
Description	Port number
Range	1 to 2
Resolution	1

Example of use
```
10   OUTPUT 717;":SENS1:CORR:COLL:ECAL:SOLT1 1"
20   OUTPUT 717;"*OPC?"
30   ENTER 717;A
```

Equivalent key **[Cal]** - **ECal** - **1-Port Cal** - **Port 1**|**Port 2**

:SENS{1-4}:CORR:COLL:ECAL:SOLT2

Syntax :SENSe{[1]|2|3|4}:CORRection:COLLect:ECAL:SOLT2 <numeric 1>,<numeric 2>

Description Executes full 2-port calibration between the 2 specified ports of channel 1 (:SENS1) to channel 4 (:SENS4) using the ECal (Electrical Calibration) module.

If you execute this command when the ECal module is not connected, an error occurs and the command is ignored. (No query)

Parameters

	<numeric 1>	**<numeric 2>**
Description	Port number	Port number
Range	1 to 2	1 to 2
Resolution	1	1

For each parameter, you must specify a different port number. If you specify the same port number for 2 or more parameters, an error occurs and the command is ignored.

Example of use
```
10   OUTPUT 717;":SENS1:CORR:COLL:ECAL:SOLT2 1,2"
20   OUTPUT 717;"*OPC?"
30   ENTER 717;A
```

Equivalent key **[Cal]** - **ECal** - **2-Port Cal**

13. SCPI Command
Reference

:SENS{1-4}:CORR:COLL:ECAL:THRU

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:ECAL:THRU <numeric 1>,<numeric 2>

Description   Executes response calibration (thru) between the 2 specified ports of channel 1 (:SENS1) to channel 4 (:SENS4) using the ECal (Electrical Calibration) module.

If you execute this command when the ECal module is not connected, an error occurs and the command is ignored. (No query)

Parameters

	<numeric 1>	**<numeric 2>**
Description	Response port number	Stimulus port number
Range	1 to 2	1 to 2
Resolution	1	1

For each parameter, you must specify a different port number. If you specify the same port number for 2 or more parameters, an error occurs and the command is ignored.

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:ECAL:SOLT2 1,2"
20    OUTPUT 717;"*OPC?"
30    ENTER 717;A
```

Equivalent key   **[Cal]** - **ECal** - **Thru Cal** - **2-1 (S21)**|**1-2 (S12)**

:SENS{1-4}:CORR:COLL:ISOL

Syntax :SENSe{[1]|2|3|4}:CORRection:COLLect[:ACQuire]:ISOLation <numeric 1>,<numeric 2>

Description For channel 1 (:SENS1) to channel 4 (:SENS4), measure the calibration data of the isolation from the stimulus port to the response port. (No query)

Parameters

	<numeric 1>	<numeric 2>
Description	Response port number	Stimulus port number
Range	1 to 2	1 to 2
Resolution	1	1

For each parameter, you must specify a different port number. If you specify the same port number for 2 or more parameters, an error occurs and the command is ignored.

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:ISOL 1,2"
20    OUTPUT 717;"*OPC?"
30    ENTER 717;A
```

Equivalent key **[Cal]** - **Calibrate** - **Response (Thru)** - **Isolation (Optional)**

[Cal] - **Calibrate** - **n-Port Cal** - **Isolation (Optional)** - **Port m-n Isol**

:SENS{1-4}:CORR:COLL:METH:ERES

Syntax :SENSe{[1]|2|3|4}:CORRection:COLLect:METHod:ERES <numeric 1>,<numeric 2>

Description For channel 1 (:SENS1) to channel 4 (:SENS4), sets the calibration type to the enhaced response calibration. (No query)

Parameters

	<numeric 1>	<numeric 2>
Description	Response port number	Stimulus port number
Range	1 to 2	1 to 2
Resolution	1	1

For each parameter, you must specify a different port number. If you specify the same port number for 2 or more parameters, an error occurs and the command is ignored.

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:METH:ERES 1,2"
```

13. SCPI Command Reference

Related commands

Equivalent key   **[Cal]** - **Calibrate** - **Enhanced Response** - **Ports**

:SENS{1-4}:CORR:COLL:LOAD

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect[:ACQuire]:LOAD <numeric>

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), measures the calibration data of the load standard of the specified port. (No query)

Parameters

	<numeric>
Description	Port number
Range	1 to 2
Resolution	1

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:LOAD 1"
20    OUTPUT 717;"*OPC?"
30    ENTER 717;A
```

Equivalent key   **[Cal]** - **Calibrate** - **Response (Open)|Response (Short)** - **Load (Optional)**

                              [Cal] - **Calibrate** - **1-Port Cal** - **Load**

                              [Cal] - **Calibrate** - **n-Port Cal** - **Reflection** - **Port m Load**

13. SCPI Command
Reference

:SENS{1-4}:CORR:COLL:METH:OPEN

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:METHod[:RESPonse]:OPEN <numeric>

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), sets the calibration type to the response calibration (open) of the specified port. (No query)

Parameters

	<numeric>
Description	Port number
Range	1 to 2
Resolution	1

Example of use   10   OUTPUT 717;":SENS1:CORR:COLL:METH:OPEN 1"

Related commands   :SENS{1-4}:CORR:COLL:METH:TYPE? on page 405

Equivalent key   **[Cal]** - **Calibrate** - **Response (Open)** - **Port**

:SENS{1-4}:CORR:COLL:METH:SHOR

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:METHod[:RESPonse]:SHORt <numeric>

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), sets the calibration type to the response calibration (short) of the specified port. (No query)

Parameters

	<numeric>
Description	Port number
Range	1 to 2
Resolution	1

Example of use   10   OUTPUT 717;":SENS1:CORR:COLL:METH:SHOR 1"

Related commands   :SENS{1-4}:CORR:COLL:METH:TYPE? on page 405

Equivalent key   **[Cal]** - **Calibrate** - **Response (Short)** - **Port**

:SENS{1-4}:CORR:COLL:METH:SOLT1

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:METHod:SOLT1 <numeric>

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), sets the calibration type to the full 1-port calibration of the specified port. (No query)

Parameters

	<numeric>
Description	Port number
Range	1 to 2
Resolution	1

Example of use   10   OUTPUT 717;":SENS1:CORR:COLL:METH:SOLT1 1"

Related commands   :SENS{1-4}:CORR:COLL:METH:TYPE? on page 405

Equivalent key   **[Cal]** - **Calibrate** - **1-Port Cal** - **Port**

:SENS{1-4}:CORR:COLL:METH:SOLT2

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:METHod:SOLT2 <numeric 1>,<numeric 2>

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), sets the calibration type to the full 2-port calibration between the 2 specified ports. (No query)

Parameters

	<numeric 1>	**<numeric 2>**
Description	Port number	Port number
Range	1 to 2	1 to 2
Resolution	1	1

For each parameter, you must specify a different port number. If you specify the same port number for 2 or more parameters, an error occurs and the command is ignored.

Example of use   10   OUTPUT 717;":SENS1:CORR:COLL:METH:SOLT2 1,2"

Related commands   :SENS{1-4}:CORR:COLL:METH:TYPE? on page 405

Equivalent key   **[Cal]** - **Calibrate** - **2-Port Cal** - **Ports**

13. SCPI Command
Reference

:SENS{1-4}:CORR:COLL:METH:THRU

Syntax :SENSe{[1]|2|3|4}:CORRection:COLLect:METHod[:RESPonse]:THRU <numeric 1>,<numeric 2>

Description For channel 1 (:SENS1) to channel 4 (:SENS4), sets the calibration type to the response calibration (thru) between the 2 specified ports. (No query)

Parameters

	<numeric 1>	**<numeric 2>**
Description	Port number	Port number
Range	1 to 2	1 to 2
Resolution	1	1

For each parameter, you must specify a different port number. If you specify the same port number for 2 or more parameters, an error occurs and the command is ignored.

Example of use 10   OUTPUT 717;":SENS1:CORR:COLL:METH:THRU 1,2"

Related commands :SENS{1-4}:CORR:COLL:METH:TYPE? on page 405

Equivalent key **[Cal]** - **Calibrate** - **Response (Thru)** - **Ports**

:SENS{1-4}:CORR:COLL:METH:TYPE?

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:METHod:TYPE?

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), reads out the calibration type selected for calculation of the calibration coefficients. (Query only)

Query response   {ERES|NONE|RESPO|RESPS|RESPT|SOLT1|SOLT2}<newline><^END>

	Description
ERES	The calibration type is the enhanced response calibration.
NONE	The calibration type is set to nothing.
RESPO	The calibration type is the response calibration (open).
RESPS	The calibration type is the response calibration (short).
RESPT	The calibration type is the response calibration (thru).
SOLT1	The calibration type is the full 1-port calibration.
SOLT2	The calibration type is the full 2-port calibration.

Example of use
```
10    OUTPUT 717;":SENS1:CORR:COLL:METH:TYPE?"
20    ENTER 717;A$
```

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command Reference

:SENS{1-4}:CORR:COLL:OPEN

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect[:ACQuire]:OPEN <numeric>

Description For channel 1 (:SENS1) to channel 4 (:SENS4), measures the calibration data of the open
standard of the specified port. (No query)

Parameters

	<numeric>
Description	Port number
Range	1 to 2
Resolution	1

Example of use
```
10   OUTPUT 717;":SENS1:CORR:COLL:OPEN 1"
20   OUTPUT 717;"*OPC?"
30   ENTER 717;A
```

Equivalent key   **[Cal]** - **Calibrate** - **Response (Open)**|**1-Port Cal** - **Open**

[Cal] - **Calibrate** - **n-Port Cal** - **Reflection** - **Port m Open**

:SENS{1-4}:CORR:COLL:SAVE

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect:SAVE

Description   From the measured calibration data, calculates the calibration coefficients depending on the selected calibration type.

Calculating the calibration coefficients clears all calibration data whether or not used for the calculation and also clears the calibration type selections.

If you execute this command before all necessary calibration data for calculating the calibration coefficients is measured, an error occurs and the command is ignored. (No query)

Example of use   10   OUTPUT 717;":SENS1:CORR:COLL:SAVE"

Related commands :SENS{1-4}:CORR:COLL:METH:OPEN on page 402

:SENS{1-4}:CORR:COLL:METH:SHOR on page 402

:SENS{1-4}:CORR:COLL:METH:THRU on page 404

:SENS{1-4}:CORR:COLL:METH:SOLT1 on page 403

:SENS{1-4}:CORR:COLL:METH:SOLT2 on page 403

Equivalent key   **[Cal]** - **Calibrate** - **Response**|**n-Port Cal** - **Done**

:SENS{1-4}:CORR:COLL:SHOR

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect[:ACQuire]:SHORt <numeric>

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), measures the calibration data of the short standard of the specified port. (No query)

Parameters

	<numeric>
Description	Port number
Range	1 to 2
Resolution	1

Example of use   10   OUTPUT 717;":SENS1:CORR:COLL:SHOR 1"
20   OUTPUT 717;"*OPC?"
30   ENTER 717;A

Equivalent key   **[Cal]** - **Calibrate** - **Response (Short)**|**1-Port Cal** - **Short**

[Cal] - **Calibrate** - **n-Port Cal** - **Reflection** - **Port m Short**

13. SCPI Command Reference

:SENS{1-4}:CORR:COLL:THRU

Syntax   :SENSe{[1]|2|3|4}:CORRection:COLLect[:ACQuire]:THRU <numeric 1>,<numeric 2>

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), measure the calibration data of the thru
                standard from the stimulus port to the response port. (No query)

Parameters

	<numeric 1>	<numeric 2>
Description	Response port number	Stimulus port number
Range	1 to 2	1 to 2
Resolution	1	1

For each parameter, you must specify a different port number. If you specify the same port
number for 2 or more parameters, an error occurs and the command is ignored.

Example of use
```
10   OUTPUT 717;":SENS1:CORR:COLL:THRU 1,2"
20   OUTPUT 717;"*OPC?"
30   ENTER 717;A
```

Equivalent key   **[Cal]** - **Calibrate** - **Response (Thru)** - **Thru**

                 [Cal] - **Calibrate** - **n-Port Cal** - **Transmission** - **Port m-n Thru**

:SENS{1-4}:CORR:EXT

Syntax   :SENSe{[1]|2|3|4}:CORRection:EXTension[:STATe] {ON|OFF|1|0}

              :SENSe{[1]|2|3|4}:CORRection:EXTension[:STATe]?

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), turns ON/OFF the port extension.

Parameters

	Description
ON or 1	Turns ON the port extension.
OFF or 0 (preset value)	Turns OFF the port extension.

Query response   {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:EXT ON"
20    OUTPUT 717;":SENS1:CORR:EXT?"
30    ENTER 717;A
```

Related commands   :SENS{1-4}:CORR:EXT:PORT{1-2} on page 410

Equivalent key   **[Cal]** - **Port Extensions** - **Extensions**

13. SCPI Command
Reference

:SENS{1-4}:CORR:EXT:PORT{1-2}

Syntax :SENSe{[1]|2|3|4}:CORRection:EXTension:PORT{[1]|2} <numeric>

:SENSe{[1]|2|3|4}:CORRection:EXTension:PORT{[1]|2}?

Description For channel 1 (:SENS1) to channel 4 (:SENS4), sets the correction amount for the port extension of port 1 (:PORT1) to port 2 (:PORT2) as the delay time.

Parameters

	<numeric>
Description	Delay time
Range	-10 to 10
Preset value	0
Unit	s (second)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:EXT:PORT1 1E-3"
20    OUTPUT 717;":SENS1:CORR:EXT?"
30    ENTER 717;A
```

Related commands :SENS{1-4}:CORR:EXT on page 409

Equivalent key **[Cal]** - **Port Extensions** - **Extension Port 1**|**Extension Port 2**

:SENS{1-4}:CORR:PROP

Syntax   :SENSe{[1]|2|3|4}:CORRection:PROPerty {ON|OFF|1|0}

:SENSe{[1]|2|3|4}:CORRection:PROPerty?

Description   Turns ON/OFF the display of the calibration property of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	Description
ON or 1	Turns ON the calibration property display.
OFF or 0 (preset value)	Turns OFF the calibration property display.

Query response   {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:PROP ON"
20    OUTPUT 717;":SENS1:CORR:PROP?"
30    ENTER 717;A
```

Equivalent key   **[Cal]** - **Property**

:SENS{1-4}:CORR:RVEL:COAX

Syntax   :SENSe{[1]|2|3|4}:CORRection:RVELocity:COAX <numeric>

:SENSe{[1]|2|3|4}:CORRection:RVELocity:COAX?

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), sets the velocity factor.

Parameters

	<numeric>
Description	Velocity factor
Range	0.01 to 10
Preset value	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:CORR:RVEL:COAX 0.7"
20    OUTPUT 717;":SENS1:CORR:RVEL:COAX?"
30    ENTER 717;A
```

Equivalent key   **[Cal]** - **Velocity Factor**

13. SCPI Command Reference

:SENS{1-4}:CORR:STAT

Syntax   :SENSe{[1]|2|3|4}:CORRection:STATe {ON|OFF|1|0}

                        :SENSe{[1]|2|3|4}:CORRection:STATe?

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), turns ON/OFF the error correction.

Parameters

	Description
ON or 1	Turns ON the error correction.
OFF or 0 (preset value)	Turns OFF the error correction.

Query response   {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS1:CORR:STAT ON"
20   OUTPUT 717;":SENS1:CORR:STAT?"
30   ENTER 717;A
```

Equivalent key   **[Cal]** - **Correction**

:SENS{1-4}:CORR:TYPE{1-4}?

Syntax   :SENSe{[1]|2|3|4}:CORRection:TYPE{[1]|2|3|4}?

Description   For trace 1 (:TYPE1) to trace 4 (:TYPE4) of channel 1 (:SENS1) to channel 4 (:SENS4), reads out the information (calibration type, port numbers) of the applied calibration coefficients for the actual error correction.

Query response {ERES|NONE|RESPO|RESPS|RESPT|SOLT1|SOLT2},{numeric 1},{numeric 2}<newline><^END>

{ERES|NONE|RESPO|RESPS|RESPT|SOLT1|SOLT2}:

	Description
ERES	The enhanced response calibration is applied.
NONE	Any calibration is not applied.
RESPO	The response calibration (open) is applied.
RESPS	The response calibration (short) is applied.
RESPT	The response calibration (thru) is applied.
SOLT1	The full 1-port calibration is applied.
SOLT2	The full 2-port calibration is applied.

{numeric 1}:   the calibration port number
                 (This parameter is 0 when the first parameter is NONE.)

{numeric 2}:   the calibration port number
                 (This parameter is 0 when the first parameter is not ERES, RESPT and SOLT2.)

Example of use 10   OUTPUT 717;":SENS1:CORR:TYPE1?"
                20   ENTER 717;A$

Equivalent key No equivalent key is available on the front panel.

13. SCPI Command Reference

:SENS{1-4}:FREQ

Syntax

:SENSe{[1]|2|3|4}:FREQuency[:CW|FIXed] <numeric>

:SENSe{[1]|2|3|4}:FREQuency[:CW|FIXed]?

Description

Sets the fixed frequency (CW frequency) for the power sweep for channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	<numeric>
Description	Fixed frequency
Range	3E5 to 3E9
Preset value	3E5
Unit	Hz (hertz)
Resolution	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response

{numeric}<newline><^END>

Example of use

```
10   OUTPUT 717;":SENS1:FREQ 1E9"
20   OUTPUT 717;":SENS1:FREQ?"
30   ENTER 717;A
```

Related commands

:SENS{1-4}:SWE:TYPE on page 428

Equivalent key

[Sweep Setup] - **Power** - **CW Freq**

:SENS{1-4}:FREQ:CENT

Syntax   :SENSe{[1]|2|3|4}:FREQuency:CENTer <numeric>

                  :SENSe{[1]|2|3|4}:FREQuency:CENTer?

Description   Sets the center value of the sweep range of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	<numeric>
Description	Center value
Range	3E5 to 3E9
Preset value	4.25015E9
Unit	Hz (hertz)
Resolution	0.5 or 1

                  If the specified parameter is out of the allowable setup range, the minimum value (if the
                  lower limit of the range is not reached) or the maximum value (if the upper limit of the
                  range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":SENS1:FREQ:CENT 2E9"
                  20   OUTPUT 717;":SENS1:FREQ:CENT?"
                  30   ENTER 717;A

Related commands :SENS{1-4}:FREQ:SPAN on page 417

Equivalent key   **[Center]**

:SENS{1-4}:FREQ:DATA?

Syntax   :SENSe{[1]|2|3|4}:FREQuency:DATA?

Description   For channel 1 (:SENS1) to channel 4 (:SENS4), reads out the frequencies of all
                    measurement point.

                    The data transfer format when this command is executed depends on the setting with the
                    :FORM:DATA command. (Query only)

Query response   {numeric 1},…,{numeric NOP}<newline><^END>

	Description
{numeric n}	Frequency at the n-th measurement point

                    Where NOP is the number of measurement points and n is an integer between 1 and NOP.

Example of use
```
10    DIM A(1:201)
20    OUTPUT 717;":SENS1:FREQ:DATA?"
30    ENTER 717;A(*)
```

Related commands   :FORM:DATA on page 338

Equivalent key   No equivalent key is available on the front panel.

:SENS{1-4}:FREQ:SPAN

Syntax   :SENSe{[1]|2|3|4}:FREQuency:SPAN <numeric>

:SENSe{[1]|2|3|4}:FREQuency:SPAN?

Description   Sets the span value of the sweep range of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	<numeric>
Description	Span value
Range	0 to 2.9997E9
Preset value	2.9997E9
Unit	Hz (hertz)
Resolution	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:FREQ:SPAN 1E9"
20    OUTPUT 717;":SENS1:FREQ:SPAN?"
30    ENTER 717;A
```

Related commands :SENS{1-4}:FREQ:CENT on page 415

Equivalent key   **[Span]**

:SENS{1-4}:FREQ:STAR

Syntax :SENSe{[1]|2|3|4}:FREQuency:STARt <numeric>

:SENSe{[1]|2|3|4}:FREQuency:STARt?

Description Sets the start value of the sweep range of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	<numeric>
Description	Start value
Range	3E5 to 3E9
Preset value	3E5
Unit	Hz (hertz)
Resolution	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:FREQ:STAR 100E6"
20    OUTPUT 717;":SENS1:FREQ:STAR?"
30    ENTER 717;A
```

Related commands :SENS{1-4}:FREQ:STOP on page 419

Equivalent key **[Start]**

:SENS{1-4}:FREQ:STOP

Syntax :SENSe{[1]|2|3|4}:FREQuency:STOP <numeric>

:SENSe{[1]|2|3|4}:FREQuency:STOP?

Description Sets the stop value of the sweep range of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	<numeric>
Description	Stop value
Range	3E5 to 3E9
Preset value	3E9
Unit	Hz (hertz)
Resolution	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS1:FREQ:STOP 100E6"
20   OUTPUT 717;":SENS1:FREQ:STOP?"
30   ENTER 717;A
```

Related commands :SENS{1-4}:FREQ:STAR on page 418

Equivalent key **[Stop]**

13. SCPI Command
Reference

:SENS{1-4}:ROSC:SOUR?

Syntax   :SENSe{[1]|2|3|4}:ROSCillator:SOURce?

Description   Reads out whether the external reference signal is inputted to the Ref In connector on the
                        rear panel. (Query only)

Query response   {INTernal|EXTernal}<newline><^END>

	Description
INTernal	The external reference signal is not inputted.
EXTernal	The external reference signal is inputted.

Example of use   10   OUTPUT 717;":SENS1:ROSC:SOUR?"
                        20   ENTER 717;A$

Equivalent key   Displayed on the instrument status bar (at the bottom of the LCD display).

:SENS{1-4}:SEGM:DATA

Syntax

:SENSe{[1]|2|3|4}:SEGMent:DATA 5,<mode>,<ifbw>,<pow>,<del>,<time>,<segm>,
<star 1>,<stop 1>,<nop 1>,<ifbw 1>,<pow 1>,<del 1>,<time 1>,…,
<star n>,<stop n>,<nop n>,<ifbw n>,<pow n>,<del n>,<time n>,…,
<star N>,<stop N>,<nop N>,<ifbw N>,<pow N>,<del N>,<time N>

:SENSe{[1]|2|3|4}:SEGMent:DATA?

Where N is the number of segments (specified with <segm>) and n is an integer between 1 and N.

Description

Creates the segment sweep table for channel 1 (:SENS1) to channel 4 (:SENS4).

The data transfer format when this command is executed depends on the setting with the :FORM:DATA command.

Parameters

The first value is 5 and the parameters listed below follow.

	Description
<mode>	Stimulus setting mode 0: Specifies with start/stop values 1: Specifies with center/span values
<ifbw>	ON/OFF of the IF bandwidth setting for each segment 0: Off, 1: On
<pow>	ON/OFF of the power setting for each segment 0: Off, 1: On
<del>	ON/OFF of the sweep delay time setting for each segment 0: Off, 1: On
<time>	ON/OFF of the sweep time setting for each segment 0: Off, 1: On
<segm>	Number of segments (1 to 201)
<star n>	Start value/center value of the n-th segment
<stop n>	Stop value/span value of the n-th segment
<nop n>	Number of measurement points of the n-th segment
<ifbw n>	IF bandwidth of the n-th segment Not required when the IF bandwidth setting for each segment is OFF (<ifbw> = 0)
<pow n>	Power of the n-th segment Not required when the power setting for each segment is OFF (<pow> = 0)
<del n>	Sweep delay time of the n-th segment Not required when the sweep delay time setting for each segment is OFF (<del> = 0)

	Description
<time n>	Sweep time of the n-th segment (specify 0 If you want to set "auto setting") Not required when the sweep time setting for each segment is OFF (<time> = 0)

Query response

5,{mode},{ifbw},{pow},{del},{time},{segm},
{star 1},{stop 1},{nop 1},{pow 1},{del 1},{time 1},…,
{star n},{stop n},{nop n},{pow n},{del n},{time n},…,
{star N},{stop N},{nop N},{pow N},{del N},{time N}<newline><^END>

Example of use

```
10    DIM H(1:3,1:4)
20    OUTPUT 717;":SENS1:SEGM:DATA 5,0,1,0,0,0,3,";
30    OUTPUT 717;"1E9,3E9,11,70e3,";
40    OUTPUT 717;"3E9,4E9,51,7e3,";
50    OUTPUT 717;"4E9,6E9,11,70e3"
60    OUTPUT 717;":SENS1:SEGM:DATA?"
70    ENTER 717;A,B,C,D,E,F,G,H(*)
```

Related commands   :SENS{1-4}:SWE:TYPE on page 428

:FORM:DATA on page 338

Equivalent key   **[Sweep Setup]** - **Edit Segment Table**

:SENS{1-4}:SEGM:SWE:POIN?

Syntax   :SENSe{[1]|2|3|4}:SEGMent:SWEep:POINts?

Description   For the segment sweep table of channel 1 (:SENS1) to channel 4 (:SENS4), reads out the total number of the measurement points of all segments. (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":SENS1:SEGM:SWE:POIN?"
                        20   ENTER 717;A

Related commands   :SENS{1-4}:SEGM:DATA on page 421

Equivalent key   No equivalent key is available on the front panel.

:SENS{1-4}:SEGM:SWE:TIME?

Syntax   :SENSe{[1]|2|3|4}:SEGMent:SWEep:TIME?

Description   For the segment sweep table of channel 1 (:SENS1) to channel 4 (:SENS4), reads out the total sweep time of all segments. (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":SENS1:SEGM:SWE:TIME?"
                        20   ENTER 717;A

Related commands   :SENS{1-4}:SEGM:DATA on page 421

Equivalent key   No equivalent key is available on the front panel.

:SENS{1-4}:SWE:DEL

Syntax :SENSe{[1]|2|3|4}:SWEep:DELay <numeric>

:SENSe{[1]|2|3|4}:SWEep:DELay?

Description Sets the sweep delay time of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	<numeric>
Description	Sweep delay time
Range	0 to 1
Preset value	0
Unit	s (second)
Resolution	0.001

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS1:SWE:DEL 0.05"
20   OUTPUT 717;":SENS1:SWE:DEL?"
30   ENTER 717;A
```

Equivalent key **[Sweep Setup]** - **Sweep Delay**

:SENS{1-4}:SWE:POIN

Syntax   :SENSe{[1]|2|3|4}:SWEep:POINts <numeric>

                :SENSe{[1]|2|3|4}:SWEep:POINts?

Description   Sets the number of measurement points of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	<numeric>
Description	Number of measurement points
Range	2 to 1601
Preset value	201
Resolution	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS1:SWE:POIN 801"
20   OUTPUT 717;":SENS1:SWE:POIN?"
30   ENTER 717;A
```

Equivalent key   **[Sweep Setup]** - **Points**

13. SCPI Command
Reference

:SENS{1-4}:SWE:TIME

Syntax :SENSe{[1]|2|3|4}:SWEep:TIME[:DATA] <numeric>

:SENSe{[1]|2|3|4}:SWEep:TIME[:DATA]?

Description Sets the sweep time of channel 1 (:SENS1) to channel 4 (:SENS4).

When the auto setting of the sweep time is ON, even if you try to set the sweep time to any value with this command, it automatically returns to the value defined by the E5061A/E5062A. Before using this command, turns OFF the auto setting of the sweep time (specify OFF with the :SENS{1-4}:SWE:TIME:AUTO command).

Parameters

	<numeric>
Description	Sweep time
Range	Varies depending on the measurement conditions.
Preset value	Varies depending on the measurement conditions.
Unit	s (second)

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SENS1:SWE:TIME 1.5"
20    OUTPUT 717;":SENS1:SWE:TIME?"
30    ENTER 717;A
```

Related commands :SENS{1-4}:SWE:TIME:AUTO on page 427

Equivalent key **[Sweep Setup]** - **Sweep Time**

:SENS{1-4}:SWE:TIME:AUTO

Syntax   :SENSe{[1]|2|3|4}:SWEep:TIME:AUTO {ON|OFF|1|0}

                          :SENSe{[1]|2|3|4}:SWEep:TIME:AUTO?

Description   Sets whether to automatically set the sweep time of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	Description
ON or 1 (preset value)	Turns ON the auto setting.
OFF or 0	Turns OFF the auto setting.

Query response   {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":SENS1:SWE:TIME:AUTO ON"
20   OUTPUT 717;":SENS1:SWE:TIME:AUTO?"
30   ENTER 717;A
```

Related commands   :SENS{1-4}:SWE:TIME on page 426

Equivalent key   **[Sweep Setup]** - **Sweep Time**

:SENS{1-4}:SWE:TYPE

Syntax   :SENSe{[1]|2|3|4}:SWEep:TYPE {LINear|LOGarithmic|SEGMent|POWer}

                        :SENSe{[1]|2|3|4}:SWEep:TYPE?

Description   Sets the sweep type of channel 1 (:SENS1) to channel 4 (:SENS4).

Parameters

	Description
LINear (preset value)	Specifies the linear sweep.
LOGarithmic	Specifies the logarithmic sweep.[1]
SEGMent	Specifies the segment sweep.
POWer	Specifies the power sweep.

> *1. If you execute this command to try to specify the log sweep when the frequency span condition necessary for the log sweep is not satisfied (the stop frequency is about 4 times or more the start frequency), an error occurs and the command is ignored.

Query response   {LIN|LOG|SEGM|POW}<newline><^END>

Example of use   10   OUTPUT 717;":SENS1:SWE:TYPE SEGM"
                        20   OUTPUT 717;":SENS1:SWE:TYPE?"
                        30   ENTER 717;A$

Equivalent key   **[Sweep Setup]** - **Sweep Type** - **Lin Freq**|**Log Freq**|**Segment**

:SERV:CHAN:ACT?

Syntax   :SERVice:CHANnel:ACTive?

Description   Reads out the active channel number. (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":SERV:CHAN:ACT?"
                        20   ENTER 717;A

Related commands   :DISP:WIND{1-4}:ACT on page 318

Equivalent key   No equivalent key is available on the front panel.

:SERV:CHAN:COUN?

Syntax   :SERVice:CHANnel:COUNt?

Description   Reads out the upper limit of the number of channels of the E5061A/E5062A. (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":SERV:CHAN:COUN?"
                  20   ENTER 717;A

Equivalent key   No equivalent key is available on the front panel.

:SERV:CHAN{1-4}:TRAC:ACT?

Syntax   :SERVice:CHANnel{[1]|2|3|4}:TRACe:ACTive?

Description   Reads out the active trace number of channel 1 (:CHAN1) to channel 4 (:CHAN4). (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":SERV:CHAN1:TRAC:ACT?"
                  20   ENTER 717;A

Related commands :CALC{1-4}:PAR{1-4}:SEL on page 286

Equivalent key   No equivalent key is available on the front panel.

:SERV:CHAN:TRAC:COUN?

Syntax   :SERVice:CHANnel:TRACe:COUNt?

Description   Reads out the upper limit of the number of traces per channel. (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":SERV:CHAN:TRAC:COUN?"
                  20   ENTER 717;A

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

:SERV:PORT:COUN?

Syntax :SERVice:PORT:COUNt?

Description Reads out the number of ports of the E5061A/E5062A. (Query only)

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":SERV:PORT:COUN?"
20   ENTER 717;A
```

Equivalent key No equivalent key is available on the front panel.

:SOUR{1-4}:POW

Syntax
:SOURce{[1]|2|3|4}:POWer[:LEVel][:IMMediate]
[:AMPLitude] <numeric>

:SOURce{[1]|2|3|4}:POWer[:LEVel][:IMMediate]
[:AMPLitude]?

Description
Sets the power level of channel 1 (:SOUR1) to channel 4 (:SOUR4).

Parameters

	<numeric>
Description	Power level
Range	Varies depending on the power range.
Preset value	0
Unit	dBm
Resolution	0.05

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response
{numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SOUR1:POW -12.5"
20    OUTPUT 717;":SOUR1:POW?"
30    ENTER 717;A
```

Related commands
:SOUR{1-4}:POW:ATT on page 432

Equivalent key
[Sweep Setup] - **Power**

:SOUR{1-4}:POW:ATT

Syntax :SOURce{[1]|2|3|4}:POWer:ATTenuation[:DATA] <numeric>

:SOURce{[1]|2|3|4}:POWer:ATTenuation[:DATA]?

Description Sets the power range of channel 1 (:SOUR1) to channel 4 (:SOUR4).

The power range is selected depending on the setting of the attenuator. The following table shows the relationship between the attenuator value and the power range.

Attenuator	Power range	Attenuator	Power range
0 dB	-5 to +10 dBm	30 dB	-35 to -20 dBm
10 dB	-15 to 0 dBm	40 dB	-45 to -30 dBm
20 dB	-25 to -10 dBm		

If you execute this command when the power range extension function is not installed, an error occurs and the command is ignored.

Parameters

	<numeric>
Description	Attenuator value
Range	0 to 40
Preset value	0
Unit	dB
Resolution	10

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":SOUR1:POW:ATT 10"
20   OUTPUT 717;":SOUR1:POW:ATT?"
30   ENTER 717;A
```

Related commands :SOUR{1-4}:POW on page 431

Equivalent key **[Sweep Setup]** - **Power** - **Power Ranges**

:SOUR{1-4}:POW:CENT

Syntax
:SOURce{[1]|2|3|4}:POWer:CENTer <numeric>

:SOURce{[1]|2|3|4}:POWer:CENTer?

Description
Sets the center value of the sweep range for the power sweep for channel 1 (:SOUR1) to channel 4 (:SOUR4).

Parameters

	<numeric>
Description	Center value
Range	Varies depending on the power range.
Preset value	-2.5
Unit	dBm
Resolution	0.05 or 0.025

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response
{numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SOUR1:POW:CENT 0"
20    OUTPUT 717;":SOUR1:POW:CENT?"
30    ENTER 717;A
```

Related commands
:SENS{1-4}:SWE:TYPE on page 428

:SOUR{1-4}:POW:ATT on page 432

:SOUR{1-4}:POW:SPAN on page 438

Equivalent key
[Center]

13. SCPI Command
Reference

:SOUR{1-4}:POW:PORT:COUP

Syntax   :SOURce{[1]|2|3|4}:POWer:PORT:COUPle {ON|OFF|1|0}

              :SOURce{[1]|2|3|4}:POWer:PORT:COUPle?

Description   Sets whether to output the same power level for each port of channel 1 (:SOUR1) to
              channel 4 (:SOUR4). When the power slope feature is on (ON specified with the
              :SOUR{1-4}:POW:SLOP:STAT command), the same power level is always outputted to
              all ports regardless of this setting because different power levels cannot be outputted for
              each port.

Parameters

	Description
ON or 1 (preset value)	Outputs the same power level to individual ports.
OFF or 0	Outputs different power levels to individual ports.

Query response   {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":SOUR1:POW:PORT:COUP OFF"
20    OUTPUT 717;":SOUR1:POW:PORT:COUP?"
30    ENTER 717;A
```

Related commands :SOUR{1-4}:POW:PORT{1-2} on page 435

Equivalent key   **[Sweep Setup]** - **Power** - **Port Couple**

:SOUR{1-4}:POW:PORT{1-2}

Syntax   :SOURce{[1]|2|3|4}:POWer:PORT{[1]|2}[:LEVel][:IMMediate][:AMPLitude] <numeric>

                :SOURce{[1]|2|3|4}:POWer:PORT{[1]|2}[:LEVel][:IMMediate][:AMPLitude]?

Description   Sets the power level of port 1 (:PORT1) to port 2 (:PORT2) of channel 1 (:SOUR1) to
                channel 4 (:SOUR4).

Parameters

	\<numeric\>
Description	The power level at the specified port.
Range	Varies depending on the power range.
Preset value	0
Unit	dBm
Resolution	0.05

                If the specified parameter is out of the allowable setup range, the minimum value (if the
                lower limit of the range is not reached) or the maximum value (if the upper limit of the
                range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use 10   OUTPUT 717;":SOUR1:POW:PORT1 -12.5"
                20   OUTPUT 717;":SOUR1:POW:PORT1?"
                30   ENTER 717;A

Related commands :SOUR{1-4}:POW:PORT:COUP on page 434

                :SOUR{1-4}:POW:ATT on page 432

Equivalent key **[Sweep Setup]** - **Power** - **Port Power** - **Port 1 Power**|**Port 2 Power**

13. SCPI Command
Reference

:SOUR{1-4}:POW:SLOP

Syntax   :SOURce{[1]|2|3|4}:POWer[:LEVel]:SLOPe[:DATA] <numeric>

                     :SOURce{[1]|2|3|4}:POWer[:LEVel]:SLOPe[:DATA]?

Description   Sets the correction value of the power slope feature of channel 1 (:SOUR1) to channel 4 (:SOUR4).

Parameters

	<numeric>
Description	The correction value of the power slope feature
Range	-2 to 2
Preset value	0
Unit	dB/GHz
Resolution	0.01

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SOUR1:POW:SLOP 0.1"
20    OUTPUT 717;":SOUR1:POW:SLOP?"
30    ENTER 717;A
```

Related commands   :SOUR{1-4}:POW:SLOP:STAT on page 437

Equivalent key   **[Sweep Setup]** - **Power** - **Slop [xxx dB/GHz]**

:SOUR{1-4}:POW:SLOP:STAT

Syntax   :SOURce{[1]|2|3|4}:POWer[:LEVel]:SLOPe:STATe {ON|OFF|1|0}

:SOURce{[1]|2|3|4}:POWer[:LEVel]:SLOPe:STATe?

Description   Turns on/off the power slope feature of channel 1 (:SOUR1) to channel 4 (:SOUR4). This function is a function to correct the attenuation of simple power level proportional to the frequency (attenuation due to cables and so on).

Parameters

	Description
ON or 1	Turns on the power slope feature.
OFF or 0 (preset value)	Turns off the power slope feature.

Query response   {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":SOUR1:POW:SLOP:STAT ON"
20    OUTPUT 717;":SOUR1:POW:SLOP:STAT?"
30    ENTER 717;A
```

Related commands :SOUR{1-4}:POW:SLOP on page 436

Equivalent key   **[Sweep Setup]** - **Power** - **Slop [ON/OFF]**

13. SCPI Command
Reference

:SOUR{1-4}:POW:SPAN

Syntax   :SOURce{[1]|2|3|4}:POWer:SPAN <numeric>

                :SOURce{[1]|2|3|4}:POWer:SPAN?

Description   Sets the span value of the sweep range for the power sweep for channel 1 (:SOUR1) to channel 4 (:SOUR4).

Parameters

	<numeric>
Description	Span value
Range	Varies depending on the power range.
Preset value	5
Unit	dBm
Resolution	0.05

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SOUR1:POW:SPAN 10"
20    OUTPUT 717;":SOUR1:POW:SPAN?"
30    ENTER 717;A
```

Related commands   :SENS{1-4}:SWE:TYPE on page 428

                               :SOUR{1-4}:POW:ATT on page 432

                               :SOUR{1-4}:POW:CENT on page 433

Equivalent key   **[Span]**

:SOUR{1-4}:POW:STAR

Syntax   :SOURce{[1]|2|3|4}:POWer:STARt <numeric>

                :SOURce{[1]|2|3|4}:POWer:STARt?

Description   Sets the start value of the sweep range for the power sweep for channel 1 (:SOUR1) to channel 4 (:SOUR4).

Parameters

	<numeric>
Description	Start value
Range	Varies depending on the power range.
Preset value	-5
Unit	dBm
Resolution	0.05

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":SOUR1:POW:STAR -10"
20    OUTPUT 717;":SOUR1:POW:STAR?"
30    ENTER 717;A
```

Related commands :SENS{1-4}:SWE:TYPE on page 428

                  :SOUR{1-4}:POW:ATT on page 432

                  :SOUR{1-4}:POW:STOP on page 440

Equivalent key **[Start]**

13. SCPI Command
Reference

:SOUR{1-4}:POW:STOP

Syntax
:SOURce{[1]|2|3|4}:POWer:STOP <numeric>

:SOURce{[1]|2|3|4}:POWer:STOP?

Description
Sets the stop value of the sweep range for the power sweep for channel 1 (:SOUR1) to channel 4 (:SOUR4).

Parameters

	\<numeric\>
Description	Stop value
Range	Varies depending on the power range.
Preset value	0
Unit	dBm
Resolution	0.05

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response
{numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":SOUR1:POW:STOP 10"
20   OUTPUT 717;":SOUR1:POW:STOP?"
30   ENTER 717;A
```

Related commands
:SENS{1-4}:SWE:TYPE on page 428

:SOUR{1-4}:POW:ATT on page 432

:SOUR{1-4}:POW:STAR on page 439

Equivalent key
[Stop]

:STAT:OPER?

Syntax   :STATus:OPERation[:EVENt]?

Description   Reads out the value of the Operation Status Event Register. (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":STAT:OPER?"
                    20   ENTER 717;A

Related commands   *CLS on page 196

Equivalent key   No equivalent key is available on the front panel.

:STAT:OPER:COND?

Syntax   :STATus:OPERation:CONDition?

Description   Reads out the value of the Operation Status Condition Register. (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":STAT:OPER:COND?"
                    20   ENTER 717;A

Related commands   :STAT:OPER:NTR on page 443

                    :STAT:OPER:PTR on page 444

Equivalent key   No equivalent key is available on the front panel.

:STAT:OPER:ENAB

Syntax   :STATus:OPERation:ENABle \<numeric\>

                :STATus:OPERation:ENABle?

Description   Sets the value of the Operation Status Enable Register.

Parameters

	\<numeric\>
Description	Value of the enable register
Range	0 to 65535
Preset value	0
Resolution	1

Note that bit 0 to bit 3, bit 6 to bit 13 and bit 15 cannot be set to 1.

Query response {numeric}\<newline\>\<^END\>

Example of use
```
10   OUTPUT 717;":STAT:OPER:ENAB 16"
20   OUTPUT 717;":STAT:OPER:ENAB?"
30   ENTER 717;A
```

Related commands *SRE on page 200

Equivalent key   No equivalent key is available on the front panel.

:STAT:OPER:NTR

Syntax

:STATus:OPERation:NTRansition <numeric>

:STATus:OPERation:NTRansition?

Description

Sets the value of negative transition filter of the Operation Status Register.

Parameters

	<numeric>
Description	Value of the negative transition filter
Range	0 to 65535
Preset value	0
Resolution	1

Note that bit 0 to bit 3, bit 6 to bit 13 and bit 15 cannot be set to 1.

Query response

{numeric}<newline><^END>

Example of use

```
10   OUTPUT 717;":STAT:OPER:NTR 16"
20   OUTPUT 717;":STAT:OPER:NTR?"
30   ENTER 717;A
```

Related commands

:STAT:OPER? on page 441

:STAT:OPER:PTR on page 444

Equivalent key

No equivalent key is available on the front panel.

13. SCPI Command Reference

:STAT:OPER:PTR

Syntax :STATus:OPERation:PTRansition <numeric>

:STATus:OPERation:PTRansition?

Description Sets the value of positive transition filter of the Operation Status Register.

Parameters

	<numeric>
Description	Value of the positive transition filter
Range	0 to 65535
Preset value	16432
Resolution	1

Note that bit 0 to bit 3, bit 6 to bit 13 and bit 15 cannot be set to 1.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":STAT:OPER:PTR 16"
20   OUTPUT 717;":STAT:OPER:PTR?"
30   ENTER 717;A
```

Related commands :STAT:OPER? on page 441

:STAT:OPER:NTR on page 443

Equivalent key No equivalent key is available on the front panel.

:STAT:PRES

Syntax   :STATus:PRESet

Description   Initialize the Operation Status Register, Questionable Status Register, Questionable Limit Status Register, Questionable Limit Extra Status Register, Questionable Limit Channel Status Register, and Questionable Limit Channel Extra Status Register. (No query)

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES?

Syntax   :STATus:QUEStionable[:EVENt]?

Description   Reads out the value of the Questionable Status Event Register. (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":STAT:QUES?"
                        20   ENTER 717;A

Related commands   *CLS on page 196

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:BLIM?

Syntax   :STATus:QUEStionable:BLIMit[:EVENt]?

Description   Reads out the value of the Questionable Bandwidth Limit Status Event Register. (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":STAT:QUES:BLIM?"
                        20   ENTER 717;A

Related commands   *CLS on page 196

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command Reference

:STAT:QUES:BLIM:CHAN{1-4}?

Syntax   :STATus:QUEStionable:BLIMit:CHANnel{[1]|2|3|4}[:EVENt]?

Description   Reads out the value of the Questionable Bandwidth Limit Channel Status Event Register of
                      channel 1 (:CHAN1) to channel 4 (:CHAN4). (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":STAT:QUES:BLIM:CHAN1?"
                      20   ENTER 717;A

Related commands   *CLS on page 196

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:BLIM:CHAN{1-4}:COND?

Syntax   :STATus:QUEStionable:BLIMit:CHANnel{[1]|2|3|4}:CONDition?

Description   Reads out the value of the Questionable Bandwidth Limit Channel Status Condition
                      Register of channel 1 (:CHAN1) to channel 4 (:CHAN4). (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":STAT:QUES:BLIM:CHAN1:COND?"
                      20   ENTER 717;A

Related commands   :STAT:QUES:BLIM:CHAN{1-4}:NTR on page 448

                      :STAT:QUES:BLIM:CHAN{1-4}:PTR on page 449

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:BLIM:CHAN{1-4}:ENAB

Syntax :STATus:QUEStionable:BLIMit:CHANnel{[1]|2|3|4}:ENABle <numeric>

:STATus:QUEStionable:BLIMit:CHANnel{[1]|2|3|4}:ENABle?

Description Sets the value of the Questionable Bandwidth Limit Channel Status Enable Register of channel 1 (:CHAN1) to channel 4 (:CHAN4).

Parameters

	<numeric>
Description	Value of the enable register
Range	0 to 65535
Preset value	Varies depending on the upper limit setting for channel/trace number.
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:BLIM:CHAN1:ENAB 16"
20    OUTPUT 717;":STAT:QUES:BLIM:CHAN1:ENAB?"
30    ENTER 717;A
```

Related commands :STAT:QUES:BLIM:ENAB on page 450

Equivalent key No equivalent key is available on the front panel.

:STAT:QUES:BLIM:CHAN{1-4}:NTR

Syntax   :STATus:QUEStionable:BLIMit:CHANnel{[1]|2|3|4}:NTRansition <numeric>

                      :STATus:QUEStionable:BLIMit:CHANnel{[1]|2|3|4}:NTRansition?

Description   Sets the value of the negative transition filter of the Questionable Bandwidth Limit
Channel Status Register of channel 1 (:CHAN1) to channel 4 (:CHAN4).

Parameters

	<numeric>
Description	Value of the negative transition filter
Range	0 to 65535
Preset value	0
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:BLIM:CHAN1:NTR 16"
20    OUTPUT 717;":STAT:QUES:BLIM:CHAN1:NTR?"
30    ENTER 717;A
```

Related commands   :STAT:QUES:BLIM:CHAN{1-4}? on page 446

                            :STAT:QUES:BLIM:CHAN{1-4}:PTR on page 449

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:BLIM:CHAN{1-4}:PTR

Syntax   :STATus:QUEStionable:BLIMit:CHANnel{[1]|2|3|4}:PTRansition <numeric>

                      :STATus:QUEStionable:BLIMit:CHANnel{[1]|2|3|4}:PTRansition?

Description   Sets the value of the positive transition filter of the Questionable Bandwidth Limit Channel
                      Status Register of channel 1 (:CHAN1) to channel 4 (:CHAN4).

Parameters

	<numeric>
Description	Value of the positive transition filter
Range	0 to 65535
Preset value	Varies depending on the upper limit setting for channel/trace number.
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:BLIM:CHAN1:PTR 16"
20    OUTPUT 717;":STAT:QUES:BLIM:CHAN1:PTR?"
30    ENTER 717;A
```

Related commands   :STAT:QUES:BLIM:CHAN{1-4}? on page 446

                      :STAT:QUES:BLIM:CHAN{1-4}:NTR on page 448

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:BLIM:COND?

Syntax   :STATus:QUEStionable:BLIMit:CONDition?

Description   Reads out the value of the Questionable Bandwidth Limit Status Condition Register.
                      (Query only)

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:BLIM:COND?"
20    ENTER 717;A
```

Related commands   :STAT:QUES:BLIM:NTR on page 451

                      :STAT:QUES:BLIM:PTR on page 452

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:BLIM:ENAB

Syntax
:STATus:QUEStionable:BLIMit:ENABle <numeric>

:STATus:QUEStionable:BLIMit:ENABle?

Description
Sets the value of the Questionable Bandwidth Limit Status Enable Register.

Parameters

	<numeric>
Description	Value of the enable register
Range	0 to 65535
Preset value	Varies depending on the upper limit setting for channel/trace number.
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response
{numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:BLIM:ENAB 16"
20    OUTPUT 717;":STAT:QUES:BLIM:ENAB?"
30    ENTER 717;A
```

Related commands
:STAT:QUES:ENAB on page 454

Equivalent key
No equivalent key is available on the front panel.

:STAT:QUES:BLIM:NTR

Syntax :STATus:QUEStionable:BLIMit:NTRansition <numeric>

:STATus:QUEStionable:BLIMit:NTRansition?

Description Sets the value of the negative transition filter of the Questionable Bandwidth Limit Status Register.

Parameters

	<numeric>
Description	Value of the negative transition filter
Range	0 to 65535
Preset value	0
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":STAT:QUES:BLIM:NTR 16"
20   OUTPUT 717;":STAT:QUES:BLIM:NTR?"
30   ENTER 717;A
```

Related commands :STAT:QUES:BLIM? on page 445

:STAT:QUES:BLIM:PTR on page 452

Equivalent key No equivalent key is available on the front panel.

13. SCPI Command Reference

:STAT:QUES:BLIM:PTR

Syntax   :STATus:QUEStionable:BLIMit:PTRansition <numeric>

                      :STATus:QUEStionable:BLIMit:PTRansition?

Description   Sets the value of the positive transition filter of the Questionable Bandwidth Limit Status
                      Register.

Parameters

	<numeric>
Description	Value of the positive transition filter
Range	0 to 65535
Preset value	Varies depending on the upper limit setting for channel/trace number.
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":STAT:QUES:BLIM:PTR 16"
                      20   OUTPUT 717;":STAT:QUES:BLIM:PTR?"
                      30   ENTER 717;A

Related commands   :STAT:QUES:BLIM? on page 445

                      :STAT:QUES:BLIM:NTR on page 451

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:COND?

Syntax   :STATus:QUEStionable:CONDition?

Description   Reads out the value of the Questionable Status Condition Register. (Query only)

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":STAT:QUES:COND?"
                        20   ENTER 717;A

Related commands   :STAT:QUES:NTR on page 463

                        :STAT:QUES:PTR on page 464

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:ENAB

Syntax   :STATus:QUEStionable:ENABle <numeric>

                   :STATus:QUEStionable:ENABle?

Description   Sets the value of the Questionable Status Enable Register.

Parameters

	\<numeric\>
Description	Value of the enable register
Range	0 to 65535
Preset value	0
Resolution	1

Note that bit 0 to bit 9 and bit 12 to bit 15 cannot be set to 1.

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":STAT:QUES:ENAB 16"
                   20   OUTPUT 717;":STAT:QUES:ENAB?"
                   30   ENTER 717;A

Related commands   *SRE on page 200

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:LIM?

Syntax   :STATus:QUEStionable:LIMit[:EVENt]?

Description   Reads out the value of the Questionable Limit Status Event Register. (Query only)

Query response   {numeric}<newline><^END>

Example of use   ```
10   OUTPUT 717;":STAT:QUES:LIM?"
20   ENTER 717;A
```

Related commands *CLS on page 196

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:LIM:CHAN{1-4}?

Syntax   :STATus:QUEStionable:LIMit:CHANnel{[1]|2|3|4}[:EVENt]?

Description   Reads out the value of the Questionable Limit Channel Status Event Register of channel 1 (:CHAN1) to channel 4 (:CHAN4). (Query only)

Query response   {numeric}<newline><^END>

Example of use   ```
10   OUTPUT 717;":STAT:QUES:LIM:CHAN1?"
20   ENTER 717;A
```

Related commands  *CLS on page 196

Equivalent key    No equivalent key is available on the front panel.


## :STAT:QUES:LIM:CHAN{1-4}:COND?

Syntax            :STATus:QUEStionable:LIMit:CHANnel{[1]|2|3|4}:CONDition?

Description       Reads out the value of the Questionable Limit Channel Status Condition Register of channel 1 (:CHAN1) to channel 4 (:CHAN4). (Query only)

Query response    {numeric}<newline><^END>

Example of use    ```
10   OUTPUT 717;":STAT:QUES:LIM:CHAN1:COND?"
20   ENTER 717;A
```

Related commands :STAT:QUES:LIM:CHAN{1-4}:NTR on page 457

                  :STAT:QUES:LIM:CHAN{1-4}:PTR on page 458

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command Reference

:STAT:QUES:LIM:CHAN{1-4}:ENAB

Syntax :STATus:QUEStionable:LIMit:CHANnel{[1]|2|3|4}:ENABle <numeric>

:STATus:QUEStionable:LIMit:CHANnel{[1]|2|3|4}:ENABle?

Description Sets the value of the Questionable Limit Channel Status Enable Register of channel 1
(:CHAN1) to channel 4 (:CHAN4).

Parameters

	<numeric>
Description	Value of the enable register
Range	0 to 65535
Preset value	30
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:LIM:CHAN1:ENAB 16"
20    OUTPUT 717;":STAT:QUES:LIM:CHAN1:ENAB?"
30    ENTER 717;A
```

Related commands :STAT:QUES:LIM:ENAB on page 460

Equivalent key No equivalent key is available on the front panel.

:STAT:QUES:LIM:CHAN{1-4}:NTR

Syntax :STATus:QUEStionable:LIMit:CHANnel{[1]|2|3|4}:NTRansition <numeric>

:STATus:QUEStionable:LIMit:CHANnel{[1]|2|3|4}:NTRansition?

Description Sets the value of the negative transition filter of the Questionable Limit Channel Status Register of channel 1 (:CHAN1) to channel 4 (:CHAN4).

Parameters

	<numeric>
Description	Value of the negative transition filter
Range	0 to 65535
Preset value	0
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:LIM:CHAN1:NTR 16"
20    OUTPUT 717;":STAT:QUES:LIM:CHAN1:NTR?"
30    ENTER 717;A
```

Related commands :STAT:QUES:LIM:CHAN{1-4}? on page 455

:STAT:QUES:LIM:CHAN{1-4}:PTR on page 458

Equivalent key No equivalent key is available on the front panel.

:STAT:QUES:LIM:CHAN{1-4}:PTR

Syntax :STATus:QUEStionable:LIMit:CHANnel{[1]|2|3|4}:PTRansition <numeric>

:STATus:QUEStionable:LIMit:CHANnel{[1]|2|3|4}:PTRansition?

Description Sets the value of the positive transition filter of the Questionable Limit Channel Status Register of channel 1 (:CHAN1) to channel 4 (:CHAN4).

Parameters

	<numeric>
Description	Value of the positive transition filter
Range	0 to 65535
Preset value	30
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:LIM:CHAN1:PTR 16"
20    OUTPUT 717;":STAT:QUES:LIM:CHAN1:PTR?"
30    ENTER 717;A
```

Related commands :STAT:QUES:LIM:CHAN{1-4}? on page 455

:STAT:QUES:LIM:CHAN{1-4}:NTR on page 457

Equivalent key No equivalent key is available on the front panel.

:STAT:QUES:LIM:COND?

Syntax   :STATus:QUEStionable:LIMit:CONDition?

Description   Reads out the value of the Questionable Limit Status Condition Register. (Query only)

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":STAT:QUES:LIM:COND?"
20   ENTER 717;A
```

Related commands :STAT:QUES:LIM:NTR on page 461

:STAT:QUES:LIM:PTR on page 462

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:LIM:ENAB

Syntax   :STATus:QUEStionable:LIMit:ENABle <numeric>

               :STATus:QUEStionable:LIMit:ENABle?

Description   Sets the value of the Questionable Limit Status Enable Register.

Parameters

	<numeric>
Description	Value of the enable register
Range	0 to 65535
Preset value	30
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response   {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":STAT:QUES:LIM:ENAB 16"
20   OUTPUT 717;":STAT:QUES:LIM:ENAB?"
30   ENTER 717;A
```

Related commands   :STAT:QUES:ENAB on page 454

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:LIM:NTR

Syntax :STATus:QUEStionable:LIMit:NTRansition <numeric>

:STATus:QUEStionable:LIMit:NTRansition?

Description Sets the value of the negative transition filter of the Questionable Limit Status Register.

Parameters

	<numeric>
Description	Value of the negative transition filter
Range	0 to 65535
Preset value	0
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:LIM:CHAN1:NTR 16"
20    OUTPUT 717;":STAT:QUES:LIM:CHAN1:NTR?"
30    ENTER 717;A
```

Related commands :STAT:QUES:LIM? on page 455

:STAT:QUES:LIM:PTR on page 462

Equivalent key No equivalent key is available on the front panel.

:STAT:QUES:LIM:PTR

Syntax   :STATus:QUEStionable:LIMit:PTRansition \<numeric\>

:STATus:QUEStionable:LIMit:PTRansition?

Description   Sets the value of the positive transition filter of the Questionable Limit Status Register.

Parameters

	\<numeric\>
Description	Value of the positive transition filter
Range	0 to 65535
Preset value	30
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response   {numeric}\<newline\>\<^END\>

Example of use
```
10    OUTPUT 717;":STAT:QUES:LIM:CHAN1:PTR 16"
20    OUTPUT 717;":STAT:QUES:LIM:CHAN1:PTR?"
30    ENTER 717;A
```

Related commands   :STAT:QUES:LIM? on page 455

:STAT:QUES:LIM:NTR on page 461

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:NTR

Syntax   :STATus:QUEStionable:NTRansition <numeric>

                  :STATus:QUEStionable:NTRansition?

Description   Sets the value of negative transition filter of the Questionable Status Register.

Parameters

	<numeric>
Description	Value of the negative transition filter
Range	0 to 65535
Preset value	0
Resolution	1

                  Note that bit 0 to bit 9 and bit 12 to bit 15 cannot be set to 1.

Query response   {numeric}<newline><^END>

Example of use   10   OUTPUT 717;":STAT:QUES:NTR 16"
                  20   OUTPUT 717;":STAT:QUES:NTR?"
                  30   ENTER 717;A

Related commands :STAT:QUES? on page 445

                  :STAT:QUES:PTR on page 464

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

:STAT:QUES:PTR

Syntax
:STATus:QUEStionable:PTRansition <numeric>

:STATus:QUEStionable:PTRansition?

Description
Sets the value of positive transition filter of the Questionable Status Register.

Parameters

	<numeric>
Description	Value of the positive transition filter
Range	0 to 65535
Preset value	3072
Resolution	1

Note that bit 0 to bit 9 and bit 12 to bit 15 cannot be set to 1.

Query response
{numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:PTR 16"
20    OUTPUT 717;":STAT:QUES:PTR?"
30    ENTER 717;A
```

Related commands
:STAT:QUES? on page 445

:STAT:QUES:NTR on page 463

Equivalent key
No equivalent key is available on the front panel.

:STAT:QUES:RLIM?

Syntax   :STATus:QUEStionable:RLIMit[:EVENt]?

Description   Reads out the value of the Questionable Ripple Limit Status Event Register. (Query only)

Query response   {numeric}<newline><^END>

Example of use   ```
10   OUTPUT 717;":STAT:QUES:RLIM?"
20   ENTER 717;A
```

Related commands        *CLS on page 196

Equivalent key          No equivalent key is available on the front panel.


# :STAT:QUES:RLIM:CHAN{1-4}?

Syntax                  :STATus:QUEStionable:RLIMit:CHANnel{[1]|2|3|4}[:EVENt]?

Description             Reads out the value of the Questionable Ripple Limit Channel Status Event Register of channel 1 (:CHAN1) to channel 4 (:CHAN4). (Query only)

Query response          {numeric}<newline><^END>

Example of use          ```
10    OUTPUT 717;":STAT:QUES:RLIM:CHAN1?"
20    ENTER 717;A
```

Related commands   *CLS on page 196

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:RLIM:CHAN{1-4}:COND?

Syntax   :STATus:QUEStionable:RLIMit:CHANnel{[1]|2|3|4}:CONDition?

Description   Reads out the value of the Questionable Ripple Limit Channel Status Condition Register of channel 1 (:CHAN1) to channel 4 (:CHAN4). (Query only)

Query response   {numeric}<newline><^END>

Example of use   ```
10   OUTPUT 717;":STAT:QUES:RLIM:CHAN1:COND?"
20   ENTER 717;A
```

Related commands        :STAT:QUES:RLIM:CHAN{1-4}:NTR on page 467

                        :STAT:QUES:RLIM:CHAN{1-4}:PTR on page 468

Equivalent key          No equivalent key is available on the front panel.

# :STAT:QUES:RLIM:CHAN{1-4}:ENAB

Syntax          :STATus:QUEStionable:RLIMit:CHANnel{[1]|2|3|4}:ENABle <numeric>

                :STATus:QUEStionable:RLIMit:CHANnel{[1]|2|3|4}:ENABle?

Description     Sets the value of the Questionable Ripple Limit Channel Status Enable Register of channel
                1 (:CHAN1) to channel 4 (:CHAN4).

Parameters

|  | **<numeric>** |
|---|---|
| Description | Value of the enable register |
| Range | 0 to 65535 |
| Preset value | Varies depending on the upper limit setting for channel/trace number. |
| Resolution | 1 |

                Note that bit 5 to 15 cannot be set to 1.

Query response  {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":STAT:QUES:RLIM:CHAN1:ENAB 16"
20   OUTPUT 717;":STAT:QUES:RLIM:CHAN1:ENAB?"
30   ENTER 717;A
```

Related commands  :STAT:QUES:RLIM:ENAB on page 469

Equivalent key    No equivalent key is available on the front panel.

# :STAT:QUES:RLIM:CHAN{1-4}:NTR

Syntax                  :STATus:QUEStionable:RLIMit:CHANnel{[1]|2|3|4}:NTRansition <numeric>

                        :STATus:QUEStionable:RLIMit:CHANnel{[1]|2|3|4}:NTRansition?

Description             Sets the value of the negative transition filter of the Questionable Ripple Limit Channel
                        Status Register of channel 1 (:CHAN1) to channel 4 (:CHAN4).

Parameters

|  | **\<numeric\>** |
|---|---|
| Description | Value of the negative transition filter |
| Range | 0 to 65535 |
| Preset value | 0 |
| Resolution | 1 |

Note that bit 5 to 15 cannot be set to 1.

Query response          {numeric}<newline><^END>

Example of use          ```
10    OUTPUT 717;":STAT:QUES:RLIM:CHAN1:NTR 16"
20    OUTPUT 717;":STAT:QUES:RLIM:CHAN1:NTR?"
30    ENTER 717;A
```

Related commands   :STAT:QUES:RLIM:CHAN{1-4}? on page 465

                        :STAT:QUES:RLIM:CHAN{1-4}:PTR on page 468

Equivalent key   No equivalent key is available on the front panel.

13. SCPI Command
Reference

:STAT:QUES:RLIM:CHAN{1-4}:PTR

Syntax
:STATus:QUEStionable:RLIMit:CHANnel{[1]|2|3|4}:PTRansition <numeric>

:STATus:QUEStionable:RLIMit:CHANnel{[1]|2|3|4}:PTRansition?

Description
Sets the value of the positive transition filter of the Questionable Ripple Limit Channel
Status Register of channel 1 (:CHAN1) to channel 4 (:CHAN4).

Parameters

	<numeric>
Description	Value of the positive transition filter
Range	0 to 65535
Preset value	Varies depending on the upper limit setting for channel/trace number.
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response
{numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:RLIM:CHAN1:PTR 16"
20    OUTPUT 717;":STAT:QUES:RLIM:CHAN1:PTR?"
30    ENTER 717;A
```

Related commands
:STAT:QUES:RLIM:CHAN{1-4}? on page 465

:STAT:QUES:RLIM:CHAN{1-4}:NTR on page 467

Equivalent key
No equivalent key is available on the front panel.

:STAT:QUES:RLIM:COND?

Syntax
:STATus:QUEStionable:RLIMit:CONDition?

Description
Reads out the value of the Questionable Ripple Limit Status Condition Register. (Query
only)

Query response
{numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:RLIM:COND?"
20    ENTER 717;A
```

Related commands
:STAT:QUES:RLIM:NTR on page 470

:STAT:QUES:RLIM:PTR on page 471

Equivalent key
No equivalent key is available on the front panel.

:STAT:QUES:RLIM:ENAB

Syntax   :STATus:QUEStionable:RLIMit:ENABle <numeric>

                       :STATus:QUEStionable:RLIMit:ENABle?

Description   Sets the value of the Questionable Ripple Limit Status Enable Register.

Parameters

	<numeric>
Description	Value of the enable register
Range	0 to 65535
Preset value	Varies depending on the upper limit setting for channel/trace number.
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response   {numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:RLIM:ENAB 16"
20    OUTPUT 717;":STAT:QUES:RLIM:ENAB?"
30    ENTER 717;A
```

Related commands   :STAT:QUES:ENAB on page 454

Equivalent key   No equivalent key is available on the front panel.

:STAT:QUES:RLIM:NTR

Syntax
:STATus:QUEStionable:RLIMit:NTRansition <numeric>

:STATus:QUEStionable:RLIMit:NTRansition?

Description
Sets the value of the negative transition filter of the Questionable Ripple Limit Status Register.

Parameters

	<numeric>
Description	Value of the negative transition filter
Range	0 to 65535
Preset value	0
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response
{numeric}<newline><^END>

Example of use
```
10    OUTPUT 717;":STAT:QUES:RLIM:NTR 16"
20    OUTPUT 717;":STAT:QUES:RLIM:NTR?"
30    ENTER 717;A
```

Related commands
:STAT:QUES:RLIM? on page 465

:STAT:QUES:RLIM:PTR on page 471

Equivalent key
No equivalent key is available on the front panel.

:STAT:QUES:RLIM:PTR

Syntax :STATus:QUEStionable:RLIMit:PTRansition <numeric>

:STATus:QUEStionable:RLIMit:PTRansition?

Description Sets the value of the positive transition filter of the Questionable Ripple Limit Status Register.

Parameters

	<numeric>
Description	Value of the positive transition filter
Range	0 to 65535
Preset value	Varies depending on the upper limit setting for channel/trace number.
Resolution	1

Note that bit 5 to 15 cannot be set to 1.

Query response {numeric}<newline><^END>

Example of use
```
10   OUTPUT 717;":STAT:QUES:RLIM:PTR 16"
20   OUTPUT 717;":STAT:QUES:RLIM:PTR?"
30   ENTER 717;A
```

Related commands :STAT:QUES:RLIM? on page 465

:STAT:QUES:RLIM:NTR on page 470

Equivalent key No equivalent key is available on the front panel.

13. SCPI Command
Reference

:SYST:BACK

Syntax :SYSTem:BACKlight {ON|OFF|1|0}

:SYSTem:BACKlight?

Description Turns ON/OFF the backlight of the LCD display.

When the backlight is OFF, you cannot read the information on the display.

Parameters

	Description
ON or 1 (preset value)	Turns ON the backlight.
OFF or 0	Turns OFF the backlight.

Query response {1|0}<newline><^END>

Example of use
```
10    OUTPUT 717;":SYST:BACK OFF"
20    OUTPUT 717;":SYST:BACK?"
30    ENTER 717;A
```

Equivalent key **[System]** - **Backlight**

To turn it ON, press any key on the front panel.

:SYST:BEEP:COMP:IMM

Syntax   :SYSTem:BEEPer:COMPlete:IMMediate

Description   Generates a beep for the notification of the completion of the operation. (No query)

Example of use   10   OUTPUT 717;":SYST:BEEP:COMP:IMM"

Related commands   :SYST:BEEP:COMP:STAT on page 473

                        :SYST:BEEP:WARN:IMM on page 474

Equivalent key   **[System]** - **Misc Setup** - **Beeper** - **Test Beep Complete**

:SYST:BEEP:COMP:STAT

Syntax   :SYSTem:BEEPer:COMPlete:STATe {ON|OFF|1|0}

                        :SYSTem:BEEPer:COMPlete:STATe?

Description   Turns ON/OFF the beeper for the notification of the completion of the operation.

Parameters

	Description
ON or 1 (preset value)	Turns ON the beeper.
OFF or 0	Turns OFF the beeper.

Query response   {1|0}<newline><^END>

Example of use   10   OUTPUT 717;":SYST:BEEP:COMP:STAT OFF"
                        20   OUTPUT 717;":SYST:BEEP:COMP:STAT?"
                        30   ENTER 717;A

Related commands   :SYST:BEEP:COMP:IMM on page 473

                        :SYST:BEEP:WARN:STAT on page 474

Equivalent key   **[System]** - **Misc Setup** - **Beeper** - **Beep Complete**

13. SCPI Command
Reference

:SYST:BEEP:WARN:IMM

Syntax   :SYSTem:BEEPer:WARNing:IMMediate

Description   Generates a beep for the notification of warning/limit test result. (No query)

Example of use   `10    OUTPUT 717;":SYST:BEEP:WARN:IMM"`

Related commands   :SYST:BEEP:WARN:STAT on page 474

                       :SYST:BEEP:COMP:IMM on page 473

Equivalent key   **[System]** - **Misc Setup** - **Beeper** - **Test Beep Warning**

:SYST:BEEP:WARN:STAT

Syntax   :SYSTem:BEEPer:WARNing:STATe {ON|OFF|1|0}

                       :SYSTem:BEEPer:WARNing:STATe?

Description   Turns ON/OFF the beeper for the notification of warning/limit test result.

Parameters

	Description
ON or 1 (preset value)	Turns ON the beeper.
OFF or 0	Turns OFF the beeper.

Query response   {1|0}<newline><^END>

Example of use   `10    OUTPUT 717;":SYST:BEEP:WARN:STAT OFF"`
                       `20    OUTPUT 717;":SYST:BEEP:WARN:STAT?"`
                       `30    ENTER 717;A`

Related commands   :SYST:BEEP:WARN:IMM on page 474

                       :SYST:BEEP:COMP:STAT on page 473

Equivalent key   **[System]** - **Misc Setup** - **Beeper** - **Beep Warning**

:SYST:DATE

Syntax   :SYSTem:DATE <numeric 1>,<numeric 2>,<numeric 3>

                        :SYSTem:DATE?

Description   Sets the date of the clock built in the E5061A/E5062A.

Parameters

	<numeric 1>	<numeric 2>	<numeric 3>
Description	Year	Month	Day
Range	1980 to 2099	1 to 12	1 to 31
Resolution	1	1	1

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response   {numeric 1},{numeric 2},{numeric 3}<newline><^END>

Example of use   10   OUTPUT 717;":SYST:DATE 2002,1,1"
                        20   OUTPUT 717;":SYST:DATE?"
                        30   ENTER 717;A,B,C

Related commands   :SYST:TIME on page 482

                        :DISP:CLOC on page 305

Equivalent key   **[System]** - **Misc Setup** - **Clock Setup** - **Set Date and Time**

13. SCPI Command
Reference

:SYST:ERR?

Syntax :SYSTem:ERRor?

Description Reads out the oldest error of the errors stored in the error queue of the E5061A/E5062A. The read-out error is deleted from the error queue. The size of the error queue is 100.

Executing the *CLS command clears the errors stored in the error queue. (Query only)

NOTE This command can not return an error that occurs by the manual operation or the COM object used in controlling the E5061A/E5062A from the VBA Macro.

Query response {numeric},{string}<newline><^END>

{numeric}: Error number

{string}: Error message (a character string with double quotation marks ("))

If no error is stored in the error queue, 0 and "No error" are read out as the error number and the error message.

Example of use
```
10   OUTPUT 717;":SYST:ERR?"
20   ENTER 717;A,B$
```

Related commands *CLS on page 196

Equivalent key No equivalent key is available on the front panel.

:SYST:KLOC:KBD

Syntax   :SYSTem:KLOCk:KBD {ON|OFF|1|0}

                  :SYSTem:KLOCk:KBD?

Description   Sets whether to lock the operation of the front panel (key and rotary knob) and keyboard.

Parameters

	Description
ON or 1	Specifies lock.
OFF or 0 (preset value)	Specifies unlock.

Query response   {1|0}<newline><^END>

Example of use   ```
10   OUTPUT 717;":SYST:KLOC:KBD ON"
20   OUTPUT 717;":SYST:KLOC:KBD?"
30   ENTER 717;A
```

Related commands  :SYST:KLOC:MOUS on page 478

Equivalent key    **[System]** - **Misc Setup** - **Key Lock** - **Front Panel & Keyboard Lock**

13. SCPI Command
Reference

# :SYST:KLOC:MOUS

Syntax          :SYSTem:KLOCk:MOUSe {ON|OFF|1|0}

                :SYSTem:KLOCk:MOUSe?

Description     Sets whether to lock the operation of the mouse and touch screen.

Parameters

|                        | **Description**      |
|------------------------|---------------------|
| ON or 1                | Specifies lock.     |
| OFF or 0 (preset value)| Specifies unlock.   |

Query response  {1|0}<newline><^END>

Example of use
```
10   OUTPUT 717;":SYST:KLOC:MOUS ON"
20   OUTPUT 717;":SYST:KLOC:MOUS?"
30   ENTER 717;A
```

Related commands  :SYST:KLOC:KBD on page 477

Equivalent key    **[System]** - **Misc Setup** - **Key Lock** - **Mouse Lock**

## :SYST:POFF

Syntax :SYSTem:POFF

Description Turns OFF the E5061A/E5062A. (No query)

Example of use 10    OUTPUT 717;":SYST:POFF"

Equivalent key Standby switch

## :SYST:PRES

Syntax :SYSTem:PRESet

Description Performs preset.

There is the following difference from the setting state preset with the *RST command. (No query)

• The continuous initiation mode of channel 1 is set to ON.

Example of use 10    OUTPUT 717;":SYST:PRES"

Related commands *RST on page 199

:SYST:UPR on page 483

Equivalent key **[Preset]** - **OK**

13. SCPI Command Reference

# :SYST:SEC:LEV

Syntax      :SYSTem:SECurity[:LEVel] {NON|LOW|HIGH}

:SYSTem:SECurity[:LEVel]?

Description      Sets/Reads the security level.

Parameters

| | **Description** |
|---|---|
| NON (preset value) | Turns OFF the security level. |
| LOW | Turns ON and specifies LOW level to the security level. |
| HIGH | Turns ON and specifies HIGH level to the security level. |

When the setting of security level is LOW, it is able to change to NON or HIGH. But when this setting is HIGH, it is not able to change NON or LOW.

The setting of security level can be turned NON by executing the preset or recalling when the setting of security level is HIGH.

Even if the setting of security level is ON, the command that reads out the frequency is not influenced.

Query response      {NON|LOW|HIGH}<newline><^END>

Example of use
```
10   OUTPUT 717;":SYST:SEC LOW"
20   OUTPUT 717;":SYST:SEC?"
30   ENTER 717;A$
```

Equivalent key      **[System]** - **Service Menu** - **Security Level** - **None**|**Low**|**High**

## :SYST:SERV?

Syntax             :SYSTem:SERVice?

Description        Reads out whether to be in the service mode. (Query only)

Query response     {1|0}<newline><^END>

|   | **Description** |
|---|-----------------|
| 1 | In the service mode. |
| 0 | Not in the service mode. |

Example of use     
```
10   OUTPUT 717;":SYST:SERV?"
30   ENTER 717;A
```

Equivalent key     Displayed on the instrument status bar (at the bottom of the LCD display).

# :SYST:TIME

Syntax　　　　　　:SYSTem:TIME <numeric 1>,<numeric 2>,<numeric 3>

:SYSTem:TIME?

Description　　　　Sets the time of the clock built in the E5061A/E5062A.

Parameters

|  | **<numeric 1>** | **<numeric 2>** | **<numeric 3>** |
|---|---|---|---|
| Description | Hour (24-hour basis) | Minute | Second |
| Range | 0 to 23 | 0 to 59 | 0 to 59 |
| Resolution | 1 | 1 | 1 |

If the specified parameter is out of the allowable setup range, the minimum value (if the lower limit of the range is not reached) or the maximum value (if the upper limit of the range is exceeded) is set.

Query response　　{numeric 1},{numeric 2},{numeric 3}<newline><^END>

Example of use
```
10   OUTPUT 717;":SYST:TIME 17,30,0"
20   OUTPUT 717;":SYST:TIME?"
30   ENTER 717;A,B,C
```

Related commands　:SYST:DATE on page 475

:DISP:CLOC on page 305

Equivalent key　　**[System]** - **Misc Setup** - **Clock Setup** - **Set Date and Time**

# :SYST:UPR

Syntax                  :SYSTem:UPReset

Description             Executes the user-specified preset.

The command is executed regardless of the preset operation mode. (No query)

If the user-specified preset file (D:\UserPreset.sta) does not exist, a warning message is displayed, and ":SYST:PRES" is executed.

Example of use          10    OUTPUT 717;":SYST:UPR"

Related commands        *RST on page 199

:SYST:PRES on page 479

Equivalent key          **[Preset]** - **OK**

# :TRIG

| | |
|---|---|
| Syntax | :TRIGger[:SEQuence][:IMMediate] |
| Description | Regardless of the setting of the trigger mode, generates a trigger immediately and executes a measurement. |
| | There is the following difference from the trigger with the :TRIG:SING command. |
| | • The execution of the command finishes at the time of a trigger. |
| | If you execute this command when the trigger system is not in the trigger wait state (trigger event detection state), an error occurs and the command is ignored. |
| | For details about the trigger system, refer to "Trigger system" on page 80. (No query) |
| Example of use | 10    OUTPUT 717;":TRIG" |
| Related commands | :TRIG:SING on page 484 |
| Equivalent key | No equivalent key is available on the front panel. |

# :TRIG:SING

| | |
|---|---|
| Syntax | :TRIGger[:SEQuence]:SINGle |
| Description | Regardless of the setting of the trigger mode, generates a trigger immediately and executes a measurement. |
| | There is the following difference from the trigger with the :TRIG command. |
| | • The execution of the command finishes when the measurement (all sweeps) initiated with this command finishes. In other words, you can wait for the end of the measurement using the *OPC? command. |
| | If you execute this command when the trigger system is not in the trigger wait state (trigger event detection state), an error occurs and the command is ignored. |
| | For details about the trigger system, refer to "Trigger system" on page 80. (No query) |
| Example of use | 10    OUTPUT 717;":TRIG:SING"<br>20    OUTPUT 717;"*OPC?"<br>30    ENTER 717;A |
| Related commands | :TRIG on page 484 |
| | *OPC? on page 198 |
| Equivalent key | No equivalent key is available on the front panel. |

# :TRIG:SOUR

Syntax                  :TRIGger[:SEQuence]:SOURce {INTernal|EXTernal|MANual|BUS}

                        :TRIGger[:SEQuence]:SOURce?

Description             Selects the trigger source from the following 4 types.

    Internal            Uses the internal trigger to generate continuous triggers automatically.

    External            Generates a trigger when the trigger signal is inputted externally via the Ext Trig connector or the handler interface.

    Manual              Generates a trigger when the key operation of **[Trigger]** - **Trigger** is executed from the front panel.

    Bus                 Generates a trigger when the \*TRG command is executed.

    When you change the trigger source during sweep, the sweep is canceled.

Parameters

|                         | **Description**         |
|-------------------------|-------------------------|
| INTernal (preset value) | Specifies internal.     |
| EXTernal                | Specifies external.     |
| MANual                  | Specifies manual.       |
| BUS                     | Specifies bus.          |

Query response          {BUS|EXT|INT|MAN}<newline><^END>

Example of use          
```
10   OUTPUT 717;":TRIG:SOUR BUS"
20   OUTPUT 717;":TRIG:SOUR?"
30   ENTER 717;A$
```

Related commands        \*TRG on page 201

Equivalent key          **[Trigger]** - **Trigger Source** - **Internal**|**External**|**Manual**|**Bus**

# Command list

## Command tree

Table 13-1 shows the SCPI command tree of the E5061A/E5062A.

**Table 13-1** **E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| ABORt | | [No query] |
| | | |
| CALCulate{[1]|2|3|4} | | |
|    :PARameter | | |
|       :COUNt | &lt;numeric&gt; | |
|    :PARameter{[1]|2|3|4} | | |
|       :DEFine | {S11|S21|S12|S22} | |
|       :SELect | | [No query] |
|    [:SELected] | | |
|       :BLIMit | | |
|          :DB | &lt;numeric&gt; | |
|          :DISPlay | | |
|             :MARKer | {ON|OFF|1|0} | |
|             :VALue | {ON|OFF|1|0} | |
|          :FAIL? | | [Query only] |
|          :MAXimum | &lt;numeric&gt; | |
|          :MINimum | &lt;numeric&gt; | |
|          :REPort | | |
|             [:DATA]? | | [Query only] |
|          [:STATe] | {ON|OFF|1|0} | |
|       :CONVersion | | |
|          :FUNCtion | {ZREFlection|ZTRansmit|YREFlection|YTRansmit|INVersion} | |
|          [:STATe] | {ON|OFF|1|0} | |
|       :CORRection | | |
|          :EDELay | | |
|             :TIME | &lt;numeric&gt; | |
|          :OFFSet | | |
|             :PHASe | &lt;numeric&gt; | |
|       :DATA | | |
|          :FDATa | &lt;numeric&gt;,…,&lt;numeric&gt; (number of measurement points × 2 parameters) | |
|          :FMEMory | &lt;numeric&gt;,…,&lt;numeric&gt; (number of measurement points × 2 parameters) | |
|          :SDATa | &lt;numeric&gt;,…,&lt;numeric&gt; (number of measurement points × 2 parameters) | |
|          :SMEMory | &lt;numeric&gt;,…,&lt;numeric&gt; (number of measurement points × 2 parameters) | |
|       :FORMat | {MLOGarithmic|PHASe|GDELay|SLINear|SLOGarithmic| SCOMplex|SMITh|SADMittance|PLINear|PLOGarithmic| POLar|MLINear|SWR|REAL|IMAGinary|UPHase|PPHase} | |

**Table 13-1    E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| CALCulate{[1]|2|3|4} | | |
|     [:SELected] | | |
|         :FUNCtion | | |
|            :DOMain | | |
|                :COUPle | {ON|OFF|1|0} | |
|                :STARt | \<numeric> | |
|                [:STATe] | {ON|OFF|1|0} | |
|                :STOP | \<numeric> | |
|            :EXECute | | [No query] |
|            :PEXCursion | \<numeric> | |
|            :POINts? | | [Query only] |
|            :PPOLarity | {POSitive|NEGative|BOTH} | |
|            :TARGet | \<numeric> | |
|            :TTRansition | {POSitive|NEGative|BOTH} | |
|            :TYPE | {PTPeak|STDEV|MEAN|MAXimum|MINimum|PEAK|APEak|ATARget} | |
|         :LIMit | | |
|            :DATA | \<numeric>,…,\<numeric> (1 + number of lines × 5 parameters) | |
|            :DISPlay | | |
|                [:STATe] | {ON|OFF|1|0} | |
|                :CLIP | {ON|OFF|1|0} | |
|            :FAIL? | | [Query only] |
|            :OFFSet | | |
|                :AMPLitude | \<numeric> | |
|                :MARKer? | | [Query only] |
|                :STIMulus | \<numeric> | |
|            :REPort | | |
|                :ALL? | | [Query only] |
|                [:DATA]? | | [Query only] |
|                :POINts? | | [Query only] |
|            [:STATe] | {ON|OFF|1|0} | |
|         :MARKer | | |
|            :BWIDth | | |
|                [:STATe] | {ON|OFF|1|0} | |
|            :COUPle | {ON|OFF|1|0} | |
|            :DISCrete | {ON|OFF|1|0} | |
|            :FUNCtion | | |
|                :DOMain | | |
|                     :COUPle | {ON|OFF|1|0} | |
|                     :STARt | \<numeric> | |
|                     [:STATe] | {ON|OFF|1|0} | |
|                     :STOP | \<numeric> | |
|                :MULTi | | |
|                     :PEXCursion | \<numeric> | |
|                     :PPOLarity | {POSitive|NEGative|BOTH} | |
|                     :TARGet | \<numeric> | |
|                     :TRACking | {ON|OFF|1|0} | |

**Table 13-1       E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| CALCulate{[1]\|2\|3\|4} | | |
|     [:SELected] | | |
|         :MARKer | | |
|             :FUNCtion | | |
|                 :MULTi | | |
|                     :TTRansition | {POSitive\|NEGative\|BOTH} | |
|                     :TYPE | {OFF\|PEAK\|TARGet} | |
|             :MATH | | |
|                 :FLATness | | |
|                     :DATA? | | [Query only] |
|                     [:STATe] | {ON\|OFF\|1\|0} | |
|                 :FSTatistics | | |
|                     :DATA? | | [Query only] |
|                     [:STATe] | {ON\|OFF\|1\|0} | |
|                 :STSTistics | | |
|                     :DATA? | | [Query only] |
|                     [:STATe] | {ON\|OFF\|1\|0} | |
|             :NOTCh | | |
|                 [:STATe] | {ON\|OFF\|1\|0} | |
|             :REFerence | | |
|                 [:STATe] | {ON\|OFF\|1\|0} | |
|         :MARKer{[1]\|2\|3\|4\|5\|6\|7\|8\|9\|10} | | |
|             :ACTivate | | [No query] |
|             :BWIDth | | |
|                 :DATA? | | [Query only] |
|                 :THReshhold | &lt;numeric&gt; | |
|             :FUNCtion | | |
|                 :EXECute | | [No query] |
|                 :PEXCursion | &lt;numeric&gt; | |
|                 :PPOLarity | {POSitive\|NEGative\|BOTH} | |
|                 :TARGet | &lt;numeric&gt; | |
|                 :TRACking | {ON\|OFF\|1\|0} | |
|                 :TTRansition | {POSitive\|NEGative\|BOTH} | |
|                 :TYPE | {MAXimum\|MINimum\|PEAK\|LPEak\|RPEak\|TARGet\|LTARget\|RTARget} | |
|             :NOTCh | | |
|                 :DATA? | | [Query only] |
|                 :THReshhold | &lt;numeric&gt; | |
|             :SET | {STARt\|STOP\|CENTer\|RLEVel\|DELay} | [No query] |
|             [:STATe] | {ON\|OFF\|1\|0} | |
|             :X | &lt;numeric&gt; | |
|             :Y? | | [Query only] |
|         :MATH | | |
|             :FUNCtion | {NORMal\|SUBTract\|DIVide\|ADD\|MULTiply} | |
|             :MEMorize | | [No query] |

**Table 13-1        E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| CALCulate{[1]\|2\|3\|4} | | |
|     [:SELected] | | |
|         :MSTatistics | | |
|             :DATA? | | [Query only] |
|             [:STATe] | {ON\|OFF\|1\|0} | |
|         :RLIMit | | |
|             :DATA | \<numeric\>,…,\<numeric\> (1 + number of lines × 4 parameters) | |
|             :DISPlay | | |
|                 :LINE | {ON\|OFF\|1\|0} | |
|                 :SELect | \<numeric\> | |
|                 :VALue | {OFF\|ABSolute\|MARgin} | |
|             :FAIL? | | [Query only] |
|             :REPort | | |
|                 [:DATA]? | | [Query only] |
|             [:STATe] | {ON\|OFF\|1\|0} | |
|         :SMOothing | | |
|             :APERture | \<numeric\> | |
|             [:STATe] | {ON\|OFF\|1\|0} | |
|         :TRANsform | | |
|             :TIME | | |
|                 :CENTer | \<numeric\> | |
|                 :IMPulse | | |
|                     :WIDTh | \<numeric\> | |
|                 :KBESsel | \<numeric\> | |
|                 :LPFRequency | | [No query] |
|                 :SPAN | \<numeric\> | |
|                 :STARt | \<numeric\> | |
|                 :STATe | {ON\|OFF\|1\|0} | |
|                 :STEP | | |
|                     :RTIMe | \<numeric\> | |
|                 :STIMulus | {IMPulse\|STEP} | |
|                 :STOP | \<numeric\> | |
|                 [:TYPE] | {BPASs\|LPASs} | |
| CONTrol | | |
|     :HANDler | | |
|         :A | | |
|             [:DATA] | \<numeric\> | [No query] |
|         :B | | |
|             [:DATA] | \<numeric\> | [No query] |
|         :C | | |
|             [:DATA] | \<numeric\> | |
|             :MODE | {INPut\|OUTPut} | |
|         :D | | |
|             [:DATA] | \<numeric\> | |
|             :MODE | {INPut\|OUTPut} | |

13. SCPI Command
Reference

**Table 13-1        E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| CONTrol | | |
| :HANDler | | |
| :E | | |
| [:DATA] | <numeric> | |
| [:EXTension] | | |
| :INDex | | |
| :STATe | {ON\|OFF\|1\|0} | |
| :RTRigger | | |
| :STATe | {ON\|OFF\|1\|0} | |
| :F | | |
| [:DATA] | <numeric> | [No query] |
| :OUTPut{[1]\|2} | | |
| [:DATA] | <numeric> | |
| DISPlay | | |
| :ANNotation | | |
| :FREQuency | | |
| [:STATe] | {ON\|OFF\|1\|0} | |
| :CLOCk | {ON\|OFF\|1\|0} | |
| :COLOr{[1]\|2} | | |
| :BACK | <numeric>,<numeric>,<numeric> | |
| :GRATicule{[1]\|2} | <numeric>,<numeric>,<numeric> | |
| :LIMit{[1]\|2} | <numeric>,<numeric>,<numeric> | |
| :RESet | | [No query] |
| :TRACe{[1]\|2\|3\|4} | | |
| :DATA | <numeric>,<numeric>,<numeric> | |
| :MEMory | <numeric>,<numeric>,<numeric> | |
| :ECHO | | |
| :CLEar | | [No query] |
| [:DATA] | <string> | [No query] |
| :ENABle | {ON\|OFF\|1\|0} | |
| :FSIGn | {ON\|OFF\|1\|0} | |
| :IMAGe | {NORMal\|INVert} | |
| :MAXimize | {ON\|OFF\|1\|0} | |
| :SKEY | | |
| [:STATe] | {ON\|OFF\|1\|0} | |
| :SPLit | {D1\|D12\|D1_2\|D112\|D1_1_2\|D123\|D1_2_3\|D12_33\|D11_23\|D13_23\|<br>D12_13\|D1234\|D1_2_3_4\|D12_34} | |
| :TABLe | | |
| [:STATe] | {ON\|OFF\|1\|0} | |
| :TYPE | {MARKer\|LIMit\|SEGMent} | |
| :UPDate | | |
| [:IMMediate] | | [No query] |

**Table 13-1          E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| DISPlay | | |
|    :WINDow{[1]|2|3|4} | | |
|       :ACTivate | | [No query] |
|       :ANNotation | | |
|          :MARKer | | |
|             :ALIGn | | |
|                [:STATe] | {ON|OFF|1|0} | |
|             :SINGle | | |
|                [:STATe] | {ON|OFF|1|0} | |
|       :LABel | {ON|OFF|1|0} | |
|       :MAXimize | {ON|OFF|1|0} | |
|       :SPLit | {D1|D12|D1_2|D112|D1_1_2|D123|D1_2_3|D12_33|D11_23|D13_23| D12_13|D1234|D1_2_3_4|D12_34} | |
|       :TITLe | | |
|          :DATA | &lt;string&gt; | |
|          [:STATe] | {ON|OFF|1|0} | |
|       :TRACe{[1]|2|3|4} | | |
|          :ANNotation | | |
|             :MARKer | | |
|                :POSition:X | &lt;numeric&gt; | |
|                :POSition:Y | &lt;numeric&gt; | |
|             :YAXis | | |
|                :MODE | {AUTO|RELative} | |
|          :MEMory | | |
|             [:STATe] | {ON|OFF|1|0} | |
|          :STATe | {ON|OFF|1|0} | |
|          :Y | | |
|             [:SCALe] | | |
|                :AUTO | | [No query] |
|                :PDIVision | &lt;numeric&gt; | |
|                :RLEVel | &lt;numeric&gt; | |
|                :RPOSition | &lt;numeric&gt; | |
|             :TRACk | | |
|                :MODE | {OFF|PEAK|FREQuency} | |
|                :FREQuency | &lt;numeric&gt; | |
|     :X | | |
|       :SPACing | {LINear|OBASe} | |
|     :Y | | |
|       [:SCALe] | | |
|          :DIVisions | &lt;numeric&gt; | |
| FORMat | | |
|    :BORDer | {NORMal|SWAPped} | |
|    :DATA | {ASCii|REAL|REAL32} | |

**Table 13-1        E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| HCOPy | | |
| :ABORt | | [No query] |
| :IMAGe | {NORMal\|INVert} | |
| [:IMMediate] | | [No query] |
| | | |
| INITiate{[1]\|2\|3\|4} | | |
| :CONTinuous | {ON\|OFF\|1\|0} | |
| [:IMMediate] | | [No query] |
| | | |
| MMEMory | | |
| :CATalog? | <string> | [Query only] |
| :COPY | <string>,<string> | [No query] |
| :DELete | <string> | [No query] |
| :LOAD | | |
| :CHANnel | | |
| :COEFficient | {A\|B\|C\|D} | [No query] |
| [:STATe] | {A\|B\|C\|D} | [No query] |
| :LIMit | <string> | [No query] |
| :PROGram | <string> | [No query] |
| :SEGMent | <string> | [No query] |
| [:STATe] | <string> | [No query] |
| :MDIRectory | <string> | [No query] |
| :STORe | | |
| :CHANnel | | |
| :CLEar | | [No query] |
| :COEFficient | {A\|B\|C\|D} | [No query] |
| [:STATe] | {A\|B\|C\|D} | [No query] |
| :FDATa | <string> | [No query] |
| :IMAGe | <string> | [No query] |
| :LIMit | <string> | [No query] |
| :PROGram | <string> | [No query] |
| :SALL | {ON\|OFF\|1\|0} | |
| :SEGMent | <string> | [No query] |
| [:STATe] | <string> | [No query] |
| :STYPe | {STATe\|CSTate\|DSTate\|CDSTate} | |
| :TRANsfer | <string>,<block> | [No query] |
| | | |
| OUTPut | | |
| [:STATe] | {ON\|OFF\|1\|0} | |
| | | |
| PROGram | | |
| :CATalog? | | [Query only] |
| [:SELected] | | |
| :NAME | <string> | |
| :STATe | {STOP\|RUN} | |

**Table 13-1          E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| SENSe | | |
|     :CORRection | | |
|         :COLLect | | |
|             :ECAL | | |
|                 :PATH? | | [Query only] |
| | | |
| SENSe{[1]|2|3|4} | | |
|     :AVERage | | |
|         :CLEar | | [No query] |
|         :COUNt | <numeric> | |
|         [:STATe] | {ON|OFF|1|0} | |
|     :BANDwidth | | |
|         [:RESolution] | <numeric> | |
|     :BWIDth | | |
|         [:RESolution] | <numeric> | |
|     :CORRection | | |
|         :CLEar | | [No query] |
|         :COEFficient | | |
|             [:DATA]? | {ES|ER|ED|EL|ET|EX},<numeric>,<numeric> | [Query only] |
|         :COLLect | | |
|             [:ACQuire] | | |
|                 :ISOLation | <numeric>,<numeric> | |
|                 :LOAD | <numeric> | |
|                 :OPEN | <numeric> | |
|                 :SHORt | <numeric> | |
|                 :THRU | <numeric>,<numeric> | |
|             :CKIT | | |
|                 :LABel | <string> | |
|                 :ORDer | | |
|                     :LOAD | <numeric>,<numeric> | |
|                     :OPEN | <numeric>,<numeric> | |
|                     :SHORt | <numeric>,<numeric> | |
|                     :THRU | <numeric>,<numeric>,<numeric> | |
|                 [:SELect] | <numeric> | |
|                 :STAN{[1]|2|3|4|5|6|7|8|9|10|11|12|13|14|15|16|17|18|19|20|21} | | |
|                     :ARBitrary | <numeric> | |
|                     :C0 | <numeric> | |
|                     :C1 | <numeric> | |
|                     :C2 | <numeric> | |
|                     :C3 | <numeric> | |
|                     :DELay | <numeric> | |
|                     :L0 | <numeric> | |
|                     :L1 | <numeric> | |
|                     :L2 | <numeric> | |
|                     :L3 | <numeric> | |
|                     :LABel | <string> | |

**Table 13-1          E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| SENSe{[1]\|2\|3\|4} | | |
|    :CORRection | | |
|       :COLLect | | |
|          :CKIT | | |
|             :STAN{[1]\|2\|3\|4\|5\|6\|7\|8\|9\|10\|11\|12\|13\|14\|15\|16\|17\|18\|19\|20\|21} | | |
|                :LOSS | \<numeric> | |
|                :TYPE | {OPEN\|SHORt\|LOAD\|THRU\|ARBI\|NONE} | |
|                :Z0 | \<numeric> | |
|          :ECAL | | |
|             :ERESponse | \<numeric>,\<numeric> | [No query] |
|             :ISOLation | | |
|                [:STATe] | {ON\|OFF\|1\|0} | |
|             :SOLT1 | \<numeric> | |
|             :SOLT2 | \<numeric>,\<numeric> | |
|             :THRU | \<numeric>,\<numeric> | |
|          :METHod | | |
|             :ERESponse | \<numeric>,\<numeric> | |
|             [:RESPonse] | | |
|                :OPEN | \<numeric> | |
|                :SHORt | \<numeric> | |
|                :THRU | \<numeric>,\<numeric> | |
|             :SOLT1 | \<numeric> | |
|             :SOLT2 | \<numeric>,\<numeric> | |
|             :TYPE? | | [Query only] |
|          :SAVE | | [No query] |
|       :EXTension | | |
|          :PORT{[1]\|2} | | |
|             [:TIME] | \<numeric> | |
|          [:STATe] | {ON\|OFF\|1\|0} | |
|         :PROPerty | {ON\|OFF\|1\|0} | |
|         :RVELocity | | |
|           :COAX | \<numeric> | |
|          :STATe | {ON\|OFF\|1\|0} | |
|         :TYPE{[1]\|2\|3\|4}? | | [Query only] |
|    :FREQuency | | |
|       :CENTer | \<numeric> | |
|       :[CW\|FIXed] | \<numeric> | |
|       :DATA? | | [Query only] |
|       :SPAN | \<numeric> | |
|       :STARt | \<numeric> | |
|       :STOP | \<numeric> | |
|    :ROSCillator | | |
|       :SOURce? | | [Query only] |

**Table 13-1          E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| SENSe{[1]|2|3|4} | | |
|     :SEGMent | | |
|         :DATA | <numeric>,…,<numeric> | |
|         :SWEep | | |
|             :POINts? | | [Query only] |
|             :TIME | | |
|                 [:DATA]? | | [Query only] |
|     :SWEep | | |
|         :DELay | <numeric> | |
|         :POINts | <numeric> | |
|         :TIME | | |
|             :AUTO | {ON|OFF|1|0} | |
|             [:DATA] | <numeric> | |
|         :TYPE | {LINear|LOGarithmic|SEGMent|POWer} | |
| | | |
| SERVice | | |
|     :CHANnel | | |
|         :ACTive? | | [Query only] |
|         :COUNt? | | [Query only] |
|         :TRACe | | |
|             :COUNt? | | [Query only] |
|     :CHANnel{[1]|2|3|4} | | |
|         :TRACe | | |
|             :ACTive? | | [Query only] |
|     :PORT | | |
|         :COUNt? | | [Query only] |
| | | |
| SOURce{[1]|2|3|4} | | |
|     :POWer | | |
|         :ATTenuation | | |
|             [:DATA] | <numeric> | |
|         :CENTer | <numeric> | |
|         [:LEVel] | | |
|             [:IMMediate] | | |
|                 [:AMPLitude] | <numeric> | |
|             :SLOPe | | |
|                 [:DATA] | <numeric> | |
|                 :STATe | {ON|OFF|1|0} | |
|         :PORT | | |
|             :COUPle | {ON|OFF|1|0} | |
|         :PORT{[1]|2} | | |
|             [:LEVel] | | |
|                 [:IMMediate] | | |
|                     [:AMPLitude] | <numeric> | |
|         :SPAN | <numeric> | |
|         :STARt | <numeric> | |

**Table 13-1        E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| SOURce{[1]|2|3|4} | | |
|     :POWer | | |
|         :STOP | <numeric> | |
| | | |
| STATus | | |
|     :OPERation | | |
|         :CONDition? | | [Query only] |
|         :ENABle | <numeric> | |
|         [:EVENt]? | | [Query only] |
|         :NTRansition | <numeric> | |
|         :PTRansition | <numeric> | |
|     :PRESet | | [No query] |
|     :QUEStionable | | |
|         :CONDition? | | [Query only] |
|         :ENABle | <numeric> | |
|         [:EVENt]? | | [Query only] |
|         :LIMit | | |
|             :CHANnel{[1]|2|3|4} | | |
|                 :CONDition? | | [Query only] |
|                 :ENABle | <numeric> | |
|                 [:EVENt]? | | [Query only] |
|                 :NTRansition | <numeric> | |
|                 :PTRansition | <numeric> | |
|             :CONDition? | | [Query only] |
|             :ENABle | <numeric> | |
|             [:EVENt]? | | [Query only] |
|             :NTRansition | <numeric> | |
|             :PTRansition | <numeric> | |
| | | |
| STATus | | |
|     :QUEStionable | | |
|         :NTRansition | <numeric> | |
|         :PTRansition | <numeric> | |
| | | |
| SYSTem | | |
|     :BACKlight | {ON|OFF|1|0} | |
|     :BEEPer | | |
|         :COMPlete | | |
|             :IMMediate | | |
|             :STATe | {ON|OFF|1|0} | |
|         :WARNing | | |
|             :IMMediate | | |
|             :STATe | {ON|OFF|1|0} | |
|     :DATE | <numeric>,<numeric>,<numeric> | |
|     :ERRor? | | [Query only] |
|     :KLOCk | | |

**Table 13-1          E5061A/E5062A SCPI command tree**

| Command | Parameters | Note |
|---|---|---|
| SYSTem | | |
|     :KLOCk | | |
|        :KBD | {ON\|OFF\|1\|0} | |
|        :MOUSe | {ON\|OFF\|1\|0} | |
|     :POFF | | [No query] |
|     :PRESet | | [No query] |
|     :SECurity | | |
|        [:LELel] | {NONE\|LOW\|HIGH} | |
|     :SERVice? | | [Query only] |
|     :TIME | &lt;numeric&gt;,&lt;numeric&gt;,&lt;numeric&gt; | |
|     :UPReset | | [No query] |
| | | |
| TRIGger | | |
|     [:SEQuence] | | |
|        [:IMMediate] | | [No query] |
|        :SINGle | | [No query] |
|        :SOURce | {INTernal\|EXTernal\|MANual\|BUS} | |

# A    Manual Changes

This appendix contains the information required to adapt this manual to earlier versions or configurations of the Agilent E5061A/E5062A than that indicated by the current printing date of this manual. The information in this manual applies directly to the E5061A/E5062A model that has the serial number prefix listed on the title page of this manual.

# Manual Changes

To adapt this manual to your Agilent E5061A/E5062A, refer to Table A-1 and Table A-2.

**Table A-1**       **Manual Changes by Serial Number**

| Serial Prefix or Number | Make Manual Changes |
|---|---|
|  |  |

**Table A-2**       **Manual Changes by Firmware Version**

| Version | Make Manual Changes |
|---|---|
| A.02.00 or later | Change 1 |
| A.02.10 or later | Change 2 |
| A.03.00 or later | Change 3 |

Agilent Technologies uses a two-part, ten-character serial number that is stamped on the serial number plate (Figure A-1).

Execute the *IDN? command on page 198 to check the firmware version.

**Figure A-1**       **Serial Number Plate (Example)**



**Agilent Technologies**
Made In Malaysia

E5061A-xxxxxx
MY12345678

e5061auj2001

### Change 3

The firmware revision A.02.10 or below does not support the following functions. Please disregard the descriptions of these functions in this manual.

❏ Compliant with LXI (Lan eXtensions for Instrumentation) standard Class C.[1]

### Change 2

The firmware revision A.02.00 or below does not support the following functions. Please disregard the descriptions of these functions in this manual.

❏ Offset limit line function

❏ Ripple test function

❏ Bandwidth test function

The firmware revision A.02.00 and below does not support the following SCPI commands. Please delete their descriptions in this manual.

- :CALC{1-4}:BLIM on page 203
- :CALC{1-4}:BLIM:DB on page 204
- :CALC{1-4}:BLIM:DISP:MARK on page 205
- :CALC{1-4}:BLIM:DISP:VAL on page 206
- :CALC{1-4}:BLIM:FAIL? on page 207
- :CALC{1-4}:BLIM:MAX on page 208
- :CALC{1-4}:BLIM:MIN on page 209
- :CALC{1-4}:BLIM:REP? on page 210
- :CALC{1-4}:LIM:OFFS:AMPL on page 238
- :CALC{1-4}:LIM:OFFS:MARK on page 239
- :CALC{1-4}:LIM:OFFS:STIM on page 240
- :CALC{1-4}:LIM:REP:ALL? on page 241
- :CALC{1-4}:RLIM on page 286
- :CALC{1-4}:RLIM:DATA on page 287
- :CALC{1-4}:RLIM:DISP:LINE on page 288
- :CALC{1-4}:RLIM:DISP:SEL on page 289
- :CALC{1-4}:RLIM:DISP:VAL on page 290
- :CALC{1-4}:RLIM:FAIL? on page 291
- :CALC{1-4}:RLIM:REP? on page 292
- :MMEM:LOAD:RLIM on page 350
- :MMEM:STOR:LIM on page 358
- :STAT:QUES:BLIM? on page 445

*1. This function is available when the volume label on the hard disk is AL300 or higher.

A. Manual Changes

### Change 1

The following functions are newly integrated into the firmware version A.02.00 onward. They are not supported by firmware version A.01.0x.

❏ User preset function.

❏ Notch search function

❏ Function to all the marker value are displayed.

❏ Function to change display position where marker value are displayed.

❏ Function to align the marker value.

❏ Display the overlap limit lines.

❏ Reference tracking function.

❏ Function to change display value where Y axis are displayed.

❏ Frequency information appearing as asterisks.

❏ User recovery function.[1]

❏ Remote control using HTTP.[1]

---

*1. This function is available when the volume label on the hard disk is AL200 or higher.

The firmware version A.01.0x does not support the following SCPI commands. Please delete their descriptions in this manual.

- :CALC{1-4}:LIM:DISP:CLIP on page 236

- :CALC{1-4}:MARK:NOTC on page 261

- :CALC{1-4}:MARK{1-10}:NOTC:DATA? on page 276

- :CALC{1-4}:MARK{1-10}:NOTC:THR on page 277

- :DISP:WIND{1-4}:ANN:MARK:ALIG on page 319

- :DISP:WIND{1-4}:ANN:MARK:SING on page 320

- :DISP:WIND{1-4}:TRAC{1-4}:ANN:MARK:POS:X on page 325

- :DISP:WIND{1-4}:TRAC{1-4}:ANN:MARK:POS:Y on page 326

- :DISP:WIND{1-4}:TRAC{1-4}:ANN:YAX:MODE on page 327

- :DISP:WIND{1-4}:TRAC{1-4}:Y:TRAC:FREQ on page 333

- :DISP:WIND{1-4}:TRAC{1-4}:Y:TRAC:MODE on page 334

- :SYST:SEC:LEV on page 480

- :SYST:UPR on page 483

A. Manual Changes

# B Status Reporting System

This appendix describes the status reporting system of the Agilent E5061A/E5062A.

# General Status Register Model

The Agilent E5061A/E5062A has a status reporting system to report the condition of the instrument.

**Figure B-1**          **General status register model**



4294ape021

The status reporting system has a hierarchical structure as shown in Figure B-1. When the instrument satisfies a particular condition, the corresponding bit of the event register is set to 1. Therefore, you can check the instrument status by reading the event register.

When the event register bit is set to "1" and a corresponding enable register bit (a bit marked with an arrow in Figure B-1) is also "1," the summary bit of the status byte register is set to "1." You can read the status byte register by using the serial poll.

If the bit of the service request enable register is "1," a service request (SRQ) is generated by the positive transition of the corresponding status byte register bit. By generating SRQ, you can notify the controller that the E5061A/E5062A is requesting service. In other words, interruption by SRQ can be programmed. For more information on using SRQ, see "Using the Status Register" on page 84 in Chapter 5, "Making a Measurement," or "Using the status reporting system" on page 166 in Chapter 11, "Working with Automatic Test Systems."

### Event Register

Reflects the corresponding condition of the E5061A/E5062A (e.g., occurrence of an event) as a bit status. These bits continuously monitor changes in the E5061A/E5062A's state and change the bit status when the condition (e.g., change bit status to "1" if a specific event occurs) for each bit is met. You cannot change the bit status by issuing a SCPI command.

### Enable Register

Setting the enable register allows you to specify event register bits that can set "1" to the summary bit of the status byte register when an event occurs. The register bits work as mask bits; setting "1" to an enable register will enable a corresponding bit in the event register.

For example, when you want to set "1" as the summary bit in the status byte register by a specific register condition, set the corresponding enable register to "1."

### Status Byte Register

If the enabled event register is set to "1," a corresponding bit of the status byte register is also set to "1." This register also indicates the output queue and SRQ status.

The value of the status byte register can be read by using the *STB? command on page 201 command or serial poll (SPOLL statement in HTBasic) from the controller.

Reading the status byte register by using the **\*STB?** command does not affect the contents of the status byte register. However, reading it with the SPOLL statement of HTBasic will clear the RQS bit in the status byte register.

Also, setting the service request enable register using the *SRE command on page 200 command can generate a service request synchronously with the status byte register.

## Condition Register and Transition Filter

When the status register has a transition filter, there is a lower register called a condition register under the event register. The transition filter is between the event register and the condition register.

The transition filter enables you to select a positive and/or negative transition of the condition register bit in order to set a bit in the corresponding event register. For example, using the negative transition filter to set bit 3 to "1" causes bit 3 of the event register to be set to "1" when bit 3 of the condition register makes a negative transition, that is, changes from 1 to 0.

**Figure B-2**    **Transition filter and condition register**



4294ape022

In the E5061A/E5062A, the following registers provide a condition register and transition filter:

- Operation status register
- Questionable status register
- Questionable limit status register
- Questionable limit extra status register
- Questionable limit channel {1-16} status register
- Questionable limit channel {1-16} extra status register

# Status Register Structure

The status reporting system has a hierarchical structure as shown in Figure B-3 through Figure B-9. The status byte register is a summary of registers in the lower level. This section describes the E5061A/E5062A's status registers in each hierarchy. Each bit of the status register is described in Table B-1 through Table B-11.

Figure B-3          Status Register Structure (1 of 7)



e5061ape3001

**Figure B-4**  **Status Register Structure (2 of 7)**



e5061ape0405

**Figure B-5**  **Status Register Structure (3 of 7)**



e5061ape3002

Figure B-6          Status Register Structure (4 of 7)



e5061ape3003

Figure B-7                    Status Register Structure (5 of 7)



e5061ape0406

**Figure B-8**                  **Status Register Structure (6 of 7)**



e5061ape3004

Figure B-9            Status Register Structure (7 of 7)



e5061ape3005

B. Status Reporting System

Table B-1                    **Status Bit Definitions of Status Byte Register**

| Bit Position | Name | Description |
|---|---|---|
| 0, 1 | Not used | Always 0 |
| 2 | Error/Event Queue | Set to "1" if the error/event queue contains data; reset to "0" when all the data has been retrieved. |
| 3 | Questionable Status Register Summary | Set to "1" when one of the enabled bits in the status event status register is set to "1." |
| 4 | MAV (Message Available) | Set to "1" when the output queue contains data; reset to "0" when all the data has been retrieved. |
| 5 | Standard Event Status Register Summary | Set to "1" when one of the enabled bits in the status event status register is set to "1." |
| 6 | RQS | Set to "1" when any of the status byte register bits enabled by the service request enable register is set to "1"; reset to "0" when all the data has been retrieved through serial polling. |
| 7 | Operation Status Register Summary | Set to "1" when one of the enabled bits in the operational status register is set to "1." |

Issuing the **\*CLS** command will clear all bits from the status byte register.

**Table B-2**          **Status Bit Definitions of Event Status Register (ESR)**

| Bit Position | Name | Description |
|---|---|---|
| 0 | Operation Complete | Set to "1" upon completion of all operations done by commands that precede the *OPC? command on page 198 command. |
| 1 | Not used | Always 0 |
| 2 | Query Error | 1. Set to "1" when the E5061A/E5062A receives a data output request but there is no data to output.<br><br>2. Set to "1" when the data of the E5061A/E5062A's output queue has been cleared because of a new message received before the completion of data output. |
| 3 | Instrument Dependent Error | Set to "1" when an error has occurred and the error is not a command, query, or execution error. |
| 4 | Execution Error | 1. Set to "1" when any parameter in an SCPI command exceeds its input range or is inconsistent with the E5061A/E5062A's capabilities.<br><br>2. Set to "1" when an SCPI command cannot be properly executed due to some condition of the E5061A/E5062A. |
| 5 | Command Error | 1. Set to "1" when an IEEE 488.2 syntax error occurs (a command sent to the E5061A/E5062A does not follow the IEEE 488.2 syntax). Possible violations include the command parameter violating the E5061A/E5062A listening formats or being unacceptable.<br><br>2. Set to "1" when a semantic error occurs. Possible causes include a command containing misspellings being sent to the E5061A/E5062A or an IEEE 488.2 command not supported by the E5061A/E5062A being sent.<br><br>3. Set to "1" when GET (Group Execution Trigger) is input while a program message is being received. |
| 6 | Not used | Always 0 |
| 7 | Power ON | Set to "1" when the E5061A/E5062A is powered ON, or when the firmware is restarted. |

Issuing the **\*CLS** command will clear all bits from the standard event status register.

B. Status Reporting System

**Table B-3**        **Status Bit Definitions of the Operation Status Condition Register**

| Bit Position | Name | Description |
|---|---|---|
| 0 - 3 | Not used | Always 0 |
| 4 | Measurement | Set to "1" during measurement[*1]. |
| 5 | Waiting for Trigger | Set to "1" while the instrument is waiting for a trigger[*2]. |
| 6 - 13 | Not used | Always 0 |
| 14 | VBA Macro Running | Set to "1" while a VBA macro is running. |
| 15 | Not used | Always 0 |

*1. This is the time from the beginning of the first sweep to the end of the last sweep when several sweeps are executed for one measurement.
*2. This is when the trigger system is in "Waiting for Trigger" state. For more information on the trigger system, refer to "Trigger system" on page 80.

Issuing the **\*CLS** command will clear all bits from the operation status event register.

**Table B-4**        **Status Bit Definitions of the Questionable Status Condition Register**

| Bit Position | Name | Description |
|---|---|---|
| 0 - 7 | Not used | Always 0 |
| 8 | Bandwidth Test Fail (Questionable bandwidth limit status register summary) | Set to "1" while one of the enabled bits in the questionable bandwidth limit status event register is set to "1." |
| 9 | Ripple Test Fail (Questionable ripple limit status register summary) | Set to "1" while one of the enabled bits in the questionable ripple limit status event register is set to "1." |
| 10 | Limit Test Fail (Questionable limit status register summary) | Set to "1" while one of the enabled bits in the questionable limit status event register is set to "1." |
| 11 - 15 | Not used | Always 0 |

**Table B-5**          **Status Bit Definitions of the Questionable Status Event Register**

| Bit Position | Name | Description |
|---|---|---|
| 0 - 7 | Not used | Always 0 |
| 8 | Bandwidth Test Fail (Questionable bandwidth limit status register summary) | Set to "1" when a transition of the condition register occurs if the transition filters are set as valid values. |
| 9 | Ripple Test Fail (Questionable ripple limit status register summary) | Set to "1" when a transition of the condition register occurs if the transition filters are set as valid values. |
| 10 | Limit Test Fail (Questionable limit status register summary) | Set to "1" when a transition of the condition register occurs if the transition filters are set as valid values. |
| 11 | VBA Macro Interrupted | Set to "1" when a VBA macro is interrupted by one of the following reasons.[1]<br>• Occurrence of an execution error<br>• Executing "End" statement in the VBA Macro<br>• Executing **:PROG:STAT STOP**<br>• Operating **[Ctrl]**+**[Break]** using the keyboard<br>• Operating **[Macro Break]** or **[Macro Setup]** - **Stop** using the front panel |
| 12 - 15 | Not used | Always 0 |

*1. This setting is made after you click the **End** button in the dialog box displayed when the VBA macro is interrupted.

Issuing the **\*CLS** command will clear all bits from the questionable status event register.

**Table B-6**     **Status Bit Definitions of the Questionable Limit Status Condition Register**

| Bit Position | Name | Description |
|---|---|---|
| 0 | Not used | Always 0 |
| 1 | Channel 1 Limit Test Fail (questionable limit channel 1 status register summary) | Set to "1" while one of the enabled bits in the questionable limit channel 1 status event register is set to "1." |
| 2 | Channel 2 Limit Test Fail (questionable limit channel 2 status register summary) | Set to "1" while one of the enabled bits in the questionable limit channel 2 status event register is set to "1." |
| 3 | Channel 3 Limit Test Fail (questionable limit channel 3 status register summary) | Set to "1" while one of the enabled bits in the questionable limit channel 3 status event register is set to "1." |
| 4 | Channel 4 Limit Test Fail (questionable limit channel 4 status register summary) | Set to "1" while one of the enabled bits in the questionable limit channel 4 status event register is set to "1." |
| 5-15 | Not used | Always 0 |

Issuing the **\*CLS** command will clear all bits from the questionable bandwidth limit status event register.

**Table B-7**     **Status Bit Definitions of the Questionable Limit Channel {1-4} Status Condition Register**

| Bit Position | Name | Description |
|---|---|---|
| 0 | Not used | Always 0 |
| 1 | Trace 1 Limit Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the limit test result for trace 1. |
| 2 | Trace 2 Limit Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the limit test result for trace 2. |
| 3 | Trace 3 Limit Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the limit test result for trace 3. |
| 4 | Trace 4 Limit Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the limit test result for trace 4. |
| 5-15 | Not used | Always 0 |

Issuing the **\*CLS** command will clear all the bits in the questionable limit channel {1-4} status event register.

Table B-8      **Status Bit Definitions of the Questionable Bandwidth Limit Status Condition Register**

| Bit Position | Name | Description |
|---|---|---|
| 0 | Not used | Always 0 |
| 1 | Channel 1 Bandwidth Test Fail (questionable bandwidth limit channel 1 status register summary) | Set to "1" while one of the enabled bits in the questionable bandwidth limit channel 1 status event register is set to "1." |
| 2 | Channel 2 Bandwidth Test Fail (questionable bandwidth limit channel 2 status register summary) | Set to "1" while one of the enabled bits in the questionable bandwidth limit channel 2 status event register is set to "1." |
| 3 | Channel 3 Bandwidth Test Fail (questionable bandwidth limit channel 3 status register summary) | Set to "1" while one of the enabled bits in the questionable bandwidth limit channel 3 status event register is set to "1." |
| 4 | Channel 4 Bandwidth Test Fail (questionable bandwidth limit channel 4 status register summary) | Set to "1" while one of the enabled bits in the questionable bandwidth limit channel 4 status event register is set to "1." |
| 5-15 | Not used | Always 0 |

Issuing the **\*CLS** command will clear all bits from the questionable bandwidth limit status event register.

Table B-9      **Status Bit Definitions of the Questionable Bandwidth Limit Channel {1-4} Status Condition Register**

| Bit Position | Name | Description |
|---|---|---|
| 0 | Not used | Always 0 |
| 1 | Trace 1 Bandwidth Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the bandwidth test result for trace 1. |
| 2 | Trace 2 Bandwidth Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the bandwidth test result for trace 2. |
| 3 | Trace 3 Bandwidth Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the bandwidth test result for trace 3. |
| 4 | Trace 4 Bandwidth Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the bandwidth test result for trace 4. |
| 5-15 | Not used | Always 0 |

Issuing the **\*CLS** command will clear all the bits in the questionable bandwidth limit channel {1-4} status event register.

**Table B-10**        **Status Bit Definitions of the Questionable Ripple Limit Status Condition Register**

| Bit Position | Name | Description |
|---|---|---|
| 0 | Not used | Always 0 |
| 1 | Channel 1 Ripple Test Fail (questionable ripple limit channel 1 status register summary) | Set to "1" while one of the enabled bits in the questionable ripple limit channel 1 status event register is set to "1." |
| 2 | Channel 2 Ripple Test Fail (questionable ripple limit channel 2 status register summary) | Set to "1" while one of the enabled bits in the questionable ripple limit channel 2 status event register is set to "1." |
| 3 | Channel 3 Ripple Test Fail (questionable ripple limit channel 3 status register summary) | Set to "1" while one of the enabled bits in the questionable ripple limit channel 3 status event register is set to "1." |
| 4 | Channel 4 Ripple Test Fail (questionable ripple limit channel 4 status register summary) | Set to "1" while one of the enabled bits in the questionable ripple limit channel 4 status event register is set to "1." |
| 5-15 | Not used | Always 0 |

Issuing the **\*CLS** command will clear all bits from the questionable ripple limit status event register.

**Table B-11**        **Status Bit Definitions of the Questionable Ripple Limit Channel {1-4} Status Condition Register**

| Bit Position | Name | Description |
|---|---|---|
| 0 | Not used | Always 0 |
| 1 | Trace 1 Ripple Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the ripple test result for trace 1. |
| 2 | Trace 2 Ripple Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the ripple test result for trace 2. |
| 3 | Trace 3 Ripple Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the ripple test result for trace 3. |
| 4 | Trace 4 Ripple Test Fail | Set to "0" when a measurement cycle begins; set to "1" when the measurement cycle finishes and returns "fail" as the ripple test result for trace 4. |
| 5-15 | Not used | Always 0 |

Issuing the **\*CLS** command will clear all the bits in the questionable ripple limit channel {1-4} status event register.

## Using the Status Reporting System

You can manage the status report system using the following commands in any combination:

- *CLS on page 196
- *SRE on page 200
- *STB? on page 201
- *ESE on page 197
- *ESR? on page 197
- :STAT:PRES on page 445
- :STAT:OPER:ENAB on page 442
- :STAT:OPER:COND? on page 441
- :STAT:OPER? on page 441
- :STAT:OPER:PTR on page 444
- :STAT:OPER:NTR on page 443
- :STAT:QUES:ENAB on page 454
- :STAT:QUES:COND? on page 453
- :STAT:QUES? on page 445
- :STAT:QUES:PTR on page 464
- :STAT:QUES:NTR on page 463
- :STAT:QUES:LIM:ENAB on page 460
- :STAT:QUES:LIM:COND? on page 459
- :STAT:QUES:LIM? on page 455
- :STAT:QUES:LIM:PTR on page 462
- :STAT:QUES:LIM:NTR on page 461
- :STAT:QUES:LIM:CHAN{1-4}:ENAB on page 456
- :STAT:QUES:LIM:CHAN{1-4}:COND? on page 455
- :STAT:QUES:LIM:CHAN{1-4}? on page 455
- :STAT:QUES:LIM:CHAN{1-4}:PTR on page 458
- :STAT:QUES:LIM:CHAN{1-4}:NTR on page 457
- :STAT:QUES:BLIM? on page 445
- :STAT:QUES:BLIM:CHAN{1-4}? on page 446
- :STAT:QUES:BLIM:CHAN{1-4}:COND? on page 446
- :STAT:QUES:BLIM:CHAN{1-4}:ENAB on page 447
- :STAT:QUES:BLIM:CHAN{1-4}:NTR on page 448
- :STAT:QUES:BLIM:CHAN{1-4}:PTR on page 449
- :STAT:QUES:BLIM:COND? on page 449
- :STAT:QUES:BLIM:ENAB on page 450
- :STAT:QUES:BLIM:NTR on page 451
- :STAT:QUES:BLIM:PTR on page 452
- :STAT:QUES:RLIM? on page 465
- :STAT:QUES:RLIM:CHAN{1-4}? on page 465
- :STAT:QUES:RLIM:CHAN{1-4}:COND? on page 465
- :STAT:QUES:RLIM:CHAN{1-4}:ENAB on page 466
- :STAT:QUES:RLIM:CHAN{1-4}:NTR on page 467
- :STAT:QUES:RLIM:CHAN{1-4}:PTR on page 468
- :STAT:QUES:RLIM:COND? on page 468
- :STAT:QUES:RLIM:ENAB on page 469
- :STAT:QUES:RLIM:NTR on page 470
- :STAT:QUES:RLIM:PTR on page 471

B. Status Reporting System

For sample programs that demonstrate the use of the commands listed above, refer to "Using the Status Register" on page 84 in Chapter 5 or "Obtaining Test Results" on page 121 in Chapter 8.

# C Error Messages

The Agilent E5061A/E5062A provides error messages to indicate its operating status. This appendix describes the error messages of the E5061A/E5062A in order of error number.

# Error Messages

An error message is displayed against a red background in the instrument message/warning area in the lower left part of the screen. Pushing a front panel key or executing **:DISP:CCL** command clears the error message. Errors caused by the operation of a front panel key simply appear on the display. They are not stored in the error queue with some exceptions.

An error with a positive error number is one uniquely defined for this instrument. On the other hand, an error with a negative error number is basically one defined for common GPIB devices in IEEE488.2

## A

20          **Additional standard needed**

The GPIB command that turns ON the calibration function has been sent before all of the data measurements needed to calculate the calibration factor have been completed. For instance, the "SENS:CORR:COLL:SAVE" command is sent to calculate calibration coefficients and turn on error correction for 1-Port Calibration when open and short calibration are completed but load calibration is not completed. Be sure to measure all necessary calibration data before sending commands. This error is not generated by front key operations.

77          **Additional test set calibration needed**

Multiport test set calibration needs to be completed. This error occurrs when Slef Cal (SENS:CORR:MULT:SELF:ONCE) is performed without having test set calibration completed.

## B

-168        **Block data not allowed**

An block-data element has been received at a position where this instrument does not accept one.

## C

240         **Calibration data lost**

This error occurs when a file containing the system calibration data is not found or in a damaged state at time of the startup of this instrument, indicating a failure of this instrument. Contact an Agilent Technology sales office or the company from which you bought the instrument.

22          **Calibration method not selected**

This error occurs when the command for validating the calibration, SENS:CORR:COLL:SAVE, is executed before the command for selecting a calibration type, SENS:CORR:COLL:METH:xxxx, is executed. This error is not generated by front key operations.

-148        **Character data not allowed**

A character data element (not violating the standard) has been received at a position where

this instrument does not accept one. Double quotes (") are omitted where it is necessary to place a parameter in double quotes ("), for example.

| -100 | **Command error** |

A comprehensive syntax error has occurred showing that this instrument cannot detect a more detailed error. This code simply shows that a command error defined in 11.5.1.1.4, IEEE488.2 has occurred.

## D

| -222 | **Data out of range** |

A data element (not violating the standard) outside the range defined by this instrument has been received. This error occurs when an integer-based command for which the parameter can be rounded exceeds the range of -65536 to +65536 or when a real-number-based command for which the parameter can be rounded exceeds the range of -9.9e37 to +9.9e37, for example.

This error occurs also when a numeric value other than a specified one is entered into a command in which the "port number" and "CalKit number" are specified as parameters and hence the parameters are not rounded. Such commands are, for example, SENS:CORR:COLL:ACQ:OPEN, SENS:CORR:COLL:ECAL:SOLT1, SENS:CORR:COLL:CKIT:ORD:LOAD, etc.

| -104 | **Data type error** |

The parser has recognized a data element that must not exist. Block data has been sent instead of numeric value data or character string data that had been expected, for example.

## E

| 32 | **Ecal module not in appropriate RF path** |

This error occurs when an ECal command, SENS:CORR:COLL:ECAL:SOLTn, is executed with the port on the ECal module not connected correctly to the instrument.

| -200 | **Execution error** |

An error associated with execution has been generated for which this instrument cannot specify the error message. This code shows that an error associated with execution defined in 11.5.1.1.5, IEEE488.2 has occurred. This error occurs also when a calibration measurement is aborted.

| -123 | **Exponent too large** |

The absolute value of the exponent exceeds 32,000 (see 7.7.2.4.1, IEEE488.2).

| -178 | **Expression data not allowed** |

An expression-data element has been received at a position where this instrument does not accept one.

| -170 | **Expression error** |

When the expression data is put to syntactic analysis, an error not corresponding to one of Error Numbers -171 through -179 occurs.

**F**

31              **Failed to configure ECal module**

This error occurs when the control of the ECal module fails at time of executing an ECal command, SENS:CORR:COLL:ECAL:SOLTn. The failure results from the failure to connect the ECal module to the USB port, failure of the ECal module, etc.

76              **Failed to configure multiport test set**

This error occurs when multiport test set control is enabled (SENS:MULT ON) and the analyzer fails to control the test set. Make sure the analyzer and the test set are connected with the parallel cable, and the test set is powered on.

102             **Failed to copy file**

This error occurs when copying a file (MMEM:COPY command) fails.

104             **Failed to create directory**

This error occurs when creating a directory (MMEM:MDIR command) fails.

103             **Failed to delete file**

This error occurs when deleting a file (MMEM:DEL command) fails.

100             **Failed to read file**

This error occurs when a 2-port touchstone file (CALC:FSIM:SEND:PMC:PORT:USER:FIL command), the formatted data array (MMEM:LOAD:FDAT command) and limit table (MMEM:STOR:LIM command) for the active trace on the active channel, segment sweep table (MMEM:LOAD:SEGM command) for the active channel, a VBA project file (MMEM:LOAD:PROG command), etc. cannot be read normally.

101             **Failed to write file**

This error occurs when the formatted data array (MMEM:STOR:FDATcommand) and limit table (MMEM:STOR:LIM command) for the active trace on the active channel, segment sweep table (MMEM:STOR:SEGM command) for the active channel, display image (MMEM:STOR:IMAG command) for the LCD screen, a VBA project file (MMEM:STOR:PROG command), etc. cannot be written normally.

54              **Fault location not allowed**

This error occurs when the fault location function is enabled when the sweep type is not set to linear or the number of measurement points is two. The fault location function is available only when linear sweep with more than two measurement points.

-257            **File name error**

A file name error. This message appears when an error exists in the file name and hence a command is not executed correctly. This error occurs when you try to copy to an unsuitable file name, for example.

-256            **File name not found**

The file name specified is not found and hence the command is not executed correctly. This error occurs when you try to read a file that does not exist in a disk or a disk is not correctly inserted into the drive to read or write a file, for example.

107             **File transfer failed**

This error occurs when writing data into or reading data from a file (MMEM:TRAN

command) fails.

## G

| -105 | **GET not allowed** |

A group execution trigger (GET) has been received in the program message (see 7.7, IEEE488.2).

## H

| -114 | **Header suffix out of range** |

The unit of the header is outside the range. The header is invalid in the unit for numeric parameters following a SCPI command.

## I

| -224 | **Illegal parameter value** |

The parameter value is not suitable. This error occurs when the CALC:PAR:DEF command is used to specify an S-parameter that does not exist in the model.

| -282 | **Illegal program name** |

This error occurs when a nonexistent VBA program name is specified by the PROG:SEL:NAME command.

| -213 | **Init ignored** |

Because another measurement is in progress, the request for initiating a measurement ("INIT" command) is ignored.

| -161 | **Invalid block data** |

Block data has been expected, but the block data that appears is invalid for some reason (see 7.7.6.2, IEEE488.2). The END message is received before the length of block data has been filled, for example.

| -101 | **Invalid character** |

An invalid character exists in the program message character string.

| -141 | **Invalid character data** |

An invalid character is found in the character data element, or the parameter received is not valid.

| -121 | **Invalid character in number** |

A character that is invalid for the data type subject to syntactic analysis has been received. For example, a letter is found in a decimal numeric value or a numeric character "9" in octal data.

| -171 | **Invalid expression** |

The expression-data element is invalid (see 7.7.7.2, IEEE488.2). Parentheses are not paired, or illegal characters are used, for example.

| -103 | **Invalid separator** |

The parser (a syntactic analysis program) had been expecting a delimiter, but a character

that is not a delimiter has been sent.

| -151 | **Invalid string data** |

Character string data has been expected, but the character string data that appears is invalid for some reason (see 7.7.5.2, IEEE488.2). The END message is received before the ending quotation mark character appears, for example.

| -131 | **Invalid suffix** |

The suffix does not comply with the syntax defined in 7.7.3.2, IEEE488.2. Or it does not suit 4294A.

## L

| 53 | **Log sweep requires 2 octave minimum span** |

The span of sweep range is not satisfied the requirement for logarithmic sweep. The sweep type is automatically changed to linear sweep when this error occurs.

For example, this error occurs when, with the start and stop frequency are set 1 MHz and 2 MHz respectively, the sweep type is changed to logarithmic sweep.

Set the stop frequency to more than four times as many as the start frequency. And then select logarithmic sweep.

## M

| -109 | **Missing parameter** |

The number of parameters is less than that required for the command, or the parameter has not been entered. For example, the command SENS{1-4}:SWE:POIN requires one more parameter.

Therefore, when a message "SENS1:SWE:POIN" is sent to a correct program message "SENS1:SWE:POIN 201" this instrument receives the former message as an invalid one because all parameters have not been entered. Enter command parameters correctly.

| 75 | **Multiport test set not enabled** |

This error occurs when multiport test set calibration is performed while test set control is not enabled.

## N

| 56 | **Not enough points for connector model** |

This error occurs when the connector measurement function of the SRL measurement is performed with the number of measurement points less than 101. Use at least 101 points.

| 52 | **No valid memory trace** |

This error occurs when there is no valide memory trace data and :DISP: WIND:TRAC:MEM ON or DISP:WIND:TRAC:STAT ON is received or parameters other than "NORM" is set with CALC:MATH:FUNC.

| -120 | **Numeric data error** |

An error resulting from the numeric value data (including numeric value data having no

decimal point representation) has occurred. A numeric value error other than Errors -121 through -129 has occurred.

-128                 **Numeric data not allowed**

An numeric-value-data element (not violating the standard) has been received at a position where this instrument does not accept one.

## O

200                  **Option not installed**

The command received has been ignored because of the mismatch between the contents of an option for this instrument and the command.

For example, this error occurs when the source attenuator (power range) is set at a value other than zero (SOUR:POW:ATT command) in a model not having the extended power output option.

This error is not generated by front key operations.

-225                 **Out of memory**

Insufficient memory is available in this instrument to perform the required operation.

## P

-220                 **Parameter error**

When a parameter-related error other than Errors -221 through -229 occurs, that error is displayed.

-108                 **Parameter not allowed**

The number of parameters exceeds that required for the command.

For instance, when a program message ":SENS1:SWE:TYPE LIN, SEGM" is sent instead of a correct program message with a command ":SENS1:SWE:TYPE LIN" which requires a parameter, the instrument receives the message as the number of parameters is invalid. See the command reference to confirm the required number of parameters.

41                   **Peak not found**

This error occurs when, after specifying a peak and executing the CALC:MARK:FUNC:EXEC and CALC:FUNC:EXEC commands, the specified peak is not found in the marker search analysis.

220                  **Phase lock loop unlocked**

This error occurs when the PLL circuit of this instrument becomes unlocked while the measurement is in progress. The measurement value is not correct. This error may occur when an external reference out of specification is connected to this instrument. Should an error occur with an external reference not connected, this instrument is faulty. Contact an Agilent Technology sales office or the company from which you bought the instrument.

221                  **Port 1 receiver overload**

The input to Test Port 1 exceeds the maximum input level. The measurement value is not correct. When a DUT is an amplifier or the like, this error may occur, damaging the receiver in the worst case. Should this error occur with a passive part used as the DUT or with nothing connected to the test port, this instrument is faulty. Contact an Agilent

Technology sales office or the company from which you bought the instrument.

If this error occurs, the stimulus signal output is automatically turned to off.

222 **Port 2 receiver overload**

The input to Test Port 2 exceeds the maximum input level. The measurement value is not correct. When a DUT is an amplifier or the like, this error may occur, damaging the receiver in the worst case. Should this error occur with a passive part used as the DUT or with nothing connected to the test port, this instrument is faulty. Contact an Agilent Technology sales office or the company from which you bought the instrument.

If this error occurs, the stimulus signal output is automatically turned to off.

241 **Power on test failed**

This error occurs when the power-on test fails, indicating a failure of this instrument. Contact an Agilent Technology sales office or the company from which you bought the instrument.

61 **Power unleveled**

The out power level exceeds available range.

For example, if the level after correction exceeds the power level that can be outputted when correcting the power level with the power slope feature, this error occurs.

Check that the power level is set correctly, and the correction value of the power slope is set correctly.

120 **Printer error**

This error occurs when the previous printing is still in progress or the printer fails (offline, short of paper, etc.) at time of outputting the display image on the LCD screen to the printer (HCOP:IMM command).

121 **Print failed**

This error occurs when printing fails for reasons other than Error 120, Printer error.

-284 **Program currently running**

This error occurs when the PROG:SEL:STAT RUN command is executed with the VBA program in the Run state.

-112 **Program mnemonic too long**

The length of the header exceeds 12 characters (see 7.6.1.4.1, IEEE488.2).

-286 **Program runtime error**

An error occurring when VBA is executed.

## Q

-430 **Query DEADLOCKED**

The state that generates a "DEADLOCKED" Query error (see 6.3.1.7, IEEE488.2). This error occurs when both input and output buffers have become full, preventing the instrument from continuing processing, for example.

-400 **Query error**

A comprehensive query error has occurred showing that this instrument cannot detect a

more detailed error. This code simply shows that a query error defined in 11.5.1.1.7 and 6.3, IEEE488.2 has occurred.

| -410 | **Query INTERRUPTED** |

The state that generates a "INTERRUPTED" Query error (see 6.3.2.3, IEEE488.1). This error occurs when data bytes (DAB) or GET are received before the transmission of the response after a query has not been completed, for example.

| -420 | **Query UNTERMINATED** |

The state that generates an "UNTERMINATED" Query error (see 6.3.2, IEEE488.2). This error occurs when this instrument is designated as the talker and an incomplete program message is received, for example.

| -440 | **Query UNTERMINATED after indefinite response** |

After a query asking for an indefinite response has been run, another query is received in the same program message (See 6.5.7.5.7, IEEE488.2).

## R

| 105 | **Recall failed** |

This error occurs when reading an instrument status file (State01.sta, etc.) (MMEM:LOAD:STAT command) fails.

## S

| 106 | **Save failed** |

This error occurs when writing an instrument status file (State01.sta, etc.) (MMEM:STOR:STAT command) fails.

| 50 | **Specified channel hidden** |

This error occurs when an attempt is made to activate a channel not on display using the DISP:WIND:ACT command. This error is not generated by front key operations.

| 23 | **Specified error term dose not exist** |

| 21 | **Specified ports overlapped** |

This error occurs when a port number is duplicated in a command requiring two or more port numbers as parameters. Specify port setup correctly to avoid duplication of ports. This error is not generated by front key operations.

| 51 | **Specified trace dose not exist** |

| -150 | **String data error** |

When a character-string-data element is put to syntactic analysis, an error not corresponding to one of Error Numbers -151 through -159 occurs.

| -158 | **String data not allowed** |

A character-string-data element has been received at a position where this instrument does not accept one.

| -138 | **Suffix not allowed** |
|---|---|

A suffix is attached to a numeric value element to which a suffix is not allowed to be attached.

| -134 | **Suffix too long** |
|---|---|

The unit is too long.

The unit is expressed in 12 or more characters (see 7.7.3.4, IEEE488.2).

| -102 | **Syntax error** |
|---|---|

A command or data type that is not recognized exists.

| -310 | **System error** |
|---|---|

One of the errors designated as "system errors" in this instrument has occurred.

### T

| 40 | **Target value not found** |
|---|---|

This error occurs when the target is not found during the marker search analysis after specifying the target and executing the CALC:MARK:FUNC:EXEC and CALC:FUNC:EXEC commands. This error occurs also when the bandwidth is not found after executing the bandwidth marker command, CALC:MARK:BWID:DATA?

| -124 | **Too many digits** |
|---|---|

The number of digits of the argument of the decimal numeric-value-data element exceeds 255 with the preceding 0 removed (see 7.7.2.4.1, IEEE488.2).

| -223 | **Too much data** |
|---|---|

The block-, expression-, or character-string-type program data that has been received conforms with the standard. But it exceeds the amount that can be processed under the condition of the memory or conditions specific to memory-related devices. In this instrument, this error occurs when the number of characters exceeds 254 in a character-string parameter.

| -211 | **Trigger ignored** |
|---|---|

This instrument receives and detects a trigger command ("TRIG") or an external trigger signal. But it is ignored due to the timing condition (This instrument is not in the wait-for-trigger state, for example). Change the setup so that a trigger command or an external trigger signal can be sent after the instrument has entered the wait-for- trigger state.

### U

| -113 | **Undefined header** |
|---|---|

A command not defined in this instrument, though not illegal in the syntactic structure, has been received. For example, when a message ":DISP:WIND1:TABL:MEM ON" is sent to a correct program message ":DISP:WIND1:TRAC1:MEM ON," the message sent is received as an undefined command by this instrument. See the command reference and use correct commands.

This error occurs also when a port not existing on this model is specified in a command specifying a port number as an index. Such commands are CALC:FSIM:SEND:DEEM:PORTn:xxxx, CALC:FSIM:SEND:PMC:PORTn:xxxx,

CALC:FSIM:SEND:ZCON:PORTn:Z0:R, and SENS:CORR:EXT:PORTn:TIME; they
include PORTn as a part.

## Warning Message

A warning message is displayed in the instrument message/Warning area in the lower left part of the display against a gray background. Pushing a front panel key or executing **:DISP:CCL** command clears the message.

This message simply appears on the display, being not known to a remote environment such as a GPIB. This message is not displayed when another error (against a red background) has already been displayed in the instrument message/Warning area.

The warning messages for this instrument are as follows:

### Cable Z out of range

This error occurs in SRL measurement function when measured average impedance is out of the trelance (system impedance +/- 30%), and the SRL caluculation is not valid.

### Fault location not allowed

This warning message is displayed when the gating/transform function of time domain function is turned on, number of points is set 2 or sweep type is set logarithmic/segment sweep.

The gating function and transform function are automatically turned off when this warning message is displayed.

### Log sweep requires 2 octave minimum span

If you change the sweep range that does not satisfy the necessary condition of the frequency span (the stop frequency is about 4 times or more of the start frequency) when the sweep type is set to the log sweep, this message is displayed.

If this message is displayed, the sweep type is automatically set to the linear sweep.

For example, if you attempt to change the log type to the log sweep when the start frequency is set to 1 MHz and the stop frequency to 2 MHz, this error occurs.

Set the stop frequency to a value of about 4 times or more the start frequency and then set the low seep.

### Peak not found

This warning message is displayed when, with the tracking turned on, the peak specified by the marker search has not been found by the time the sweep is finished (with the tracking executed).

### Segment table changed

This warning message is displayed when the setting specified segment by segment in the segment table is automatically changed by a change in the other setting.

For example, this warning message is displayed when, with the power specified segment by segment in the segment table, the power setting for a segment is adjusted by a change in the power range setting.

### Target value not found

This warning message is displayed when, with the tracking turned on, the target specified by the marker search has not been found by the time the sweep is finished (with the tracking executed).

This warning message is displayed also when, with the bandwidth marker displayed, the setting for the bandwidth marker is changed at the end of the sweep, or when, with the

active marker changed or moved, the bandwidth is not found.

**User Preset File not found**

This warning message is displayed if no user preset file (D:\UserPreset.sta) exists when executing the **:SYST:UPR** command.
If this message is displayed, a normal preset (**:SYST:PRES**) will be performed.

# Index

# Index

Index

# Index

# Index

# Index

Index

# Index

# REGIONAL SALES AND SUPPORT OFFICES

*For more information about Agilent Technologies test and measurement products, applications, services, and for a current sales office listing, visit our web site: http://www.agilent.com/find/tmdir. You can also contact one of the following centers and ask for a test and measurement sales representative.*          *21/01/2004*

**United States:**
Test and Measurement Call Center
(tel) 1 800 452-4844
(fax) 1 888 900-8921

**Canada:**
Test and Measurement Call Center
(tel) 1 877 894-4414
(fax) 1 888 900-8921

**China:**
(tel) 800 810-0189
(fax) 800 820-2816

**Europe:**
(tel) (31 20) 547-2323
(fax) (31 20) 547-2390

**Japan:**
Call Center
(tel) 0120 421-345
(tel) (81) 426 56-7832
(fax) (81) 426 56-7840

**Korea:**
(tel) (82 2) 2004-5004
(fax) (82 2) 2004-5115

**Latin America:**
(tel) (305) 269-7500
(fax) (305) 269-7599

**Taiwan:**
(tel) 0800 047 866
(fax) 0800 286 331

**Australia/New Zealand:**
(tel) (61 3) 9210-5555 (Australia)
(fax) (61 3) 9210-5899
(tel) (64 4) 939-0636 (New Zealand)
(fax) (64 4) 972-5364

**Asia Pacific:**
(tel) (65) 6375-8100
(fax) (65) 6836-0252
Email: tm_asia@agilent.com