


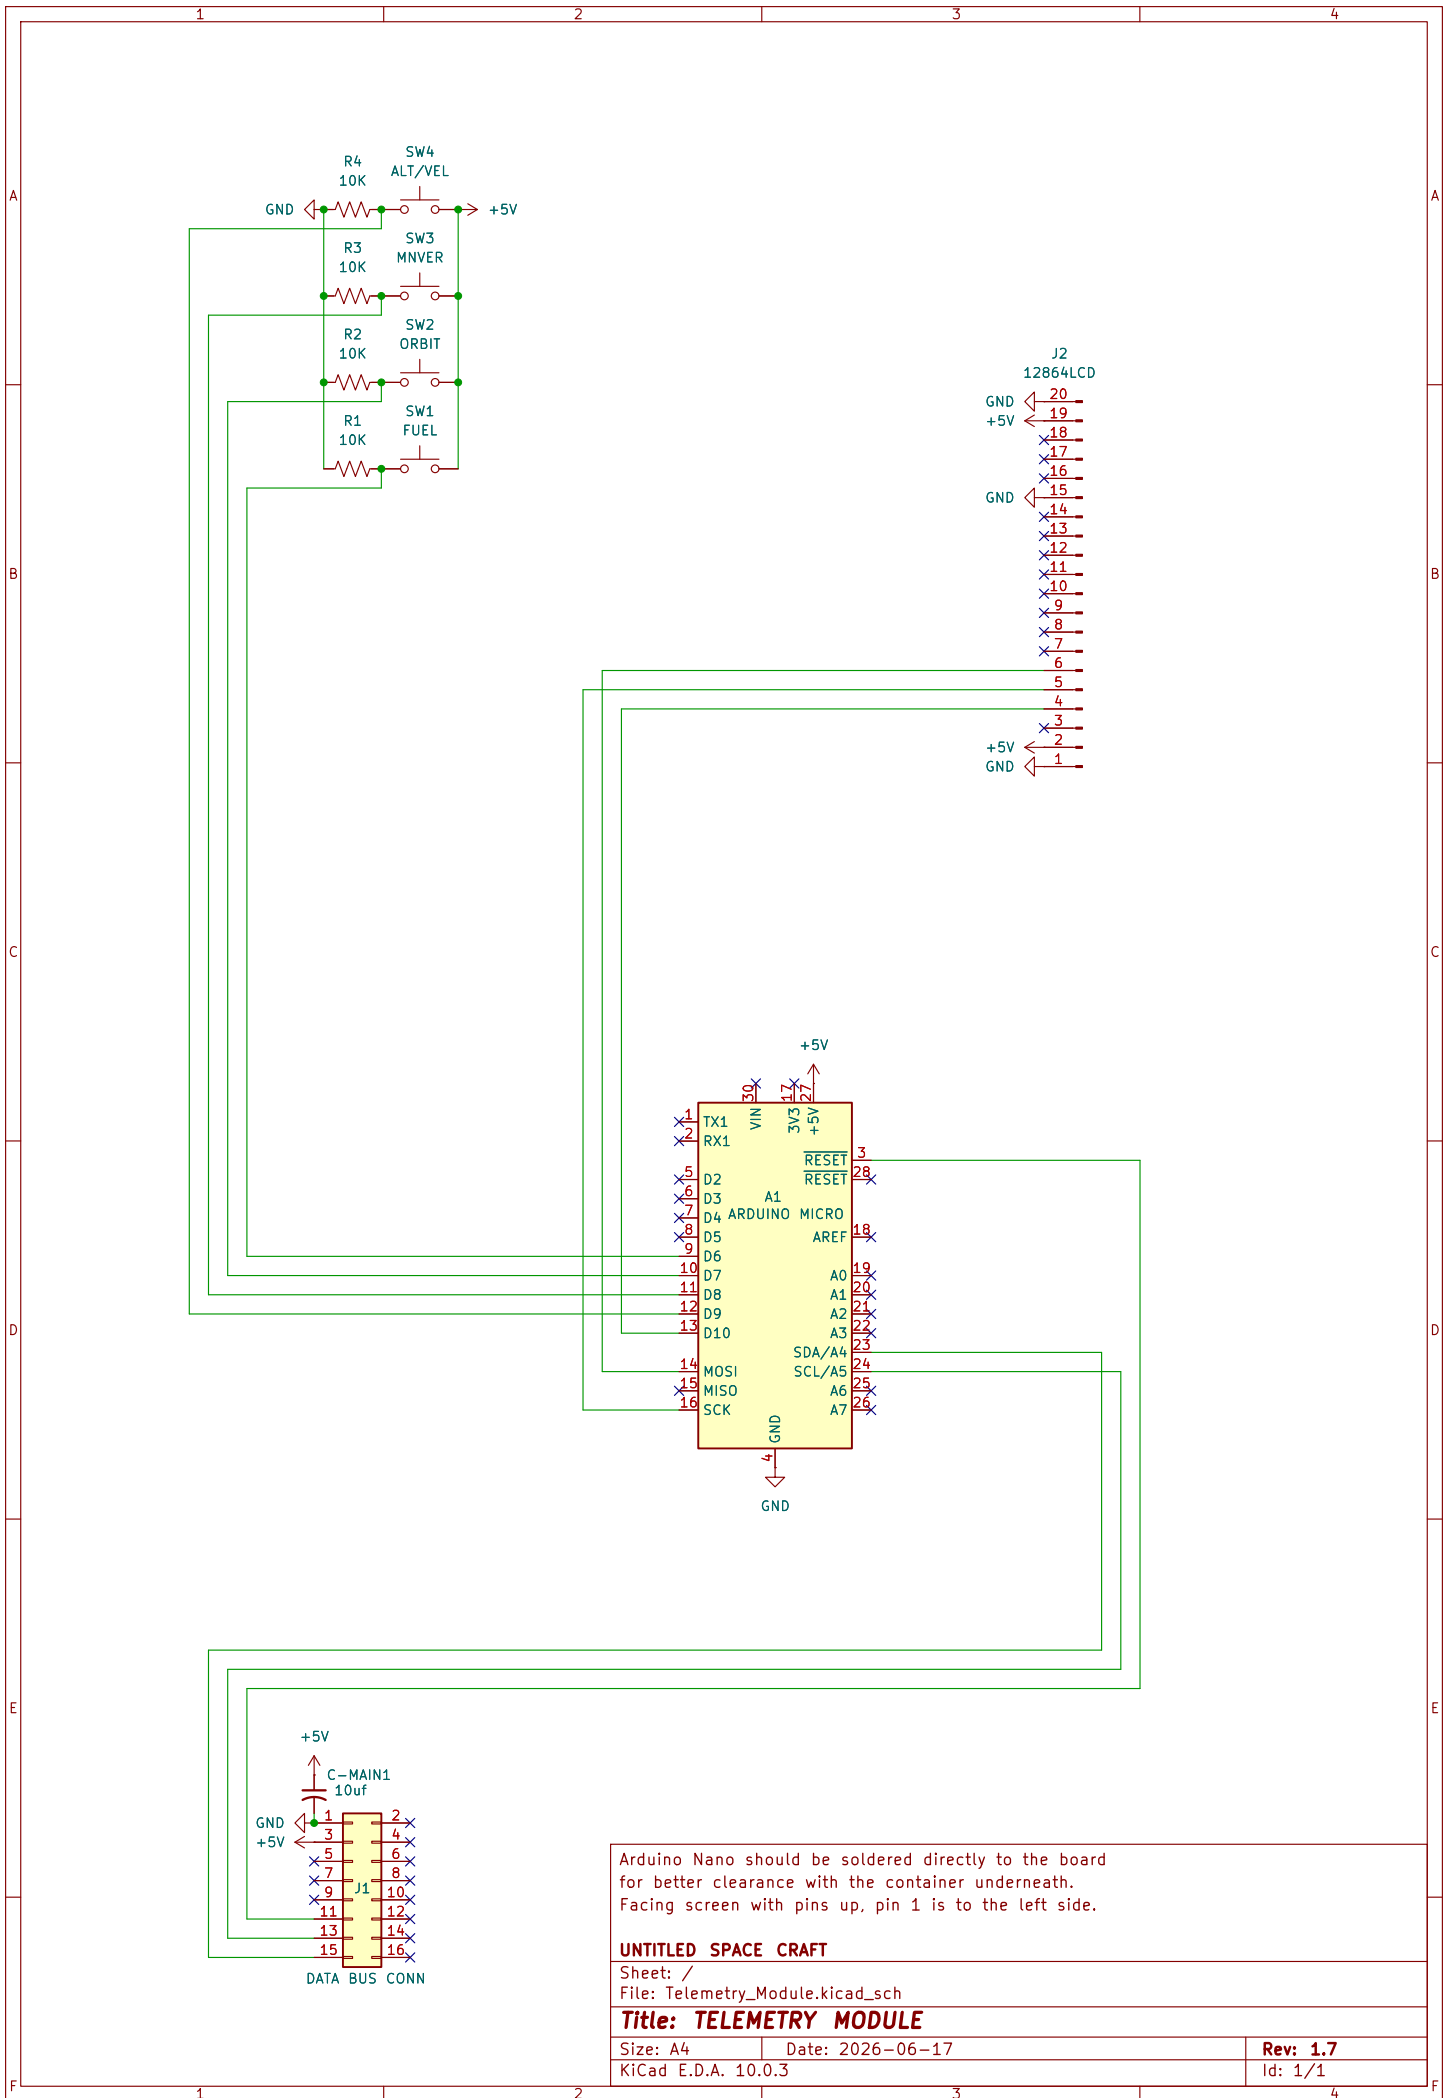

Arduino Nano should be soldered directly to the board for better clearance with the container underneath. Facing screen with pins up, pin 1 is to the left side.

UNTITLED SPACE CRAFT

Sheet: /
File: Telemetry_Module.kicad_sch

Title: **TELEMETRY MODULE**

Size: A4 Date: 2026-06-17
KiCad E.D.A. 10.0.3

Rev: **1.7**
Id: 1/1