



NETWORKS

ER. NITESH KUMAR JANGID

ASSISTANT PROFESSOR

DEPARTMENT OF COMPUTER SCIENCE

CENTRAL UNIVERSITY OF RAJASTHAN

INTRODUCTION

- The **network** is the interconnection of a set of devices capable of communication.
- The device can be a **host** (or an end system as it is sometimes called) such as a large computer, desktop, laptop, workstation, cellular phone, or security system.
- A device in this definition can also be a **connecting device** such as a router, which connects the network to other networks, a switch, which connects devices together, a modem (modulator-demodulator), which changes the form of data, and so on.
- These devices in a network are **connected** using wired or wireless transmission media such as cable or air.

NETWORK CRITERIA

- A network must be able to meet a certain number of criteria. The most important of these are performance, reliability, and security.
 - **Performance** can be measured in many ways, including transit time and response time. Transit time is the amount of time required for a message to travel from one device to another. Response time is the elapsed time between an inquiry and a response.
 - The performance of a network depends on a number of factors, including the number of users, the type of transmission medium, the capabilities of the connected hardware, and the efficiency of the software.
 - Performance is often evaluated by two networking metrics: throughput and delay. We often need more throughput and less delay. However, these two criteria are often contradictory. If we try to send more data to the network, we may increase throughput but we increase the delay because of traffic congestion in the network.

NETWORK CRITERIA


- **Reliability** In addition to accuracy of delivery, network reliability is measured by the frequency of failure, the time it takes a link to recover from a failure, and the network's robustness in a catastrophe.
- **Security** Network security issues include protecting data from unauthorized access, protecting data from damage and development, and implementing policies and procedures for recovery from breaches and data losses.

PHYSICAL STRUCTURES

- **Type of Connection:** A network is two or more devices connected through links. A link is a communications pathway that transfers data from one device to another. There are two possible types of connections: point-to-point and multipoint.
 - A **point-to-point** connection provides a dedicated link between two devices. The entire capacity of the link is reserved for transmission between those two devices. Most point-to-point connections use an actual length of wire or cable to connect the two ends, but other options, such as microwave or satellite links, are also possible. When we change television channels by infrared remote control, we are establishing a point-to-point connection between the remote control and the television's control system.
 - A **multipoint** (also called multidrop) connection is one in which more than two specific devices share a single link. In a multipoint environment, the capacity of the channel is shared, either spatially or temporally. If several devices can use the link simultaneously, it is a spatially shared connection. If users must take turns, it is a timeshared connection.

PHYSICAL STRUCTURES

Figure 1.3 *Types of connections: point-to-point and multipoint*

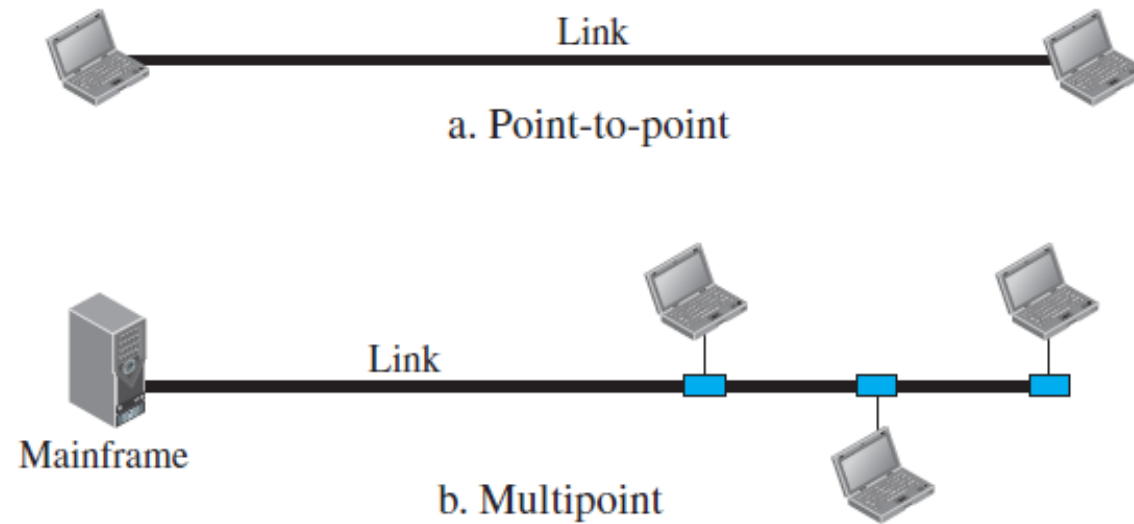

PHYSICAL TOPOLOGY

- The term **physical topology** refers to the way in which a network is laid out physically. Two or more devices connect to a link; two or more links form a topology. The topology of a network is the geometric representation of the relationship of all the links and linking devices (usually called nodes) to one another. There are four basic topologies possible: mesh, star, bus, and ring.


MESH TOPOLOGY

- In a **mesh topology**, every device has a dedicated point-to-point link to every other device. The term dedicated means that the link carries traffic only between the two devices it connects.
- To find the number of physical links in a fully connected mesh network with n nodes, we first consider that each node must be connected to every other node.
- In a mesh topology, we need $n(n - 1) / 2$ duplex-mode links. To accommodate that many links, every device on the network must have $n - 1$ input/output (I/O) ports to be connected to the other $n - 1$ stations.

MESH TOPOLOGY

Figure 1.4 *A fully connected mesh topology (five devices)*

$n = 5$
10 links.

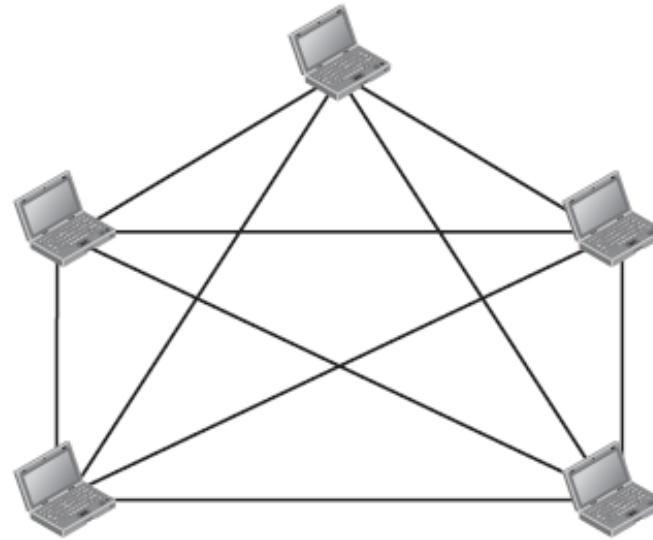

MESH TOPOLOGY

■ **Advantages:**

- The use of dedicated links guarantees that each connection can carry its own data load, thus eliminating the traffic problems that can occur when links must be shared by multiple devices.
- A mesh topology is robust. If one link becomes unusable, it does not incapacitate the entire system.
- There is the advantage of privacy or security. When every message travels along a dedicated line, only the intended recipient sees it. Physical boundaries prevent other users from gaining access to messages.
- Finally, point-to-point links make fault identification and fault isolation easy. Traffic can be routed to avoid links with suspected problems.

MESH TOPOLOGY

- **Disadvantages:**


- Because every device must be connected to every other device, installation and reconnection are difficult.
 - The sheer bulk of the wiring can be greater than the available space (in walls, ceilings, or floors) can accommodate.
 - The hardware required to connect each link (I/O ports and cable) can be prohibitively expensive.
-
- For these reasons, a mesh topology is usually implemented in a limited fashion. One practical example of a mesh topology is the connection of telephone regional offices, in which each regional office needs to be connected to every other regional office.

STAR TOPOLOGY

- In a **star topology**, each device has a dedicated point-to-point link only to a central controller, usually called a hub.
- The devices are not directly linked to one another. Unlike a mesh topology, a star topology does not allow direct traffic between devices.
- The controller acts as an exchange: If one device wants to send data to another, it sends the data to the controller, which then relays the data to the other connected device
- The star topology is used in local-area networks (LANs).

STAR TOPOLOGY

Figure 1.5 *A star topology connecting four stations*

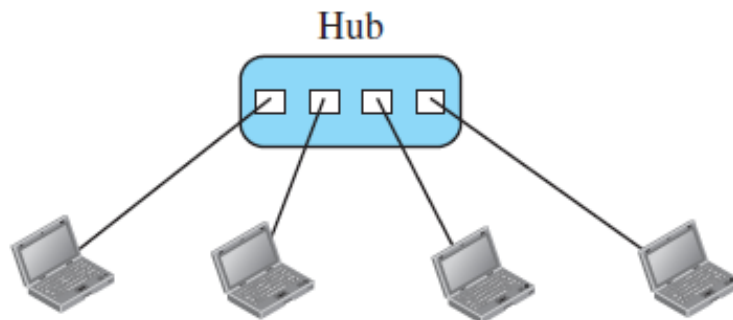

STAR TOPOLOGY

■ **Advantages:**

- A star topology is less expensive than a mesh topology.
- In a star, each device needs only one link and one I/O port to connect it to any number of others. This factor also makes it easy to install and reconfigure.
- Far less cabling needs to be housed, and additions, moves, and deletions involve only one connection: between that device and the hub.
- Other advantages include robustness. If one link fails, only that link is affected. All other links remain active. This factor also lends itself to easy fault identification and fault isolation. As long as the hub is working, it can be used to monitor link problems and bypass defective links.

STAR TOPOLOGY

■ Disadvantages:


- One big disadvantage of a star topology is the dependency of the whole topology on one single point, the hub. If the hub goes down, the whole system is dead.
- Although a star requires far less cable than a mesh, each node must be linked central hub. For this reason, often more cabling is required in a star than in some other topologies (such as ring or bus).

BUS TOPOLOGY

- A **bus topology** is multipoint. One long cable acts as a **backbone** to link all the devices in a network.
- Nodes are connected to the bus cable by drop lines and taps. A drop line is a connection running between the device and the main cable. A tap is a connector that either splices into the main cable or punctures the sheathing of a cable to create a contact with the metallic core.
- As a signal travels along the backbone, some of its energy is transformed into heat. Therefore, it becomes weaker and weaker as it travels farther and farther. For this reason there is a limit on the number of taps a bus can support and on the distance between those taps.

BUS TOPOLOGY

Figure 1.6 *A bus topology connecting three stations*

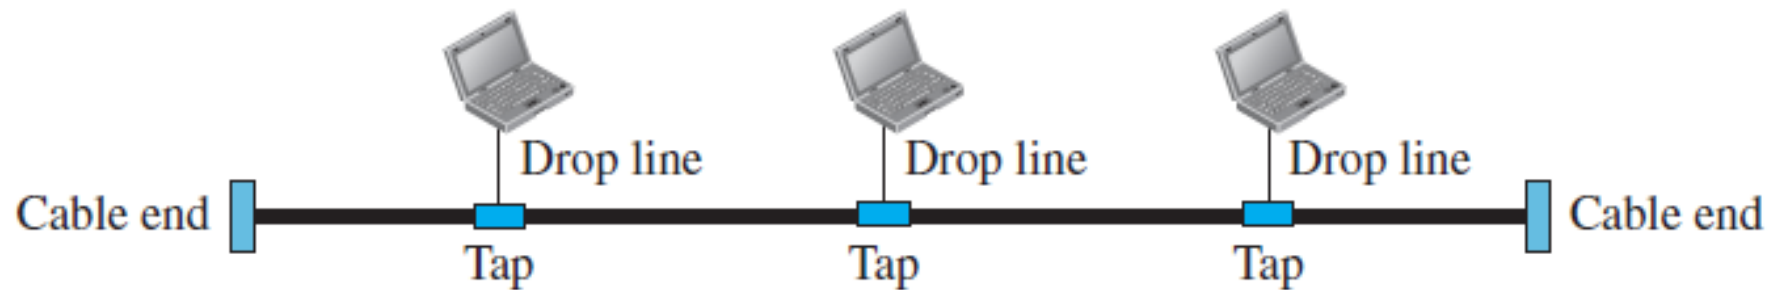

BUS TOPOLOGY

■ Advantages:

- Advantages of a bus topology include ease of installation. Backbone cable can be laid along the most efficient path, then connected to the nodes by drop lines of various lengths. In this way, a bus uses less cabling than mesh or star topologies.
- Example: In a star, for example, four network devices in the same room require four lengths of cable reaching all the way to the hub. In a bus, this redundancy is eliminated. Only the backbone cable stretches through the entire facility. Each drop line has to reach only as far as the nearest point on the backbone.

BUS TOPOLOGY

■ Disadvantages:


- Difficult reconnection and fault isolation. A bus is usually designed to be optimally efficient at installation. It can therefore be difficult to add new devices. Signal reflection at the taps can cause degradation in quality. This degradation can be controlled by limiting the number and spacing of devices connected to a given length of cable. Adding new devices may therefore require modification or replacement of the backbone.
- In addition, a fault or break in the bus cable stops all transmission, even between devices on the same side of the problem. The damaged area reflects signals back in the direction of origin, creating noise in both directions.

RING TOPOLOGY

- In a **ring topology**, each device has a dedicated point-to-point connection with only the two devices on either side of it.
- A signal is passed along the ring in one direction, from device to device, until it reaches its destination. Each device in the ring incorporates a repeater. When a device receives a signal intended for another device, its repeater regenerates the bits and passes them along.

RING TOPOLOGY

Figure 1.7 *A ring topology connecting six stations*

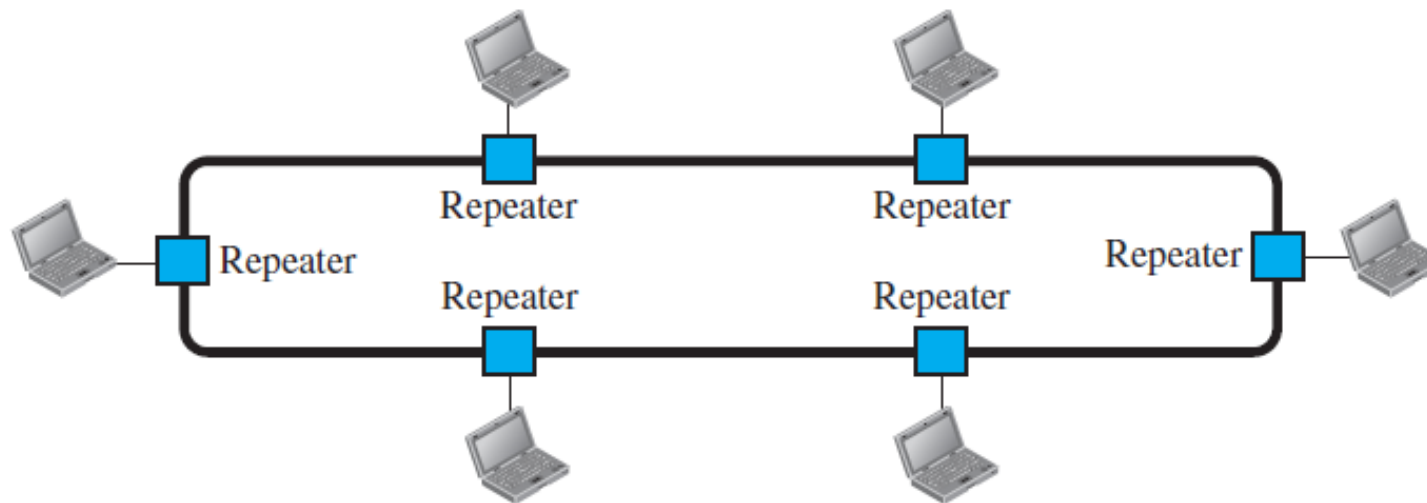

RING TOPOLOGY

■ Advantages:

- A ring is relatively easy to install and reconfigure. Each device is linked to only its immediate neighbors. To add or delete a device requires changing only two connections. The only constraints are media and traffic considerations (maximum ring length and number of devices).
- In addition, fault isolation is simplified. Generally, in a ring, a signal is circulating at all times. If one device does not receive a signal within a specified period, it can issue an alarm. The alarm alerts the network operator to the problem and its location.

RING TOPOLOGY

- **Disadvantages:**

- However, unidirectional traffic can be a disadvantage. In a simple ring, a break in the ring (such as a disabled station) can disable the entire network. This weakness can be solved by using a dual ring or a switch capable of closing off the break.