

# DJ Link Packet Analysis

James Elliott  
Deep Symmetry, LLC

May 26, 2017

## Abstract

The protocol used by Pioneer professional DJ equipment to communicate and coordinate performances can be monitored to provide useful information for synchronizing other software, such as light shows and sequencers. By creating a “virtual CDJ” that sends appropriate packets to the network, other devices can be induced to send packets containing even more useful information about their state. This article documents what has been learned so far about the protocol, and how to accomplish these tasks.

## Contents

<b>1</b>	<b>Mixer Startup</b>	<b>3</b>
<b>2</b>	<b>CDJ Startup</b>	<b>5</b>
<b>3</b>	<b>Tracking BPM and Beats</b>	<b>6</b>
<b>4</b>	<b>Creating a Virtual CDJ</b>	<b>8</b>
4.1	Mixer Status Packets . . . . .	9
4.2	CDJ Status Packets . . . . .	10
4.3	Rekordbox Status Packets . . . . .	16
<b>5</b>	<b>Track Metadata</b>	<b>16</b>
5.1	Field Types . . . . .	17
5.1.1	Number Fields . . . . .	17
5.1.2	Binary Fields . . . . .	18
5.1.3	String Fields . . . . .	18
5.2	Messages . . . . .	19
5.3	Track Metadata . . . . .	21
5.3.1	Track Metadata Item 1: Title . . . . .	24
5.3.2	Track Metadata Item 2: Artist . . . . .	25

5.3.3	Track Metadata Item 3: Album Title . . . . .	25
5.3.4	Track Metadata Item 4: Duration . . . . .	25
5.3.5	Track Metadata Item 5: Tempo . . . . .	26
5.3.6	Track Metadata Item 6: Comment . . . . .	26
5.3.7	Track Metadata Item 7: Key . . . . .	26
5.3.8	Track Metadata Item 8: Rating . . . . .	26
5.3.9	Track Metadata Item 9: Color . . . . .	26
5.3.10	Track Metadata Item 10: Genre . . . . .	26
5.3.11	Track Metadata Item 11: Date Added . . . . .	26
5.4	Menu Footer Response . . . . .	27
5.5	Menu Item Types . . . . .	27
5.6	Album Art . . . . .	28
5.7	Beat Grids . . . . .	28
5.8	Requesting Track Waveforms . . . . .	31
5.9	Requesting All Tracks . . . . .	31
5.10	Playlists . . . . .	31
5.11	Experimenting with Metadata . . . . .	31
5.12	Background Research . . . . .	33
<b>6</b>	<b>What's Missing?</b>	<b>33</b>
6.1	CDJ Packets to Rekordbox . . . . .	34
6.2	Dysentery . . . . .	34



Figure 1: Initial announcement packets from Mixer



Figure 2: First-stage Mixer device number assignment packets

## 1 Mixer Startup

When the mixer starts up, after it obtains an IP address (or gives up on doing that and self-assigns an address), it sends out what look like a series of packets<sup>1</sup> simply announcing its existence to UDP port 50000 on the broadcast address of the local network.

These have a data length<sup>2</sup> of 37 bytes, appear roughly every 300 milliseconds, and have the content shown in Figure 1.

The tenth byte (inside what is labeled the header) is bolded because its value changes in the different types of packets which follow.

After about three of these packets are sent, another series of three begins. It is not clear what purpose these packets serve, because they are not yet asserting ownership of any device number; perhaps they are used when CDJs are powering up as part of the mechanism the mixer can use to tell them which device number to use based on which network port they are connected to?

In any case, these three packets have a data length of 44 bytes, are again sent to UDP port 50000 on the local network broadcast address, at roughly 300 millisecond intervals, and have the content shown in Figure 2.

The value  $N$  at byte 36 is 1, 2, or 3, depending on whether this is

<sup>1</sup>The packet capture described in this analysis can be found at <https://github.com/brunchboy/dysentery/raw/master/doc/assets/powerup.pcapng>

<sup>2</sup>Values within packets are shown in hexadecimal, while packet lengths and byte offsets are discussed in decimal.

the first, second, or third time the packet is sent.

After these comes another series of three numbered packets. These appear to be claiming the device number for a particular device, as well as announcing the IP address at which it can be found. They have a data length of 50 bytes, and are again sent to UDP port 50000 on the local network broadcast address, at roughly 300 millisecond intervals, with the content shown in Figure 3.

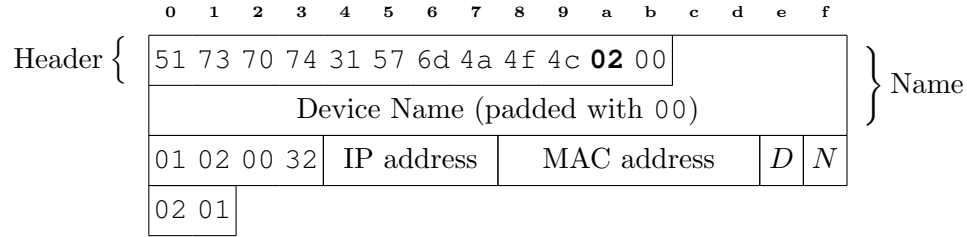


Figure 3: Second-stage Mixer device number assignment packets

I identify these as claiming/identifying the device number because the value  $D$  at byte 46 is the same as the device number that the mixer uses to identify itself ( $0 \times 21$ ) and the same is true for the corresponding packets seen from the CDJs (they use device numbers 2 and 3, as they are connected to those ports/channels on the mixer).

As with the previous series of three packets, the value  $N$  at byte 47 takes on the values 1, 2, and 3 in the three packets.

These are followed by another three packets, perhaps the last stage of claiming the device number, again at 300 millisecond intervals, to the same port 50000. These shorter packets have 38 bytes of data and the content shown in Figure 4.

As before the value  $D$  at byte 36 is the same as the device number that the mixer uses to identify itself ( $0 \times 21$ ) and  $N$  at byte 37 takes on the values 1, 2, and 3 in the three packets.

Once those are sent, the mixer seems to settle down and send what looks like a keep-alive packet to retain presence on the network and

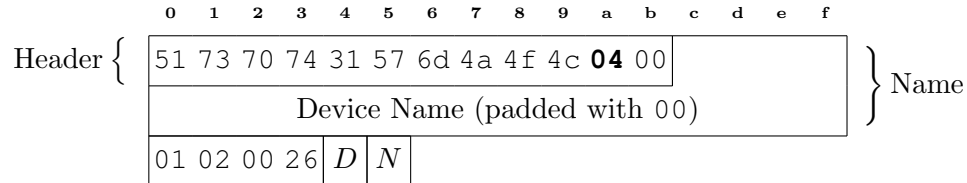


Figure 4: Final-stage Mixer device number assignment packets

ownership of its device number, at a less frequent interval. These packets are 54 bytes long, again sent to port 50000 on the local network broadcast address, roughly every second and a half. They have the content shown in Figure 5.

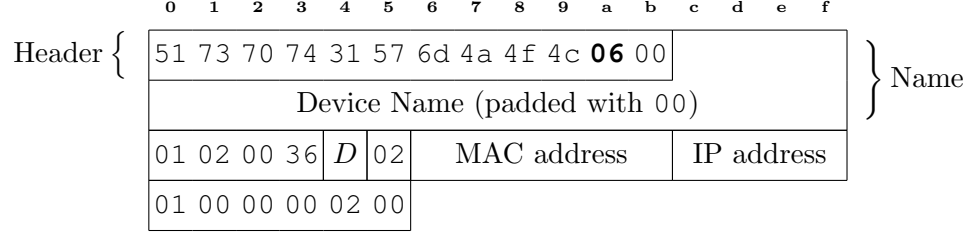


Figure 5: Mixer keep-alive packets

## 2 CDJ Startup

When a CDJ starts up the procedure and packets are nearly identical, with groups of three packets sent at 300 millisecond intervals to port 50000 of the local network broadcast address. The only difference between Figure 6 and Figure 1 is the final byte, which is 0x01 for the CDJ, and was 0x02 for the mixer.

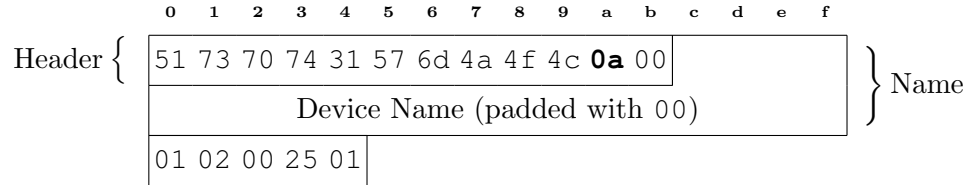


Figure 6: Initial announcement packets from CDJ

Similarly, the next series of three packets from the CDJ are nearly identical to those from the mixer. The only difference between Figure 7 and Figure 2 is byte 37 (immediately after the packet counter  $N$ ), which again is 0x01 for the CDJ, and was 0x02 for the mixer.

However it appears that in this capture the CDJ skips the second stage of claiming a device number, probably because it is configured to be automatically assigned a device number based on the port of the mixer to which it is connected, and we cannot see a packet that the mixer sent it assigning it that device number. Instead, it jumps right to the end of the third and final stage, sending a single 38-byte packet



Figure 7: First-stage CDJ device number assignment packets

with header byte 10 set to tt 04 (which identified the three packets of the third stage when the mixer was starting up), with content identical to Figure 4.

Even though the value of  $N$  is 01, this is the only packet in this series that the CDJ sends. It would probably behave differently if configured to assign its own device number (behaving like we saw the mixer behave in claiming its device number).

The CDJ then moves to the keep-alive stage, sending out 54-byte packets with the content shown in Figure 8.

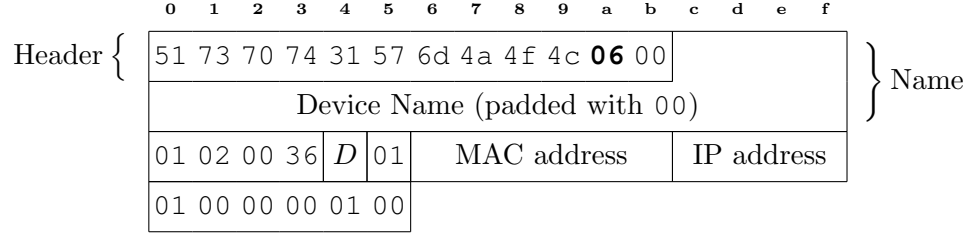


Figure 8: CDJ keep-alive packets

As seems to always be the case when comparing mixer and CDJ packets, the difference between this and Figure 5 is that byte 37 (following the device number  $D$ ) has the value 01 rather than 02, and the same is true of the second-to-last byte in each of the packets. (Byte 52 is 01 in Figure 8 and 02 in Figure 5.)

### 3 Tracking BPM and Beats

For some time now, Afterglow<sup>3</sup> has been able to synchronize its light shows with music being played on Pioneer equipment by observing packets broadcast by the mixer to port 50001. Until recently, however, it was not possible to tell which player was the master, so there was

<sup>3</sup><https://github.com/brunchboy/afterglow#afterglow>

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
00	51	73	70	74	31	57	6d	4a	4f	4c	28					
10	Device Name (padded with 00)															01
20	00	<i>D</i>	00	3c	<i>nextBeat</i>				<i>2ndBeat</i>				<i>nextBar</i>			
30	<i>4thBeat</i>				<i>2ndBar</i>				<i>8thBeat</i>				ff	ff	ff	ff
40	ff	ff	ff	ff	ff	ff	ff	ff	ff	ff	ff	ff	ff	ff	ff	ff
50	ff	ff	ff	ff	<i>Pitch</i>				00	00	<i>BPM</i>	<i>B<sub>b</sub></i>	00	00	<i>D</i>	

Figure 9: Beat packets

no way to determine the down beat (the start of each measure). Now that it is possible to determine which CDJ is the master player using the packets described in Section 4, these beat packets have become far more useful, and Afterglow will soon be using them to track the down beat based on the beat number reported by the master player.

To track beats, open a socket and bind it to port 50001. The devices seem to broadcast two different kinds of packets to this port, a shorter packet containing 45 bytes of data, and a longer packet containing 96 bytes. The shorter packets seem to all have identical content, and do not seem to convey useful information, so we currently simply ignore them.

The 96-byte packets are sent on each beat, so even the arrival of the packet is interesting information, it means that the player is starting a new beat. (CDJs send these packets only when they are playing *and only for rekordbox-analyzed tracks*. The mixer sends them all the time, acting as a backup metronome when no other device is counting beats.) The content of these packets is shown in Figure 9.

The Device Number in *D* (bytes 33 and 95) is the Player Number as displayed on the CDJ itself, or 33 for the mixer, or another value for a computer running rekordbox.

To facilitate synchronization of variable-tempo tracks, the number of milliseconds after which a variety of upcoming beats will occur are reported. *nextBeat* at bytes 36–39 is the number of milliseconds in which the very next beat will arrive. *2ndBeat* (bytes 40–43) is the number of milliseconds until the beat after that. *nextBar* (bytes 44–47) reports the number of milliseconds until the next measure of music begins, which may be from 1 to 4 beats away. *4thBeat* (bytes 48–51) reports how many millisecond will elapse until the fourth upcoming beat; *2ndBar* (bytes 52–55) the interval until the second measure after the current one begins (which will occur in 5 to 8 beats, depending how far

into the current measure we have reached); and *8thBeat* (bytes 56–59) tells how many milliseconds we have to wait until the eighth upcoming beat will arrive.

The player's current pitch adjustment<sup>4</sup> can be found in bytes 84–87, labeled *Pitch*. It represents a three-byte pitch adjustment percentage, where 0x00100000 represents no adjustment (0%), 0x00000000 represents slowing all the way to a complete stop (−100%, reachable only in Wide tempo mode), and 0x00200000 represents playing at double speed (+100%).

The pitch adjustment percentage represented by *Pitch* is calculated as follows:

$$100 \times \frac{(byte[85] \times 65536 + byte[86] \times 256 + byte[87]) - 1048576}{1048576}$$

The current BPM of the track playing on the device<sup>5</sup> can be found at bytes 90–91 (labeled *BPM*). It is a two-byte integer representing one hundred times the current track BPM. So, the current track BPM value to two decimal places can be calculated as:

$$\frac{byte[90] \times 256 + byte[91]}{100}$$

In order to obtain the actual playing BPM (the value shown in the BPM display), this value must be multiplied by the current pitch adjustment. Since calculating the effective BPM reported by a CDJ is a common operation, here a simplified equation that results in the effective BPM to two decimal places, by combining the *BPM* and *Pitch* values:<sup>6</sup>

$$\frac{(byte[90] \times 256 + byte[91]) \times (byte[85] \times 65536 + byte[86] \times 256 + byte[87])}{104857600}$$

The counter  $B_b$  at byte 92 counts out the beat within each bar, cycling  $1 \rightarrow 2 \rightarrow 3 \rightarrow 4$  repeatedly, and can be used to identify the down beat if it is coming from the master player.

## 4 Creating a Virtual CDJ

Although some useful information can be obtained simply by watching broadcast traffic on a network containing Pioneer gear, in order to

---

<sup>4</sup>The mixer always reports a pitch of +0%.

<sup>5</sup>The mixer passes along the BPM of the master player.

<sup>6</sup>Since the mixer always reports a pitch adjustment of +0%, its *BPM* value can be used directly without this additional step.



get important details it is necessary to cause the gear to send you information directly. This can be done by simulating a “Virtual CDJ”.<sup>7</sup>

To do this, bind a UDP server socket to port 50002 on the network interface on which you are receiving DJ-Link traffic, and start sending keep-alive packets to port 50000 on the broadcast address as if you were a CDJ. Follow the structure shown in Figure 8, but use the actual MAC and IP addresses of the network interface on which you are receiving DJ-Link traffic, so the devices can see how to reach you.

You can use a value like 5 for  $D$  (the device/player number) so as not to conflict with any actual players you have on the network, and any name you would like. As long as you are sending these packets roughly every 1.5 seconds, the other players and mixers will begin sending packets directly to the socket you have opened on port 50002.

Each device seems to send status packets roughly every 200 milliseconds.

We are just beginning to analyze all the information which can be gleaned from these packets, but here is what we know so far.<sup>8</sup>

#### 4.1 Mixer Status Packets

Packets from the mixer will have a length of 56 bytes and the content shown in Figure 10.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
00	51	73	70	74	31	57	6d	4a	4f	4c	29					
10	Device Name (padded with 00)															01
20	00	D	00	14	D	00	00	F	00	10	00	00	80	00	BPM	
30	00	10	00	00	00	09	X	B <sub>b</sub>								

Figure 10: Mixer status packets

Packets coming from a DJM-2000 nexus connected as the only mixer on the network contain a value of 33 (0x21) for their Device Number  $D$  (bytes 33 and 36).

The value marked  $F$  at byte 39 is evidently a status flag equivalent to the one shown in Figure 12, although on a mixer the only two values seen so far are 0xf0 when it is the tempo master, and 0xd0 when it

<sup>7</sup>Thanks are due to Diogo Santos for discovering the trick of creating a virtual CDJ in order to receive detailed status information from other devices.

<sup>8</sup>Examples of packets discussed in this section can be found in the capture at <https://github.com/brunchboy/dysentery/raw/master/doc/assets/to-virtual.pcapng>

is not. So evidently the mixer always considers itself to be playing and synced, but never on-air.

There are two places that might contain pitch values, bytes 41–43 and bytes 50–51, but since they always 0x100000 (or +0%), we can't be sure. The current tempo in beats-per-minute identified by the mixer can be obtained as:

$$\frac{\text{byte}[46] \times 256 + \text{byte}[47]}{100}$$

This value is labeled *BPM* in Figure 10. Unfortunately, this BPM seems to only be valid when a rekordbox-analyzed source is playing; when the mixer is doing its own beat detection from unanalyzed audio sources, even though it displays the detected BPM on the mixer itself, and uses that to drive its beat effects, it does not send that value in these packets.

The current beat number within a bar (1, 2, 3 or 4) is sent in *byte*[55], labeled *B<sub>b</sub>*. However, the beat number is *not* synchronized with the master player, and these packets do not arrive at the same time as the beat started anyway, so this value is not useful for much. The beat number should be determined, when needed, from beat packets (described in Section 3) that are sent by the master player.

The value at *byte*[54], labeled *X*, has an unknown meaning. It seems to start out with the value 0x00, and then change when a player starts playing to the value 0xff, but it may well do other things as well.

## 4.2 CDJ Status Packets

Packets from a CDJ will have a length of 212 bytes and the content shown in Figure 11 for nexus players. Older players send 208-byte packets with slightly less information. Newer firmware and Nexus 2 players send packets that are 284 or 292 bytes long.

The Device Number in *D* (bytes 33 and 36) is the Player Number as displayed on the CDJ itself. In the case of this capture, the CDJs were assigned Player Numbers 2 and 3.

The activity flag *A* at byte 39 seems to be 0 when the player is idle, and 1 when it is playing, searching, or loading a track.

When a rekordbox track is loaded, the device holding the rekordbox database from which the track was loaded is reported in *D<sub>r</sub>* at byte 40 (if the track was loaded from the local device, this will be the same as *D*; if it was loaded over the Link, it will be the number of a different device) When no track is loaded, *D<sub>r</sub>* has the value 00.

Similarly, *S<sub>r</sub>* at byte 41 reports the slot from which the track was loaded: The value 00 means no track is loaded, 01 means the CD drive, 02 means the SD slot, and 03 means the USB slot. When a

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
00	51	73	70	74	31	57	6d	4a	4f	4c	0a					
10	Device Name (padded with 00)															01
20	03	<i>D</i>	00	b0	<i>D</i>	00	01	<i>A</i>	<i>D<sub>r</sub></i>	<i>S<sub>r</sub></i>	<i>t<sub>r</sub></i>	00	<i>rekordbox</i>			
30	00	00	<i>Track</i>		00	00	<i>t<sub>2</sub></i>	<i>t<sub>3</sub></i>	00	00	<i>t<sub>4</sub></i>	<i>t<sub>5</sub></i>	00	00	00	00
40	00	00	00	00	00	00	<i>t<sub>6</sub></i>	<i>t<sub>7</sub></i>	00	00	00	00	00	00	00	00
50	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
60	00	00	00	00	00	00	00	00	01	00	<i>U<sub>a</sub></i>	<i>S<sub>a</sub></i>	00	00	00	<i>U<sub>l</sub></i>
70	00	00	00	<i>S<sub>l</sub></i>	00	<i>L</i>		00	00	01	00	00	<i>P<sub>1</sub></i>	<i>Firmware</i>		
80	00	00	00	00	00	00	<i>Sync<sub>n</sub></i>		00	<i>F</i>	ff	<i>P<sub>2</sub></i>	00	<i>Pitch<sub>1</sub></i>		
90	<i>l<sub>1</sub></i>		<i>BPM</i>		7f	ff	ff	ff	00	<i>Pitch<sub>2</sub></i>			00	<i>P<sub>3</sub></i>	00	ff
a0	<i>Beat</i>				<i>Cue</i>		<i>B<sub>b</sub></i>	00	00	00	00	00	00	00	00	00
b0	00	00	00	00	00	00	10	00	00	00	00	00	00	00	00	00
c0	00	<i>Pitch<sub>3</sub></i>			00	<i>Pitch<sub>4</sub></i>			<i>Packet</i>				<i>nx</i>	00	00	00
d0	00	00	00	00												

Figure 11: CDJ status packets

track is loaded from a rekordbox collection on a laptop,  $S_r$  has the value 04.  $t_r$  at byte 42 may be an indicator of whether the track came from rekordbox: It seems to have the value 00 when no track is loaded or an unanalyzed track is loaded, 01 when a rekordbox track is loaded, and 05 when an audio CD is loaded.

The field *rekordbox* at bytes 44–47 contains the rekordbox database ID of the loaded track when a rekordbox track is being played. Combined with the player number and slot information, this can be used to request the track metadata as described in Section 5. When an audio CD is loaded, this just contains the track index on the disc.

The track number being played (its position within a playlist or other scrolling list of tracks, as displayed on the CDJ) can be found at bytes 50 and 51, labeled *Track*. (It may be a 4-byte value and also include bytes 48 and 49, but that would seem an unmanageable number of tracks to search through.)

There are a number of bytes, labeled  $t_2$  through  $t_7$ , whose purpose is as yet undetermined. They are all zero when there is no track loaded, but take different values when a track is loaded. (Actually, there are many other bytes than these which behave like this, so they will probably be removed from the chart in a future version of this document.)

Byte 106, labeled  $U_a$  (for “USB activity”), alternates between the values 4 and 6 when there is USB activity—it may even alternate in time with the flashing USB indicator LED on the player. Byte 107,  $S_a$ , is the same kind of activity indicator for the SD slot. Byte 111 ( $U_l$  for “USB local”) has the value 4 when there is no USB media loaded, 0 when USB is loaded, and 2 when the USB Stop button has been pressed and the USB media is being unmounted.

Byte 115 ( $S_l$  for “SD local”) has the value 4 when there is no SD media loaded, 0 when SD is loaded, and 2 when the SD door has been opened and the SD media is being unmounted.

Byte 117, labeled  $L$  (for “Link available”), appears to have the value 1 whenever USB, SD, or CD media is present in any player on the network, whether or not the Link option is chosen in the other players, and 0 otherwise.

Byte 123, labeled  $P_1$ , appears to describe the current play mode. The values that have been seen so far, and their apparent meanings, are:

- 0 No track is loaded.
- 2 A track is in the process of loading.
- 3 The player is playing normally.
- 4 The player is playing a loop.
- 5 The player is paused anywhere other than the cue point.

7	6	5	4	3	2	1	0
1	Play	Master	Sync	On-Air	1	0	0

Figure 12: CDJ state flag bits

- 6 The player is paused at the cue point.
- 7 Cue Play is in progress (playback while the cue button is held down).
- 8 Cue scratch is in progress.
- 9 The player is searching forwards or backwards.
- 17 The player reached the end of the track and stopped.

The *Firmware* value at bytes 124–127 is an ASCII representation of the firmware version running in the player.

The value  $Sync_n$  at bytes 134–135 seems to increment whenever the player syncs to a new tempo master (another player or the mixer). I am assuming it is just a 2-byte value, because I tried syncing 256 times and saw the counter expand from byte 135 to include byte 134. It may actually be a 4-byte value and also involve bytes 132 and 133, but I wasn't going to try changing sync 65,536 times or more to find out. Perhaps we could write software to test that someday by forcing tempo master changes.

Byte 137, labeled  $F$ , is a bit field containing some very useful state flags, detailed in Figure 12.<sup>9</sup> It seems to only be available on nexus players, and others always send 0 for this byte?

Byte 139, labeled  $P_2$  seems to be another play state indicator, having the value 122 (0x7a) when playing and 126 (0x7e) when stopped. When the CDJ is trying to play, but is being held in place by the DJ holding down on the jog wheel,  $P_1$  considers it to be playing (value 3), while  $P_2$  considers it to be stopped (value 126). Non-nexus players seem to use the value 106 (0x6a) when playing and 110 (0x6e) when stopped, while nxs2 players use the values 250 and 254 (0xfa and 0xfe) so this seems to be another bit field like  $F$ .

There are four different places where pitch information appears in these packets:  $Pitch_1$  at bytes 141–143,  $Pitch_2$  at bytes 153–155,  $Pitch_3$  at bytes 193–195, and  $Pitch_4$  at bytes 197–199.

Each of these values represents a three-byte pitch adjustment percentage, where 0x100000 represents no adjustment (0%), 0x000000 represents slowing all the way to a complete stop (−100%, reachable only in Wide tempo mode), and 0x200000 represents playing at double speed (+100%).

<sup>9</sup>We have not yet seen any other values for bits 0, 1, 2, or 7 in  $F$ , so we're unsure if they also carry meaning. If you ever find different values for them, please let us know by filing an Issue at <https://github.com/brunchboy/dysentery/issues>

Note that if playback is stopped by pushing the pitch fader all the way to  $-100\%$  in Wide mode, both  $P_1$  and  $P_2$  still show it as playing, which is different than when the jog wheel is held down, since  $P_2$  shows a stop in the latter situation.

Here is how the pitch adjustment percentage represented by  $Pitch_1$  would be calculated:

$$100 \times \frac{(byte[141] \times 65536 + byte[142] \times 256 + byte[143]) - 1048576}{1048576}$$

We don't know why there are so many copies of the pitch information, or all circumstances under which they might differ from each other, but it seems that  $Pitch_1$  and  $Pitch_3$  report the current pitch adjustment actually in effect (as reflected on the BPM display), whether it is due to the local pitch fader, or a synced tempo master.

$Pitch_2$  and  $Pitch_4$  are always tied to the position of the local pitch fader, unless Tempo Reset is active, effectively locking the pitch fader to  $0\%$  and  $Pitch_2$  and  $Pitch_4$  to  $0 \times 1000000$ , or the player is paused or the jog wheel is being held down, freezing playback and locking the local pitch to  $-100\%$ , in which case they both have the value  $0 \times 000000$ .

When playback stops, either due to the play button being pressed or the jog wheel held down, the value of  $Pitch_4$  drops to  $0 \times 000000$  instantly, while the value of  $Pitch_2$  drops over time, reflecting the gradual slowdown of playback which is controlled by the player's brake speed setting. When playback starts, again either due to the play button being pressed or the jog wheel being released, both  $Pitch_2$  and  $Pitch_4$  gradually rise to the target pitch, at a speed controlled by the player's release speed setting.

If the player is *not* synced, but the current pitch is different than what the pitch fader would indicate (in other words, the player is in the mode where it tells you to move the pitch fader to the current BPM in order to change the pitch), moving the pitch fader changes the values of  $Pitch_2$  and  $Pitch_4$  until they match  $Pitch_1$  and  $Pitch_3$  and begin to affect the actual effective pitch. From that point on, moving the pitch fader sets the value of all of  $Pitch_1$ ,  $Pitch_2$ ,  $Pitch_3$ , and  $Pitch_4$ . This all seems more complicated than it really needs to be...

The current BPM of the track (the BPM at the point that is currently being played, or at the location where the player is currently paused) can be found at bytes 146–147 (labeled *BPM*). It is a two-byte integer representing one hundred times the current track BPM. So, the current track BPM value to two decimal places can be calculated as:

$$\frac{byte[146] \times 256 + byte[147]}{100}$$

In order to obtain the actual playing BPM (the value shown in the BPM display), this value must be multiplied by the current effective pitch, calculated from  $Pitch_1$  as described above. Since calculating the effective BPM reported by a CDJ is a common operation, here a simplified equation that results in the effective BPM to two decimal places, by combining the  $BPM$  and  $Pitch_1$  values:

$$\frac{(b[146] \times 256 + b[147]) \times (b[141] \times 65536 + b[142] \times 256 + b[143])}{104857600}$$

Because Rekordbox and the CDJs support tracks with variable BPM, this value can and does change over the course of playing such tracks. When no track is loaded,  $BPM$  has the value `0xffff`.

The meaning of value  $l_1$  (bytes 144–145) is not currently known. It may simply reflect whether a track is loaded or not: it seems to have the value `0x7fff` when no track is loaded, `0x8000` when a rekordbox track is loaded, and `0x0000` when a non-rekordbox track (like from a physical CD) is loaded.

Byte 157 (labeled  $P_3$ ) seems to communicate additional information about the current play mode, with the following meanings that we have found so far:

- 0** No track is loaded.
- 1** The player is paused or playing in Reverse mode.
- 9** The player is playing in Forward mode with jog mode set to Vinyl.
- 13** The player is playing in Forward mode with jog mode set to CDJ.

The 4-byte beat counter (which counts each beat from 1 through the end of the track) is found in bytes 160–163, labeled *Beat*. When the player is paused at the start of the track, this seems to hold the value 0, even though it is beat 1, and when no rekordbox-analyzed track is loaded, *and in packets from non-nexus players*, this holds the value `0xffffffff`.

The counter  $B_b$  at byte 166 counts out the beat within each bar, cycling  $1 \rightarrow 2 \rightarrow 3 \rightarrow 4$  repeatedly, and can be used to identify the down beat (as is used in the Master Player display on the CDJs as a mixing aid). Again, when no rekordbox-analyzed track is loaded, this holds the value 0. If you want to synchronize events to the down beat, use the CDJ status packets'  $F$  value to identify the master player, but use the beat packets sent by that player (described in Section 3) to determine when the beats are actually happening.

A countdown timer to the next saved cue point is available in bytes 164–165 (labeled *Cue*). If there is no saved cue point after the current play location in the track, or if it is further than 64 bars ahead, these bytes contain the value `0x01ff` and the CDJ displays “--.- bars”. As soon as there are just 64 bars (256 beats) to go before the next cue

point, this value becomes  $0x0100$ . This is the point at which the CDJ starts to display a countdown, which it displays as “63.4 bars”. As each beat goes by, this value decreases by 1, until the cue point is about to be reached, at which point the value is  $0x0001$  and the CDJ displays “00.1 bars”. On the beat on which the cue point was saved the value is  $0x0000$  and the CDJ displays “00.0 Bars”. On the next beat, the value becomes determined by the next cue point (if any) in the track.

Bytes 200-203 seem to contain a 4-byte packet counter labeled *Packet*, which is incremented for each packet sent by the player. (I am just guessing it is four bytes long, I have not yet watched long enough for the count to need more than the last three bytes).

Byte 204, labeled *nx*, seems to have the value  $0x0f$  for nexus players, and  $0x05$  for older players.

### 4.3 Rekordbox Status Packets

Rekordbox sends status packets which appear to be essentially identical to those sent by a mixer, as shown in Figure 10, sending “rekordbox” as its device name. The device number *D* (bytes 33 and 36) seems to be 41 ( $0x29$ ), although it will probably use conflict resolution to pick an unused number if multiple copies are running. The *F* value we have seen remains consistent as a status flag, showing  $0xc0$  which would indicate that it is always “playing” but not synced, tempo master, nor on the air. The *BPM* value seems to track that of the master player, and the same potential pitch values (fixed at  $0x100000$ , or +0%) are present, as is *X*. *B<sub>b</sub>* always seems to be zero.

## 5 Track Metadata

Thanks to @EvanPurkhiser<sup>10</sup>, we finally started making progress in retrieving metadata from CDJs, and now some shared code from Austin Wright<sup>11</sup> is boosting our understanding considerably!

To be polite about it, the first step is to determine the port on which the player is offering its remote database server. That can be determined by opening a TCP connection to port 12,523 on the player and sending it sending a packet with the content shown in Figure 13.

The player will send back a two-byte response, containing the high byte of the port number followed by the low byte. So far, the response from a CDJ has always indicated a port number of 1051, but using this query to determine the port to use will protect you against any future changes. The same query can also be sent to a laptop running

<sup>10</sup><https://github.com/EvanPurkhiser>

<sup>11</sup><https://bitbucket.org/awwright/libpdjl>



	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
00	00	00	0f	R	e	m	o	t	e	D	B	S	e	r	v	
10	e	r	00													

Figure 13: DB Server query packet

rekordbox to find the rekordbox database server port, which can also be queried for metadata in the exact same way described below.

To find the metadata associated with a particular track, given its rekordbox ID number, as well as the player and slot from which it was loaded (all of which can be determined from a CDJ status packet received by a virtual CDJ as described in Section 4), open a TCP connection to the device from which the track was loaded, using the port that it gave you in response to the DB Server query packet, then send the following four packets.

The first packet sent to the database server contains the five bytes 11 00 00 00 01, and results in the same five bytes being sent back.

All further packets have a shared structure. They consist of lists of type-tagged fields (a type byte, followed some number of value bytes, although in the case of the variable-size types, the first four bytes are a big-endian integer that specifies the length of the additional value bytes that make up the field). So far, there are four known field types, and it turns out that the packet we just saw is one of them, it represents the number 1 as a 4-byte integer.

## 5.1 Field Types

The first byte of a field identifies what type of field is coming. The values 0x0f, 0x10, and 0x11 are followed by 1, 2, and 4 byte fixed-length integer fields, while 0x14 and 0x26 introduce variable-length fields, a binary blob and a UTF-16 big-endian string respectively.

### 5.1.1 Number Fields

Number fields are indicated by an initial byte 0x0f, 0x10, or 0x11 which is followed by big-endian integer value of length 1, 2, or 4 bytes respectively, as shown in Figure 14. So, as noted above, the initial greeting packet sent to and received back from the database server is a number field, four bytes long, representing the value 1.




Figure 14: Number Fields of length 1, 2, and 4

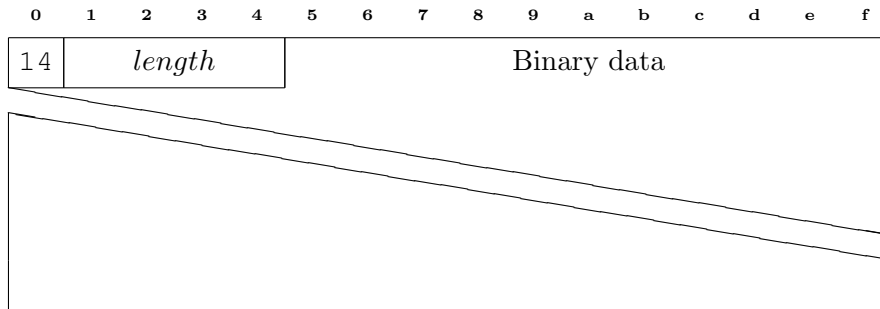


Figure 15: Binary (Blob) Field

### 5.1.2 Binary Fields

Variable-length binary (blob) fields are indicated by an initial byte 0x14, followed by a 4 byte big-endian integer which specifies the length of the field payload. The length is followed by the specified number of bytes (for example, an album art image, waveform or beat grid). This is illustrated in Figure 15.

### 5.1.3 String Fields

Variable-length string fields are indicated by an initial byte 0x26, followed by a 4 byte big-endian integer which specifies the length of the string, in two-byte UTF-16 big-endian characters. So the length is followed by  $2 \times \text{length}$  bytes containing the actual string characters. The last character of the string is always NUL, represented by 0x0000. This is illustrated in Figure 16.

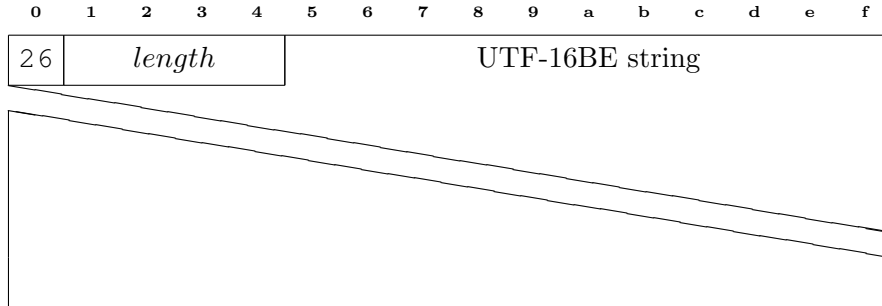


Figure 16: String Field

## 5.2 Messages

Messages are introduced by a 4 byte Number field containing the magic value `0x872349ae`. This is followed by another 4 byte number field that contains a transaction ID, which starts at 1 and is incremented for each query sent, and all messages sent in response to that query will contain the same transaction ID. This is followed by a 2 byte number field containing the message type, a 1 byte number field containing the number of argument fields present in the message, and a blob field containing a series of bytes which identify the types of each argument field. This blob is always 12 bytes long, regardless of how few arguments there are (and presumably this means no message ever has more than 12 arguments). Tag bytes past the actual argument count of the message are set to 0.

The argument type tags use different values than the field type tags themselves, for some reason, and it is not clear why this redundant information is necessary at all, but that is true a number of places in the protocol as you will see later. Here are the known tag values and their meanings:

`0x02` A string in UTF-16 big-endian encoding, with trailing NUL (zero) character.

`0x03` A binary blob.

`0x06` A 4 byte big-endian integer.

I am guessing that if we ever see them, a tag of 4 would represent a 1 byte integer, and 5 would represent a 2 byte integer. But so far no such messages have been seen.

This header is followed by the fields that make up the message arguments, if any. The header structure is illustrated in Figure 17, where *txID* is the transaction ID, *n* is the number of arguments found

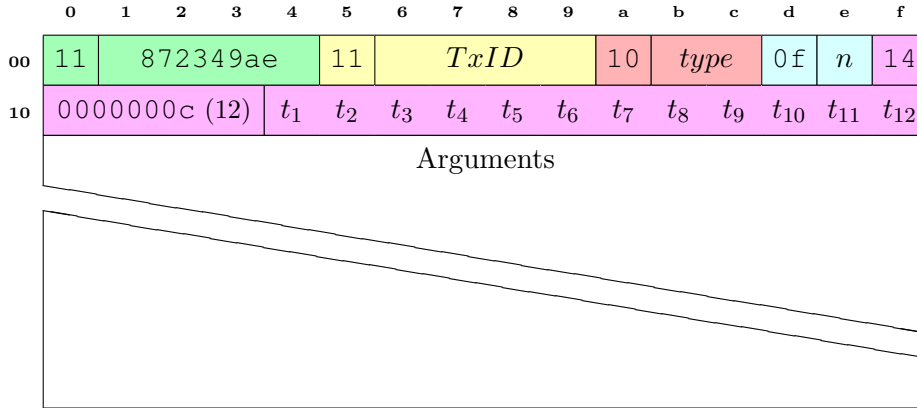


Figure 17: Message Header

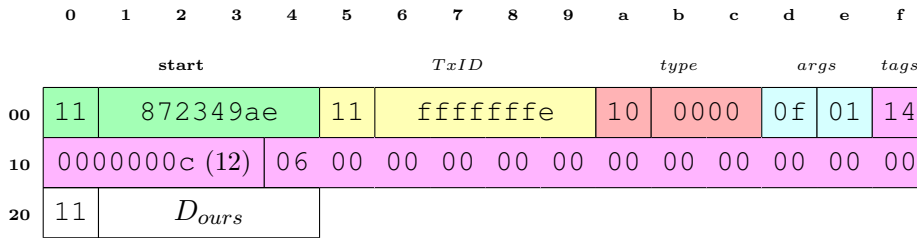


Figure 18: Query context setup message

in the message, and  $t_1$  through  $t_{12}$  are the type tags for each argument, or 0 if there is no argument in that position.

Before you can send your first actual query, you need to send a special message which seems to be necessary for establishing the context for queries. It has a *type* of 0, a special *TxID* value of  $0xffffffff$ , and a single numeric argument, as shown in Figure 18.

The value  $D$  is, like in the other packets we have seen, a player device number. In this case it is the device that is asking for metadata information. It must be a valid player number between 1 and 4, and that player must actually be present on the network, must not be the same player that you are contacting to request metadata from, and must not be a player that has connected to that player via Link and loaded a track from it. So the safest device number to use is the device number you are using for your virtual CDJ, but since it must be between 1 and 4, you can only do that if there are fewer than four actual CDJs on the network.

The player will respond with a message of type  $0x4000$ , which is

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f	
	start					TxID					type		args		tags		
00	11	872349ae				11	fffffffe				10	4000		0f	02	14	
10	0000000c (12)					06	06	00	00	00	00	00	00	00	00	00	00
20	11	00000000				11	Dtheirs										

Figure 19: Query context setup response

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f	
	start					TxID					type		args		tags		
00	11	872349ae				11	TxID				10	2002		0f	02	14	
10	0000000c (12)					06	06	00	00	00	00	00	00	00	00	00	00
20	11	D	01	S <sub>r</sub>	01	11	rekordbox										

Figure 20: Track metadata request message

the common “success” response when requested data is available. The response message has two numeric arguments, the first of which is the message type of the request we sent (which was 0), and the second usually tells you the number of items that are available in response to the query you made, but in this special setup query, it returns its own player number. The overall structure is illustrated in Figure 19.

### 5.3 Track Metadata

To ask for metadata about a particular track, send a packet like the one shown in Figure 20.

As described above,  $TxID$  should be 1 for the first query packet you send, 2 for the next, and so on.  $D$  should have the same value you used in your initial query context setup packet, identifying the device that is asking the question.  $S_r$  is the slot in which the track being asked about can be found, and has the same values used in CDJ status packets, as shown in Figure 11. Similarly,  $rekordbox$  identifies the local rekordbox database ID of the track being asked about, as found in the CDJ status packet.

Track metadata requests are built on the mechanism that is used to request and draw scrollable menus on the CDJs, so the request is essentially interpreted as setting up to draw the “menu” of information

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f	
	start					TxID					type			args		tags	
00	11	872349ae				11	TxID				10	4000		0f	02	14	
10	0000000c (12)					06	06	00	00	00	00	00	00	00	00	00	00
20	11	00002002				11	0000000b										

Figure 21: Track metadata ready response

that is known about the track. The player responds with a success indicator, saying it is ready to send these “menu items” and reporting how many of them are available, as shown in Figure 21.

We’ve seen this type of “data available” response already in Figure 19, but this one is a more typical example. As usual, *TxID* matches the value we sent in our request, and the first argument, with value 0x2002, reflects the *type* field of our request. The second argument reports that there are 11 (0x0b) entries of track metadata available to be retrieved for the track we asked about, and that the player is ready to send them to us.

If there was no track with ID *rekordbox* in that media slot, the second argument would have the value 0xffffffff to let us know. If we messed up something else about the request, we will get a response with a *type* other than 0x4000. See Section 5.11 for instructions on how to explore these variations on your own.

But assuming everything went well, we can get the player to send us all eleven of those metadata entries by telling it to render all of the current menu, using a “render menu” request with *type* 0x3000 shown in Figure 22.

As always, the value of *TxID* should be one higher than the one you sent in your setup packet, while the values of *D* and *S<sub>r</sub>* should be identical to what you sent in it.

The request has six numeric arguments. At this point it is worth talking a bit more about the byte after *D* in the first argument. This seems to specify the location of the menu being drawn, with the value 1 meaning the main menu on the left-hand half of the CDJ display, while 2 means the submenu (for example the info popup when it is open) which overlays the right-hand half of the display. We don’t yet know exactly what, if any, difference there is between the response details when 2 is used instead of 1 here. And special data requests use different values: for example, the track waveform summary, which is drawn in a strip along the entire bottom of the display, is requested with a menu location number of 8 in this second byte.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f		
	start					TxID					type		args		tags			
00	11	872349ae				11	TxID				10	3000		0f	06	14		
10	0000000c (12)					06	06	06	06	06	06	00	00	00	00	00	00	
20	11	D 01 S <sub>r</sub>		01	11	offset				11	limit				11			
30	00000000					11	limit <sub>2</sub>				11	00000000						

Figure 22: Render Menu request message

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f		
	start					TxID					type		args		tags			
00	11	872349ae				11	TxID				10	3000		0f	06	14		
10	0000000c (12)					06	06	06	06	06	06	00	00	00	00	00	00	
20	11	D	01	S <sub>r</sub>	01	11	00000000				11	0000000b				11		
30	00000000					11	0000000b				11	00000000						

Figure 23: Render track metadata request message

The byte after  $S_r$  seems to always have the value 1. We’ve seen it described as “source analyzed” but don’t know exactly what that means.

The second argument, *offset*, specifies which menu entry is the first one you want to see, and the third argument, *limit*, specifies how many should be sent. In this case, since there are only 11 entries, we can request them all at once, so we will set *offset* to 0 and *limit* to 11. But for large playlists, for example, you need to request batches of entries that are smaller than the total available, or the player will be unable to send them to you. We have not found what the exact limit is, but getting 64 at a time seems to work on Nexus 2 players.

We don’t know the purpose of the fourth argument, but sending a value of 0 works. The fifth argument, *limit<sub>2</sub>*, is also poorly understood, but sending a second copy of *limit* here works. And the sixth and final argument also has an unknown purpose, but 0 works.

So, for our metadata request, the packet we want to send in order to get all the metadata will have the specific values shown in Figure 23:

This causes the player to send us 13 messages: The 11 metadata items we requested are sent (with *type* 0x4101, Figure 25), but they

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
	start			TxID						type			args		tags	
00	11	872349ae			11	TxID				10	4001		0f	02	14	
10	0000000c (12)			06	06	00	00	00	00	00	00	00	00	00	00	00
20	11	00000001			11	00000000										

Figure 24: Track metadata menu header response

are preceded by a menu header message (with *type* 0x4001, Figure 24), and followed by a menu footer message (with *type* 0x4201, Figure 26). This wrapping happens with all “render menu” requests, and the menu footer is an easy way to know you are done, although you can also count the messages.

The menu item responses all have the same structure, and use all twelve message argument slots, containing ten numbers and two strings, although they generally don’t have meaningful values in all of the slots. They have the general structure shown in in Figure 25, and the arguments are:

- 1 Numeric, a parent ID, such as an artist for a track item.
- 2 Numeric, the main ID, such as *rekordbox* for a track item.
- 3 Numeric, the length in bytes of Label 1.
- 4 String, Label 1 (main text, such as the track title or artist name, as appropriate for the item type).
- 5 Numeric, the length in bytes of Label 2.
- 6 String, Label 2 (secondary text, e.g. for playlist entries the artist name, and Label 1 holds the title).
- 7 Numeric, the type of this item (see Section 5.5).
- 8 Numeric, some sort of flags field, details still unclear.
- 9 Numeric, holds the album art ID when the type is a Track Title.
- 10 Numeric, playlist position when relevant, e.g. when listing a playlist.
- 11 Numeric, purpose unknown.
- 12 Numeric, purpose unknown.

### 5.3.1 Track Metadata Item 1: Title

The first item returned after the menu header is the track title, so argument 7 has the value 0x04. Argument 1, which may always be



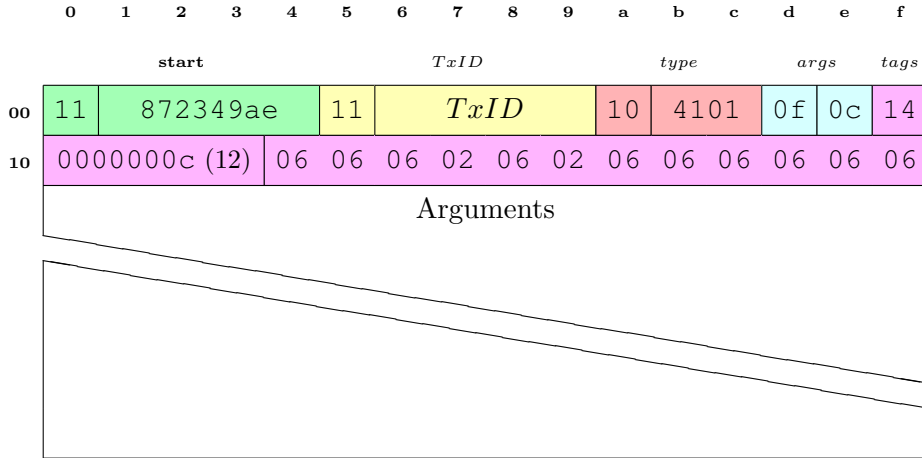


Figure 25: Track metadata item response

some kind of parent ID, holds the artist ID associated with the track. The second argument seems to always be the main ID, and for this response it holds the *rekordbox* ID of the track. Argument 4 holds the track title text, and argument 8 holds the album *artwork* ID if any is available for the track. This ID can be used to retrieve the actual album art image as described in Section 5.6.

### 5.3.2 Track Metadata Item 2: Artist

The second item contains artist information so argument 7 has the value 0x07. Argument 2 holds the artist ID, argument 4 contains the text of the artist name.

### 5.3.3 Track Metadata Item 3: Album Title

The third item contains album title information so argument 7 has the value 0x02. Argument 4 contains the text of the album name.

### 5.3.4 Track Metadata Item 4: Duration

The fourth item contains track duration information so argument 7 has the value 0x0b. Argument 2 contains the length, in seconds, of the track when played at normal tempo.

### 5.3.5 Track Metadata Item 5: Tempo

The fifth item contains tempo information so argument 7 has the value 0x0d. Argument 2 contains the track's starting tempo, in BPM, times 100, as reported in *BPM* values in other packets described earlier.

### 5.3.6 Track Metadata Item 6: Comment

The sixth item contains comment information so argument 7 has the value 0x23. Argument 4 contains the text of the track comment entered by the DJ in rekordbox.

### 5.3.7 Track Metadata Item 7: Key

The seventh item contains key information so argument 7 has the value 0x0f. Argument 4 contains the text of the track's dominant key signature.

### 5.3.8 Track Metadata Item 8: Rating

The eighth item contains rating information so argument 7 has the value 0x0a. Argument 2 contains a value from 0 to 5 corresponding to the number of stars the DJ has assigned the track in rekordbox.

### 5.3.9 Track Metadata Item 9: Color

The ninth item contains color information so argument 7 has the value 0x13. I assume Argument 2 contains a value corresponding to the color the DJ has assigned the track in rekordbox, but I have not yet figured out the details.

### 5.3.10 Track Metadata Item 10: Genre

The tenth item contains genre information so argument 7 has the value 0x06. Argument 2 contains the numeric genre ID, and argument 4 contains the text of the genre name.

### 5.3.11 Track Metadata Item 11: Date Added

The eleventh and final item contains the date added information so argument 7 has the value 0x2e. Argument 4 contains the date the track was added to the collection in the format "yyyy-mm-dd". This information seems to propagate into rekordbox from iTunes.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f	
	start					TxID					type		args		tags		
00	11	872349ae				11	TxID				10	4201		0f	00	14	
10	0000000c (12)					00	00	00	00	00	00	00	00	00	00	00	00

Figure 26: Track metadata menu footer response

### 5.4 Menu Footer Response

The menu footer message has a *type* of 0x4201 and no arguments, so it has a header only, and is always made up of the exact same sequence of bytes (apart from the *TxID*), as shown in Figure 26.

### 5.5 Menu Item Types

As noted above, the seventh argument in a menu item response identifies the type of the item. The meanings we have identified so far are:

Type	Meaning
0x0001	Folder (such as in the playlists menu) <sup>12</sup>
0x0002	Album title
0x0003	Disc
0x0004	Track Title
0x0006	Genre
0x0007	Artist
0x0008	Playlist
0x000a	Rating
0x000b	Duration (in seconds)
0x000d	Tempo
0x000f	Key
0x0013	Color
0x0023	Comment
0x002e	Date Added
0x0704	Track List

As noted above, track metadata responses use many of these types. Others are used in different kinds of menus and queries.

<sup>12</sup>A nested list of playlists rather than an individual playlist.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
	start					TxID					type		args		tags	
00	11	872349ae				11	TxID				10	2003	0f	02	14	
10	0000000c (12)				06	06	00	00	00	00	00	00	00	00	00	00
20	11	D	08	S <sub>r</sub>	01	11	artwork									

Figure 27: Track artwork request message

## 5.6 Album Art

To request the artwork image associated with a track, send a message with *type* 0x2003 containing the *artwork* ID that was specified in the track title item (as described in Section 5.3.1), like the one shown in Figure 27.

As usual, *seq* should be incremented each time you send a query, and will be used to identify the response messages. *D* should have the same value you used in your initial query context setup packet, identifying the device that is asking the question. *S<sub>r</sub>* is the slot in which the track being asked about can be found, and has the same values used in CDJ status packets, as shown in Figure 11. Finally, *artwork* identifies the specific artwork image you are requesting, as it was specified in the track metadata response. As with other graphical requests, the value after *D*, which identifies the location of the menu for which data is being loaded, is 8.

The response will be a message with *type* 0x4002, containing four arguments. The first argument echoes back our request type, which was 0x2003. The second always seems to be 0. The third contains the length of the image in bytes, which seems redundant, because that is also conveyed in the fourth argument itself, which is a blob containing the actual bytes of the image data, as shown in Figure 28.

## 5.7 Beat Grids

The CDJs do not send any timing information other than beat numbers during playback, which has made it difficult to offer absolute timecode information. The discovery of beat grid requests provides a clean answer to the problem. The beat grid for a track is a list of every beat which occurs in the track, along with the point in time at which that beat would occur if the track were played at its standard (100%) tempo. Armed with this table, it is possible to translate any beat packet into an absolute position within the track, and, combined with the tempo information, to generate timecode signals allowing other software (such

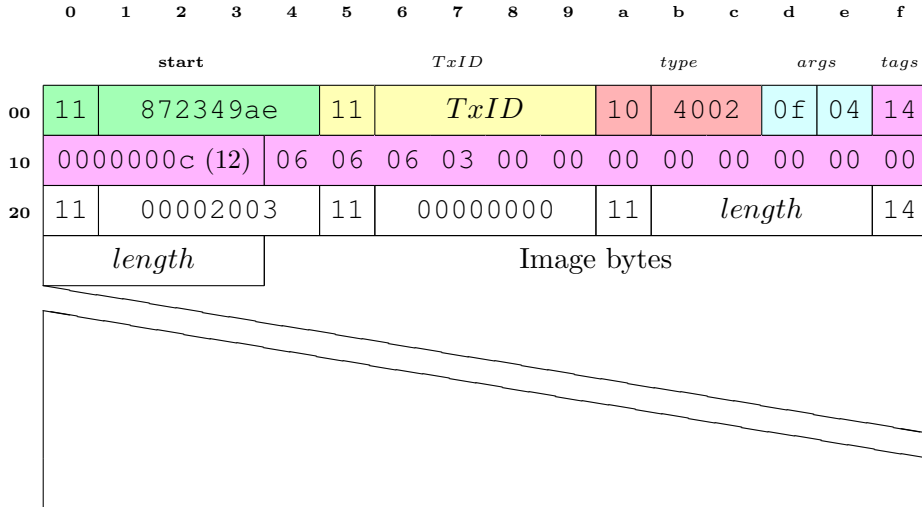


Figure 28: Track artwork response message

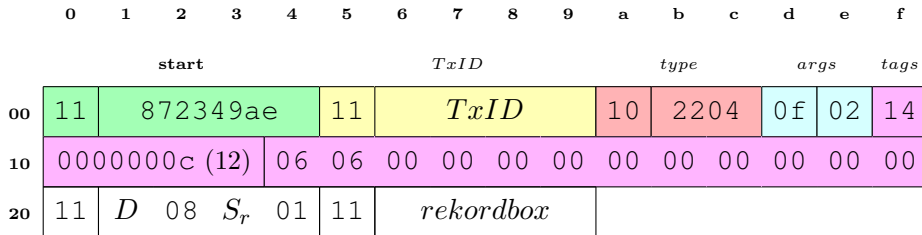


Figure 29: Track beat grid request message

as video resources) to sync tightly with DJ playback.

To request the beat grid of a track, send a message with *type* 0x2204 containing the *rekordbox* ID of the track, like the one shown in Figure 29.

As usual, *seq* should be incremented each time you send a query, and will be used to identify the response messages. *D* should have the same value you used in your initial query context setup packet, identifying the device that is asking the question. *S<sub>r</sub>* is the slot in which the track being asked about can be found, and has the same values used in CDJ status packets, as shown in Figure 11. Finally, *rekordbox* identifies the specific artwork image you are requesting, as found in a CDJ status packet or playlist response. As with graphical requests, the value after *D*, which identifies the location of the menu

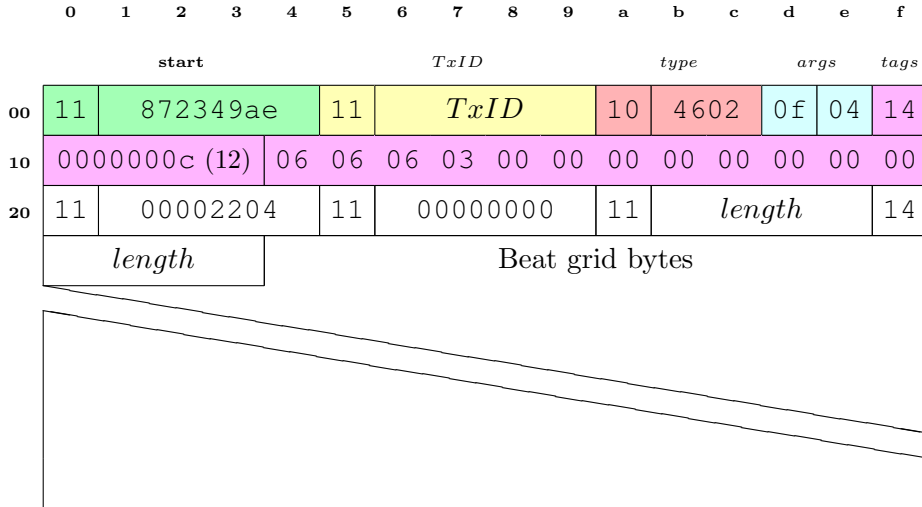


Figure 30: Track beat grid response message

for which data is being loaded, is 8.

The response will be a message with *type* 0x4602, containing four arguments. The first argument echoes back our request type, which was 0x2204. The second always seems to be 0. The third contains the length of the beat grid in bytes, which seems redundant, because that is also conveyed in the fourth argument itself, which is a blob containing the actual bytes of the beat grid, as shown in Figure 30.

The beat grid itself is spread through the value returned as argument 4, consisting of one-byte beat-within-bar numbers (labeled  $B_b$  in Figure 11), followed by four-byte timing information, specifying the number of milliseconds after the start of the track (when played at its native tempo) at which that beat falls.

The  $B_b$  value of the first beat in the track is found at byte 20 of argument 4, and the time at which that beat occurs, in milliseconds, is encoded as a 4-byte big-endian integer at bytes 21–24. Subsequent beats are found at 16-byte intervals, so the second  $B_b$  value is found at byte 36, and the second beat’s time, in milliseconds from the start of the track, is the big-endian integer at bytes 37–40. The  $B_b$  value for the third beat is at byte 52, and its millisecond time is at bytes 53–56, and so on.

The purpose of the other bytes within the beat grid is so far undetermined. It looks like there may be some sort of monotonically increasing value following the beat millisecond value, but what it means, and why it sometimes skips values, is mysterious.

## 5.8 Requesting Track Waveforms

TODO: Describe!

## 5.9 Requesting All Tracks

If you want to cache all the metadata associated with a media stick, this query is a good starting point.

TODO: Fill out!

## 5.10 Playlists

If you want to be more selective about the metadata that you are caching, you can navigate the playlist folder hierarchy and deal with only specific playlists.

TODO: Fill out!

## 5.11 Experimenting with Metadata

The best way to get a feel for the details of working with these messages is to load dysentery into a Clojure REPL, as described on the project page, and play with some of the functions in the `dysentery.dbserver` namespace. Have no more than three players connected and active on your network, so you have an unused player number for dysentery to use. In this example, player number 1 is available, so we set dysentery up to pose as player 1:

```
> lein repl
nREPL server started on port 53806 on host 127.0.0.1 -
  nrepl://127.0.0.1:53806
REPL-y 0.3.7, nREPL 0.2.12
Clojure 1.8.0
Java HotSpot(TM) 64-Bit Server VM 1.8.0_77-b03
dysentery loaded.
dysentery.core=> (view/watch-devices :player-number 1)
Looking for DJ Link devices...
Found:
  DJM-2000nexus 33 /172.16.42.3
  CDJ-2000nexus 2 /172.16.42.4
```

```
To communicate create a virtual CDJ with address
  /172.16.42.2, MAC address 3c:15:c2:e7:08:6c,
  and use broadcast address /172.16.42.255
:socket #object[java.net.DatagramSocket 0x22b952b1
  "java.net.DatagramSocket@22b952b1"],
:watcher #future[:status :pending, :val nil 0x3eb8f41b]
dysentery.core> (def p2 (db/connect-to-player 2 1))
Transaction: 4294967294, message type: 0x4000
```

```

    (requested data available), argument count: 2, arguments:
      number:      0 (0x00000000) [request type]
      number:      2 (0x00000002) [# items available]
# 'dysentery.core/p2
dysentery.core> (def md (db/request-metadata p2 2 1))
Sending > Transaction: 1, message type: 0x2002
  (request track metadata), argument count: 2, arguments:
    number: 16843265 (0x01010201) [player, menu, media, 1]
    number:      1 (0x00000001) [rekordbox ID]
Received > Transaction: 1, message type: 0x4000
  (requested data available), argument count: 2, arguments:
    number:      8194 (0x00002002) [request type]
    number:      11 (0x0000000b) [# items available]
Sending > Transaction: 2, message type: 0x3000
  (render menu), argument count: 6, arguments:
    number: 16843265 (0x01010201) [player, menu, media, 1]
    number:      0 (0x00000000) [offset]
    number:      11 (0x0000000b) [limit]
    number:      0 (0x00000000) [unknown (0)?]
    number:      11 (0x0000000b) [len_a (= limit)?]
    number:      0 (0x00000000) [unknown (0)?]
Received 1 > Transaction: 2, message type: 0x4001
  (rendered menu header), argument count: 2, arguments:
    number:      1 (0x00000001) [unknown]
    number:      0 (0x00000000) [unknown]
Received 2 > Transaction: 2, message type: 0x4101
  (rendered menu item), argument count: 12, arguments:
    number:      1 (0x00000001) [numeric 1 (parent id)]
    number:      1 (0x00000001) [numeric 2 (this id)]
    number:      80 (0x00000050) [label 1 byte size]
    string: "Escape ft. Zoe Phillips" [label 1]
    number:      2 (0x00000002) [label 2 byte size]
    string: "" [label 2]
    number:      4 (0x00000004) [item type: Track Title]
    number: 16777216 (0x01000000) [column configuration?]
    number:      0 (0x00000000) [album art id]
    number:      0 (0x00000000) [playlist position]
    number:      256 (0x00000100) [unknown]
    number:      0 (0x00000000) [unknown]
...
Received 13 > Transaction: 2, message type: 0x4201
  (rendered menu footer), argument count: 0, arguments:
# 'dysentery.core/md
dysentery.core>

```

In this interaction, after setting up the watcher so we can find players on the network, we set the var `p2` to be a connection to player 2, in which we are posing as player 1. Then we submit a metadata request to `p2`, requesting the track in slot 2 (SD card), with



*rekordbox* id 1. You can see the messages being sent and received to accomplish that. For more functions that you can call, including the very flexible `experiment` function, look at the source for the `dysentery.dbserver` namespace. Most of the response messages containing track metadata were omitted for brevity; you will get more meaningful results trying it with your own tracks, and then you can see all the details.

## 5.12 Background Research

Prior to Evan and Austin's breakthroughs, here is all we knew:

By setting up a managed switch to mirror traffic sent directly between CDJs, we have been able to see how the Link Info operation is implemented: The players open a direct TCP connection between each other, and send queries to obtain the metadata about tracks with particular rekordbox ID values.

Using an Ethernet switch with port mirroring was, as we hoped, very helpful. As can be seen in the capture at <https://github.com/brunchboy/dysentery/raw/master/doc/assets/LinkInfo.pcapng>, which shows a CDJ with IP address 169.254.192.112 booting, the new CDJ opens two TCP connections to the other CDJ at 169.254.119.181.

The first session (given id 0 by Wireshark), which begins at packet 206, connecting to port 12523, determines the port to use for metadata queries.

The second TCP connection (Wireshark display filter `tcp.stream eq 1`), beginning at packet 212 and connecting to port 1051, shows the track information used by the Link Info display passing between the CDJs. You can see packets reflecting the initial display of a track that was already loaded, then new information as the linked CDJ loaded three other tracks.

There is another capture at <https://github.com/brunchboy/dysentery/raw/master/doc/assets/LinkInfo2.pcapng>, with more Link Info streams to be studied (all of the odd numbered `tcp.stream` values in Wireshark are the relevant ones).

## 6 What's Missing?

We know this analysis isn't complete. There are some values we know are available and useful (because CDJs and rekordbox itself show them), but we have not figured out how to find them yet.

Before we discovered how to ask players for metadata about particular tracks, we did some research into the underlying rekordbox

database. The database format is called DeviceSQL,<sup>13</sup> and there used to be a free quick start suite for working with it<sup>14</sup> but that site no longer exists because the original (California) company Encirq<sup>15</sup> was acquired by the Japanese Ubiquitous Corporation in 2008.<sup>16</sup> It seems to still be available,<sup>17</sup> but I'd be surprised if they wanted to help out an open source effort like this one.

## 6.1 CDJ Packets to Rekordbox

Performing a packet capture while rekordbox is running reveals that the CDJs send unicast packets to the rekordbox address on port 50000, in addition to the packets they normally broadcast on that port. Figuring out how to pose as rekordbox might be useful in order to see what additional data these can offer, although that may be much more work than posing as a CDJ.

## 6.2 Dysentery

If you have access to Pioneer equipment and are willing to help us validate this analysis, and perhaps even figure out more details, you can find the tool that is being used to perform this research at:

<https://github.com/brunchboy/dysentery>

## List of Figures

1	Initial announcement packets from Mixer . . . . .	3
2	First-stage Mixer device number assignment packets . .	3
3	Second-stage Mixer device number assignment packets .	4
4	Final-stage Mixer device number assignment packets . .	4
5	Mixer keep-alive packets . . . . .	5
6	Initial announcement packets from CDJ . . . . .	5
7	First-stage CDJ device number assignment packets . . .	6
8	CDJ keep-alive packets . . . . .	6
9	Beat packets . . . . .	7
10	Mixer status packets . . . . .	9
11	CDJ status packets . . . . .	11
12	CDJ state flag bits . . . . .	13
13	DB Server query packet . . . . .	17
14	Number Fields of length 1, 2, and 4 . . . . .	18

<sup>13</sup><https://www.quora.com/What-database-system-did-Greg-Kemnitz-develop>

<sup>14</sup><http://java.sys-con.com/node/328557>

<sup>15</sup><https://www.crunchbase.com/organization/encirq-corporation>

<sup>16</sup>[http://www.ubiquitous.co.jp/en/news/press/pdf/p1730\\_01.pdf](http://www.ubiquitous.co.jp/en/news/press/pdf/p1730_01.pdf)

<sup>17</sup><http://www.ubiquitous.co.jp/en/products/db/md/devicesql/>

15	Binary (Blob) Field . . . . .	18
16	String Field . . . . .	19
17	Message Header . . . . .	20
18	Query context setup message . . . . .	20
19	Query context setup response . . . . .	21
20	Track metadata request message . . . . .	21
21	Track metadata ready response . . . . .	22
22	Render Menu request message . . . . .	23
23	Render track metadata request message . . . . .	23
24	Track metadata menu header response . . . . .	24
25	Track metadata item response . . . . .	25
26	Track metadata menu footer response . . . . .	27
27	Track artwork request message . . . . .	28
28	Track artwork response message . . . . .	29
29	Track beat grid request message . . . . .	29
30	Track beat grid response message . . . . .	30



<http://deepsymmetry.org>