Physical harness layout - placement suggestion

Not to scale or connector orientation. Bundles are separate labeled conductors; use the full terminal/connection tables before fitting any wire.

E1 DESIGN HOLD | Physical connections unapproved | Generic ports require actual-part mapping | 02 Nov 2026

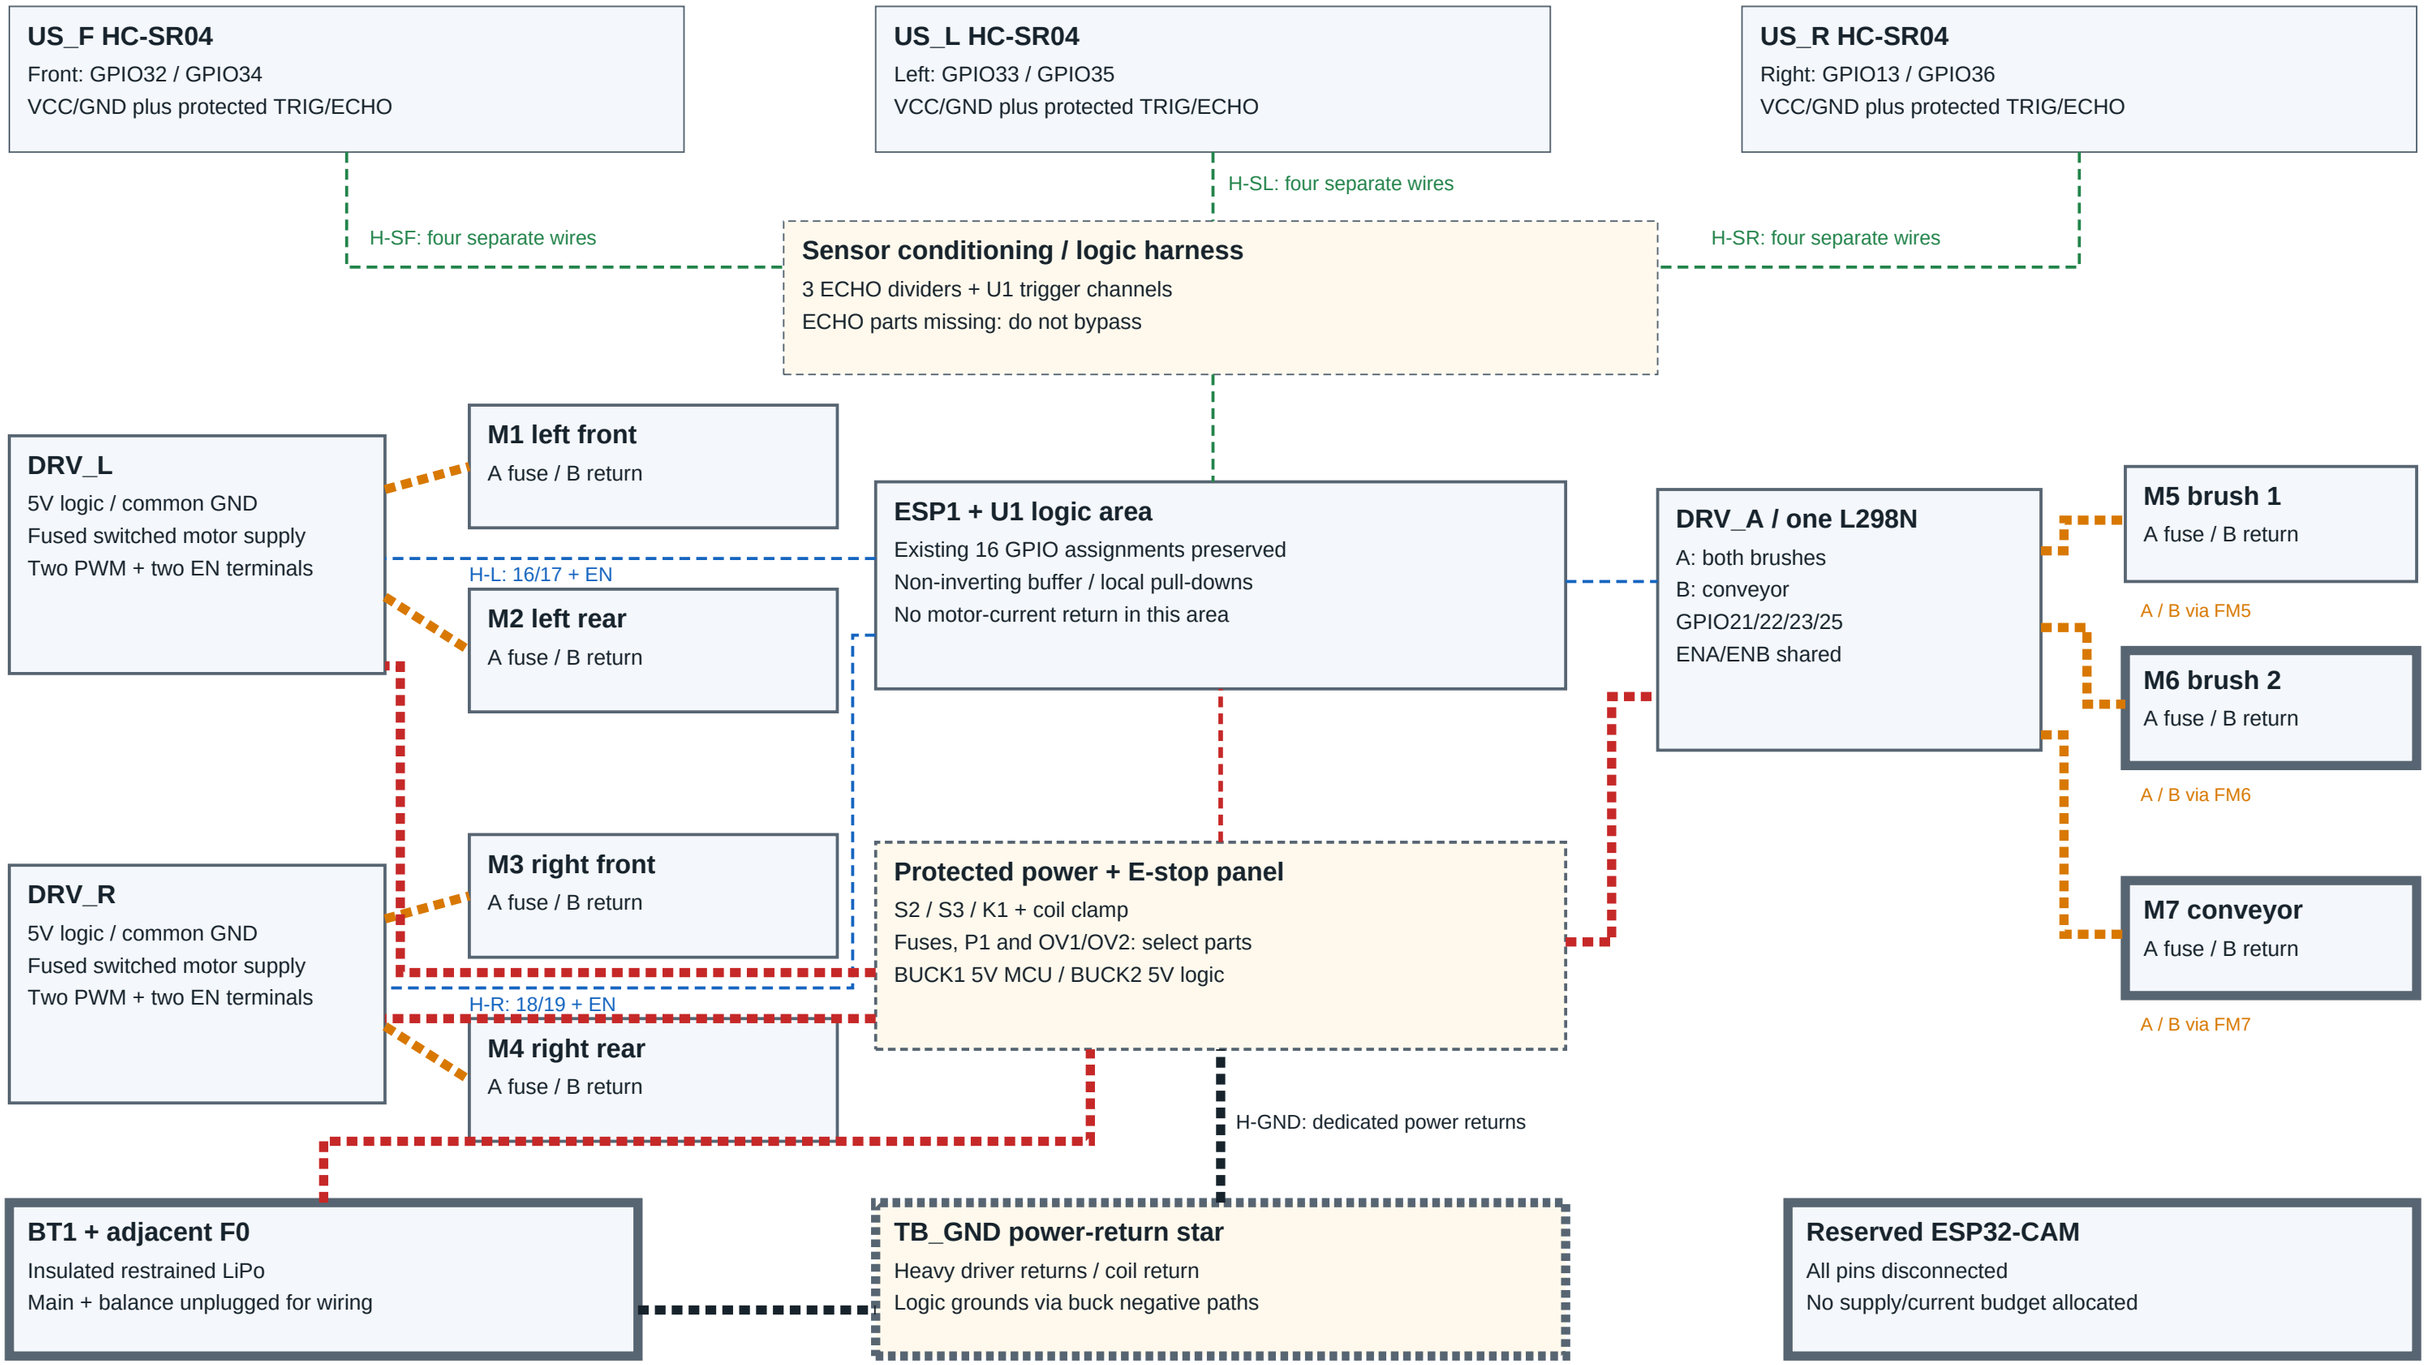

Keep high-current orange/red/black wiring separate from blue/green signal harnesses. Use insulated rated terminals; no breadboard motor paths. Exact wire gauge, length, connectors, routing and suppression remain release items.

Red +supply | Black GND | Blue control | Green sensor | Orange motor | Thick = high-current | Dashed = missing/blocked

Net labels join across sheets. Crossings alone do not join. No component footprint / connector orientation is implied.