Battery and power distribution

High-current paths are thick red/black. All fuse, wire, coil, protection and motor-current ratings are TBD; no battery operation is approved.

E1 DESIGN HOLD | Physical connections unapproved | Generic ports require actual-part mapping | 02 Nov 2026

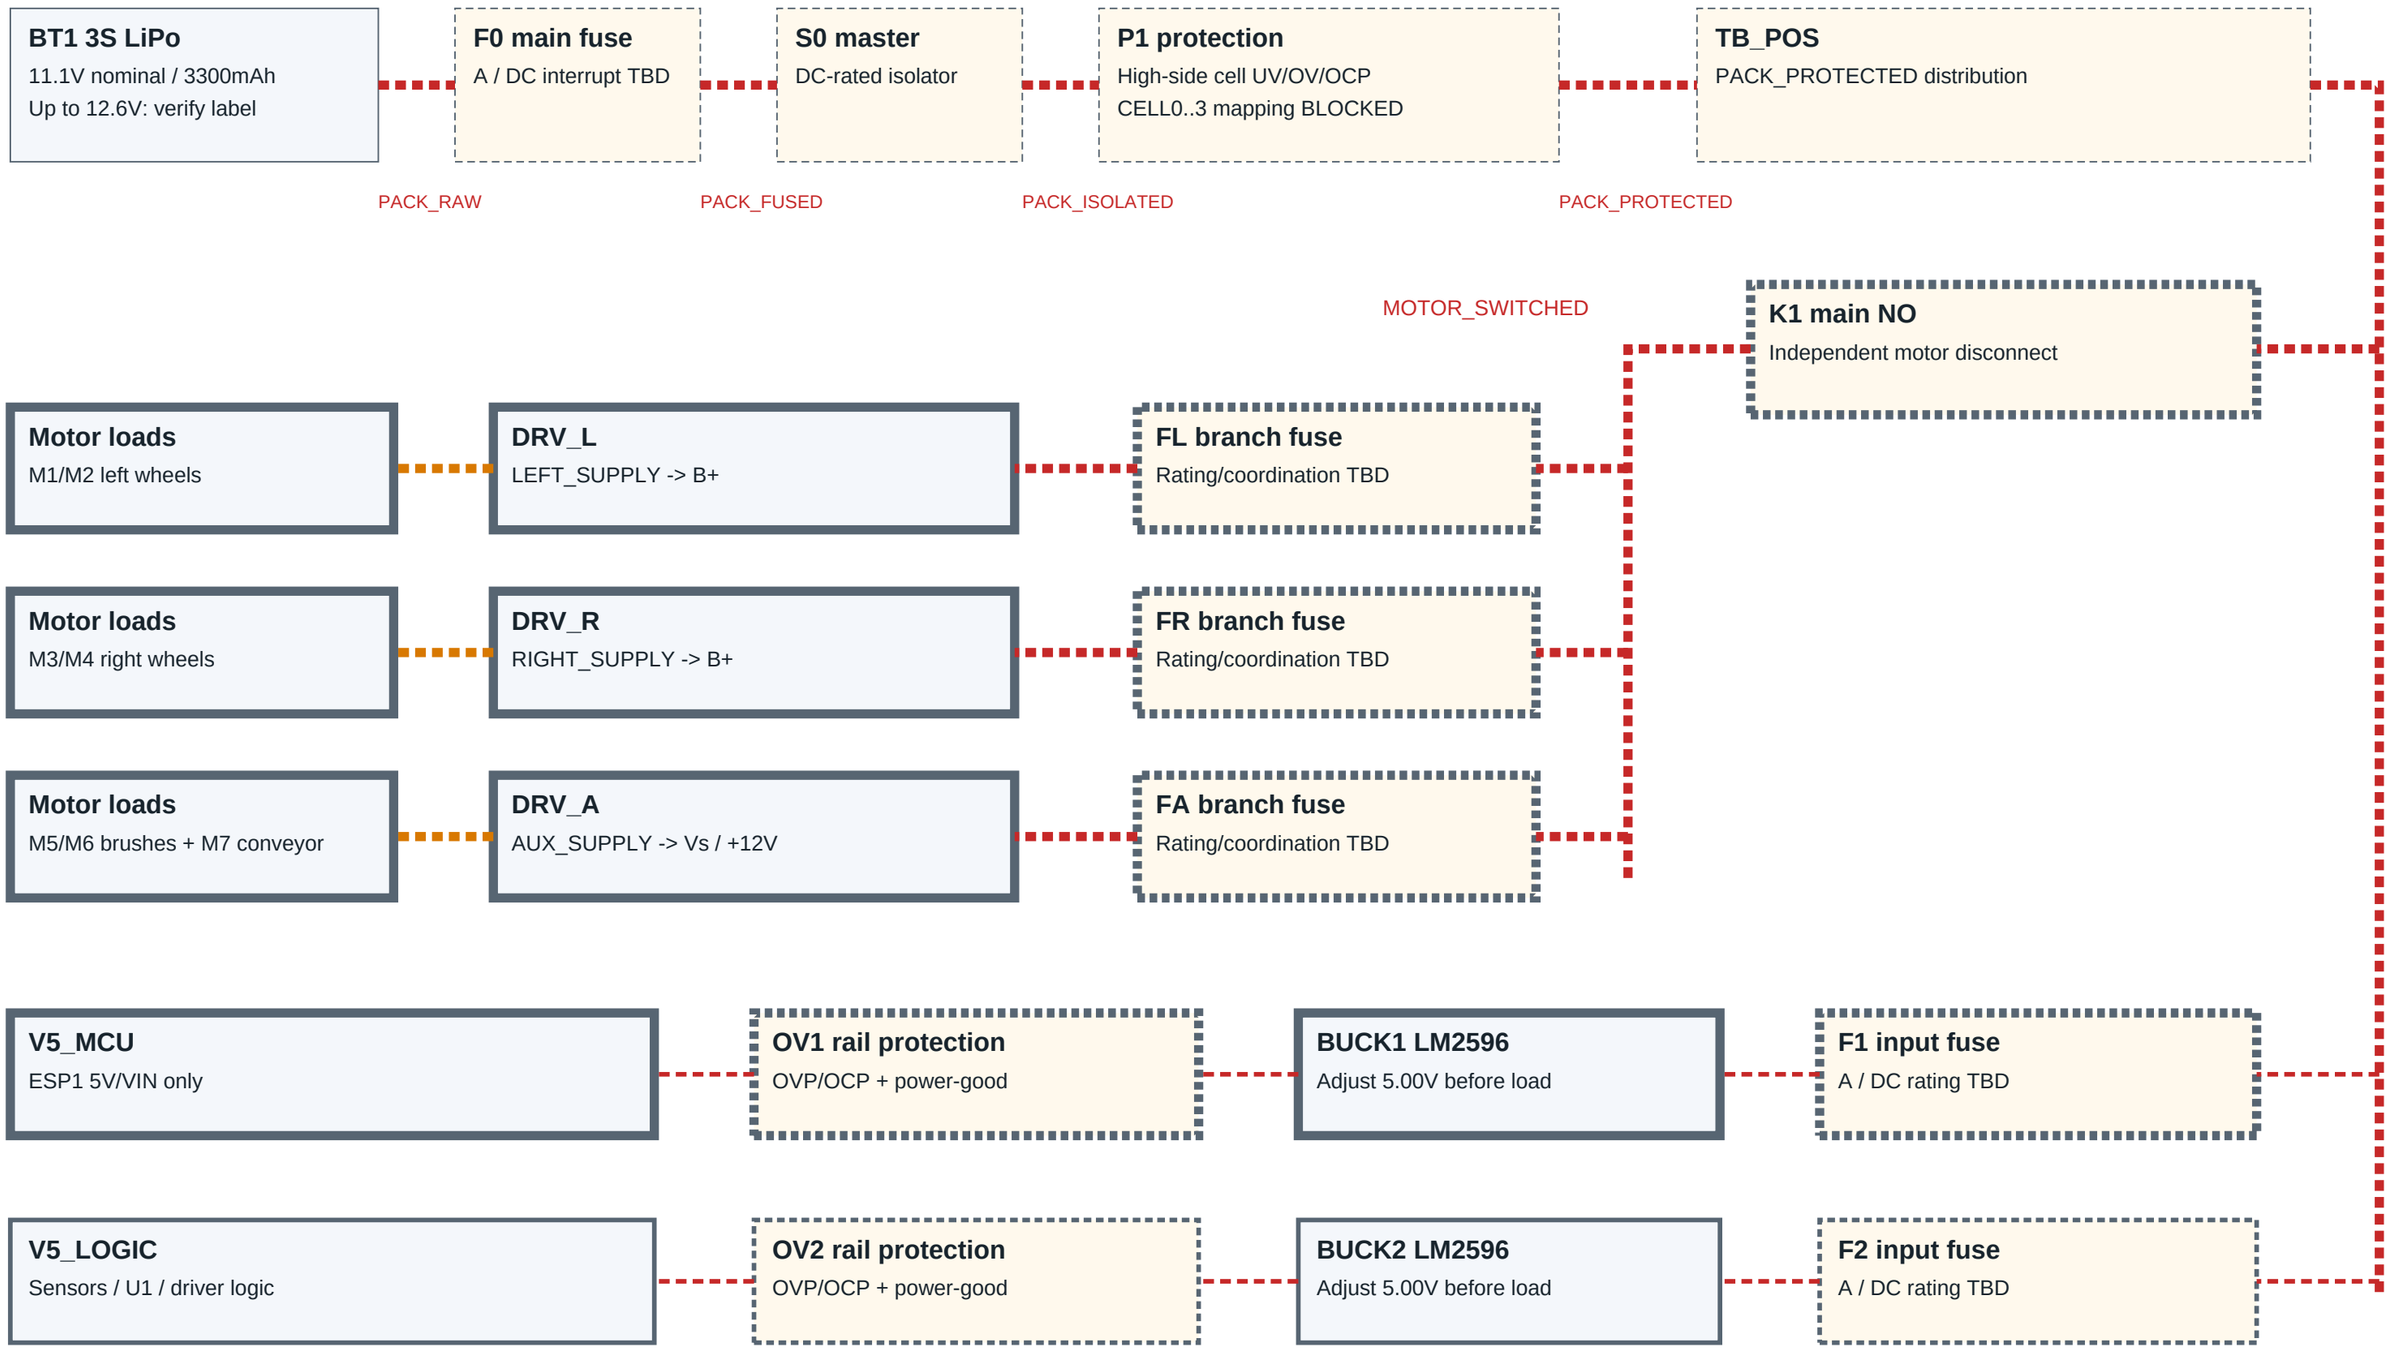

All returns -> TB_GND. Heavy driver returns; logic returns via buck OUT-. FK/coil chain: emergency_stop sheet. Do not parallel +5V outputs.

Red +supply | Black GND | Blue control | Green sensor | Orange motor | Thick = high-current | Dashed = missing/blocked

Net labels join across sheets. Crossings alone do not join. No component footprint / connector orientation is implied.