HC-SR04 sensor wiring and voltage protection

Three independent dividers are REQUIRED and currently missing. Real ECHO remains disconnected until measured compatibility is established.

E1 DESIGN HOLD | Physical connections unapproved | Generic ports require actual-part mapping | 02 Nov 2026

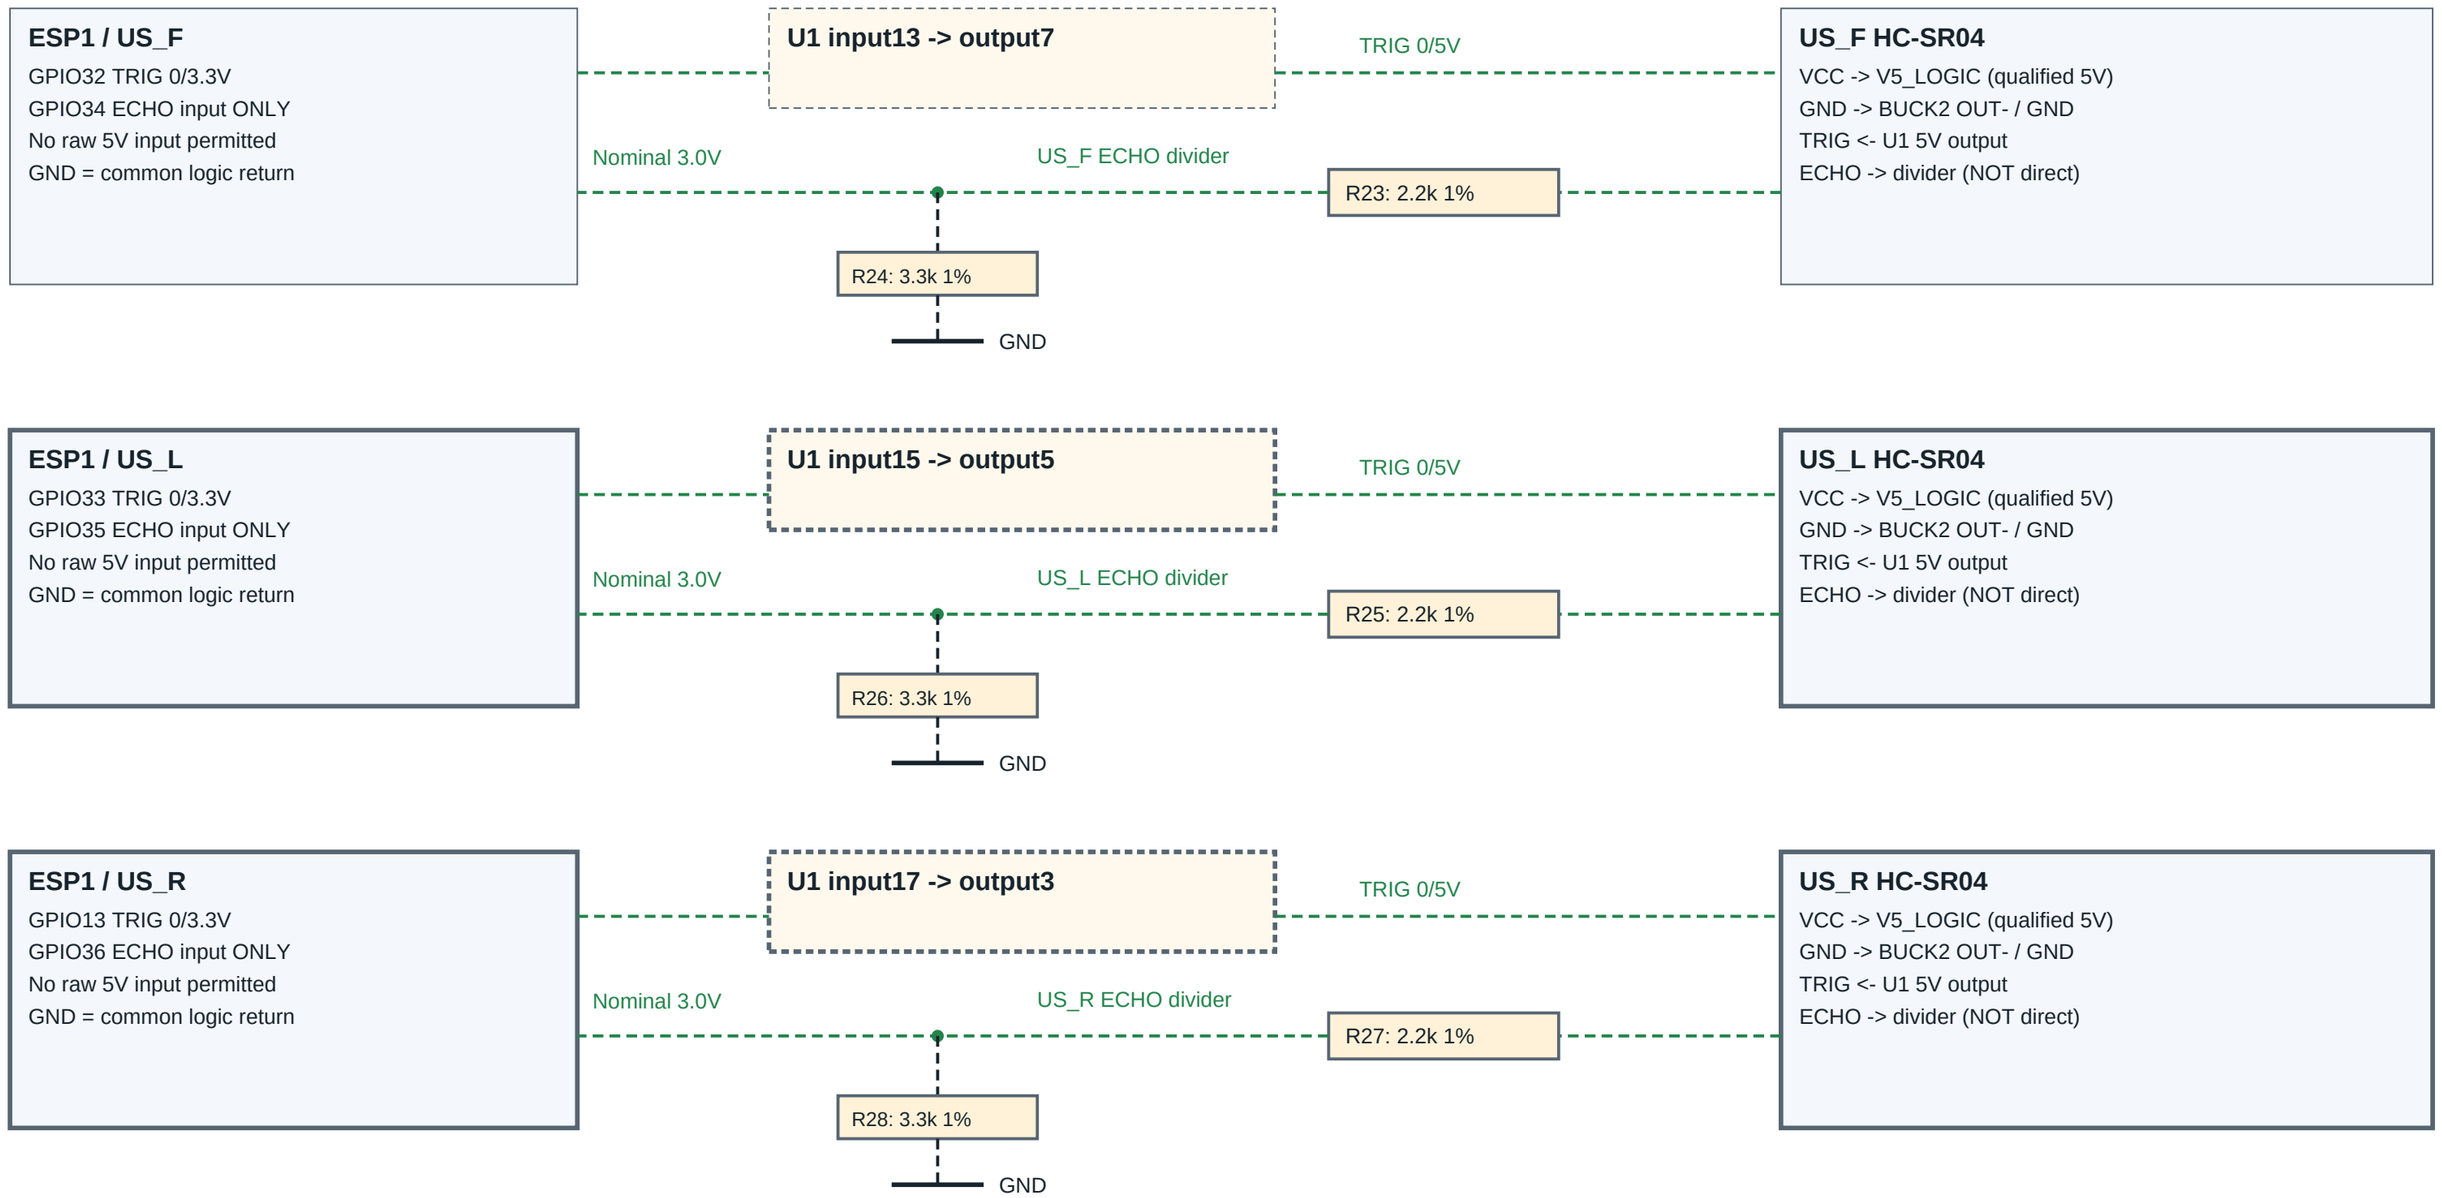

Calculated 2.827-3.175V assumes ECHO high follows a qualified 4.75-5.25V rail. Actual module VOH/VOL/overshoot must be measured. OV2 is also required for supply-fault protection; a divider is not a buck converter.

Red +supply | Black GND | Blue control | Green sensor | Orange motor | Thick = high-current | Dashed = missing/blocked

Net labels join across sheets. Crossings alone do not join. No component footprint / connector orientation is implied.