

Ethernet $\rightarrow$ IEEE 802.3.



10 Base 2.

(MAC)

10Mbps upto 400Gbps

- (i) Base Band
- (ii) Broad Band.

and beyond, while

(in this case Manchester Encoding)

CSMA/CD for collision detection.

(in this case psk-encoding).


(i) 10 Base 5 (v) 100 Base T.

(ii) 10 Base 2


(iii) 10 Base T

(iv) 1 Base 5


Twisted Pair Cable.

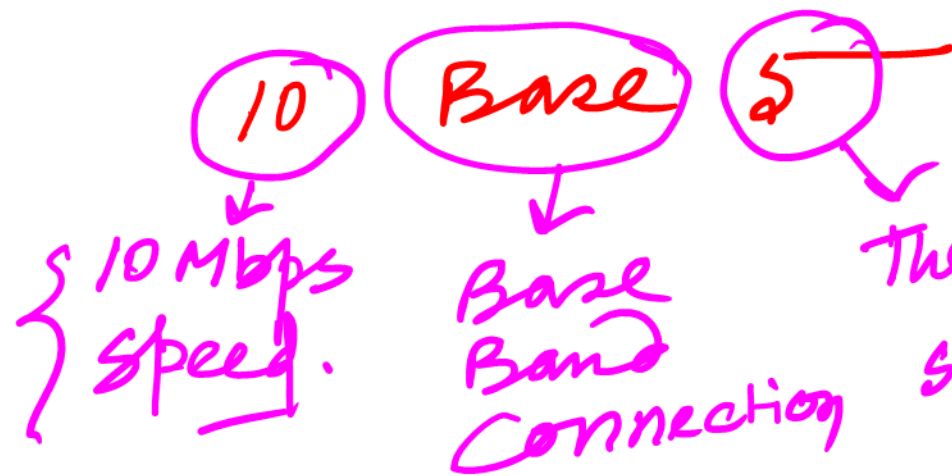

After 500 meter
we need to install
a Repeater.

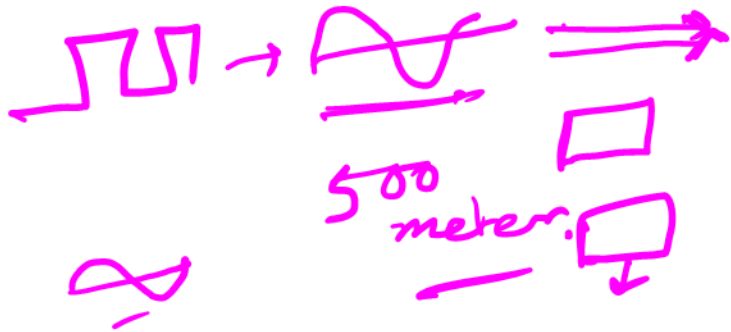

IEEE 802.4 (Token Bus): →

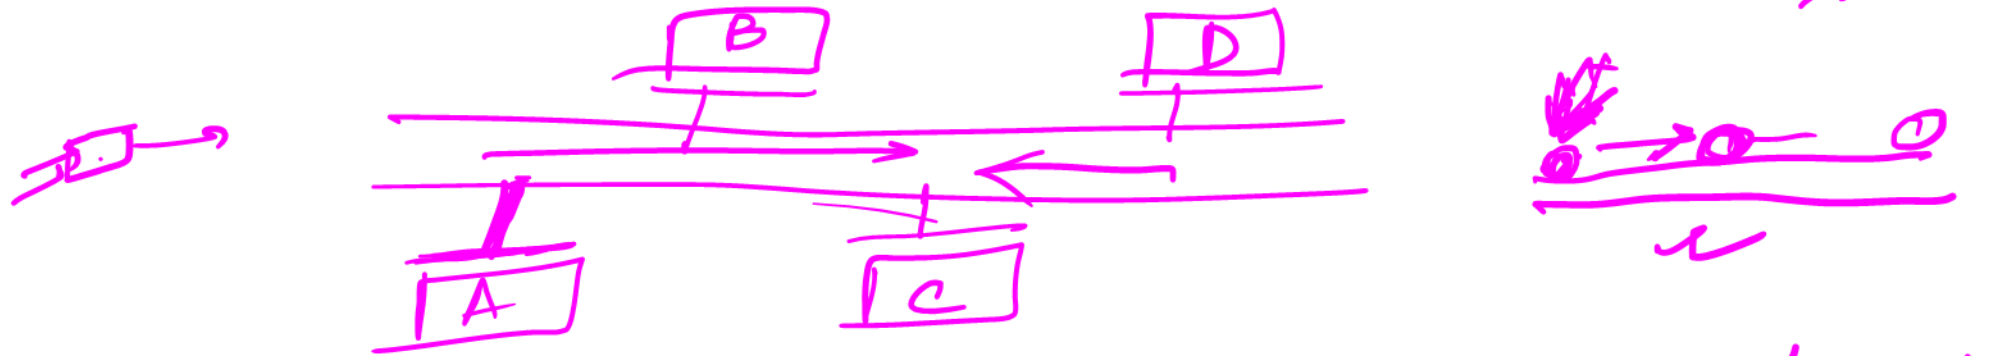


Delay


Assembly Line is a Bus topology.
Predictable Delay.
Predictable Delay.

Access Mechanism: → A 'Token'

Application: →

responsiveness are
prioritized over high
speed.

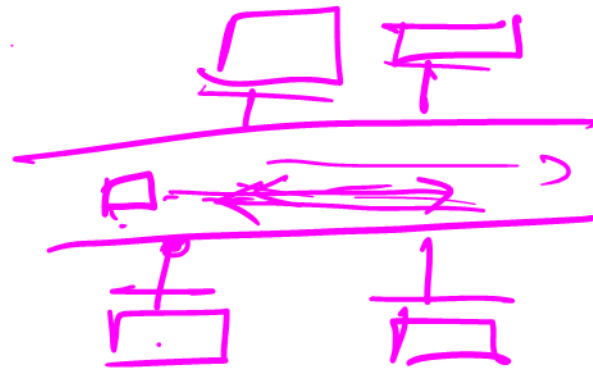

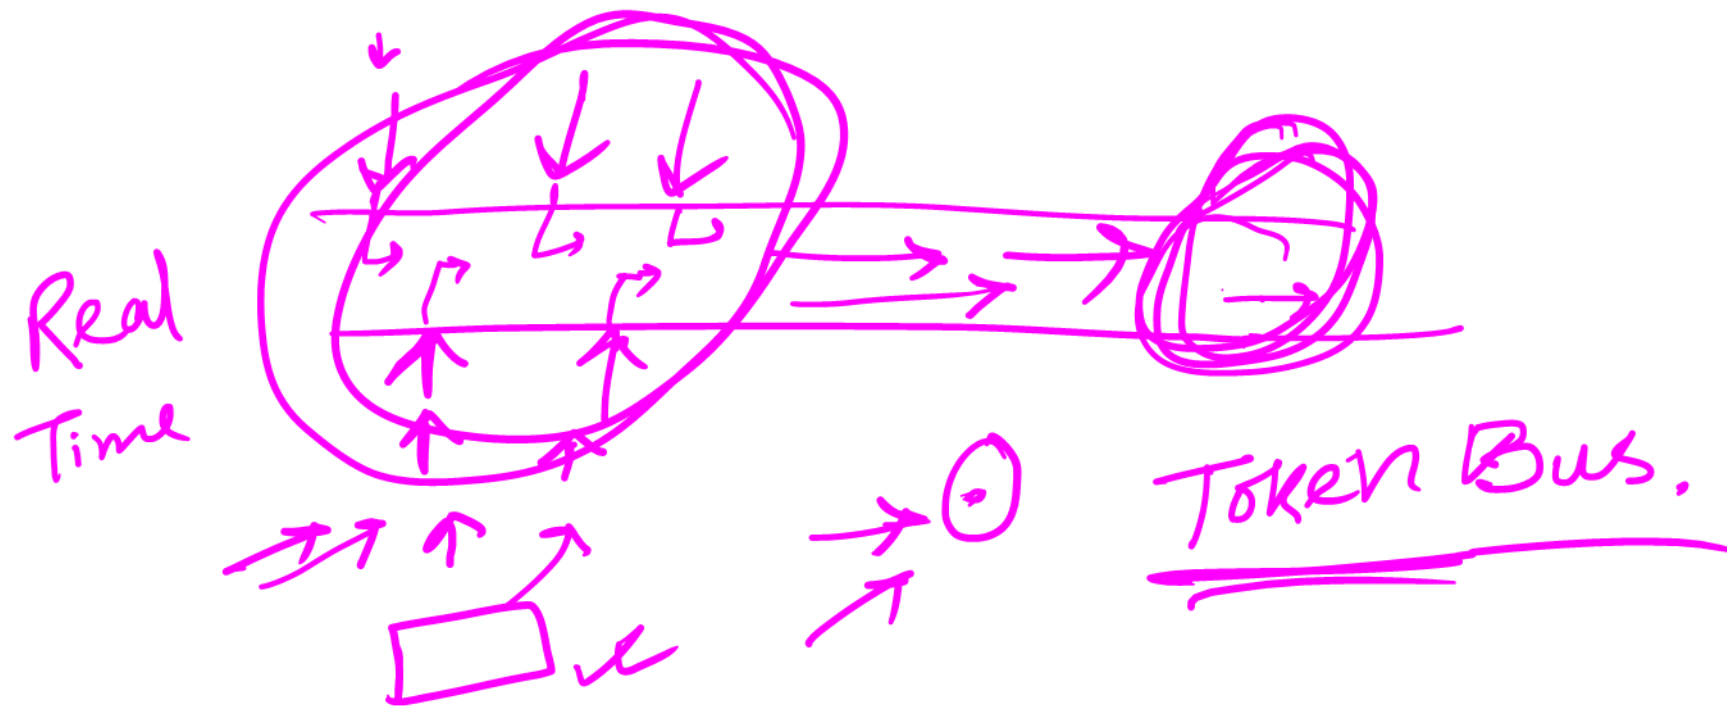


IEEE-802.5 (Token Ring)

infallible

This redundancy may create delay of indeterminable length if the traffic is heavy and there is no way to predict either occurrence of collision or delay produce by multiple stations attempting the link in same time.

Turn
to sending
data.

Turn
relation
Token
passing

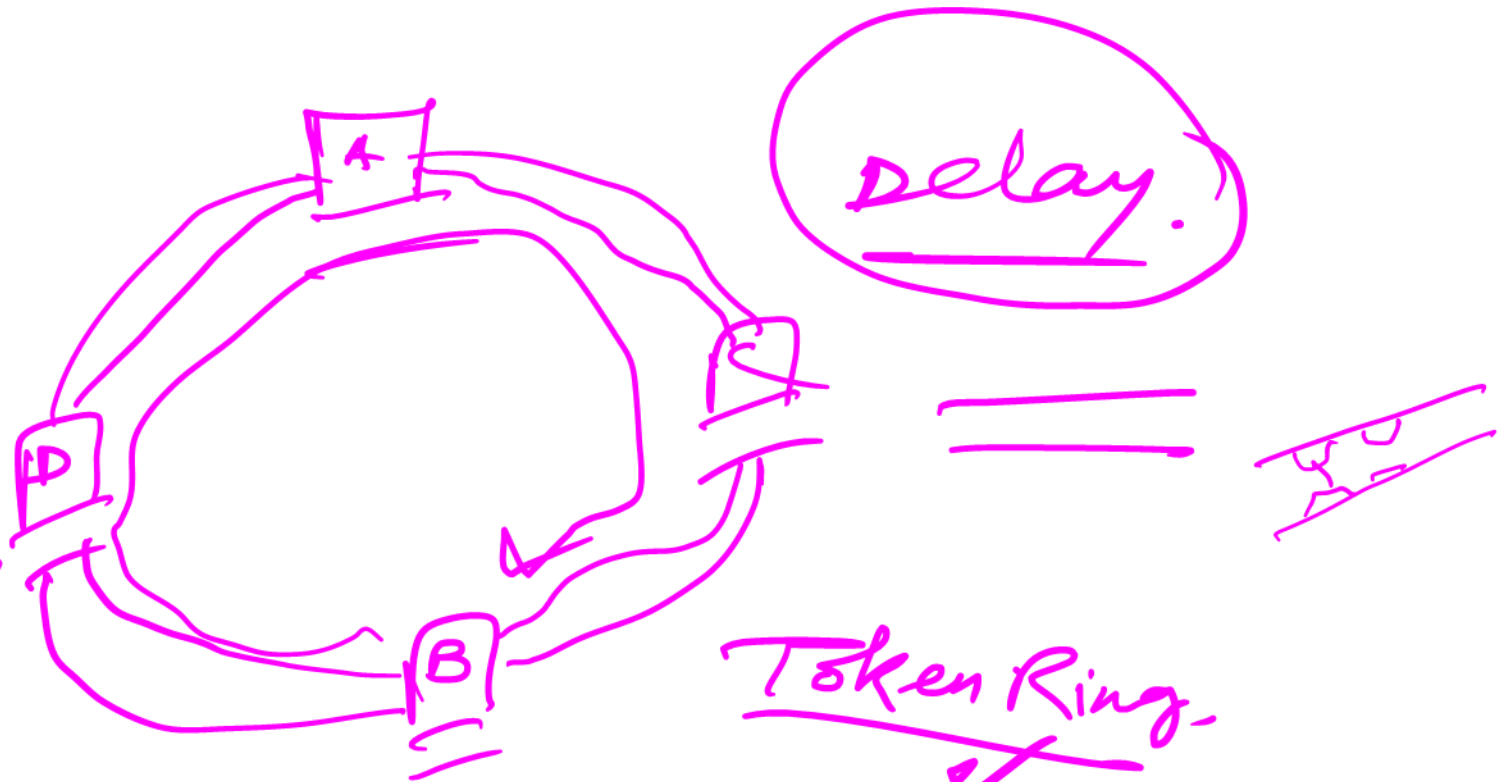

Token Ring.

A Token is a simple placeholder frame that is passed from station to station around the ring. A station may send data only when it has position have token.

