

REX9-ST Lighting Distribution Box

General



REX9-ST is applicable to residential buildings or places for non-professional people to enter, it includes control equipment and signal equipment. It is applicable to the circuit with an alternating current, the nominal voltage to earth does not exceed 380V, the output circuit is with short circuit protection function. When the total input load current does not exceed 125A, the rated current of each short circuit protection device shall not exceed 63A. This product is with plastic cover and metal box, mainly used to following conditions:

- power distribution system

Building electrical distribution system, house renovation and decoration.

- installation mode

The metal box matched with the plastic cover, it is especially suitable for flush mounting of distribution box in construction and decoration projects.

- appearance design

The stylish appearance design is suitable for high-end residences, hotels and office buildings, etc., which show the taste of modern life.

Specification


Product mode	Rows	No. of units	Surface mounting dimension	Flush mounting dimension(hole size)
REX9-ST-4	1	4	170×155×75	150×130×75
REX9-ST-6	1	6	185×210×75	160×180×75
REX9-ST-9	1	9	237×210×75	214×180×75
REX9-ST-13	1	13	310×210×75	286×180×75
REX9-ST-18	2	18	400×210×75	376×280×75
REX9-ST-22	2	22	472×210×75	448×180×75
REX9-ST-26	3	26	310×360×75	286×340×75
REX9-ST-36	2	36	400×360×75	376×340×75
REX9-ST-44	3	44	472×420×75	448×390×75
REX9-ST-54	3	54	400×630×75	376×530×75

REX1 Surface Mount Distribution Box

Type designation

Specification	Dimension	L	W	H
REX1-4WAYS		112	200	95
REX1-6WAYS		148	200	95
REX1-8WAYS		184	200	95
REX1-10WAYS		222	200	95
REX1-12WAYS		256	200	95
REX1-15WAYS		310	200	95
REX1-18WAYS		365	222	95
REX1-24WAYS		271	325	97
REX1-36WAYS		271	462	100

Outline and installation dimensions

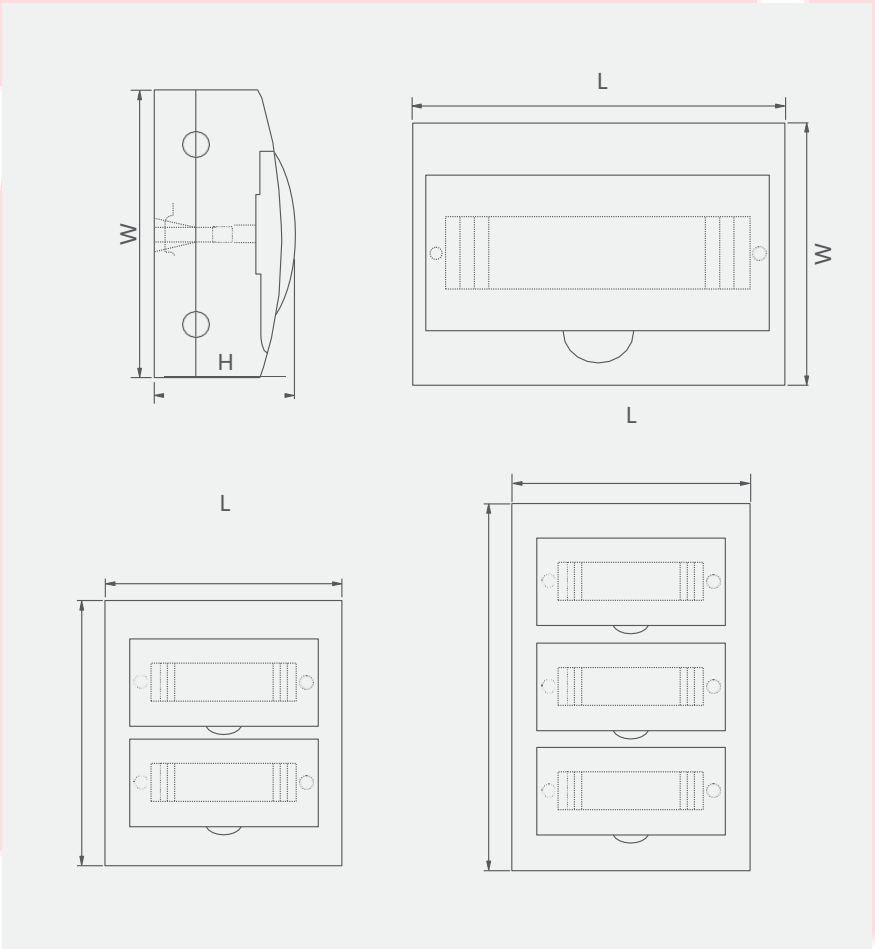

REX2 Flush Mount Distribution Box

Type designation

Specification	Dimension	L1	W1	H1	L	W	H
REX2-4WAYS		115	197	60	136	222	27
REX2-6WAYS		148	197	60	170	222	27
REX2-8WAYS		184	197	60	207	222	27
REX2-10WAYS		222	197	60	243	222	27
REX2-12WAYS		258	197	60	279	222	27
REX2-15WAYS		310	197	60	334	222	27
REX2-18WAYS		365	219	67	398	251	27
REX2-24WAYS		258	310	66	300	345	27
REX2-36WAYS		258	449	66	300	484	27

Outline and installation dimensions

