



PRODUCT CATALOGUE



Content



EDV[®] High Performance Tray2

Conventional Trays6

Random and Structured Packings7

I. Random Packings7

A. Metal Packings7

B. Plastic Packings9

C. Ceramic Packings10

II. Structured Packings13

A. Sepak[®] Series (Corrugated-Sheet Metal Packing)13

B. Sepak[®]-G Series (Gauze Type Structured Packing) ...13

C. Sepgrid[®] Series (Grid Packing)13

D. Sepak[®]-P Series (Plastic Structured Packing)14

E. Sepak[®]-C Series (Ceramic Structured Packing)14

Tower Internals15

I. Liquid Distributor15

A. Trough Distributor (Type TTD-1)15

B. Trough Distributor (Type TTD-2)15

C. Pipe Distributor (Type PTD)15

D. Spray Distributor (Type SPD)16

PRODUCT CATALOGUE

E. Orifice Pan Distributor (Type OPD)16

F. Weir-Riser Pan Distributor (Type WPD)16

II. Vapor Distributor16

A. Vapor Distributor (Type VD-1)16

B. Vapor Distributor (Type VDT)16

C. Vane Type Distributor (Type VND)17

III. Liquid Collector17

A. Liquid Collector (Type CTC-1)17

B. Chimney Tray Collector (Type CTC-2)17

IV. Packing Support & Holddown Grid17

A. Grid Type Support (Type GTS)17

B. Hump Type Support (Type HTS)18

C. Holddown Grid (Type HDG)18

V. Demister18

A. Mesh Wire Demister18


B. Vane Demister18

Fasteners19

Engineering Design & Technical Service20

A. Engineering Design20

B. Technical Service20



Knitwire Products

Over 45 years experience in the wire industry, combined with dynamic enthusiasm and innovation has produced a company that has recognition worldwide for continuous improvement in quality and service. The Knitwire Group of Companies was formally established in 1976.

A more mature experience, added to the fresh ingenuity of a younger generation maintains our ability to remain up to date with advancements in design and technology. This contributes to the strengthening of our position as a first class global supplier to industry.

The needs of all of our customers are continually assessed and anticipated. At the same time as monitoring and initiating improvements to existing product lines and operations, we endeavour to have a strategic approach to future concepts designs and manufacturing methods.

A great strength of Knitwire Products that our customers have found invaluable is the ability to offer an immediate response in the preparation of proposals and samples.

EDV[®] HIGH PERFORMANCE TRAY

Since its inception in late 1997, EDV[®] high performance trays have been successfully applied to more than 1000 commercial installations in the refining, petrochemical and chemical industries. EDV[®] trays have been used in wide range of applications ranging from 0.5 to 10.2 meter tower diameter, 170 to 1100mm tray spacing, a few to more than 200 trays, one to four passes (including three-pass), and in vacuum to high pressure systems. EDV[®] trays offer you a solution with higher capacity, higher separation efficiency, lower pressure drop and better flexibility as well as lower capital costs.

Main Features

- Valve with top canopies
- Directional valve
- Bubble promoter
- Non-revolving valve
- Improved tray deck connection

Advantages Over Conventional Trays

- Higher capacity by 40% or more
- Efficiency increase by 10-20%
- Lower pressure drop by more than 10%
- Greater flexibility by 30-50%
- Minimum modification in reconstruction
- Easy to install

Application Fields

- Atmospheric and vacuum petroleum units
- FCCU
- Light hydrocarbon separation
- Hydrogenation
- Coking
- Reform and complex aromatics
- Methanol plant
- Acetic acid
- Polysilicon



EDV[®] Valve Tray



EDV[®]



EDV[®]-R



EDV[®]-F


Typical EDV[®] valve types are listed above. There are movable EDV[®] valve and fixed EDV[®] valve in principle. However new design is updating every year with the development of oil and chemical industry.

- **The latest high efficiency tray**
- **Overall optimization for trays**
- **Higher capacity and better separation efficiency**




1.Top Canopies

The EDV® High Performance Tray technology consists of various design know-how and patented features that help, not only improve column throughput and efficiency, but also extend the column run-time. Specifically, EDV® High Performance Trays are featured with:

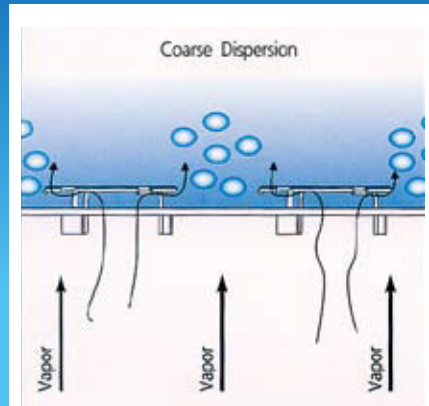

V1 Valve

Large bubble coarse dispersion

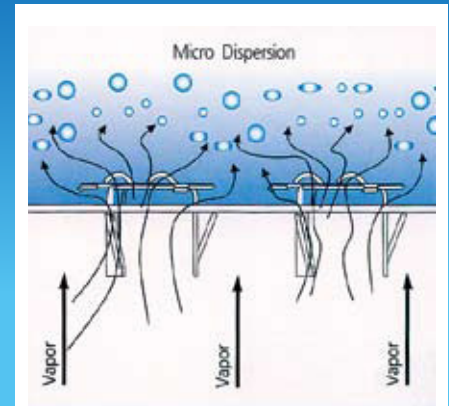


EDV® Valve

Uniform and fine dispersion

2.Directionual Flow Promotion Devices

EDV® valves and their directional flow promotion devices help eliminate stagnant liquid pools and promote uniform liquid plug flow and froth densities across the entire bubbling area. As a result, the directional promotion devices eliminate any fouling material settling on the tray deck and extend the column run time.

3.Anti-Spin Valve Hole

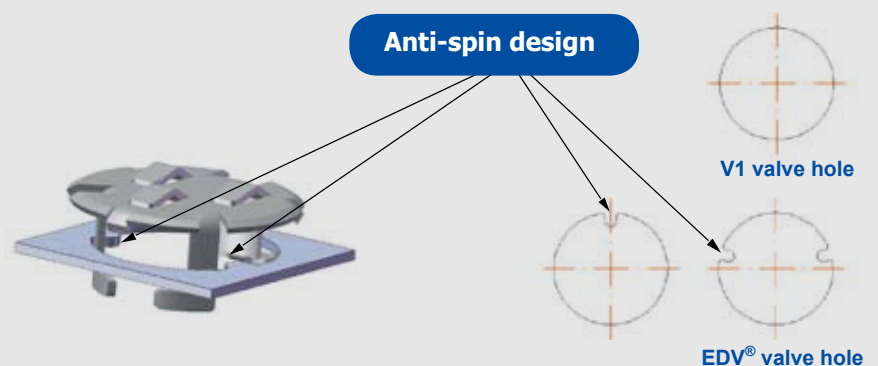



The anti-spin valve hole can prevent the valve rotating as V1 valves do, and avoid valve legs wearing with subsequent loss of valves.



4. "Quick-Connect" Active Tray Joints


EDV® Trays are designed with patented Quick-Connect active tray joints, which allows easy site installation and eliminates the inactive tray zones found in all other trays. As a result, the Quick-Connect active tray joints:

- Allow more "effective active area" for vapor/liquid contact, (i.e., more tray capacity),
- Eliminate liquid by-pass (i.e., better tray efficiency),
- Eliminate inactive zones on the tray (i.e., avoids fouling material settling on the tray decks thus extending tray run-time), and
- Helps reduce typical tray installation time by 30-50%.

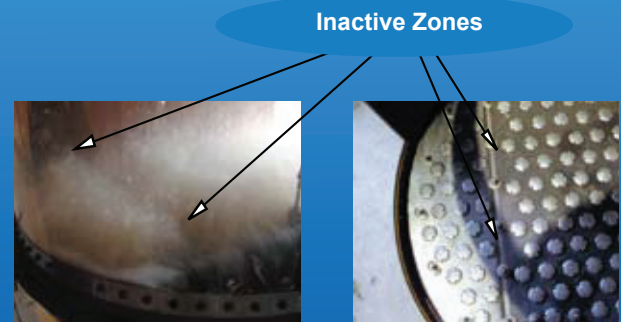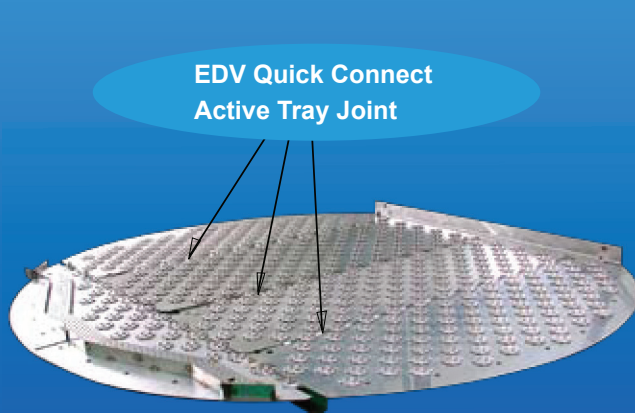

5. Inlet Bubble Promoters


The EDV® Tray is designed with unique inlet bubble promoters to allow for froth initiation near the inlet area of the active panels. The froth initiation helps minimize/eliminate the liquid gradient on the tray and promotes uniform froth distribution across the entire tray's active area and results in higher tray capacity and operating flexibility.

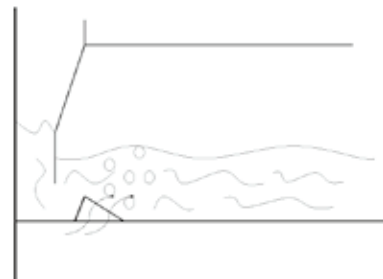


Liquid Gradient is Eliminated or Minimized with Bubble Promoters

6. Downcomer with Baffle


ZEHUA's new design of downcomer eliminates stagnant liquid pools effectively. Liquid velocity on the tray deck is unified.



Downcomer with Baffle




Simulation Result with Straight Downcomer



Simulation Result with ZEHUA's New Design

TEST RESULT COMPARED WITH V1 VALVE TRAY


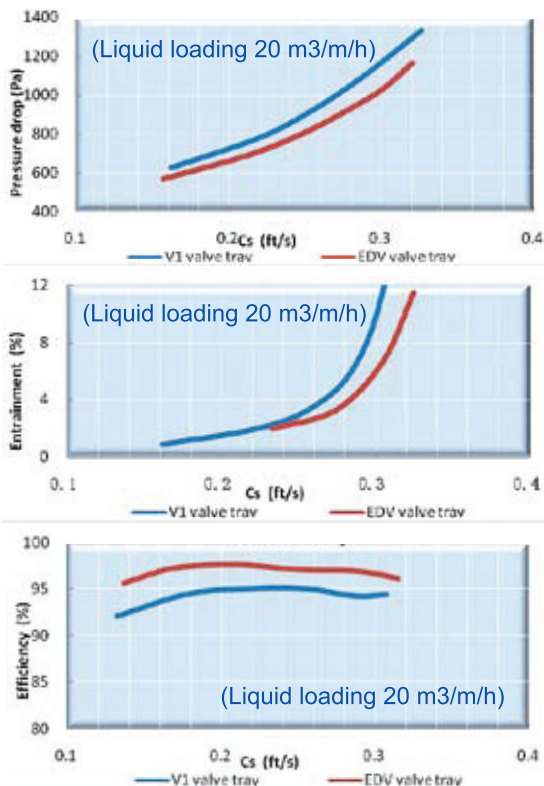


Pressure Drop

Entrainment

Efficiency

The EDV[®] valve tray has been tested in the 1.2m diameter tower and compared with V1 valve tray.

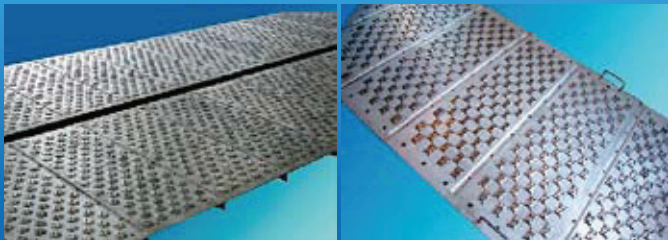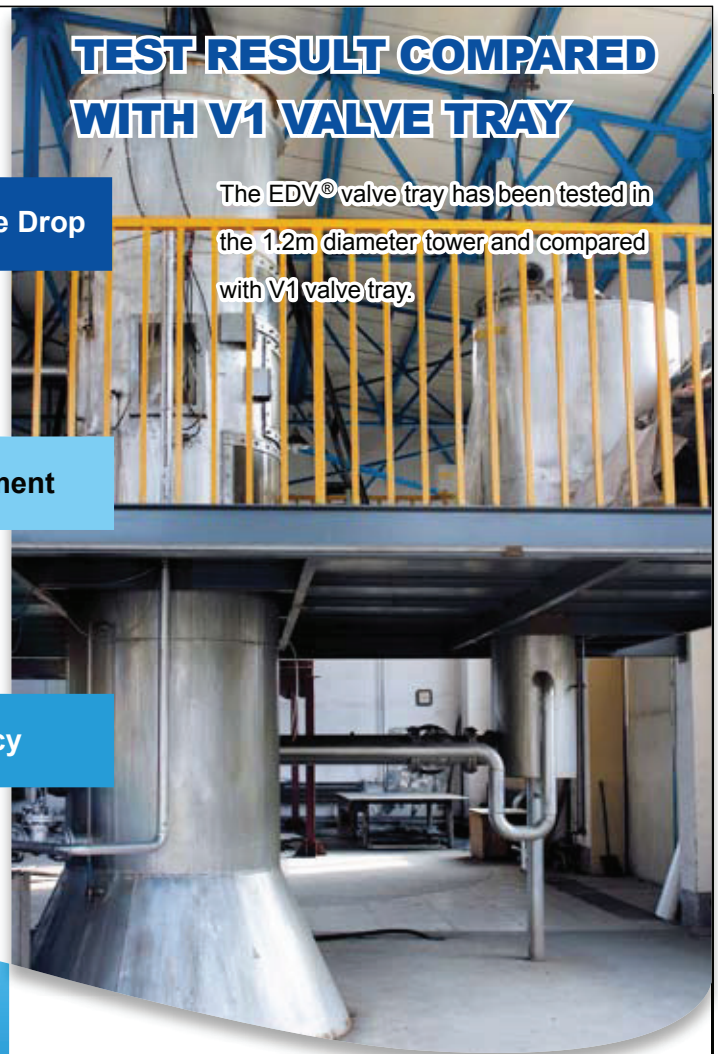

EDV[®]

EDV[®]-R



EDV[®]-FL

EDV[®]-FM



EDV[®]-FS

EDV[®] TRAY SERIES

1. EDV[®] Valve Tray

- Floating round valve with top canopies to promote fine dispersion
- Anti-spin to avoid valve leg abrasion
- High performance efficiency and capacity
- Wide operating flexibility

2. EDV[®]-R Valve Tray

- Floating rectangular valve with top canopies promote fine dispersion
- Directional flow promotion

3. EDV[®]-F Tray

- More efficient and higher flexibility than conventional sieve trays
- Adapted to fouling and coking systems

To suit for different operations, we offer the following standard sizes: EDV[®]-FL, EDV[®]-FM, EDV[®]-FS.



CONVENTIONAL TRAYS

ZEHUA can also design and supply for conventional trays, such as:

Conventional V1 Valve Tray

Available in light and heavy V1 valve

Valve trays are essentially flat perforated trays with movable or fixed valve units. Floating valves are disk-shaped type devices which contain legs formed out of the valve disk. Fixed valves are units with integral legs formed out of the tray deck.

Bubble Cap Tray

Standard round cap: 80/100/150;

Rectangular cap type;


Bubble cap trays consist of a flat perforated deck in which the holes are enclosed with vapor chimney risers and caps in the form of inverted cups mounted on top of the risers. This gives the bubble cap tray the advantage to operate at extremely low liquid and vapor rates.

Sieve Tray

Sieve trays are flat perforated plates in which vapor is forced through the holes into the cross flowing liquid. Vapor flow prevents liquid from leaking through the holes.


Dualflow Tray

The dualflow tray is a kind of sieve tray without downcomers such that the entire tray active area is perforated with holes. Hole sizes range from 10 to 25mm in diameter.

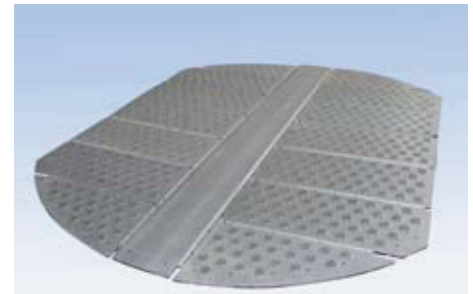


Other Trays:


Shower Deck Tray



Disc & Donut tray



Sump Tray

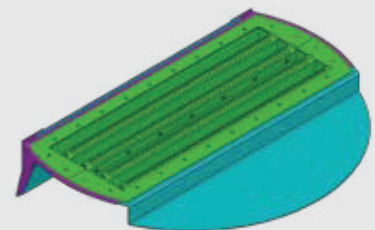

Baffle Tray

Cartridge Tray (for small diameter flanged columns)

Others at client request

Material can be in Carbon steel, Stainless steel, Alloy 600, Titanium, Monel, Hastalloy, Zirconium etc. or at client's requirements.



RANDOM AND STRUCTURED PACKINGS

I. RANDOM PACKINGS

A. METAL PACKINGS



1) SEPRING®-C (Cross Saddle Ring)

A new generation of high performance random packing

Better combination of capacity and efficiency

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
38	38×13×0.4	285	88,570
50	50×18×0.5	200	35,790
75	75×25×0.6	144	9,663



Sepring®-T1



Sepring®-T2

2) SEPRING®-T (Tsinghua Mini Ring)

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
25	25×9.0×0.3	260	155,000
38	38×12.7×0.4	228	48,000
50	50×17.0×0.5	270	21,500



3) SEPRING®-M (Multi-Saddle Ring)

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
25	25×10×0.3	269	131,057
50	50×16×0.4	210	16,600
75	75×24×0.5	184	5,600



4) RING-C (Equivalent to Cascade Mini-Ring®*)

Type	Dimension/mm (ODxIDxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
0	17×15×6×0.3	427	531,000
1	25×22×8×0.3	256	144,320
1.5	34×29×11×0.3	180	57,210
2	43×38×14×0.3	150	28,520
2.5	51×44×17×0.4	199	20,500
3	66×57×21×0.4	139	9,250
4	86×76×29×0.4	100	3,900
5	131×118×41×0.5	82	1,200



5) RING-P (Equivalent to Pall®* Ring)

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
16	16×16×0.4	502	199,800
25	25×25×0.4	300	52,380
38	38×38×0.4	200	15,120
50	50×50×0.5	190	6,820
76	76×76×0.7	168	1,830



6) RING-P (Equivalent to Pall®* Ring)

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
25	25×15×0.3	226	127,180
40	38×17×0.3	160	51,180
50	50×29×0.4	143	15,550
70	70×36×0.5	106	4,690



7) RING-R (Equivalent To Raschig®* Ring)

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
16	16 x 16 x 0.4	502	199,800
25	25 x 25 x 0.5	375	52,380
38	38 x 38 x 0.5	250	15,120
50	50 x 50 x 0.6	228	6,820
76	76 x 76 x 1.0	276	2,030



B. PLASTIC PACKINGS

1) RING-P

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
25	25×25×1.0	72	53,000
38	38×38×1.2	56	14,800
50	50×50×1.5	50	6,500
76	76×76×2.5	55	1,930

2) RING-C

Type	Dimension/mm (ODxIDxH)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
16	16 x 8.9 x 1.1	135	299,136
25	25 x 13 x 1.2	98	81,500
38	38×19×1.4	58	27,200
50	50 x 25 x 1.5	55	10,740
76	76 x 37 x 3.0	68	3,420

3) TELLER ROSETTE RING

Type	Dimension/mm (ODxIDxH)	Bulk Density kg/m ³	Bulk Density kg/m ³
51	51 x 19 x (3 x 3)	92	22,300
73	73 x 28 x (3 x 4)	71	7,071
95	95 x 37 x (3 x 6)	63	3,540

4) POLYHEDRAL HOLLOW BALL

Type	Dimension/mm (OD x THK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
25	25 x 1.0	96	65,100
38	38 x 1.2	83	28,500
50	50 x 1.5	76	11,500
76	76 x 1.6	59	3,000
100	100 x 1.8	50.4	1,800



5) INTALOX SADDLE RING

Type	Dimension mm	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
38	38×19×1.2	75	25,200
50	50×25×1.5	68	9,400
76	76×38×3.0	52	3,700



6) HEILEX RING

Type	Dimension/mm (OD x H x THK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
50	50 x 50 x 1.5	61	8200
76	76 x 76 x 1.8	56	3180
100	100 x 100 x 2.0	48	1850



7) CONJUGATE RING

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
25	25 x 17.5 x 1.0	65	74,000
38	38 x 19 x 1.2	55	18,650
50	50 x 25 x 1.5	49.4	9,200
76	76 x 38 x 2.6	64	3,980
100	100 x 50 x 3.0	45	1,800



C. CERAMIC PACKINGS



1) RING-C

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
25	25×15×3	650	72,000
38	38×23×4	630	21,600
50	50×30×5	580	9,100
76	76×46×9	530	2,500



2) RING-P

Type	Dimension/mm (ODxIDxH)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
15	15×11×15	690	178,000
25	25×19×25	620	53,000
38	38×30×38	590	25,000
50	50×40×50	550	6,800
80	80×64×80	500	1,950



3) RING-R

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
6	6×6×2	737	3,110,000
10	10×10×2	700	720,000
15	15×15×2	590	237,000
16	16×16×2	730	192,500
25	25×25×2.5	505	49,000
40	40×40×5	577	12,700
50	50×50×5	550	6,000
80	80×80×9.5	714	1,910
100	100×100×10	700	1,000
150	150×150×15	790	295



4) CROSS PARTITION RING

Type	Dimension/mm (ODxIDxH)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
50	50×40×50	600	5,600
80	80×64×80	820	2,300
100	100×80×100	850	1,000
120	120×96×120	860	370
150	150×120×150	980	280



5) CERAMIC SADDLE

Type	Dimension/mm (ODxHxTHK)	Bulk Density kg/m ³	Bulk Qty. pcs/m ³
16	16 x 12 x 3	686	269,900
25	25 x 20 x 3	544	58,230
38	38 x 30 x 4	502	19,680
50	50 x 42 x 6	470	8,234
76	76 x 53 x 9	537	2,400



6) CERAMIC BALL SERIES

(a) Inert Alumina Ball

Main Crystal Phase	Feldspar	Feldspar-Mullite	Mullite	Mullite-Corundum	Corundum
AL ₂ O ₃	20-30	30-45	45-70	70-90	≥90
Water absorption (%)	≤5				
Acid resistance (%)	≥98				
Alkali resistance (%)	≥80	≥82	≥85	≥90	≥95
Thermal resistance(°C)	≥1300	≥1400	≥1500	≥1600	≥1700
Bulk density kg/m ²	1300-1400	1400-1500	1500-1600	1600-1800	≥1800

(b) Activated Alumina



Type		401	402	403	404	405	406
Application		Absorbent	Defluorinate	Absorbent (H ₂ O ₂)	Dechlorinate	Catalyst carrier	Absorbent in air separation
Main crystal phase		x-p	x-p	y	x-p	y	x-p
Chemical composition (%)	Al ₂ O ₃	≥93	≥93	≥92	≥90	≥93	≥90
	Na ₂ O ₃	≤0.3	≤0.3	≤0.5		0.15-0.3	≤0.3
	I.L	6-8	6-8	≤8	≤8	≤5	6-8
Bulk Density (g/ml)		0.68-0.72	0.70-0.75	0.65-0.75	0.68-0.78	0.70-0.80	0.68-0.72
Surface Area (m ² /g)		≥280	≥280	≥300	≥300	≥200	≥300
Pore Volume (ml/g)		0.3-0.45	0.3-0.42	0.4-0.46	0.3-0.5	0.4	0.3-0.5
Static Absorption (%)		Water 15-17	Fluorine 0.12	Water 50	Chlorine 10-20	Water 50-70	Water 17-19
Abrasion Loss (%)		≤1.0	≤1.0	≤1.0	≤0.7	≤0.4	≤0.8



II.STRUCTURED PACKINGS

A. SEPAK® SERIES (Corrugated-Sheet Metal Packing)

Type	Crimp Angle	Surface Area m ² /m ³	Void %
125Y	45°	125	98.5
125X	60°	125	98.5
175Y	45°	175	98
175X	60°	175	98
200Y	45°	200	97.5
200X	60°	200	97.5
220Y	45°	220	97
220X	60°	220	97
250Y	45°	250	97
250X	60°	250	97
300Y	45°	300	96
300X	60°	300	96
350Y	45°	350	95
350X	60°	350	95
450Y	45°	450	94
450X	60°	450	94


B. SEPAK®-G SERIES (Gauze Type Structured Packings)

Type	Crimp Angle	Surface Area m ² /m ³	Void %
SP-G 250Y	45°	250	97
SP-G 250X	60°	250	97
SP-G 350Y	45°	350	95
SP-G 350X	60°	350	95
SP-G 500X	60°	500	93
SP-G 700Y	45°	700	87

C. SEPGRID® SERIES (Grid Packing)


Mainly used for applications where coking is likely to occur. Typical applications are as follows:

- Atmospheric or vacuum tower: wash section;
- FCC main fractionator: slurry pumparound section;
- Coker or visbreaker fractionator: wash section.

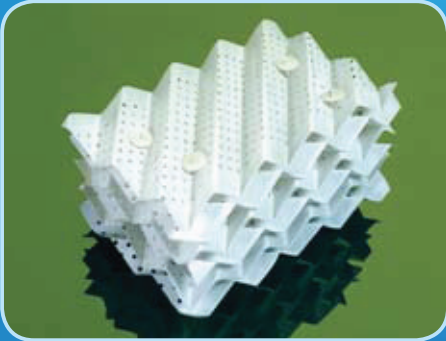

D. SEPAK®-P SERIES (Plastic Structured Packing)

Type	Crimp Angle	Surface Area m ² /m ³	Void %
SP-P 125Y	45°	125	98.5
SP-P 125X	60°	125	98.5
SP-P 250Y	45°	250	97
SP-P 250X	60°	250	97
SP-P 350Y	45°	350	95
SP-P 350X	60°	350	95
SP-P 500Y	45°	500	93
SP-P 500X	60°	500	93

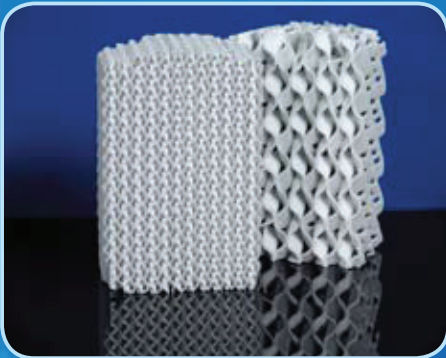

E. SEPAK®-C SERIES (Ceramic Structured Packing)

Type	Crimp Angle	Surface Area m ² /m ³	Void %
SP-C 125Y	45°	125	90
SP-C 125X	60°	125	90
SP-C 160Y	45°	160	85
SP-C 160X	60°	160	85
SP-C 250Y	45°	250	80
SP-C 250X	60°	250	80
SP-C 350Y	45°	350	78
SP-C 350X	60°	350	78
SP-C 450Y	45°	450	72
SP-C 450X	60°	450	72
SP-C 470X	60°	470	75
SP-C 700Y	45°	700	80

Material could be High silicon content ceramic, Alkali resistant ceramic, Lightened & Strengthened ceramic.



TOWER INTERNALS

Proper design and type selection of internals for packed towers, such as liquid distributors, collectors, packing supports etc. are essential for tower performance. The internals have been developed and optimized in Zehua's extensive test facility and used in commercial applications for many years.


Zehua has decades of experiences in design, construction and manufacturing combined with on-going development to guarantee you products of the highest possible quality.



I. LIQUID DISTRIBUTOR


A. TROUGH DISTRIBUTOR (TYPE TTD-1)

- Uniform liquid distribution
- Anti-block ability
- Low gas flow resistance & Less liquid entrainment
- Easy to install and clean
- High turn down ratio

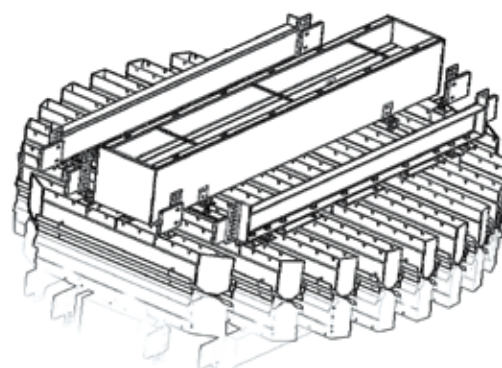


B. TROUGH DISTRIBUTOR (TYPE TTD-2)

- Less liquid residence time
- Easy to install and clean
- Tolerable to thermal expansion
- More free area
- Liquid collection and redistribution

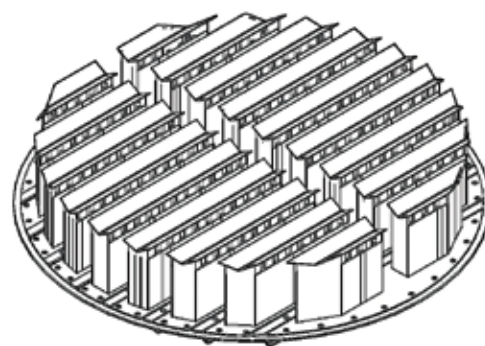

C. PIPE DISTRIBUTOR (TYPE PTD)

- Often used when liquid feed is under pressure
- Helpful to decrease height of distributor
- Relatively low liquid rate
- Clean services
- Liquid-liquid extraction liquid distributor
- Very large free area for vapor and negligible pressure drop

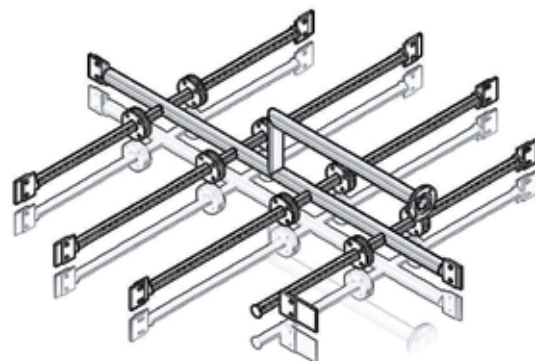



D. SPRAY DISTRIBUTOR (TYPE SPD)


Typical applications:

- Heat transfer section
- Wash zone
- Pump around zone
- Scrubber




E. ORIFICE PAN DISTRIBUTOR (TYPE OPD)

Usually for column diameters between 150 and 1200 mm.

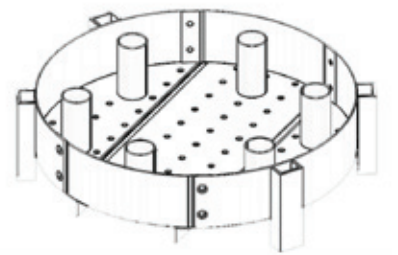

F. WEIR-RISDR PAN DISTRIBUTOR (TYPE WPD)


Less sensitive to fouling and ganging of the liquid flow.

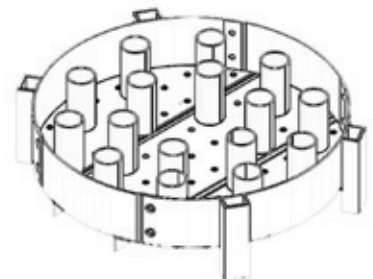

II. VAPOR DISTRIBUTOR


A.VAPOR DISTRIBUTOR (TYPE VD-1)

Pipe inlet for small column less than 1000mm.

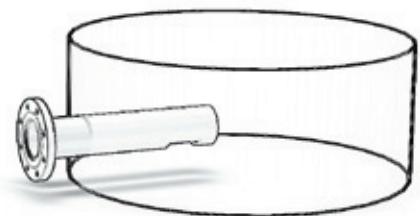

B.VAPOR DISTRIBUTOR (TYPE VDT)


- 0.1% Entrainment rate
- Provides uniform gas distribution
- Low pressure drop, less than 2mm H₂O

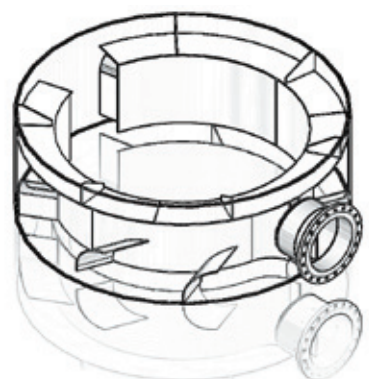



C. VANE TYPE DISTRIBUTOR (TYPE VNT)


- Decrease the momentum of the inlet feed stream efficiently
- Remove bulk liquid and solids from the entering gas flow
- prevent re-entrainment of previously collected liquid

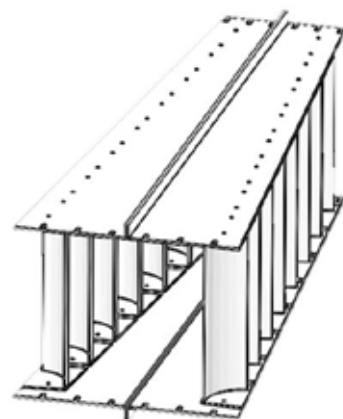

III. LIQUID COLLECTOR


A. LIQUID COLLECTOR (TYPE CTC-1)

- To shorten liquid residence time
- To promote uniform distribution of vapor from bottom
- To be resistant to heating expansion & cooling contraction
- Little on-site workload for welding

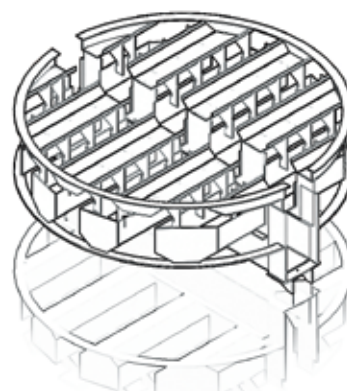

B. CHIMNEY TRAY COLLECTOR (TYPE CTC-2)


- Less liquid residence time
- Easy to install
- Tolerable to thermal expansion
- More free area

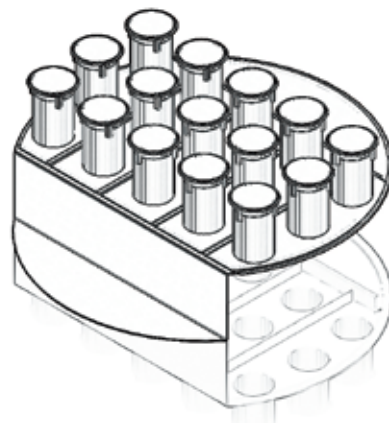

IV. PACKING SUPPORT & HOLD DOWN GRID

A. GRID TYPE SUPPORT GTS (TYPE GTS)

Support grid for structured packing.

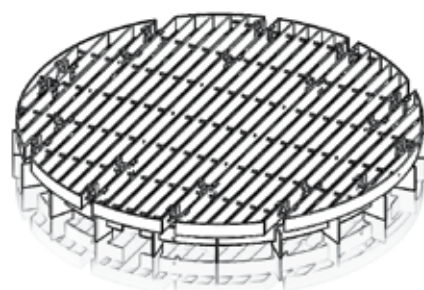




B. HUMP TYPE SUPPORT HTS (TYPE HTS)

Support grid for random packing and serves as a gas injection tray to distribute the gas to bottom layers of the packing.



C. HOLD DOWN GRID HDG (TYPE HDG)

Attached to support rings or bolting clips above the packed bed, the hold down grid prevents the loss of packing if a high pressure drop or surge conditions cause sudden bed expansion. Lightweight mesh is attached to the hold down grid to prevent carryover of smaller-sized packing.

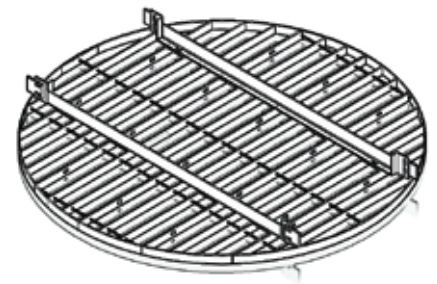

V. DEMISTER

A. MESH WIRE DEMISTER

- Reduce loss of valuable chemicals
- Increase throughput capacity
- Improve product purity
- Eliminate contamination
- Provide equipment protection
- Prevent air pollution



B. VANE DEMISTER

Vane Demisters often offers the best solution if the mist contains:

- Solid particulate
- Viscous, sticky liquids
- Large slugs of liquid





FASTENERS

			
ZHB-HW-A01	ZHB-HW-A02	ZHB-HW-A03	ZHB-HW-A04
			
ZHB-HW-A05	ZHB-HW-B01	ZHB-HW-B02	ZHB-HW-D01
			
ZHB-HW-D02	ZHB-HW-D03	ZHB-HW-E01	ZHB-HW-E03
			
ZHB-HW-E04	ZHB-HW-F01	ZHB-HW-F02	ZHB-HW-F04
			
ZHB-HW-F05	ZHB-HW-F06	ZHB-HW-F07	ZHB-HW-F09
			
ZHB-HW-F10	ZHB-HW-M01	ZHB-HW-L01	ZHB-HW-UL



ENGINEERING DESIGN & TECHNICAL SERVICE

A. ENGINEERING DESIGN

1. CALCULATION AND DESIGN FOR SEPARATION PROCESS

- Oil Refining
- Petrochemical Industry
- Chemical Industry


2. BASIC AND DETAIL DESIGN FOR SEPARATION UNIT OPERATION

- Rich experience in the design of separation units: such as distillation, extraction, absorption and drying
- "Know-how" and design for the latest column internals
- Providing optimized solutions to separation units, utilising the properties of trays, structured packing and random packing
- Customise to field conditions and existing parts of equipment
- Provide column internals in various materials (metallic, ceramic and plastic) to satisfy the requirements of different systems and field conditions
- Providing customers with prompt service with automatic and systematic designing tools

3. INTEGRATED DESIGN IN THE FIELD OF TECHNOLOGY AND EQUIPMENT OF CHEMICAL SEPARATION


4. ADVANCE PROCESS SIMULATION

- Rectisol
- PTA
- Ethyl acetate
- Aromatic Extract
- Polysilicon
-

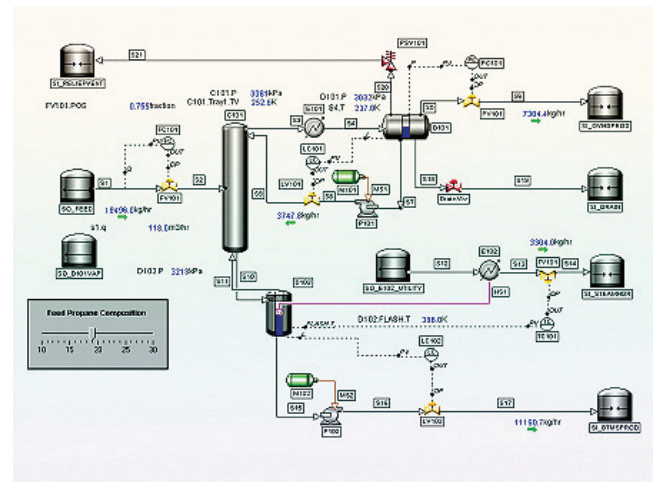

B. TECHNICAL SERVICE

- Feasibility study of separation process or unit
- Process simulation and optimisation
- Diagnosis and optimisation for existing column operation
- Providing revamp proposal of separation units to improve performance
- Installation supervision
- Provide guides for start-up, shut-down and overhauling
- Field service

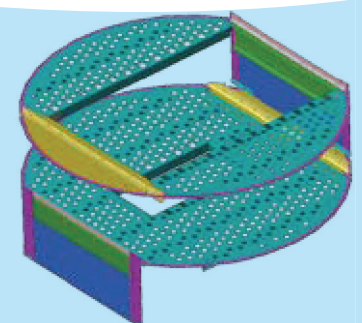



CONTACT DETAILS:

Knitwire Products UK
Maspro House
Chadwick Road
Astmoor Industrial Estate
Runcorn
WA7 1PW
UK

Tel: +44 (0) 1928 566 996

Fax: +44 (0) 1928 583 666

Email: sales@knitwire.com
info@knitwire.com

Knitwire Europe Ltd
Maspro House
Chadwick Road
Astmoor Industrial Estate
Runcorn
WA7 1PW
UK

Tel: +44 (0) 1928 566 996

Fax: +44 (0) 1928 583 666

Email: sales@knitwire.com
info@knitwire.com

Knitwire Trading Pty
Unit D10-D12 Prime Park
Mocke Road
Diep River
Cape Town
RSA

Basil Pienaar

Email: basil@knitwire.co.za

Tel: +27 (0)21 706 8138

Fax: +27 (0)21 706 9351

Paul Maher

Email: paul@knitwire.co.za

Tel: 082 906 4909

Shaun Dalrymple

Email: shaun@knitwire.co.za

Tel: 083 788 2730