

V510 Series Vision Controller



✓ Features 产品特性

- ✓ Intel® 6th/7th/8th/9th Gen Processors with LGA1151
- ✓ Support for 2 independent displays via dual DP and one VGA port with resolution up to 4K UHD
- ✓ 2 x DDR4 SO-DIMM sockets support up to 32GB memory
- \checkmark 5 x Gigabit LAN(4 x Intel i211-AT /i210-AT and 1 x Intel i219-LM)
- **√**8 DI, 16 DO
- **√** 6 Light Control
- ✓ 1 x RS-232, 1 x RS-485
- ✓ Rugged and fanless design


✓ Specifications 规格信息

Item	Sub-Items	Descriptions
Duagagay	CPU	Intel® 6th/7th/8th/9th Gen Processors with LGA1151
Processor System	Chipset	H110
	BIOS	AMI 8MB UEFI BIOS
Momory	Sockets	Dual channel 260-PIN DDR4 SO-DIMM
Memory	Capacity	4 GB (Max. 32GB)
	DP	2 x DP(4K 2K resolution), Max. 4096 x 2304@60 Hz
Display	VGA	1 x VGA, Max. 1920 x 1080@60 Hz
	Dual Display	Yes, DP + DP or DP + VGA
Audio	Controller	Realtek ALC 662, High definition Audio. Line-out, Mic-in
Ethernet	LAN	4 x Intel i211-AT/ i210-AT GbE
Luieinet	LAN	1 x Intel i219-LM GbE
	USB 3.0	4
	USB 2.0	2,1 x internal USB 2.0
	Serial Ports	1 x RS-232, 1 x RS-485
I/O Interfaces	Trigger	6
1/O litterraces	Light Control	6
	DI	8
	DO	16
	Remote	4-pin remote power on/off switch and LED on the front
Expansion	mini-PCle	1 x full size mini-PCIe, support WLAN/WWAN module
LAPAIISIOII	USIM	1
Storage	SATA 3.0	1, support 25" SSD
Jiorage	m.2	1 x m.2 2280
Watchdog	Output/Interval	Interrupt, System Reset/255 levels timer interval, from 1 to 255 sec
Power	Power Type	24V DC input
OS	OS	Windows 7(6th Gen only), Windows 10 64 Bit, Linux
	Construction	Aluminium Alloy
Physical	Mounting	Wall Mounting
Characteristics	Dimensions	220 x 226 x 75mm (LxWxH)
	Weight	3.4 Kg
	Operating Temperature	$0\sim$ 50 °C , airflow 0.7 m/s
	Storage Temperature	-40~80 °C
	Relative Humidity	95% @ 40 °C(Non-Condensing)
Environment	Vibration During Operation	With SSD: 3 Grms, IEC 60068-2-64, random vibration, 5~500 Hz, 1 hr/axis
	Shock During Opreation	With SSD: 30 G, IEC 60068-2-27, half sine, 11m duration
	ESD	Contact +/-4 KV, Air +/-8 KV
	EMC	CE/FCC Class B




/ Data Sheet 产品规格书

✓ Dimensions 尺寸

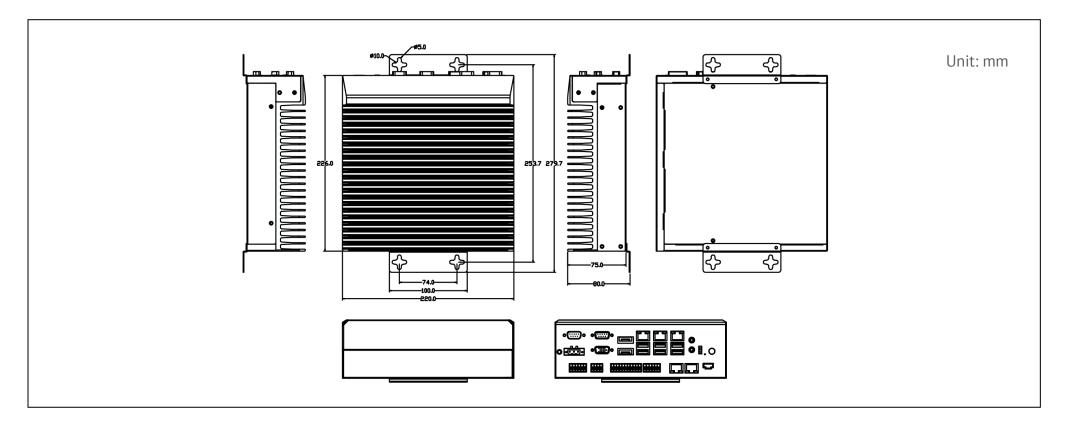

✓ Interface 接口

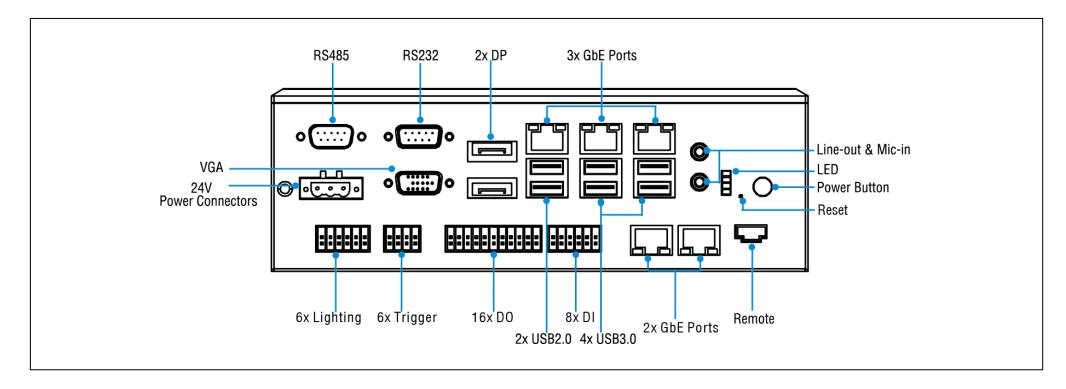

✓ Ordering Information 订购信息

Model	CPU	Memory	GbE	USB 3.0	USB 2.0	RS- 232	RS- 485	Audio	Expansion	USIM	m.2	SATA 3.0	VGA	DP	DI	DO	Trigger	Lighting	DC-Input
V510	Option al	Optional	5	4	2	1	1	2	1 x mini- PCle	1	1	1	1	2	8	16	6	6	24V DC-IN

✓ CPU List

			ı	ntel Coffee	Intel Kaby Lake CPUs								
CPU	i7- 9700	i5- 9400	i3- 9100	i7- 8700	i5- 8400	i3- 8100	Pentium- G5400	Celeron- G4900	i7- 7700	i5- 7500	i3- 7100	Pentium- G4560	Celeron- G3930
Frequency	3.0GHz	2.9GHz	3.6GHz	3.2GHz	2.8GHz	3.6GHz	3.7GHz	3.1GHz	3.6GHz	3.4GHz	3.9GHz	3.5GHz	2.9GHz
Up to	4.7GHz	4.1GHz	4.2GHz	4.6GHz	4.0GHz				4.2GHz	3.8GHz			
Cores	8	6	4	6	6	4	2	2	4	4	2	2	2
Threads	8	6	4	12	6	4	4	2	8	4	4	4	2
TDP	65W	65W	65W	65W	65W	65W	58W	54W	65W	65W	51W	54W	51W
Cache	12M	9M	6M	12M	9M	6M	4M	2M	8M	6M	3M	3M	2M