

# X215 Series All-in-One Industrial Computer



- Intel® 8th Gen Whiskey Lake processors
- 21.5 inches industrial-grade TFT LCD screen
- 10-point multi-touch projected capacitive touchscreen
- 4 x GbE LAN
- Fanless and rugged design
- IP 65 protection level for front panel


### • Specifications 规格信息

Item	Sub-Items	X215 Series				
	CPU	Intel® Whiskey Lake 4205U/8145U/8265U SoC				
Processor System	TDP	15W				
	BIOS	AMI UEFI BIOS at 64 Mbit SPI				
Manager	Socket	2 x SODIMM DDR4 1866/2133 MHz (1.2 V)				
Memory	Capacity	4 GB, Max. 16GB				
Graphics	Controller	Intel® UHD Graphics for 8th Generation Intel® Processors				
<u> </u>	Size	21.5 "TFT LCD				
	Resolution	1920 x 1080				
	Aspect Ratio	16:9				
<b>C</b>	Backlight	LED				
Screen	Backlight Life	50,000Hrs				
	Touch Type	10-point multi-touch projected capacitive				
	Light Transmission	90 % ± 3 %				
	Controller	USB interface				
Interface	LAN	4 x 10/100/1000 Mbps Ethernet (Intel I211-AT)				
	USB	4 x USB3.0				
	COM	1 x RS-232				
	Display	1 x DVI-I				
Storage	M.2	1 x M.2 B key 2280				
	Mini-PCle	1 x M.2 slot for Wi-Fi				
Expansion	USIM	1 x USIM for 4G or 5G				
	USB2.0	1 x Internal USB2.0 for dongle				
	Power Button	1 x Power button				
Other	Reset	1 x Reset				
Other	Indicator Light	4 x lights for LAN\Power\USER1\USER2				
	TPM	1 x TPM 2.0 SPI				
Power	DC Input	12 ~ 24 V DC, Phoenix				
Watch Dog	Output/Interval	Interrupt, System Reset/255 levels timer interval, from 1 to 255 sec				
OS	Microsoft Windows	Windows 10 64bit IoT				
03	Linux	Support				
Physical Characteristics	Dimensions	528 x 322.5 x 54.26mm				
	Weight	4.43Kg				
	Mounting	Flush Mounting				
Environment	Operating Temperature	0 ~ 50 °C, Airflow 0.7m/s				
	Storage Temperature	-20 ~ 60 °C				
	Relative Humidity	Operating 40 °C @ 95% RH Non-condensing  Non-Operating 60 °C @ 95% RH Non-condensing				
	Certification	CE, FCC				
	Certification	CL, I CC				


Rev. 001 April 2022



#### • Dimensions 尺寸

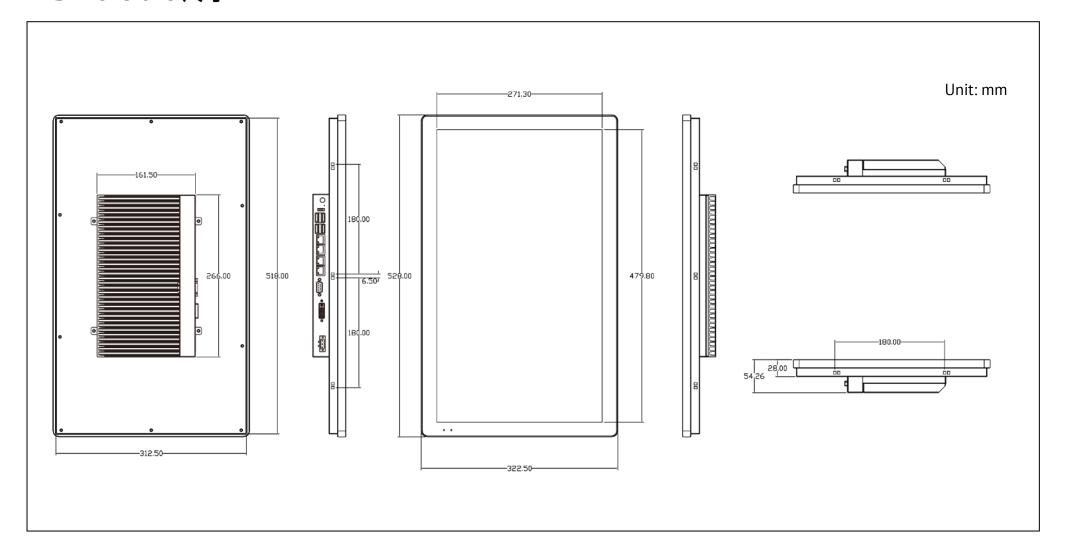

#### ● Interface 接口

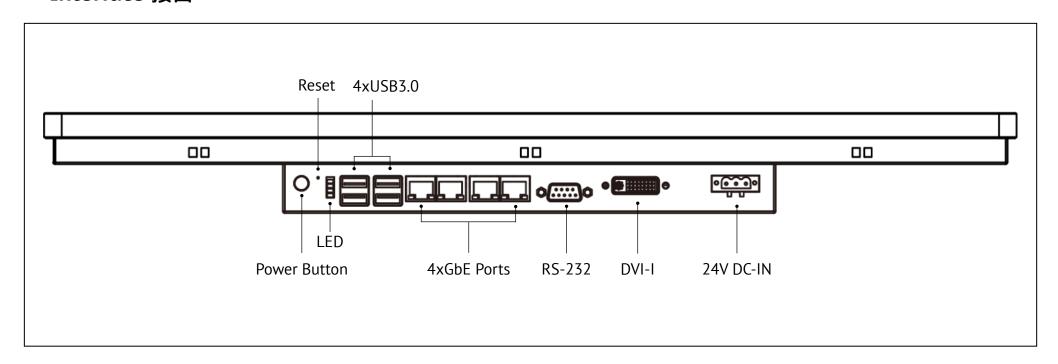

#### ● Ordering Information 订购信息

Part Number	СРИ	Screen	Mem	GbE	USB2.0	USB3.0	RS-232	Display	M.2 SSD	24V DC-IN Phoenix
X215-1260	Intel Celeron 4205U 1.8 GHz SoC	21.5" 1920x1080	4G	4	1	4	1	DVI-I	128GB	1
X215-3260	Intel Core i3-8145U 2.1 GHz SoC	21.5" 1920x1080	4G	4	1	4	1	DVI-I	128GB	1
X215-5260	Intel Core i5-8265U 1.6 GHz SoC	21.5" 1920x1080	4G	4	1	4	1	DVI-I	128GB	1

## ● Packing List 包装清单

P/N	DESCRIPTION			
	1 x X215 Unit			
	AC-DC Adapter, DC 24V with 3PIN Phoenix Connector			
	Flush Mounting kits			

Rev. 001 April 2022