

E215 Series Industrial PC



Features

- Intel® Elkhart Lake platform J6412/N6210/X6425E
- Dual channel DDR4-3200 up to 32GB
- 2 independent display via DP and HDMI
- 3 LAN (2 x Intel i210-AT, 1 x Intel i226-V)
- 1 RS-232/422/485, 1 RS-232 (Optional)
- 2 USB 3.0, 2 USB 2.0
- Support UPS, 4G or 5G, Wi-Fi expansion
- DC 9-36V
- Dimensions: 172 x 125 x 50mm(L x W x H)
- CE/FCC Class B, ESD 8KV/15KV
- Windows 10/11, centos 8, ubuntu 20.04/22.04


Specifications

Item	Sub-Items	Descriptions					
	CPU	Intel® Elkhart Lake platform J6412/N6210/X6425E CPU					
Processor System	TDP	12W MAX					
	BIOS	AMI 128Mbit SPI Flash					
	Technology	2 x DDR4 3200MT/s SO-DIMM					
Memory	Max. Capacity	32 GB					
	Controller	Intel Gen11 Graphics Engines (SoC integrated)					
Graphics	Graphic Features	DX12, OGL4.5, OCL1.2, Vulkan 1.1, MPEG2, H.264, JPEG/MJPEG, H.265 (HEVC)					
	DP	1 x DP 1.4 up to 4096 x 2160 @ 60Hz					
	HDMI	1 x HDMI 2.0b up to 4096 x 2160@60Hz					
Fortame of T/O	Ethernet	2 x Intel i210-AT GbE LAN, 1 x Intel i226-V 2.5GbE LAN					
External I/O	COM (Optional)	COM1: RS-232/422/485, COM2: RS-232					
	USB	2 x USB2.0, 2 x USB3.0					
	Power DC Jack	Phoenix 4pin					
	M.2 E-Key	1 x M.2 2230 Support Wi-Fi					
	M.2 B-Key	1 x M.2 3052 Support 4G/5G					
	M.2 M-Key	1 x M.2 2280 SATA3.0					
Expansion	SATA	1 x SATA3.0					
	Internal USB2.0	3 x Internal USB2.0 (Pin out)					
	SIM	1 x Nano SIM					
LED	LED Lights	Power status, HDD R/W,USER1,USER2					
	Supply Voltage	DC 9-36V ± 10%					
	Max. Consumption	30W					
Power	Power Management	AT/ATX					
	Watch Dog	Timer Output System reset, Programmable counter from 1 ~ 255 minutes/ seconds					
Feature	TPM	TPM 2.0 (optional)					
	Operational Temperature	0 ~ 60 °C (32~140°F)					
Environment	Storage Temperature	-40° C ~ 85° C (-40~185° F)					
	Relative Humidity (Operating)	95% @ 40 °C (non-condensing)					
	Relative Humidity (Storage)	95% @ 60 °C (non-condensing)					
BL	Dimensions	172 x 125 x 50mm(L x W x H)					
Physical characteristics	Installation	Wall-mounting/Din Rail					
Certification	EMC	CE, FCC					
OS Support	OS Support	Windows 10/11, centos 8, ubuntu 20.04/22.04					






Dimensions

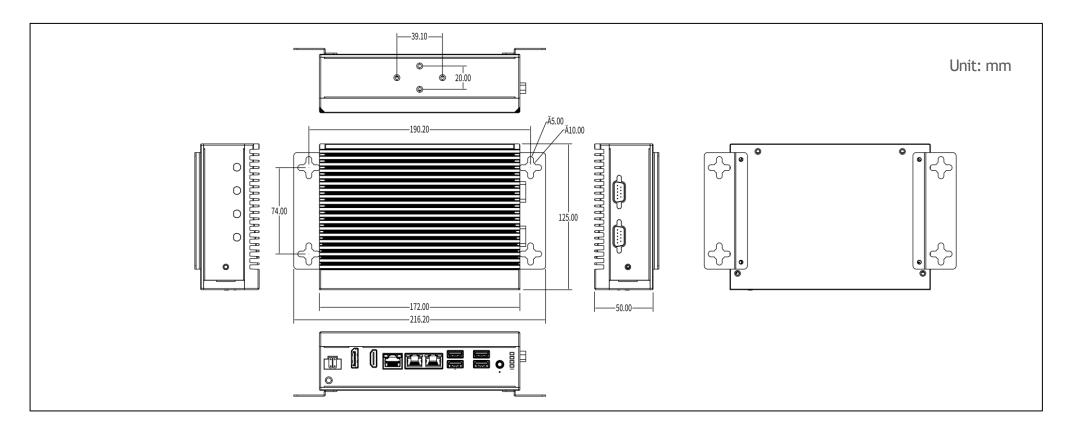

Interface

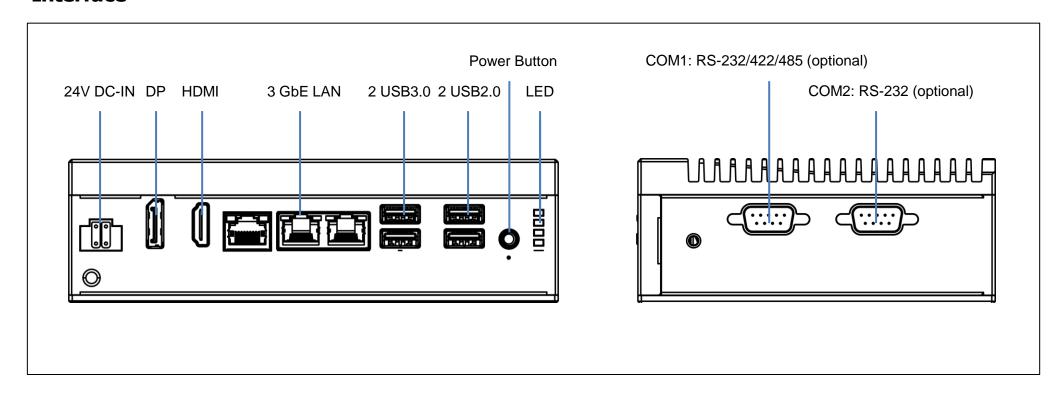

Ordering Information

Part Number	CPU	TDP	Max. Frequency	Core	Thread	LAN	USB 3.0	USB 2.0	СОМ	UPS	4G/5G	Wi-Fi
E215-01	Celeron-J6412	6.5W	2.60 GHz	4	4	3	2	2	2 (Optional)	Optional	Optional	Optional
E215-02	Celeron-N6210	6.5W	3.00 GHz	2	2	3	2	2	2 (Optional)	Optional	Optional	Optional
E215-03	X6425E	12W	3.00 GHz	4	4	3	2	2	2 (Optional)	Optional	Optional	Optional