


E610 Series Industrial PC

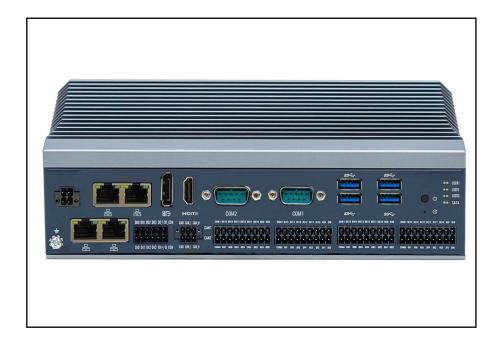

Features 产品特性

- ✓ Support Intel Tiger Lake-U UP3(i7-1165G7/i5-1135G7/i3-1115G4/6305E)
- **√ AMI 128Mbit SPI BIOS**
- √ Max. 64GB DDR4 3200MT/s SO-DIMM RAM
- $\sqrt{1 \times DP}$, 1 x HDMI, support dual independent displays
- √ 4 x Intel i226-V GbE LAN
- √ 32 DI, 32 DO
- $\sqrt{1 \text{ x RS}-232/422/485}$, 1 x RS-232, 4 x RS-485
- √ 2 x CANBus
- \checkmark Compact and fanless design


Specifications 规格信息

Item	Sub-Items	Descriptions				
_	СРИ	Intel Tiger Lake-U UP3(i7-1165G7/i5-1135G7/i3-1115G4/6305E)				
Processor System	TDP	28W MAX				
System	BIOS	AMI 128Mbit SPI Flash				
	Technology	Dual channel DDR4 3200				
Memory	Max. Capacity	64 GB				
	Socket	2 x SO-DIMM				
	Controller	Intel® Iris® Xe graphics, up to 96 graphics execution units(EU)				
Graphics	Graphic Features	5K60 10b 4:4:4 HEVC/VP9/SCC, 8K60 12b 4:2:0 HEVC/VP9/SCC, 8K30 10b 4:2:0 AV1, 4K60 8b 4:2:0 AVC				
	DP	1 x DP 1.4a up to 4096 x 2304 x 36 bpp @60 Hz or 5120 x 3200 x 24 bpp @60Hz				
Display	HDMI	1 x HDMI 2.0b up to 4096 x 2304 x 24 bpp @60 Hz				
	USB 3.0	4				
External I/O	LED	4(SATA, USER3, USER2, USER1)				
	Serial Ports	1 x RS-232/422/485, 1 x RS-232, 4 x RS-485				
	Ethernet	4 x Intel i226-V				
	CANBus	2 x CANBus 2.0 A/B				
	DIO	32DI/32DO				
	SATA 3.0	1				
Storage	M.2	1 x M.2 M-Key 2280 support SSD (PCIe x4)				
	M.2 E-Key	1 x M.2 E-Key 2230 support Wifi				
Expansion	M.2 B-Key	1 x M.2 B-Key 3052 support 4G/5G				
	SIM	1 x Nano SIM				
	Supply voltage	DC 24V				
Power	Power management	AT/ATX				
requirement	Max. consumption	60W				
	Test environment	Intel Core i7-1165GRE DDR4 32GB X2				
041	Watchdog	65536 level, 0~65535 sec				
Others	TPM	TPM 2.0				
OS	Operation system	Windows 10 64 bit, Linux				
Physical Characteristics	Dimension	236 x 165 x 63.5mm (L x W x H)				
Environment	Operational Temperature	0 ~ 60° C ,extend -40~85° C				
	Storage Temperature	-40° C ~ 85° C(-40~185° F)				
	Relative Humidity	operating 95% @ 40 °C (non-condensing)				
	Relative Humidity	non-operating 95% @ 60 °C (non-condensing)				
	EMC	CE, FCC				




/ Data Sheet 产品规格书

Dimensions 尺寸

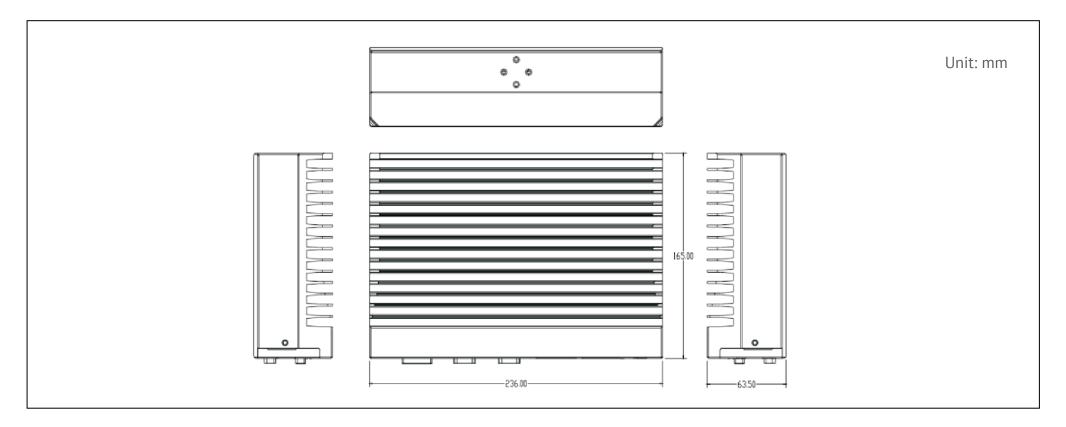

Interface 接口

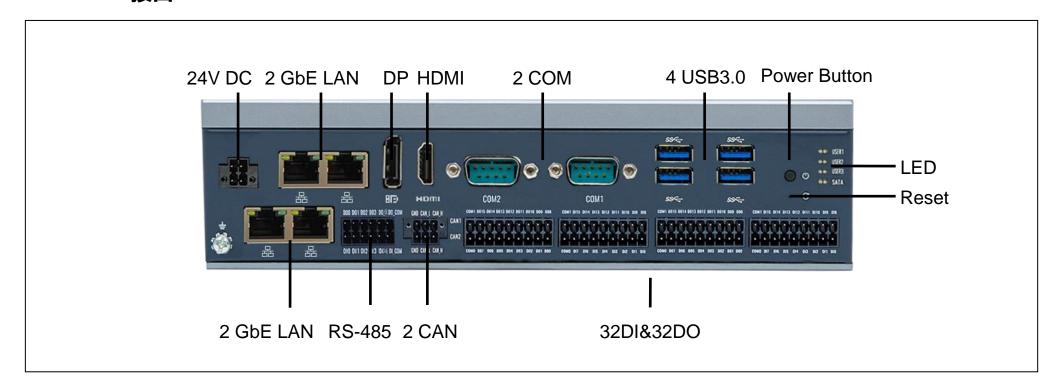

Ordering Information 订购信息

Model	CPU	Memory	GbE	USB3.0	Serial port	DP	HDMI	СОМ	SATA	M.2	Power Input
E610	Optional	Optional	6	4	6	1	1	2	1	3	24V DC

✓ CPU List

	Intel Tiger Lake-U CPUs								
CPU	i7- 1165G7	i5- 1135G7	i3- 1115G4	6305E					
Max Turbo Frequency	4.70 GHz	4.20 GHz	4.10 GHz	1					
Cores	4	4	2	2					
Threads	8	8	4	2					
TDP	Max 28W	Max 28W	Max 28W	15W					
Cache	12M	8M	6M	4M					