

E553 Series Industrial PC



Features 产品特性

- Intel® 6th/7th/8th/9th Gen Processors with LGA1151
- Support for 2 independent displays via Dual DP and one VGA ports with resolution up to 4K UHD
- 2 x DDR4 SO-DIMM sockets support up to 32 GB memory
- 1 x PCIe Gen3 x16 slot, 1 x PCIe Gen2 x2/PCI slot
- 4 x Gigabit LAN (2 x Intel i210/i211AT, 1 x Intel i219LM, 1 x i225 2.5 GbE)
- 6 x USB ports and 1 x internal USB 2.0 Type-A connector
- 3 x RS485/232, 3 x RS232
- Compact and Rugged design


Specifications 规格信息

Specs	Item	E553 Series							
	CPU	Intel® 6th/7th/8th/9th Gen Processors with LGA1151							
Processor System	Chipset	H110							
	BIOS	AMI 8MB UEFI							
Memory	Sockets	Dual Channel 260-PIN DDR4 SO-DIMM							
	Capacity	Max. 32GB							
	DP	2 x DP (4K2K resolution), Max. 4096 x 2304 @60Hz							
Display	VGA	1 x VGA, Max. 1920 x 1080 @60Hz							
	Dual Display	Yes, DP + DP or DP + VGA							
Audio	Controller	Realtek ALC662, High Definition Audio. Line-out, Mic-in							
Ethernet	LAN	2 x Intel® i210/i211-AT GbE, 1 x Intel® i219-LM GbE, 1 x Intel® i225 2.5 GbE							
	USB	2 x USB 2.0, 4 x USB 3.0							
	СОМ	3 x RS-232/485, 3 x RS-232							
	Remote	1							
Peripheral Interface	LED	4x LED(SATA/Stand by/Memory/Watchdog)							
	Reset	1x reset button							
	Power Button	1 x power button							
Storago	SATA3.0	1 x SATA3.0 for 2.5 inches storages							
Storage	m.2	1 x m.2							
	Mini-PCle	1 x full-size Mini-PCIe, with WLAN/WWAN module support							
Expansion	Internal USB	1 x USB2.0 internal							
Ελρατισίοτι	USIM	1 x USIM							
	PCIe and PCI	1 x PCle 3.0 x16 slot, 1 x PCle 2.0 x2/PCl slot							
Watchdog	Output/Interval	Interrupt, System Reset/255 levels timer interval, from 1 to 255 sec							
Power Supply	DCInput	24V DC							
00	MicrosoftWindows	Windows 7 (only for Intel® Gen6 CPUs) or Windows 10 64bit							
OS	Linux	Yes							
	Construction	Aluminium Alloy							
Physical Characteristics	Mounting	Desktop/Wall- Mounting							
	Dimensions	220 x 226 x 136mm(LxWxH)							
	Weight	4.0 Kg							
Environment	Operating Temperature	0°C~50°C, Airflow 0.7m / s							
	Storage Temperature	-40°C~80°C							
	Relative Humidity	10∼95%@40°C(Non-Condensing)							
	Vibration During Operation	With SSD:3Grms, IEC 60068-2-64, random vibration, 5~500 Hz, 1hr/axis							
	Shock During Operation	With SSD:30 G, IEC 60068-2-27, half sine, 11m duration							
	ESD	Contact +/-4 KV, Air +/-8 KV							
	EMC	CE/FCC Class B							




/ Data Sheet 产品规格书

Dimensions 尺寸

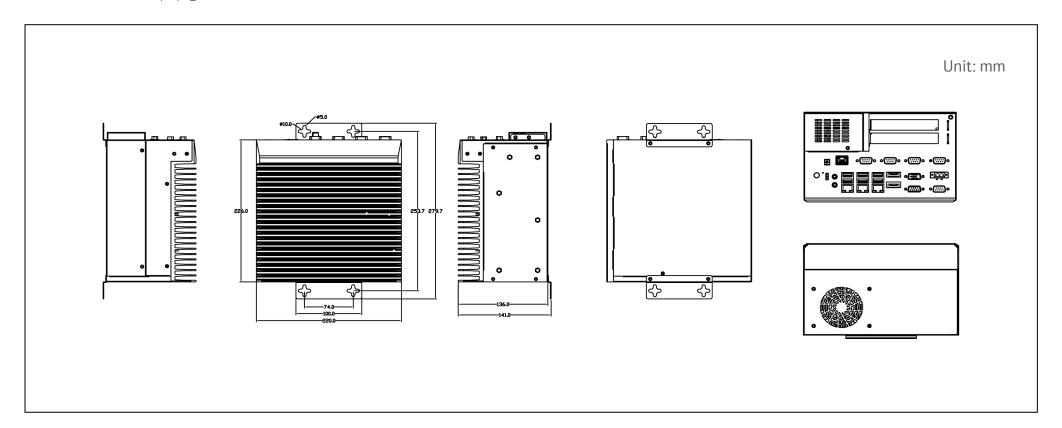

Interface 接口

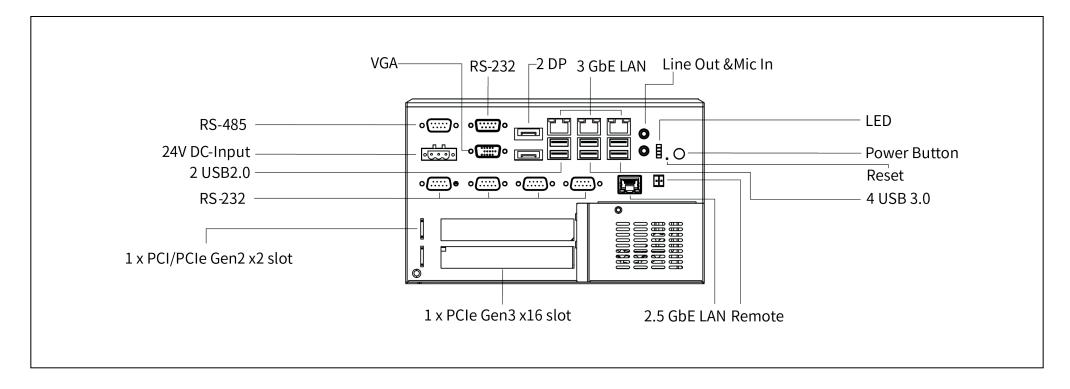

Ordering Information 订购信息

Model	CPU	Memory	GbE	2.5 GbE	USB3.0	USB2.0	RS-232	RS-485	Audio	Expansion	USIM	m.2	SATA 3.0	VGA	DP	DC-Input
E553	Optional	Optional	3	1	4	2	5	1	2	1 mini-PCle 1 PCle x16 1PCle x2/PCl	1	1	3	1	2	24V DC-IN

CPU List 可选处理器

			I	Intel Coffee	Intel Kaby Lake CPUs								
СРИ	i7- 9700	i5- 9400	i3- 9100	i7- 8700	i5- 8400	i3- 8100	Pentium- G5400	Celeron- G4900	i7- 7700	i5- 7500	i3- 7100	Pentium- G4560	Celeron- G3930
Frequency	3.0GHz	2.9GHz	3.6GHz	3.2GHz	2.8GHz	3.6GHz	3.7GHz	3.1GHz	3.6GHz	3.4GHz	3.9GHz	3.5GHz	2.9GHz
Up to	4.7GHz	4.1GHz	4.2GHz	4.6GHz	4.0GHz				4.2GHz	3.8GHz			
Cores	8	6	4	6	6	4	2	2	4	4	2	2	2
Threads	8	6	4	12	6	4	4	2	8	4	4	4	2
TDP	65W	65W	65W	65W	65W	65W	58W	54W	65W	65W	51W	54W	51W
Cache	12M	9M	6M	12M	9M	6M	4M	2M	8M	6M	3M	3M	2M