

**Programming Assignment 2 for graduates****Implementing Reliable Transport Protocols****(Due: Wednesday April 10, 2019)****1. Overview**

In this programming assignment, you will be the writing C routines which implement the sending and receiving transport-layer code for a simple reliable data transfer protocol. There are two reliable transport protocols: Alternating-Bit Protocol and Go-Back-N Protocol that have been studied. **You are asking to implement the Alternating-Bit Protocol and Go-Back-N protocol**. The detail description of the Alternating-Bit-Protocol version and the Go-Back-N version will be given at Section 5. You can also refer the textbook for more detail of each protocol.

This assignment should be fun and valuable since your implementation will differ very little from what would be required in a real-world situation.

Since you probably don't have standalone machines with an operating system that you can modify, your code will have to execute in a simulated hardware/software environment. However, the programming interface provided to your routines, i.e., the code that would call your entities from above and from below is very close to what is done in an actual UNIX environment. (Indeed, the software interfaces described in this programming assignment are much more realistic than the infinite loop senders and receivers that many texts describe). Stopping/starting of timers are also simulated, and timer interrupts will cause your timer handling routine to be activated.

Note:

- The description of the routines below is given in C.
- You do not need a network connection to run this assignment, so you can do it pretty much on any machine you would like.
- Your program should be developed with either C or C++

**2. The routines you will write**

The procedures you will write are for the sending entity (A) and the receiving entity (B). Only unidirectional transfer of data (from A to B) is required. Of course, the B side will have to send packets to A to acknowledge (positively or negatively) receipt of data. Your routines are to be implemented in the form of the procedures described below. These procedures will be called by (and will call) procedures that I have written which emulate a network environment. The overall structure of the environment is shown in Figure 2-1 (structure of the emulated environment):

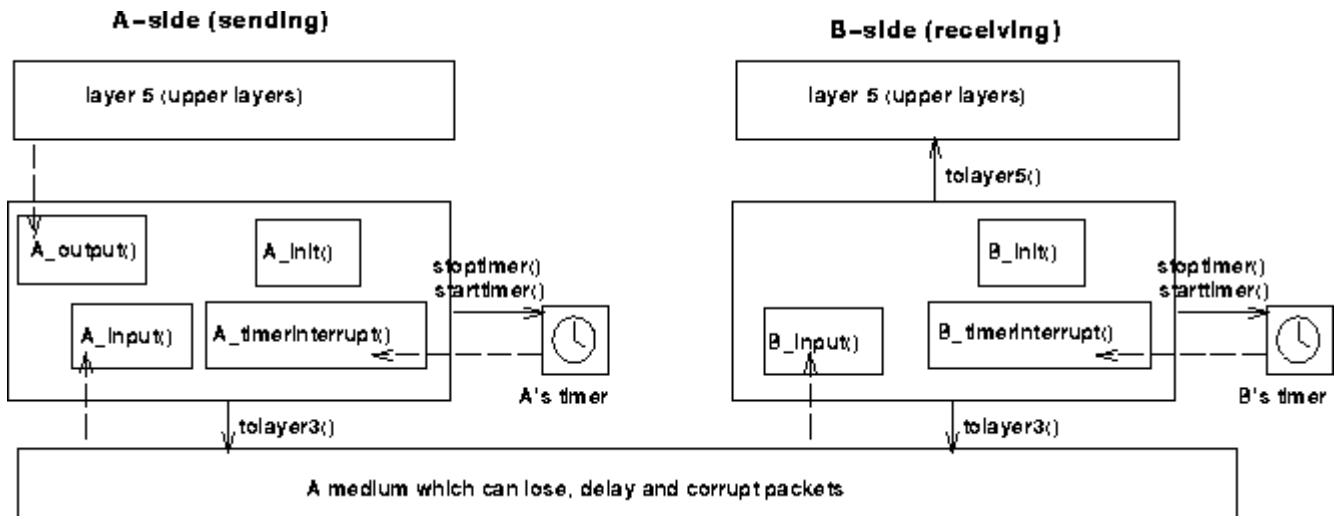


Figure 2-1: The Overall structure of the emulation environment

The unit of data passed between the upper layers and your protocols is a *message*, which is declared as:

```
struct msg {
    char data[20];
};
```

This declaration, and all other data structure and emulator routines, as well as stub routines (i.e., those you are to complete) are in the file, **prog2.c**, described later. Your sending entity will thus receive data in 20-byte chunks from layer5; your receiving entity should deliver 20-byte chunks of correctly received data to layer5 at the receiving side.

The unit of data passed between your routines and the network layer is the *packet*, which is declared as:

```
struct pkt {
    int seqnum;
    int acknum;
    int checksum;
    char payload[20];
};
```

Your routines will fill in the payload field from the message data passed down from layer5. The other packet fields will be used by your protocols to insure reliable delivery, as we've seen in class.

The routines you will write are detailed below. As noted above, such procedures in real-life would be part of the operating system, and would be called by other procedures in the operating system.

- **A\_output(message)**, where message is a structure of type msg, containing data to be sent to the B-side. This routine will be called whenever the upper layer at the sending

side (A) has a message to send. It is the job of your protocol to insure that the data in such a message is delivered in-order, and correctly, to the receiving side upper layer.

- **A\_input(packet)**, where packet is a structure of type pkt. This routine will be called whenever a packet sent from the B-side (i.e., as a result of a `tolayer3()` being done by a B-side procedure) arrives at the A-side. Packet is the (possibly corrupted) packet sent from the B-side.
- **A\_timerinterrupt()** This routine will be called when A's timer expires (thus generating a timer interrupt). You'll probably want to use this routine to control the retransmission of packets. See `starttimer()` and `stoptimer()` below for how the timer is started and stopped.
- **A\_init()** This routine will be called once, before any of your other A-side routines are called. It can be used to do any required initialization.
- **B\_input(packet)**, where packet is a structure of type pkt. This routine will be called whenever a packet sent from the A-side (i.e., as a result of a `tolayer3()` being done by a A-side procedure) arrives at the B-side. Packet is the (possibly corrupted) packet sent from the A-side.
- **B\_init()** This routine will be called once, before any of your other B-side routines are called. It can be used to do any required initialization.

### 3. Software Interfaces

The procedures described above are the ones that you will write. I have written the following routines that can be called by your routines:

- **starttimer(calling\_entity,increment)**, where `calling_entity` is either 0 (for starting the A-side timer) or 1 (for starting the B side timer), and `increment` is a *float* value indicating the amount of time that will pass before the timer interrupts. A's timer should only be started (or stopped) by A-side routines, and similarly for the B-side timer. To give you an idea of the appropriate increment value to use: a packet sent into the network takes an average of 5 time units to arrive at the other side when there are no other messages in the medium.
- **stoptimer(calling\_entity)**, where `calling_entity` is either 0 (for stopping the A-side timer) or 1 (for stopping the B side timer).
- **tolayer3(calling\_entity,packet)**, where `calling_entity` is either 0 (for the A-side send) or 1 (for the B side send), and packet is a structure of type pkt. Calling this routine will cause the packet to be sent into the network, destined for the other entity.
- **tolayer5(calling\_entity,message)**, where `calling_entity` is either 0 (for A-side delivery to layer 5) or 1 (for B-side delivery to layer 5), and `message` is a structure of type msg. With unidirectional data transfer, you would only be calling this with `calling_entity` equal to 1 (delivery to the B-side). Calling this routine will cause data to be passed up to layer 5.

## 4. The simulated network environment

A call to procedure `tolayer3()` sends packets into the medium (i.e., into the network layer). Your procedures `A_input()` and `B_input()` are called when a packet is to be delivered from the medium to your protocol layer.

The medium is capable of corrupting and losing packets. It will not reorder packets. When you compile your procedures and my procedures together and run the resulting program, you will be asked to specify values regarding the simulated network environment:

- **Number of messages to simulate.** My emulator (and your routines) will stop as soon as this number of messages has been passed down from layer 5, regardless of whether or not all of the messages have been correctly delivered. Thus, you need **not** worry about undelivered or unACK'ed messages still in your sender when the emulator stops. Note that if you set this value to 1, your program will terminate immediately, before the message is delivered to the other side. Thus, this value should always be greater than 1.
- **Loss.** You are asked to specify a packet loss probability. A value of 0.1 would mean that one in ten packets (on average) are lost.
- **Corruption.** You are asked to specify a packet loss probability. A value of 0.2 would mean that one in five packets (on average) are corrupted. Note that the contents of payload, sequence, ack, or checksum fields can be corrupted. Your checksum should thus include the data, sequence, and ack fields.
- **Tracing.** Setting a tracing value of 1 or 2 will print out useful information about what is going on inside the emulation (e.g., what's happening to packets and timers). A tracing value of 0 will turn this off. A tracing value greater than 2 will display all sorts of odd messages that are for my own emulator-debugging purposes. A tracing value of 2 may be helpful to you in debugging your code. You should keep in mind that *real* implementors do not have underlying networks that provide such nice information about what is going to happen to their packets!
- **Average time between messages from sender's layer5.** You can set this value to any non-zero, positive value. Note that the smaller the value you choose, the faster packets will be arriving to your sender.

## 5. Two Reliable Transport Protocols

### 5.1 The Alternating-Bit-Protocol

You are to write the procedures, `A_output()`, `A_input()`, `A_timerinterrupt()`, `A_init()`, `B_input()`, and `B_init()` which together will implement a stop-and-wait (i.e., the alternating bit protocol, which we referred to as `rdt3.0` in the text) unidirectional transfer of data from the A-side to the B-side. **Your protocol should use both ACK and NACK messages.**

You should choose a very large value for the average time between messages from sender's layer5, so that your sender is never called while it still has an outstanding, unacknowledged message it is trying to send to the receiver. I'd suggest you choose a value of

1000. You should also perform a check in your sender to make sure that when A\_output() is called, there is no message currently in transit. If there is, you can simply ignore (drop) the data being passed to the A\_output() routine.

You should put your procedures in a file called prog2.c. You will need the initial version of this file, containing the emulation routines I have written for you, and the stubs for your procedures. **You can obtain this program from the class Canvas.**

**For your sample output**, your procedures should print out a message whenever an event occurs at your sender or receiver (a message/packet arrival, or a timer interrupt) as well as any action taken in response. You should hand in output for a run up to the point (approximately) when 10 messages have been ACK'ed correctly at the receiver, a loss probability of 0.1, and a corruption probability of 0.3, and a trace level of 2. You should annotate your printout with a colored pen showing how your protocol correctly recovered from packet loss and corruption.

Make sure you read the "helpful hints" for this assignment following the description of the Go-Back-N version of this assignment.

## 5.2. The Go-Back-N Protocol

You are to write the procedures, A\_output(), A\_input(), A\_timerinterrupt(), A\_init(), B\_input(), and B\_init() which together will implement a Go-Back-N unidirectional transfer of data from the A-side to the B-side, with a window size of 8. Your protocol should use both ACK and NACK messages. Consult the alternating-bit-protocol version of this assignment above for information about how to obtain the network emulator.

I would **STRONGLY** recommend that you first implement the easier assignment (Alternating Bit) and then extend your code to implement the harder assignment (Go-Back-N). Believe me - it will **not** be time wasted! However, some new considerations for your Go-Back-N code (which do not apply to the Alternating Bit protocol) are:

- **A\_output(message)**, where message is a structure of type msg, containing data to be sent to the B-side. Your A\_output() routine will now sometimes be called when there are outstanding, unacknowledged messages in the medium - implying that you will have to buffer multiple messages in your sender. Also, you'll also need buffering in your sender because of the nature of Go-Back-N: sometimes your sender will be called but it won't be able to send the new message because the new message falls outside of the window. Rather than have you worry about buffering an arbitrary number of messages, it will be OK for you to have some finite, maximum number of buffers available at your sender (say for 50 messages) and have your sender simply abort (give up and exit) should all 50 buffers be in use at one point (Note: using the values given below, this should never happen!) In the "real-world," of course, one would have to come up with a more elegant solution to the finite buffer problem!

- **A\_timerinterrupt()** This routine will be called when A's timer expires (thus generating a timer interrupt). Remember that you've only got one timer, and may have many outstanding, unacknowledged packets in the medium, so you'll have to think a bit about how to use this single timer.

**For your sample output** your procedures might print out a message whenever an event occurs at your sender or receiver (a message/packet arrival, or a timer interrupt) as well as any action taken in response. You might want to hand in output for a run that was long enough so that at least 20 messages were successfully transferred from sender to receiver (i.e., the sender receives ACK for these messages) transfers, a loss probability of 0.2, and a corruption probability of 0.2, and a trace level of 2, and a mean time between arrivals of 10. You might want to annotate parts of your printout with a colored pen showing how your protocol correctly recovered from packet loss and corruption.

## 6. Helpful Hints and the like

- **Checksumming.** You can use whatever approach for checksumming you want. Remember that the sequence number and ack field can also be corrupted. I would suggest a TCP-like checksum, which consists of the sum of the (integer) sequence and ack field values, added to a character-by-character sum of the payload field of the packet (i.e., treat each character as if it were an 8 bit integer and just add them together).
- Note that any shared "state" among your routines needs to be in the form of global variables. Note also that any information that your procedures need to save from one invocation to the next must also be a global (or static) variable. For example, your routines will need to keep a copy of a packet for possible retransmission. It would probably be a good idea for such a data structure to be a global variable in your code. Note, however, that if your sender side uses one of your global variables, that variable should **NOT** be accessed by the receiving side entity, since in real life, communicating entities connected only by a communication channel cannot share global variables.
- There is a float global variable called *time* that you can access from within your code to help you out with your diagnostics msgs.
- **START SIMPLE.** Set the probabilities of loss and corruption to zero and test out your routines. Better yet, design and implement your procedures for the case of no loss and no corruption, and get them working first. Then handle the case of one of these probabilities being non-zero, and then finally both being non-zero.
- **Debugging.** I'd recommend that you set the tracing level to 2 and put LOTS of printf's in your code while your debugging your procedures.
- **Random Numbers.** The emulator generates packet loss and errors using a random number generator. Our past experience is that random number generators can vary widely from one machine to another. You may need to modify the random number generation code in the emulator I have supplied you. Our emulation routines have a test to see if the random number generator on your machine will work with our code. If you get an error message:

*It is likely that random number generation on your machine is different from what this emulator expects. Please take a look at the routine `jimsrand()` in the emulator code. Sorry.*

then you'll know you'll need to look at how random numbers are generated in the routine `jimsrand()`; see the comments in that routine.

## 7. Deliverables

- Source code, a design documents, and sample output

## 8. Grading

The maximum possible point for the assignment is 40. This programming assignment will be graded by following criteria.

- Completeness: 40
  - If you implement only ABP, you will get 30 points.
- Document and sample output: 1

## 10. How to submit

Please do the followings when you submit your programming assignment.

- Create a tar file that contains your written source code, makefile and readme. DO NOT INCLUDE EXECUTABLES AND OBJECT FILES.
- Please use the following convention when you create a tar file
  - First 3 letters of your last name + last 4 digits of your student ID
  - e.g.: If a student name is “Bill Clinton” and his ID is 999-34-5678, then his tar file name is “cli5678.tar”.
- Once you create the tar file, and compress the tar file using ‘gzip’.
- If the gzipped tar file is ready, upload it to class Canvas by Wednesday, April, 10, 2019 by 2:00 pm.

Note: This assignment is adopted from the textbook author's supplementary web-site.