

A Critical Analysis of Design Flaws in the Death Star

Luke Skywalker 99652154

Report submitted in partial fulfilment of the requirements of the module Project (E) 448 for the degree Baccalaureus in Engineering in the Department of Electrical and Electronic Engineering at Stellenbosch University.

Supervisor: Dr O. W. Kenobi

October 2099

Acknowledgements

I would like to thank my dog, Muffin. I also would like to thank the inventor of the incubator; without him/her, I would not be here. Finally, I would like to thank Dr Herman Kamper for this amazing report template.



Plagiaatverklaring / Plagiarism Declaration

- 1. Plagiaat is die oorneem en gebruik van die idees, materiaal en ander intellektuele eiendom van ander persone asof dit jou eie werk is.
 - Plagiarism is the use of ideas, material and other intellectual property of another's work and to present is as my own.
- 2. Ek erken dat die pleeg van plagiaat 'n strafbare oortreding is aangesien dit 'n vorm van diefstal is.
 - I agree that plagiarism is a punishable offence because it constitutes theft.
- 3. Ek verstaan ook dat direkte vertalings plagiaat is.

 I also understand that direct translations are plagiarism.
- 4. Dienooreenkomstig is alle aanhalings en bydraes vanuit enige bron (ingesluit die internet) volledig verwys (erken). Ek erken dat die woordelikse aanhaal van teks sonder aanhalingstekens (selfs al word die bron volledig erken) plagiaat is.

 Accordingly all quotations and contributions from any source whatsoever (including the internet) have been cited fully. I understand that the reproduction of text without quotation marks (even when the source is cited) is plagiarism
- 5. Ek verklaar dat die werk in hierdie skryfstuk vervat, behalwe waar anders aangedui, my eie oorspronklike werk is en dat ek dit nie vantevore in die geheel of gedeeltelik ingehandig het vir bepunting in hierdie module/werkstuk of 'n ander module/werkstuk nie.
 - I declare that the work contained in this assignment, except where otherwise stated, is my original work and that I have not previously (in its entirety or in part) submitted it for grading in this module/assignment or another module/assignment.

Studentenommer / Student number	Handtekening / Signature
Voorletters en van / Initials and surname	Datum / Date

Abstract

English

The English abstract.

Afrikaans

Die Afrikaanse uittreksel.

Contents

De	eclarati	on :	ii
ΑŁ	stract	i	ii
Lis	st of F	gures	\mathbf{v}
Lis	st of T	ables	⁄i
No	omencl	ature v	ii
1.			1
	1.1. \$	Section heading	1
2.	Body		3
	2.1.	Model Definition	3
	2	2.1.1. Joint Distribution	3
	2.2.	Factors	4
	2.3.	Jpdate Equations	5
			6
	2.5.	Determining m	6
3.	Sumn	nary and Conclusion	7
Bi	bliogra	phy	8
Α.	Proje	ct Planning Schedule	9
В.	Outco	omes Compliance 1	0

List of Figures

- 1.1. I am the short caption that appears in the list of figures, without references.
- 2.1. I am the short caption that appears in the list of figures, without references.

List of Tables

1.1.	Performance of the unconstrained segmental Bayesian model on TIDigits1	
	over iterations in which the reference set is refined	1
1.2.	A table with an example of using multiple columns	1

Nomenclature

Variables and functions

p(x) Probability density function with respect to variable x.

P(A) Probability of event A occurring.

 ε The Bayes error.

 ε_u The Bhattacharyya bound.

B The Bhattacharyya distance.

S An HMM state. A subscript is used to refer to a particular state, e.g. s_i

refers to the $i^{\rm th}$ state of an HMM.

S A set of HMM states.

F A set of frames.

Observation (feature) vector associated with frame f.

 $\gamma_s(\mathbf{o}_f)$ A posteriori probability of the observation vector \mathbf{o}_f being generated by

HMM state s.

 μ Statistical mean vector.

 Σ Statistical covariance matrix.

 $L(\mathbf{S})$ Log likelihood of the set of HMM states \mathbf{S} generating the training set

observation vectors assigned to the states in that set.

 $\mathcal{N}(\mathbf{x}|\mu,\Sigma)$ Multivariate Gaussian PDF with mean μ and covariance matrix Σ .

The probability of a transition from HMM state s_i to state s_j .

N Total number of frames or number of tokens, depending on the context.

D Number of deletion errors.

I Number of insertion errors.

S Number of substitution errors.

Nomenclature viii

Acronyms and abbreviations

AE Afrikaans English

AID accent identification

ASR automatic speech recognition

AST African Speech Technology

CE Cape Flats English

DCD dialect-context-dependent

DNN deep neural network

G2P grapheme-to-phoneme

GMM Gaussian mixture model

HMM hidden Markov model

HTK Hidden Markov Model Toolkit

IE Indian South African English

IPA International Phonetic Alphabet

LM language model

LMS language model scaling factor

MFCC Mel-frequency cepstral coefficient

MLLR maximum likelihood linear regression

OOV out-of-vocabulary

PD pronunciation dictionary

PDF probability density function

SAE South African English

SAMPA Speech Assessment Methods Phonetic Alphabet

Chapter 1

Introduction

The last few years have seen great advances in speech recognition. Much of this progress is due to the resurgence of neural networks; most speech systems now rely on deep neural networks (DNNs) with millions of parameters [?,1]. However, as the complexity of these models has grown, so has their reliance on labelled training data. Currently, system development requires large corpora of transcribed speech audio data, texts for language modelling, and pronunciation dictionaries. Despite speech applications becoming available in more languages, it is hard to imagine that resource collection at the required scale would be possible for all 7000 languages spoken in the world today.

I really like apples.

1.1. Section heading

This is some section with two table in it: Table 1.1 and Table 1.2.

Table 1.1: Performance of the unconstrained segmental Bayesian model on TIDigits1 over iterations in which the reference set is refined.

Metric	1	2	3	4	5
WER (%)	35.4	23.5	21.5	21.2	22.9
Average cluster purity (%)	86.5	89.7	89.2	88.5	86.6
Word boundary F -score (%)	70.6	72.2	71.8	70.9	69.4
Clusters covering 90% of data	20	13	13	13	13

Table 1.2: A table with an example of using multiple columns.

Accuracy (%)			
Model	Intermediate	Output	Bitrate
Baseline	27.5	26.4	116
VQ-VAE	26.0	22.1	190
CatVAE	28.7	24.3	215

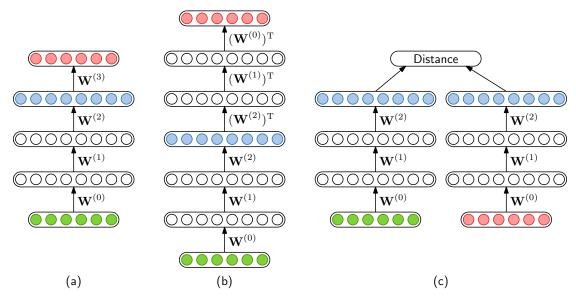


Figure 1.1: (a) The cAE as used in this chapter. The encoding layer (blue) is chosen based on performance on a development set. (b) The cAE with symmetrical tied weights. The encoding from the middle layer (blue) is always used. (c) The siamese DNN. The cosine distance between aligned frames (green and red) is either minimized or maximized depending on whether the frames belong to the same (discovered) word or not. A cAE can be seen as a type of DNN [?].

This is a new page, showing what the page headings looks like, and showing how to refer to a figure like Figure 1.1.

The following is an example of an equation:

$$P(\mathbf{z}|\boldsymbol{\alpha}) = \int_{\boldsymbol{\pi}} P(\mathbf{z}|\boldsymbol{\pi}) p(\boldsymbol{\pi}|\boldsymbol{\alpha}) d\boldsymbol{\pi} = \int_{\boldsymbol{\pi}} \prod_{k=1}^{K} \pi_k^{N_k} \frac{1}{B(\boldsymbol{\alpha})} \prod_{k=1}^{K} \pi_k^{\alpha_k - 1} d\boldsymbol{\pi}$$
(1.1)

which you can subsequently refer to as (1.1) or Equation 1.1. But make sure to consistently use the one or the other (and not mix the two ways of referring to equations).

Chapter 2

Body

2.1. Model Definition




Figure 2.1: I am a caption below the figure of course

RVs:

- Hidden Drought State RVs $\equiv S_t = \{1, 2, \dots, m\}$
- Attribute RVs $\equiv A_t^{(n)} = \{1, 2, \dots, C_n\}$

Some further notation:

•
$$\mathbf{S}_{1:T} = \{S_1, S_2, \dots, S_T\}$$

•
$$A_{1:T} = \{\mathbf{A}_1, \mathbf{A}_2, \dots, \mathbf{A}_T\}$$

- Where $\mathbf{A}_t = \{A_t^{(1)}, A_t^{(2)}, \dots, A_t^{(N)}\}$

2.1.1. Joint Distribution

$$p(S_1, S_2, \dots, S_T, A_1^{(1)}, A_1^{(2)}, \dots, A_1^{(N)}, A_2^{(1)}, \dots, A_T^{(N)})$$

$$= p(S_1, S_2, \dots, S_T, \mathbf{A}_1, \mathbf{A}_2, \dots, \mathbf{A}_T)$$

$$= p(\mathbf{S}_{1:T}, A_{1:T})$$

$$= p(S_1) \cdot \prod_{t=1}^{T-1} p(S_{t+1} \mid S_t) \cdot \prod_{n=1}^{N} \prod_{t=1}^{T} p(A_t^{(n)} \mid S_t)$$

2.2. Factors

Priors

$$\begin{array}{c|c}
S_1 & p(S_1) \\
\hline
1 & \pi_1 \\
2 & \pi_2 \\
\vdots & \vdots \\
m & \pi_m
\end{array}$$

Transition

Emission

$$\begin{array}{c|cccc} A_t^{(n)} & S_t & p(A_t^{(n)} \mid S_t) \\ \hline 1 & 1 & b_1^{(n)}(1) \\ 1 & 2 & b_2^{(n)}(1) \\ \vdots & \vdots & \vdots \\ 1 & m & b_m^{(n)}(1) \\ 2 & 1 & b_1^{(n)}(2) \\ 2 & 2 & b_2^{(n)}(2) \\ \vdots & \vdots & \vdots \\ C_n & m & b_m^{(n)}(C_n) \\ \end{array}$$

2.3. Update Equations

Priors:

$$\pi_i^{\text{new}} = q(S_1 = i) \tag{2.1}$$

Transition Probabilities:

$$a_{ij}^{\text{new}} = \frac{\sum_{t=1}^{T-1} q(S_t = i, S_{t+1} = j)}{\sum_{t=1}^{T-1} q(S_t = i)}$$
(2.2)

Emission Probabilities:

$$b_i^{(n)}(j)^{\text{new}} = \frac{\sum_{t=1}^T q(S_t = i) \cdot I(A_t^{(n)} = j)}{\sum_{t=1}^T q(S_t = i)}$$
(2.3)

We can now reference these equations by their label: Equation 2.1, Equation 2.2 or Equation 2.3. This is wicked, lemme tell you

2.4. FIGURES TIME

things before figure

We can also reference this guy with a cheeky Figure 2.1

2.5. Determining m

Okay some questions:

- 1. I have one sequence of T observations with N variables being observed at each t step. Would my k then be $T \times N$ or would it just be T?
- 2. Define, algebraically, exactly what my L should be that I need to calculate

Okay progress update: I have built the model. I have used synthetic data for model development. We have:

Note: Our attribute RVs are discrete.

Model works with a set m but the paper estimates this value using maximized log-likelihood, AIC and BIC How do i do this? Is it just creating the model for various values of m and choosing the one that returns the lowest AIC, BIC and largest log-likelihood?

Consequently, in analyzing the drought indices, the number of latent states m was the first quantity we wanted to extract. We considered a simple procedure based on information criteria, which is a usual tool for model selection. The model with the optimal number of latent states was expected to best explain the data with a minimum number of free parameters. We used the given as follows:

$$AIC = -2\log L + 2p$$

$$BIC = -2 \log L + p \log k$$

Where $L \equiv$ the maximized value of the likelihood function for the estimated model $p \equiv$ the number of free parameters,

 $k \equiv$ the number of data points.

Chapter 3 Summary and Conclusion

Bibliography

[1] G. Hinton, L. Deng, D. Yu, G. E. Dahl, A.-R. Mohamed, N. Jaitly, A. Senior, V. Vanhoucke, P. Nguyen, T. N. Sainath, and B. Kingsbury, "Deep neural networks for acoustic modeling in speech recognition: The shared views of four research groups," *IEEE Signal Process. Mag.*, vol. 29, no. 6, pp. 82–97, 2012.

Appendix A
 Project Planning Schedule

This is an appendix.

Appendix B Outcomes Compliance

This is another appendix.