



27 January 2022

NEW GOLD DISCOVERY AT PARIS PROJECT

Highlights

- Drilling centred 200m northeast of the HHH open pit mine has intersected extensive shallow gold.
- The new discovery has been named the “Caruso Prospect”.
- 9 holes for 798 metres were drilled at Caruso returning strong results, including:
 - 15m @ 3.12 g/t Au from 15m (HRC023)
 - 9m @ 3.47 g/t Au from 30m (HRC018)
 - 6m @ 1.37 g/t Au from 24m (HRC016)
- Close proximity to historic drilling which included a best result of 2m @ 11.89g/t Au from 18m (DHD507)
- Strong potential to connect the newly discovered Caruso system to unmined HHH mineralisation.
- Deeper drilling to start within weeks to test:
 - Potential for continuity of the Caruso Prospect at depth;
 - Extensions of gold mineralisation below 100m at the Observation Prospect; and
 - Extensions of gold mineralisation below and adjacent to the Paris open pit mine

Commenting on the new discovery, Torque Executive Chairman Mr Ian Finch said:

“Torque Metals’ most recent RC campaign has been highly successful. Not only has it significantly enhanced the newly discovered “Observation Prospect” by returning outstanding high-grade results, but it has now resulted in another new discovery – the “Caruso Prospect”.

“Caruso had received some encouraging historic drilling but these latest results place the discovery firmly on the Company’s radar and will be the subject of considerable follow-up exploration.

“While it is early days at this new discovery - approximately 200m from the HHH pit - we have encountered a similar geological structure, so there is the potential for these two deposits to connect and further improve our gold resource inventory at Paris.

“Meanwhile, there is no shortage of activity elsewhere on the Paris Project. We are awaiting results from our extensive geochemical survey to the South of the Paris mine whilst preparing to kick off our deeper drilling at Observation, Paris Pit and Caruso. This exciting campaign will commence in just a few weeks.”

Torque Metals Limited ASX Announcement

Perth-based, Western Australian-focused gold explorer Torque Metals Limited (“Torque” or “the Company”) is pleased to announce a new discovery at its Paris Gold Project. Drilling at the new Caruso Prospect returned a number of highly significant shallow gold results.

The Paris Project is located within the prolific Boulder-Lefroy fault corridor and is approximately 120km from the town of Kalgoorlie. The Caruso discovery, within the Paris Project, is situated only 200m to the north-east of the historic HHH open pit mine, where the Company has already returned encouraging results.

Drilling at Caruso consisted of nine RC holes for 798 metres drilled. Highlights from the recent drilling are outlined in Table 1.

Hole	Intercept	Grade (Au)	Depth from
HRC023	15m	3.12 g/t	15m
HRC018	9m	3.47 g/t	30m
HRC016	6m	1.37 g/t	24m
HRC017	3m	1.37 g/t	33m
	6m	1.43 g/t	54m
HRC020	3m	1.74 g/t	24m

Table 1 – Significant intersections from Caruso Prospect

Results are located within close proximity to a number of geologically significant historic drillholes, as seen in Figure 1.

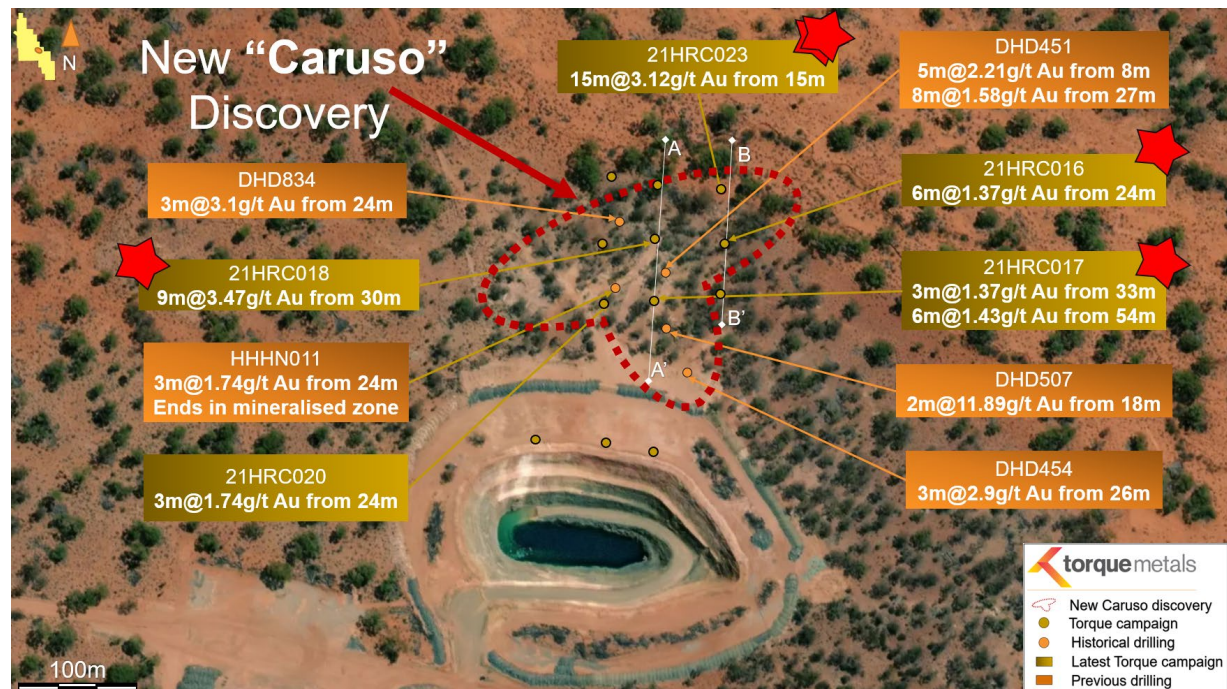


Figure 1 – Historic and recent results at the Caruso discovery, adjacent to HHH Pit

Geology at Caruso is similar to that seen at the HHH pit, which augurs well for a potential resource link-up.

Torque Metals Limited ASX Announcement

Further exploration work is now being planned to assist interpretation of the size and potential of the mineralised area. Given the similarities to the HHH mineralisation, Torque believes there is real potential for the two zones to be connected.

Figure 2 and 3 details the schematic cross sections of mineralisation encountered to date.

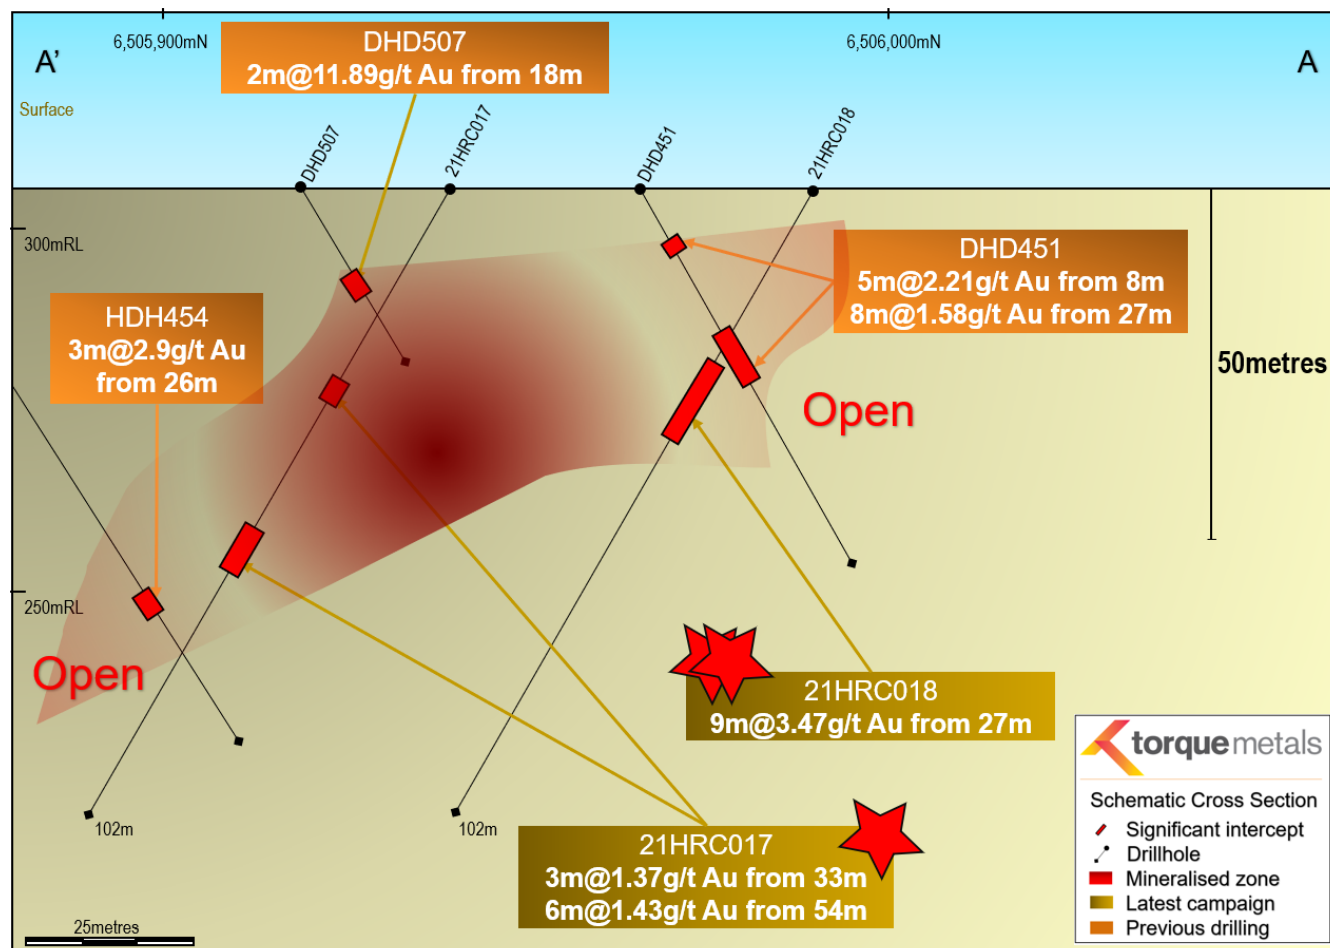


Figure 2 - Schematic cross section showing 21HRC017 & 21HRC018, as well as historic results

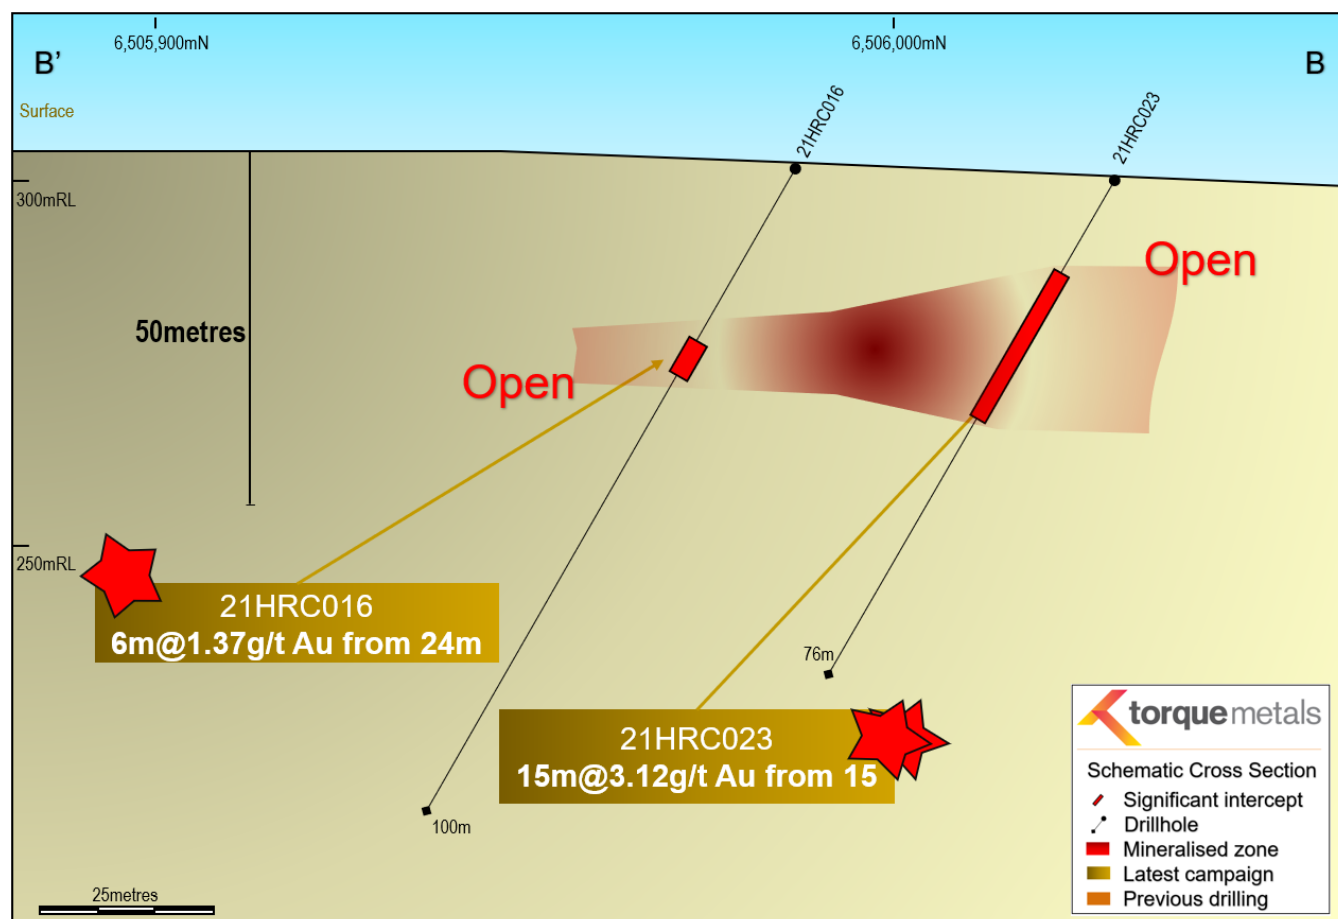


Figure 3 - Schematic cross section showing 21HRC016 and 21HRC023

Strauss and Paris Prospects.

A total of 8 holes for 816m were drilled at the Strauss prospect with a best result of:

- 9m @ 1.04g/t Au from 84m downhole in 21SRC026

Whilst the Strauss mineralisation is consistent, within a well-defined geological structure, the general low grade mineralisation means it is likely to receive less exploration attention in the near future, given the discovery of a number of higher grade targets.

4 holes for 384m were drilled at the Paris mine prospect in an attempt to achieve an early understanding of the nature and geometry of the recent bonanza grades intersected in hole 21PRC025 (6m @ 34.6 g/t Au within 24m @ 10.7 g/t Au).

These relatively shallow holes did not encounter any significant gold mineralisation. Further drilling at this prospect is planned to be undertaken by the deeper capacity rig – to be used in the upcoming programme.

Details of all holes reported on in this release are contained in Table 2 below.

Project Area	Hole_ID	Easting	Northing	RL	Dip/Azimuth	Actual Depth
Strauss	21SRC025	398802	6505700	344	-60/270	102
Strauss	21SRC026	398783	6505739	344	-60/270	102
Strauss	21SRC027	398712	6505814	345	-60/270	102
Strauss	21SRC028	398762	6505814	345	-60/270	102
Strauss	21SRC029	398711	6505854	346	-60/270	102
Strauss	21SRC030	398710	6505894	347	-60/270	102
Strauss	21SRC031	398761	6505899	346	-60/270	102
Strauss	21SRC032	398760	6505861	345	-60/270	102
Caruso	21HRC015	402272	6505947	304	-60/180	102
Caruso	21HRC016	402275	6505987	302	-60/180	102
Caruso	21HRC017	402219	6505941	306	-60/180	102
Caruso	21HRC018	402219	6505990	305	-60/180	102
Caruso	21HRC019	402221	6506033	301	-60/180	102
Caruso	21HRC020	402179	6505938	307	-60/180	54
Caruso	21HRC021	402177	6505986	306	-60/180	78
Caruso	21HRC022	402184	6506040	302	-60/180	78
Caruso	21HRC023	402273	6506030	301	-60/180	78
Paris Pit	21PRC030	402577	6504777	298	-60/200	102
Paris Pit	21PRC031	402559	6504732	299	-60/200	102
Paris Pit	21PRC032	402619	6504776	298	-60/200	102
Paris Pit	21PRC033	402597	6504736	298	-60/200	78

Table 2: Collar data for follow-up drillholes at Strauss, Paris Pit and new Caruso Prospects.

Upcoming RC Campaign

Torque anticipates its next RC drilling campaign will commence within a few weeks.

The RC rig used for Phase 1 had ~100m depth capacity. A second RC rig, with a larger capacity to test targets up to 250 metres will be used for this soon to commence drilling phase.

Targets to be tested include depth extensions of gold mineralisation at the Observation prospect, the Paris Pit and now also the Caruso prospect.

Torque envisages a total of approximately 5,000 metres of RC drilling in this upcoming programme.

Return of all results from the large surface geochemical programme south of the Paris mine is imminent. These results will be analysed with a view to determining new gold exploration targets.

Once outlined, any new targets will be quickly drill tested in order to maintain a strong pipeline of gold prospects.

Torque Metals Limited ASX Announcement

The Paris tailings treatment programme is continuing. Trial column leaching has been proposed and is currently being costed. An extension of the option agreement to the end of March was sought and agreed to by the tailings owner.

The Paris Project

Torque's Paris Project lies within the area known as the Boulder-Lefroy Fault Zone (Figure 1). This prolific gold-bearing structure is host to numerous mines that have produced many millions of ounces of gold. Not least of these mines is the world famous "Super Pit" in Kalgoorlie. Torque's Paris Project area remains vastly underexplored, with past drilling generally restricted to the top 50 metres, highlighting significant opportunities for discovery of gold mineralisation by the application of modern-day exploration techniques and the undertaking of more extensive, and deeper, drilling.

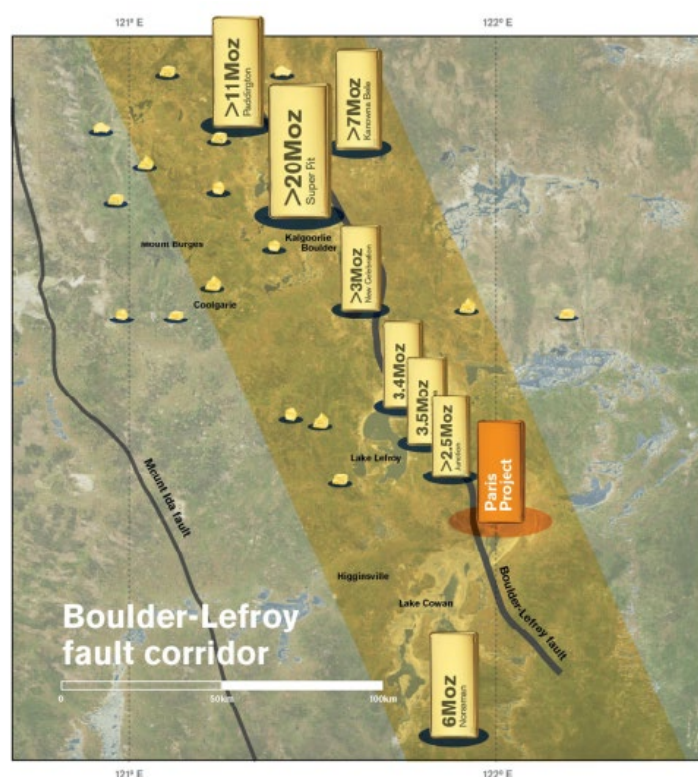


Figure 4: Paris Project located within the Boulder-Lefroy Fault Corridor

The intercepts reported herein are downhole intercepts: true width is yet to be determined. See Table 1 for significant results from the new discovery at the Caruso Prospect; Table 2 for collar data of all holes drilled and reported here; Figure 1 for collar location plan at Caruso; and Figure 2 and 3 for schematic cross sections.

This announcement reports the results of the remaining 21 holes (1,998m) of the 41 hole follow-up drilling programme, of which the first 20 holes were reported in the ASX announcement dated 20 January 2022.

Torque Metals Limited ASX Announcement

All drill hole intersections and assay data mentioned in relation to a JORC Resource Estimate of 32,700oz relate to historical work. They and the Indicated Resource Estimate have previously been reported in the Torque Metals Limited Prospectus dated 14 April 2021, in the Independent Technical Assessment Report prepared by Agricola Mining Consultants Pty Ltd and also in the Company's Quarterly Report dated 30 July 2021 and ASX Announcement of 14 July 2021. The Paris Mineral Resource is reported above a block grade of 0.5 g/t Au using a 35 g/t Au top cut. The HHH Mineral Resource is reported above a block grade of 0.5 g/t Au using a 50 g/t Au top cut.

Depleted Mineral Resource Estimate				
Deposit	Category	Tonnes	g/t Au	Ounce
Paris	Indicated	81,000	4.50	11,700
HHH	Indicated	233,000	2.80	21,000
Total		314,000	3.24	32,700

The relevant JORC Competent Person Statement and Consent can be found on pages 1 and 2 of that report (pages 63 and 64 of the Prospectus). Torque Metals confirms that it is not aware of any new information or data that materially affects the information included in this announcement and that all material assumptions and technical parameters underpinning any resource estimates quoted herein continue to apply and have not materially changed.

COMPETENT PERSONS STATEMENT – EXPLORATION RESULTS

The information in this announcement that relates to Exploration Results is based on information compiled by Mr Rohan Williams, who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Williams is an employee of Torque Metals Limited ("the Company"). Rohan Williams has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Rohan Williams consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

FORWARD LOOKING STATEMENTS

This report may contain certain "forward-looking statements" which may not have been based solely on historical facts, but rather may be based on the Company's current expectations about future events and results. Where the Company expresses or implies an expectation or belief as to future events or results, such expectation or belief is expressed in good faith and believed to have a reasonable basis.

However, forward looking statements are subject to risks, uncertainties, assumptions and other factors which could cause actual results to differ materially from future results expressed, projected or implied by such forward-looking statements. Readers should not

Torque Metals Limited ASX Announcement

place undue reliance on forward looking information. The Company does not undertake any obligation to release publicly any revisions to any “forward-looking statement” to reflect events or circumstances after the date of this report, or to reflect the occurrence of unanticipated events, except as may be required under applicable securities laws.

This announcement has been authorised by the Board of Torque Metals.

ENDS

For further information, please contact:

Ian D. Finch
Executive Chairman
ian@torquemetals.com
M: +61 414 270 248

Media

David Tasker / Colin Jacoby
Chapter One Advisors
dtasker@chapteroneadvisors.com.au / cjacoby@chapteroneadvisors.com.au
M: +61 433 112 936 / +61 439 980 359

Appendix 1: Laboratory assay results: Fire Assay 40g charge after 4-acid digest with ICP analysis.

Only gold assays ≥ 0.05 ppm (0.05 gpt) are recorded in the following table, except where relevant as part of a longer intercept.

Hole No	From (m)	To (m)	Width (m)	Au (ppm)
21HRC015	0	3	3	0.06
21HRC015	24	27	3	0.08
21HRC015	39	42	3	0.55
21HRC015	42	45	3	0.23
21HRC015	45	48	3	0.35
21HRC015	48	51	3	0.09
21HRC015	51	54	3	0.02
21HRC015	54	57	3	0.06
21HRC015	57	60	3	0.10
21HRC015	69	72	3	0.02
21HRC015	72	75	3	0.34
21HRC015	75	78	3	0.04
21HRC015	78	81	3	0.17
21HRC015	81	84	3	0.37
21HRC016	15	18	3	0.36
21HRC016	18	21	3	0.64
21HRC016	21	24	3	0.27
21HRC016	24	27	3	0.79
21HRC016	27	30	3	1.94
21HRC016	30	33	3	0.14
21HRC016	45	48	3	0.12
21HRC016	48	51	3	0.02
21HRC016	51	54	3	0.06
21HRC016	54	57	3	0.08
21HRC016	66	69	3	0.30
21HRC017	15	18	3	0.59
21HRC017	18	21	3	0.25
21HRC017	21	24	3	0.05
21HRC017	24	27	3	0.03
21HRC017	27	30	3	0.07
21HRC017	30	33	3	0.23
21HRC017	33	36	3	1.37
21HRC017	36	39	3	0.30
21HRC017	39	42	3	0.18
21HRC017	42	45	3	0.04
21HRC017	45	48	3	-0.01
21HRC017	48	51	3	0.03
21HRC017	51	54	3	-0.01
21HRC017	54	57	3	1.50
21HRC017	57	60	3	1.36
21HRC017	60	63	3	0.04

Hole No	From (m)	To (m)	Width (m)	Au (ppm)
21HRC017	63	66	3	0.19
21HRC017	66	69	3	0.02
21HRC017	69	72	3	0.06
21HRC018	21	24	3	0.16
21HRC018	24	27	3	0.46
21HRC018	27	30	3	0.81
21HRC018	30	33	3	2.60
21HRC018	33	36	3	3.70
21HRC018	36	39	3	4.12
21HRC018	39	42	3	0.85
21HRC018	42	45	3	0.08
21HRC018	45	48	3	0.07
21HRC018	48	51	3	0.14
21HRC018	51	54	3	0.03
21HRC018	54	57	3	0.29
21HRC019	15	18	3	0.22
21HRC019	18	21	3	0.04
21HRC019	21	24	3	0.03
21HRC019	24	27	3	0.03
21HRC019	27	30	3	0.03
21HRC019	30	33	3	0.07
21HRC019	72	75	3	0.33
21HRC020	24	27	3	1.74
21HRC021	27	30	3	0.26
21HRC021	60	63	3	0.23
21HRC021	63	66	3	0.19
21HRC021	66	67	1	0.10
21HRC021	67	69	2	0.10
21HRC021	69	72	3	0.10
21HRC022	18	21	3	0.18
21HRC022	21	24	3	0.06
21HRC022	24	27	3	0.05
21HRC022	27	30	3	-0.01
21HRC022	30	33	3	0.20
21HRC022	42	45	3	0.24
21HRC022	45	48	3	0.16
21HRC023	12	15	3	0.58
21HRC023	15	18	3	2.00
21HRC023	18	21	3	1.95
21HRC023	21	24	3	0.28
21HRC023	24	27	3	4.64
21HRC023	27	30	3	6.71
21HRC023	30	33	3	0.87
21HRC023	33	36	3	0.04
21HRC023	75	78	3	0.14
21PRC032	96	99	3	0.25

Hole No	From (m)	To (m)	Width (m)	Au (ppm)
21PRC032	99	102	3	0.15
21SRC025	9	12	3	0.04
21SRC025	12	15	3	0.23
21SRC025	15	18	3	0.07
21SRC025	30	33	3	0.06
21SRC025	33	36	3	0.17
21SRC025	36	39	3	0.04
21SRC025	51	54	3	0.14
21SRC025	54	57	3	0.10
21SRC025	81	84	3	0.03
21SRC025	84	87	3	0.13
21SRC025	87	90	3	-0.01
21SRC025	90	93	3	0.10
21SRC025	93	96	3	0.37
21SRC025	96	99	3	0.65
21SRC025	99	102	3	0.05
21SRC026	33	36	3	0.08
21SRC026	36	39	3	0.30
21SRC026	39	42	3	-0.01
21SRC026	42	45	3	0.06
21SRC026	63	66	3	0.21
21SRC026	66	69	3	0.17
21SRC026	69	72	3	0.10
21SRC026	84	87	3	1.49
21SRC026	87	90	3	0.30
21SRC026	90	93	3	1.32
21SRC026	93	96	3	0.08
21SRC026	96	99	3	0.03
21SRC026	99	102	3	0.14
21SRC027	0	3	3	0.10
21SRC027	27	30	3	0.32
21SRC027	30	33	3	0.39
21SRC027	33	36	3	0.30
21SRC027	36	39	3	0.11
21SRC027	84	87	3	0.06
21SRC027	87	90	3	0.23
21SRC028	0	3	3	0.45
21SRC028	27	30	3	0.07
21SRC028	30	33	3	-0.01
21SRC028	33	36	3	0.06
21SRC028	36	39	3	0.61
21SRC028	39	42	3	0.43
21SRC028	42	45	3	0.57
21SRC028	45	48	3	0.30
21SRC028	48	51	3	0.08
21SRC028	51	54	3	0.18

Hole No	From (m)	To (m)	Width (m)	Au (ppm)
21SRC028	54	57	3	0.54
21SRC028	57	60	3	0.35
21SRC028	60	63	3	0.28
21SRC028	63	66	3	0.06
21SRC029	33	36	3	0.10
21SRC029	36	39	3	0.14
21SRC029	39	42	3	0.38
21SRC029	42	45	3	0.17
21SRC029	45	48	3	0.17
21SRC029	48	51	3	0.28
21SRC029	51	54	3	0.06
21SRC029	54	57	3	0.03
21SRC030	63	66	3	0.12
21SRC031	30	33	3	0.29
21SRC031	33	36	3	0.04
21SRC031	36	39	3	0.63
21SRC031	39	42	3	0.43
21SRC031	42	45	3	0.49
21SRC031	45	48	3	0.17
21SRC032	0	3	3	0.12
21SRC032	18	21	3	0.07
21SRC032	21	24	3	-0.01
21SRC032	24	27	3	0.18
21SRC032	27	30	3	0.66
21SRC032	30	33	3	0.37
21SRC032	33	36	3	-0.01
21SRC032	36	39	3	0.12
21SRC032	39	42	3	0.49
21SRC032	42	45	3	0.13
21SRC032	45	48	3	0.07

Appendix 2: JORC Code, 2012 Edition – Table 1 Exploration Results

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of	- For this drilling programme Torque used angled Reverse Circulation (RC) drill holes. - The drilling was to generally accepted industry standards producing 1.0m samples which were collected beneath the cyclone and then passed through a cone splitter. - The splitter reject sample was collected into green plastic bags or plastic buckets and laid out on the ground in 20-40m rows. - The holes were sampled as initial 3m composites for all prospects using a PVC spear to produce an approximate representative 3kg sample into pre-numbered calico sample bags.

Criteria	JORC Code explanation	Commentary
	<i>mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i>	- Anomalous 3m composites will be individually assayed as the 1m splits which were collected beneath the RC rig cyclone and passed through the cone splitter being a more representative sample of the lithologies intersected. - The full length of each hole drilled was sampled. - All samples collected are submitted to a contract commercial laboratory. Samples are dried, crushed and homogenised to produce a 40g charge for fire assay and a separate sample for 4- acid digest and 18 multi-element analysis using an Induced Coupled Plasma Mass Spectrometer where considered appropriate by the site geologist.
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	- These RC holes were drilled with a truck-mounted MK 10 RC Drilling rig mounted on a Volvo FM7 8 x 4 with u Onboard C18 CAT with 1350cfm/500psi Sullair Compressor supplied by Westside Drilling. - All RC holes were drilled using a 145mm (5.5in) face-sampling drilling bit.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	- The RC samples were not individually weighed or measured for recovery. - To ensure maximum sample recovery and the representivity of the samples, an experienced Company geologist was present during drilling to monitor the sampling process. Any issues were immediately rectified. - Sample recovery was recorded by the Company Field Assistant based on how much of the sample is returned from the cyclone and cone splitter. This is recorded as good, fair, poor or no sample. - Torque is satisfied that the RC holes have taken a sufficiently representative sample of the interval and minimal loss of fines has occurred in the RC drilling resulting in minimal sample bias. - No twin RC drill holes have been completed to assess sample bias. - At this stage no investigations have been made into whether there is a relationship between sample recovery and grade.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i>	- All of the 1m RC samples were sieved and collected into 20m chip trays for geological logging of colour, weathering, lithology, alteration and mineralisation for potential Mineral Resource estimation and mining studies. - RC logging is both qualitative and quantitative in nature. - The total length of the RC holes was logged. Where no sample was returned due to cavities/voids it was recorded as such.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise</i>	- Sampling technique: - All RC samples were collected from the RC rig and were collected beneath the cyclone and then passed through the cone splitter. - The samples were generally dry and all attempts were made to ensure the collected samples were dry. However, on deeper portions of some of the drillholes some samples were logged as moist and/or wet. - The cyclone and cone splitter were cleaned with

Criteria	JORC Code explanation	Commentary
	<i>representivity of samples.</i> - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	compressed air at the end of every completed hole. - The sample sizes were appropriate to correctly represent the mineralisation based on the style of mineralisation, the thickness and consistency of intersections, the sampling methodology and percent value assay ranges for the primary elements. - Quality Control Procedures - A duplicate sample was collected every hole. - Certified Reference Material (CRM) samples were inserted in the field every approximately 50 samples containing a range of gold and base metal values. - Blank washed sand material was inserted in the field every approximately 50 samples. - Overall QAQC insertion rate of 1:10 samples - Laboratory repeats taken and standards inserted at pre-determined level specified by the laboratory. - Sample preparation in the Bureau Veritas (Canning Vale, Western Australia) laboratory: The samples are weighed dried for a minimum of 12 hours at 1000C, then crushed to -2mm using a jaw crusher, and pulverised by LM5 or disc pulveriser to -75 microns for a 40g Lead collection fire assay to create a homogeneous sub-sample. The pulp samples were also analysed with 4 acid digest induced Coupled Plasma Mass Spectrometer for 18 multi-elements - The sample sizes are considered appropriate to correctly represent the mineralisation based on the style of mineralisation, the thickness and consistency of intersections, the sampling methodology and the assay value ranges expected for both gold and copper.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	Duplicates and samples containing standards are included in the analyses.
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage	- Significant intersections have been independently verified by alternative company personnel. - The use of twinned holes has not been implemented and is not considered necessary at this stage of exploration. - The Competent Person has visited the site and

Criteria	JORC Code explanation	Commentary
	<i>(physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	supervised all the drilling and sampling process in the field. - All primary data related to logging and sampling are captured into Excel templates on palmtops or laptops. - All paper copies of data have been stored. - All data is sent to Perth and stored in the centralised Access database with a DataShed front end which is managed by a qualified database geologist. - No adjustments or calibrations have been made to any assay data, apart from resetting below detection values to half positive detection.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	- All collars were initially located by a Geologist using a conventional hand-held GPS. - Following completion of the drilling the hole collars will be independently surveyed by surveyors using a differential GPS for accurate collar location and RL with the digital data entered directly into the company database. - Downhole surveys are being completed on all the RC drill holes by the drillers. They used a Reflex Gyro downhole tool to collect the surveys approximately every 25m down the hole. - The grid system for the Paris Prospect is MGA_GDA94 Zone 51. - Topographic data is collected by a hand-held GPS.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	This programme was the first follow-up drilling programme across a number of different prospects. There may still be variation in the drill spacing and drillhole orientation until geological orientations and attitude of mineralisation can be established with a suitable degree of certainty. - The drill spacing is generally not sufficient to establish the degree of geological and grade continuity applied under the 2012 JORC code for the estimation of Mineral Resources. - Sample compositing has been applied to this drilling programme with 1m samples collected and submitted to the laboratory as 3m composites.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	- The attitude of the lithological units is predominantly North - South dipping to sub-vertical however at the Paris Project mineralised structures are often oriented on an approximately 290 degree orientation. Therefore, most holes were drilled with an azimuth of 190 to 220 degrees to intersect the structures at right angles to the orientation of the anticipated mineralised structures. Some holes will be drilled in other orientations to intersect specific mineralised structures, but always with an attempt to drill orthogonal to the strike of the interpreted structure. Due to locally varying intersection angles between drillholes and lithological units all results are defined as downhole widths. True widths are not yet known. - No drilling orientation and sampling bias has been recognised at this time and it is not considered to have introduced a sampling bias.
Sample security	<i>The measures taken to ensure sample security.</i>	- The samples collected were placed in calico bags and transported to the relevant Perth or Kalgoorlie laboratory by courier or company field personnel. - Sample security was not considered a significant risk.

Torque Metals Limited ASX Announcement

Criteria	JORC Code explanation	Commentary
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	- The Company database was originally compiled from primary data by independent database consultants based on original assay data and historical database compilations. Data is now managed by suitably qualified in-house personnel. - No review or audit of the data and sampling techniques has been completed.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- The relevant tenements (M15/480, M15/497 and M15/498) are all 100% owned by and registered to Torque Metals Limited. - At the time of reporting, there are no known impediments to obtaining a licence to operate in the area and the tenements are in good standing.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- In 1920, Paris Gold Mine Company was floated in Adelaide to take up a 12-month option over the mine area. Just to the south, another company had an option over the Paris South Gold Mine, but soon abandoned it to focus attention on the Observation Gold Mine, 1 km to the north, which it abandoned in turn after only one month. The Paris Mine at the time contained 5 shafts and 2 costeans. Gold was said to be erratic in a quartz, schist, jasper lode jumbled by faults. At some point it was excavated as an open pit. - Western Mining Corporation (WMC) started to explore the Paris area in the 1960s and relied on aerial magnetics supported by geological mapping to assess mineralisation potential. This work identified the basalt/gabbro contact as the major control for Paris style gold-copper mineralisation and extensions to the ultramafic units that host the nickel mineralisation around the Kambalda Dome. In the early 1970s the area was the focus of both nickel and copper-zinc exploration. Reconnaissance diamond drilling for nickel was undertaken by WMC that drilled on 5 lines spaced at 800m across the interpreted basal contact position of the Democrat Hill Ultramafic and the BLF. The basal contact of the Kambalda Komatiite (and equivalents) is host to all the nickel mines in the Kambalda district and is the primary exploration area of interest for nickel mineralisation. Base metal exploration involved reconnaissance mapping, gossan search, soil, and stream sediment sampling. In 1973, DHD 101 was drilled to follow up a copper anomaly on the Democratic Shale. Results showed the anomalous gossan values to be associated with a sulphidic shale with values in the range 0.1 to 0.2% Cu and 0.8-1.0% Zn. During the early 1980s, Esso Exploration Australia and Aztec Exploration Limited conducted exploration programs along strike from the Paris Mine. Primary area of interest was copper-zinc-(gold) mineralisation in the felsic volcanics. Work included geochemistry, geophysics, and drilling. The Boundary gossan was

Criteria	JORC Code explanation	Commentary
		discovered, and later drill tested with a single diamond hole in 1984. This hole failed to locate the primary source of the anomalous surface geochemistry. • In 1988, Julia Mines conducted an intensive drilling program comprising aircore, RC and diamond holes concentrated around the Paris Mine. This work was successful in delineating extensions and parallel lodes to the known Paris mineralisation. both along strike and down plunge. Paris Gold Mine was developed and worked in 1989 by Julia Mines and produced 24koz gold, 17koz silver and 245t copper. Estimated recovered gold grade was 11.2g/t. • In 1989/90, WMC completed a six-hole diamond drilling program to test for depth extensions to the Paris mineralisation below the 180m depth. Results defined a narrow (1-2m) high-grade zone over 70m of strike and also intersected hanging wall lodes 10m and 30m stratigraphically above the interpreted main lode. This was the last drilling program to be carried out on the Paris Mine by WMC. From 1994 to 1999, WMC focussed their gold resource definition drilling on the HHH deposit and conducted a series of RC drilling campaigns resulting in 30m drill line spacings with holes every 10m to 20m along the lines. Elsewhere, exploration by WMC and later by St Ives Gold Mining Company identified a number of areas of interest based on favourable structural and geochemistry evaluations. The 7km x 1km long N-S trending soil anomaly at Strauss was systematically drill tested in 2000 and yielded encouraging results associated with the Butcher's Well Dolerite. Aircore drilling in 2005 focussed on the southern strike extensions of the mineralisation discovered in the 2000 program with limited success. • Gold Fields Australia (St Ives Gold Mining Company) explored the area in 2008. The Paris and HHH deposits were tested as part of the SIGMC's broader air core program. The drilling (148 holes, 640m x 80m) focussed on poorly exposed differentiated dolerite proximal to interpreted intrusives. The exploration potential was supported by a structural interpretation which highlighted strong NNW trending magnetic features with the apparent intersection of crustal-scale lineaments observed in the regional gravity images. Anomalous values are associated with a felsic intrusive hosted by a sediment on the western margin of the area of interest. • Austral Pacific Pty Ltd acquired the Paris Gold Project from SIGMC in July 2015. Mineral Resource and Reserve estimates were compiled in-house and exploitation of the Paris and HHH deposits focussed on a staged approach with near term gold production as a priority and near mine exploration to follow.
Geology	• <i>Deposit type, geological setting and style of mineralisation.</i>	• The Paris Gold Project covers a north-south trending belt of Archaean granite-greenstone terrain, and the majority of the package is currently situated to the east of the Boulder Lefroy Structural Zone (BLSZ). Consequently, the Parker Domain dominates the project geology, defined as existing east of the BLFZ and bounded to the east by the Mount Monger Fault. The Parker Domain comprises a series of ultramafic and mafic units interlayered with felsic volcanoclastic and sediments. The stratigraphic sequence is similar to the Kambalda Domain.

Criteria	JORC Code explanation	Commentary
		Gold mineralisation is widespread, occurring in almost all parts of the craton, but almost entirely restricted to the supracrustal belts. Gold occurs as structurally and host-rock controlled lodes, sharply bounded high-grade quartz veins and associated lower-grade haloes of sulphide-altered wall rock. Mineralisation occurs in all rock types, although Fe-rich dolerite and basalt are the most common, and large granitic bodies are the least common hosts. Most deposits are accompanied by significant alteration, generally comprising an outer carbonate halo, intermediate to proximal potassic-mica and inner sulphide zones. The principal control on gold mineralisation is structure, at different scales, constraining both fluid flow and deposition positions.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	Refer to Table 2 of this ASX Announcement.
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	- No high-grade cuts have been applied to the reporting of exploration results. - Arithmetic weighted averages are used. For example, 15m to 30m in hole 21HRC023 is reported as 15m at 3.12 gpt Au. This comprised 5 * 3m composite samples, calculated as follows: $[(3*2.00)+(3*1.95)+(3*0.28)+(3*4.64)+(3*6.71)] = [46.74/15] = 3.12 \text{ gpt Au to two decimal places.}$ - No metal equivalent values have been used.
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	- As this programme was a first pass exploration drill programme across a number of different prospects there was considerable variation in the drill spacing and hole orientation. - Due to locally varying intersection angles between drill holes and lithological units all results are defined as downhole widths. - This drill spacing is also not sufficient to establish the degree of geological and grade continuity applied under the 2012 JORC Code.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	See attached figures within this announcement.

Torque Metals Limited ASX Announcement

Criteria	JORC Code explanation	Commentary
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All significant intercepts and a summary of drill hole assay information are presented in Tables 1 and 2 of this announcement. All assay results >0.05gpt Au are reported in Appendix 1.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All meaningful and material information has been included in the body of this announcement.
Further work	- The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	- Refer to this announcement. - The extent of follow-up drilling has not yet been confirmed but will likely include further RC and possibly diamond drilling.

---oo0oo---