

2,563ppm REO in Drilling at Cascade REE Project

- Historical assay results relating to 4,426m of reconnaissance drilling completed between 2012 and 2015 across the **100km long southern corridor of the Cascade Rare Earth Project** have been retrieved, compiled and reviewed by the Company
- The final metre of each drill hole was assayed for a **partial suite of rare earth elements (three of the 15 REE) and Scandium**:

Lanthanum	Cerium	Praseodymium	Neodymium	Samarium	Europium	Gadolinium	Terbium	Dysprosium	Holmium	Erbium	Thulium	Ytterbium	Lutetium	Yttrium	Scandium
La	Ce	Pr	Nd	Sm	Eu	Gd	Tb	Dy	Ho	Er	Tm	Yb	Lu	Y	Sc
✓	✓													✓	✓

These REE not previously assayed for in historical drilling

- Assays results show grades up to **2,563ppm REO ($\text{La}_2\text{O}_3 + \text{CeO}_2 + \text{Y}_2\text{O}_3$)** only accounting for three of the 15 rare earth elements
- 65 of the 147 holes (44%) returned >200ppm REO ($\text{La}_2\text{O}_3 + \text{CeO}_2 + \text{Y}_2\text{O}_3$)**
- Analysis of reported results from other explorers in the province show that the **three elements used to calculate the REO grade for Cascade make up between 50-60% of the total rare earth oxide (TREO) grade**

Meeka Gold Limited (ASX:MEK) ("**Meeka**" or "**the Company**") is pleased to release a partial suite of REO results compiled from historical drill records for the Cascade Rare Earth Project, which covers 2,068km² of the Albany-Fraser Mobile Belt. The grades only reflect the end of hole REO grades as the full length of the hole was not analysed for REE. These results also only include three of the total 15 REE. The remaining 12 elements were not analysed as part of the historical test work. Significant end of hole REO ($\text{La}_2\text{O}_3 + \text{CeO}_2 + \text{Y}_2\text{O}_3$) results include:


- 2563ppm** at 37m to 38m downhole MGA118
- 1275ppm** at 31m to 32m downhole MGA076
- 1260ppm** at 23m to 24m downhole MGA090
- 868ppm** at 15m to 16m downhole MGA146
- 861ppm** at 32m to 33m downhole MGA076
- 805ppm** at 56m to 57m downhole MGA132
- 763ppm** at 13m to 14m downhole MGA208
- 729ppm** at 13m to 14m downhole MGA089

- **649ppm** at 71m to 72m downhole MGA277
- **574ppm** at 19m to 20m downhole MGA178
- **546ppm** at 15m to 16m downhole MGA282
- **543ppm** at 32m to 33m downhole MGA197

Results from existing explorers in the province also show **higher REE enrichment in the saprolite above the end of hole sample location**. Figure 1 shows an idealised schematic of the regolith profile and zone of maximum REE enrichment. The Company believes the **samples reported here were collected below the zone that is expected to have the highest grade TREO**.

This is supported by the results from hole MGA076, which had two successive samples from the bottom of the hole sent for multielement analysis. The REO grade reduces toward the bottom of the hole. The first sample from 31m to 32m depth returned a REO grade of 1275ppm and the second deeper sample taken from 32m to 33m depth returned a REO grade of 861ppm.

Figure 1: Schematic diagram of idealised regolith profile and REE sampling location.

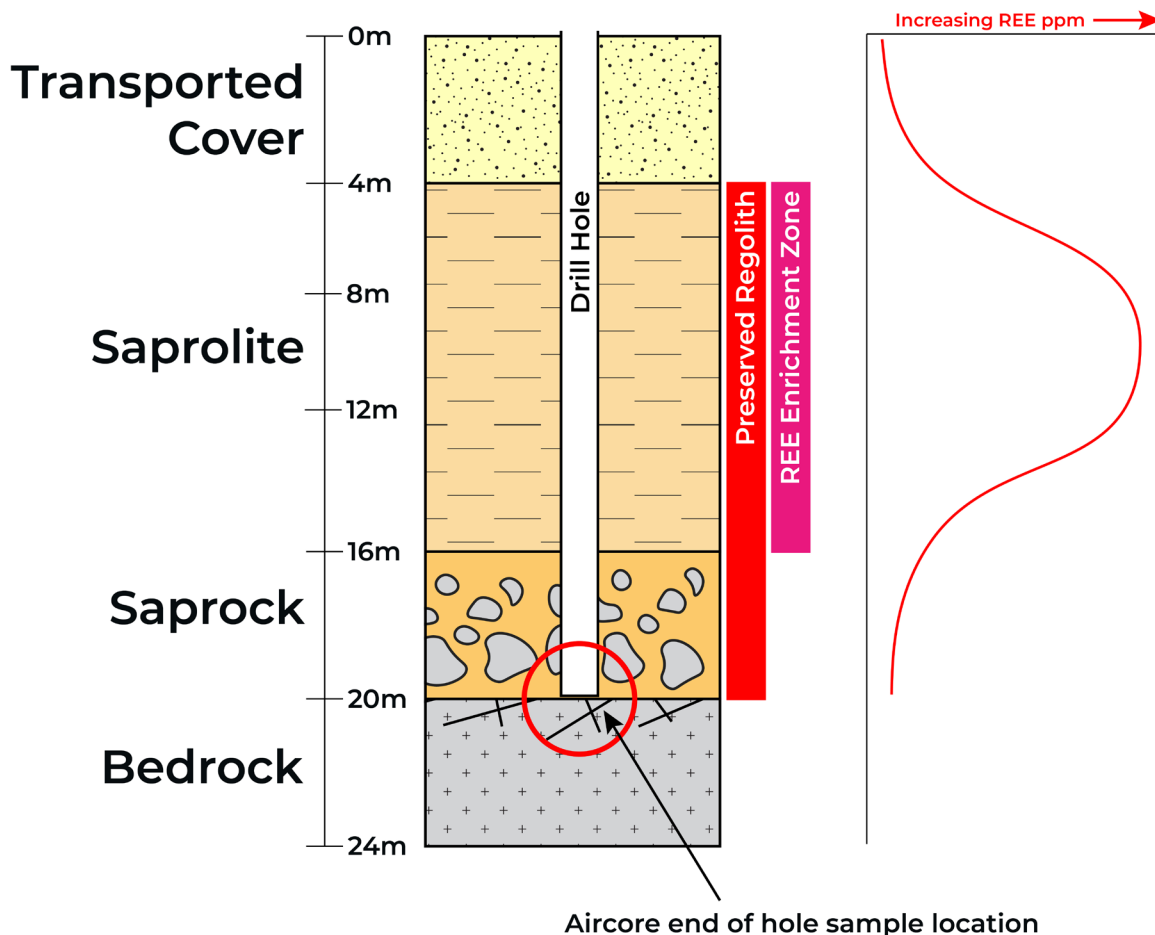

Analysis of assay results from REE explorers in the Albany-Fraser region also show Lanthanum (La) to be a good indicator of total REE content within the regolith (**elevated La = elevated total REE**). The samples reported in this announcement have elevated Lanthanum grades.

The average length weighted REO ($\text{La}_2\text{O}_3 + \text{CeO}_2 + \text{Y}_2\text{O}_3$) grade of samples >300ppm from Cascade is 567ppm. This grade only includes three of the total 15 rare earth elements as the remaining 12 elements were not analysed as part of the historical test work

To understand the exploration potential that the Company sees in the Cascade REE Project it is useful to view the results from Cascade in relation to TREO grades reported by existing REE explorers in the province and more broadly explorers with IAC or felsic origin type deposits external to the Albany-Fraser. Drilling and Mineral Resource grades from various ASX listed explorers and developers are shown in Table 1 and Table 2 below.

Table 1 – Reported TREO exploration drilling grades within the Albany-Fraser^{1, 2}

Company	ASX Code	Market Cap A\$M	Project Ownership	Prospect	Average Drilling Grade TREO ppm
Mount Ridley Mines Limited	MRD	52	100%	Winston's	663
				The Lake	807
				Keith's	566

Table 2 – Reported Mineral Resource TREO grades for projects outside the Albany-Fraser³

Company	ASX Code	Market Cap A\$M	Project Ownership	Project	Mineral Resource Grade TREO ppm
Ionic Rare Earths Limited	IXR	184	51%	Makuutu (Uganda)	650
American Rare Earths Limited	ARR	157	100%	La Paz (Arizona)	469
Australian Rare Earths Limited	AR3	61	100%	Koppamurra (Sth Aust)	725

¹ Refer to Mount Ridley Mines Limited announcement to the ASX on 2nd August 2021.

² See Appendix 1 for source data

³ See Appendix 1 for source data

Figure 2: Cascade REE Project tenure and existing REE explorers within the province.


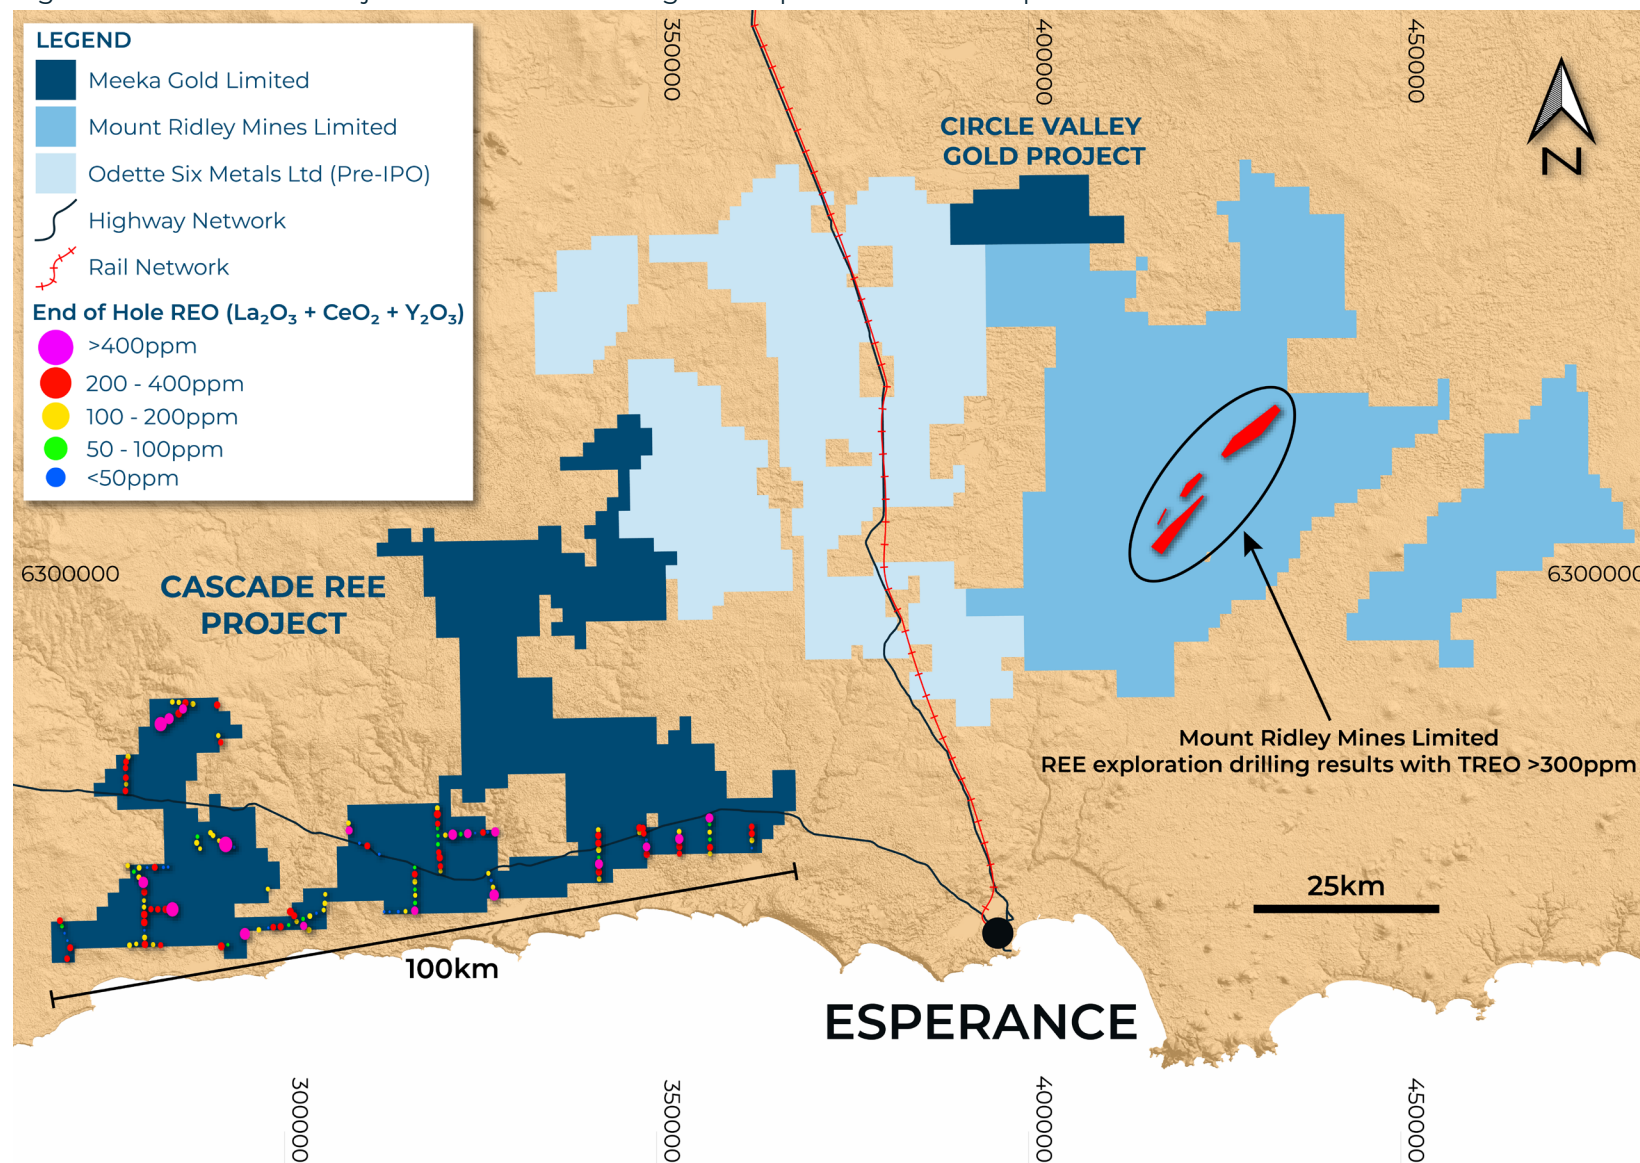


Figure 3: Cascade REE Project showing end of hole REO ($\text{La}_2\text{O}_3 + \text{CeO}_2 + \text{Y}_2\text{O}_3$) grades.

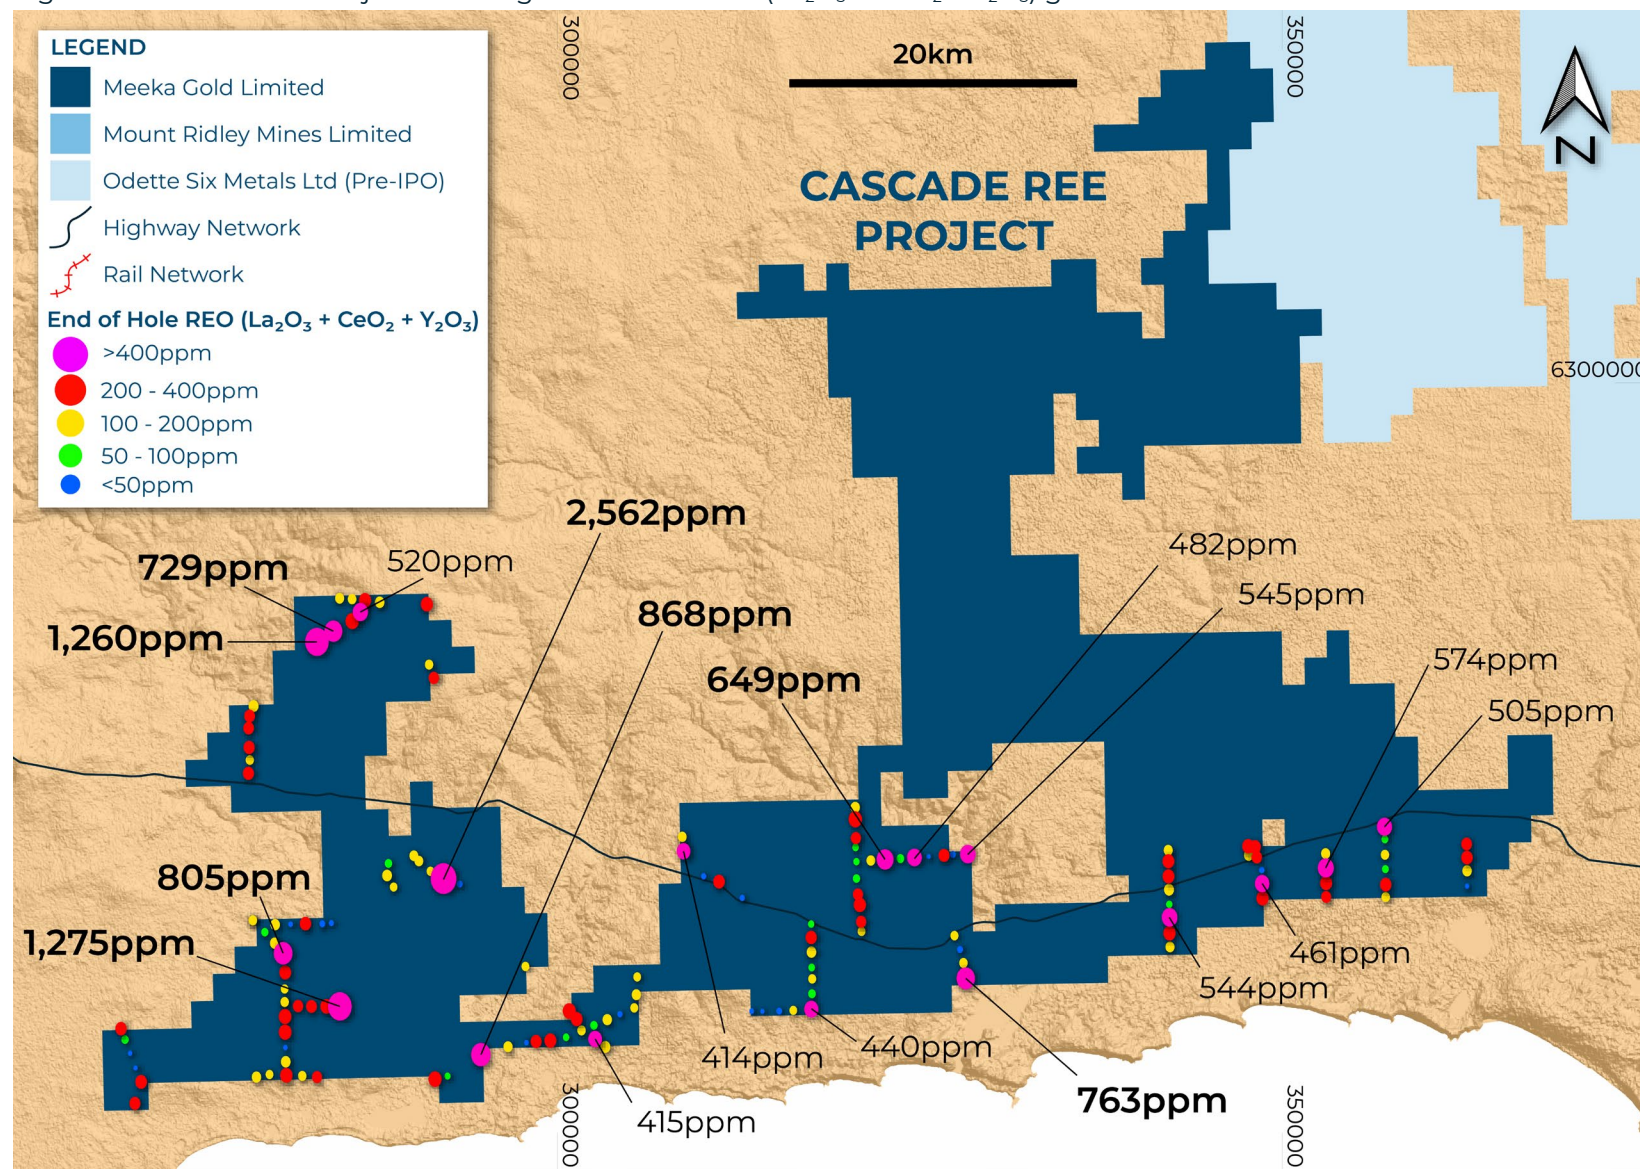

Commenting on the historical drilling results for the Cascade REE Project, CEO Tim Davidson said:


“As we systematically review all available data for the Cascade REE Project our view that we are in the early stages of identifying a province scale exploration opportunity is strengthening.

The results released in this announcement relate to end of hole samples where only three of the 15 rare earth elements were assayed, however the high-grade nature of the results and thickness of the preserved regolith above these samples suggest there is a great potential for large scale IAC-REE style deposits.

Reviewing the existing REE assay data from explorers in the province also highlights the fact that Lanthanum is a good indicator of total REE enrichment. This is an indication of the potential scale of the Cascade REE Project as drilling demonstrates highly elevated levels of Lanthanum along the full 100km southern corridor of the Project.

I look forward to providing more results from historical work completed within the Project tenure as we finalise the review and verification process in the coming weeks.”

Figure 4: Cascade Project Location, an emerging REE province.

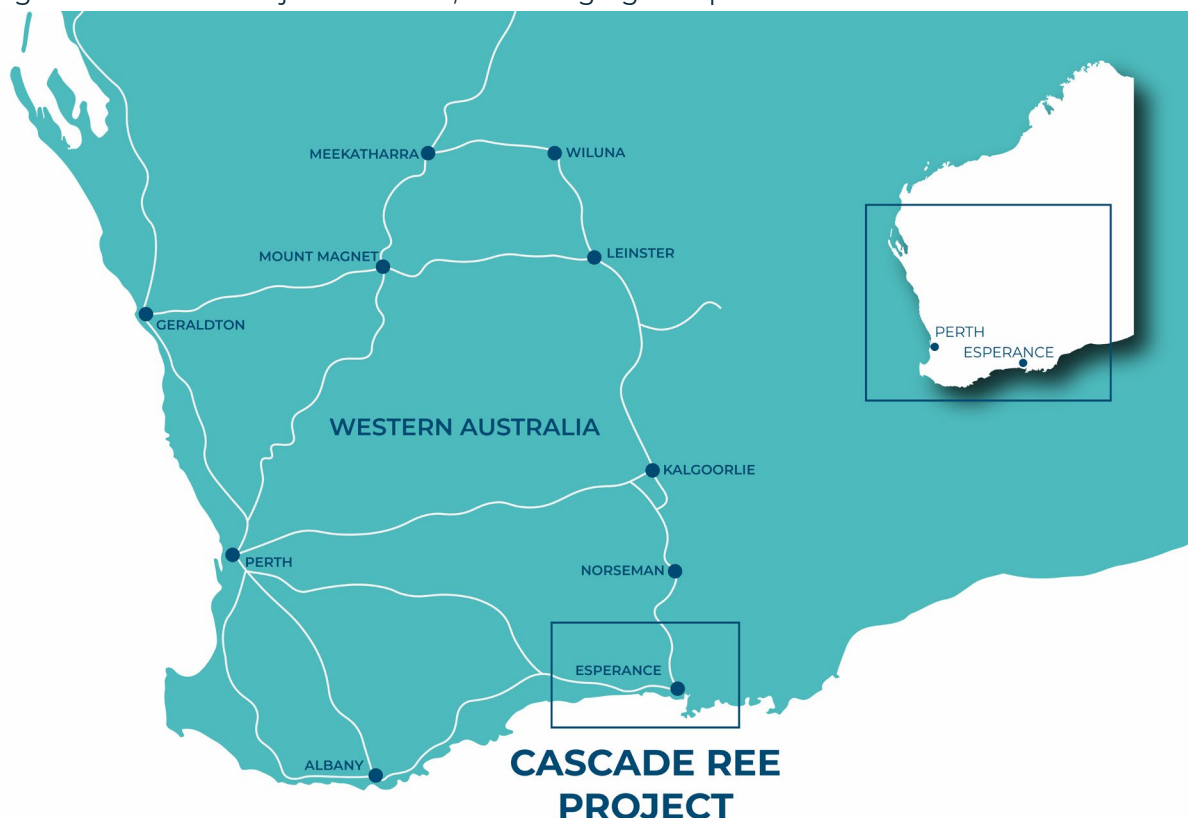

This announcement has been authorised for release by the Company's Board of Directors.

For further information, please contact:

Tim Davidson – Chief Executive Officer
+61 8 6388 2700

info@meekagold.com.au

www.meekagold.com.au

ABOUT MEEKA GOLD LIMITED

Meeka Gold (ASX:MEK) is a junior gold and rare earths explorer with a portfolio of exploration projects across Western Australia.

Meeka's flagship Murchison Gold Project has a combined 343km² landholding in the prolific Murchison Gold Fields of Western Australia and hosts a large high grade 1.1Moz Mineral Resource. The Company is actively exploring on this tenure while also progressing toward production with the release of the Murchison Gold Project Scoping Study in December 2021 outlining a robust Project that produces over 420koz of gold and delivers significant free cashflow.

Complimentary to the Murchison Gold Project, the Company owns the Circle Valley Gold Project in southern WA. Circle Valley sits in the Albany-Fraser Mobile Belt, which hosts the Tropicana gold mine (3Moz past production). Gold mineralisation has been identified in two separate locations at Circle Valley and presents an exciting greenfield exploration opportunity, which the Company is aggressively pursuing.

In addition to gold exploration in the Albany-Fraser, the Company controls the Cascade REE Project, 2,068km² of exploration tenure in a region that is rapidly emerging as a highly prospective ionic clay type rare earths province. The Company intends to leverage its existing exploration resources in the province to conduct fieldwork at Cascade.



Global Mineral Resource Summary

Project	Measured			Indicated			Inferred			Total		
	Tonnes ('000t)	Grade (g/t)	Ounces ('000oz)	Tonnes ('000t)	Grade (g/t)	Ounces ('000oz)	Tonnes ('000t)	Grade (g/t)	Ounces ('000oz)	Tonnes ('000t)	Grade (g/t)	Ounces ('000oz)
Andy Well	150	11.4	55	1,050	9.3	315	650	6.5	135	1,800	8.6	505
Turnberry				6,800	1.6	355	4,500	1.8	255	11,300	1.7	610
TOTAL	150	11.4	55	7,850	2.7	670	5,150	2.4	390	13,100	2.6	1,115

Notes:

1. Mineral Resources previously reported to the ASX on 18th May 2021 in announcement titled "Murchison Gold Mineral Resource Grows 44% to +1.1 Million Ounces". The Company is not aware of any new information or data that materially affects the information included in this announcement and that all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed.
2. Mineral Resources are produced in accordance with the 2012 Edition of the Australian Code for Reporting of Mineral Resources and Ore Reserves (JORC 2012).
3. Andy Well Mineral Resource is reported using 0.1g/t cut-off grade.
4. Turnberry Open Pit Mineral Resource is reported within a A\$2,400/oz pit shell and above 0.5g/t cut-off grade.
5. Turnberry Underground Mineral Resource is reported outside a A\$2,400/oz pit shell and above 1.5g/t cut-off grade.

COMPETENT PERSON'S STATEMENT

The information that relates to Exploration Results as those terms are defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserve", is based on information reviewed by Mr Duncan Franey, a Competent Person who is a member of The Australasian Institute of Mining and Metallurgy and the Australian Institute of Geoscientists. Mr Franey is a full-time employee of the Company. Mr Franey has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Franey consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The information that relates to Mineral Resources was first reported by the Company in its announcement to the ASX on 18th May 2021. The Company is not aware of any new information or data that materially affects the information included in this announcement and that all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed.

The information that relates to Scoping Study results is based on information compiled by Mr Tim Davidson, a Competent Person who is a Member of the Australian Institute of Mining and Metallurgy. Mr Davidson is a full-time employee of the company. Mr Davidson is eligible to participate in short and long-term incentive plans of and holds shares and performance rights in the Company as previously disclosed. Mr Davidson has sufficient experience in the study, development and operation of gold projects and consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

FORWARD LOOKING STATEMENTS

Certain statements in this report relate to the future, including forward looking statements relating to the Company's financial position, strategy and expected operating results. These forward-looking statements involve known and unknown risks, uncertainties, assumptions and other important factors that could cause the actual results, performance or achievements of the Company to be materially different from future results, performance or achievements expressed or implied by such statements. Actual events or results may differ materially from the events or results expressed or implied in any forward-looking statement and deviations are both normal and to be expected. Other than required by law, neither the Company, their officers nor any other person gives any representation, assurance or guarantee that the occurrence of the events expressed or implied in any forward-looking statements will actually occur. You are cautioned not to place undue reliance on those statements.

APPENDIX 1 – REE EXPLORERS SOURCE DATA

Company	MRD	IXR	ARR	AR3
Price (ASX Closing Price)	23/02/2022	23/02/2022	23/02/2022	23/02/2022
Shares (Appendix 2A/3B)	18/02/2022	4/02/2022	10/02/2022	3/12/2021
Mineral Resource (ASX Announcement)	N/A	3/03/2021	11/11/2020	29/06/2021

DRILLING DATA

Table 1 – Collar Table

Hole ID	Type	Easting	Northing	RL	Dip (Degrees)	End of Hole (m)
MGA041	AC	283672	6252008	25	-90	22
MGA042	AC	282655	6252081	27	-90	7
MGA050	AC	291804	6251902	7	-90	18
MGA051	AC	292667	6252115	23	-90	24
MGA060A	AC	281447	6256162	71	-90	18
MGA061A	AC	281434	6257164	94	-90	8
MGA062	AC	281405	6258061	90	-90	23
MGA063	AC	281440	6259201	94	-90	12
MGA064	AC	271552	6251598	47	-90	9
MGA065	AC	271163	6252556	67	-90	5
MGA066	AC	270781	6253561	78	-90	7
MGA067	AC	270421	6254508	88	-90	27
MGA068	AC	270140	6255253	76	-90	12
MGA073	AC	282338	6256889	71	-90	19
MGA074	AC	283263	6256873	77	-90	48
MGA075	AC	284302	6256877	69	-90	25
MGA076	AC	285221	6256885	68	-90	33
MGA076	AC	285221	6256885	68	-90	33
MGA077	AC	279151	6277540	90	-90	40
MGA078	AC	278877	6276852	100	-90	39
MGA079	AC	278817	6276021	120	-90	34
MGA080	AC	278856	6274689	120	-90	54
MGA081	AC	278911	6273816	120	-90	80
MGA082	AC	278819	6272906	120	-90	7
MGA083	AC	287830	6284739	230	-90	12
MGA084	AC	286819	6284872	229	-90	24
MGA085	AC	285921	6284943	220	-90	20
MGA086	AC	285058	6284996	213	-90	7
MGA087	AC	286500	6284059	220	-90	18
MGA088	AC	285938	6283431	204	-90	16
MGA089	AC	284638	6282729	181	-90	14
MGA090	AC	284086	6282426	180	-90	24
MGA095	AC	291093	6284618	224	-90	22
MGA100	AC	291265	6280461	206	-90	15
MGA101	AC	291595	6279542	206	-90	30
MGA112	AC	288524	6266747	70	-90	39
MGA113	AC	288433	6265917	67	-90	9
MGA114	AC	288889	6265126	50	-90	7
MGA115	AC	290275	6267285	89	-90	40
MGA116	AC	290621	6266923	82	-90	49
MGA117	AC	291425	6266221	79	-90	71
MGA118	AC	292329	6265723	57	-90	38

MGA119	AC	293451	6265345	81	-90	4
MGA130	AC	280017	6261965	80	-90	21
MGA131	AC	280700	6261213	85	-90	21
MGA131A	AC	280703	6261205	84	-90	33
MGA132	AC	281288	6260520	86	-90	57
MGA133	AC	280725	6262488	80	-90	61
MGA134	AC	281794	6262527	83	-90	44
MGA135	AC	282817	6262572	76	-90	80
MGA135	AC	282817	6262572	76	-90	80
MGA136	AC	283982	6262569	90	-90	23
MGA137	AC	284609	6262614	90	-90	3
MGA138	AC	279190	6262778	90	-90	33
MGA146	AC	294960	6253603	14	-90	16
MGA148	AC	298005	6259694	41	-90	53
MGA152	AC	362931	6268160	70	-90	17
MGA153	AC	362952	6267228	66	-90	4
MGA154	AC	362955	6266317	63	-90	51
MGA155	AC	362954	6265260	60	-90	63
MGA163	AC	357335	6264520	60	-90	31
MGA164	AC	357341	6265379	57	-90	53
MGA165	AC	357320	6266448	73	-90	51
MGA167	AC	357294	6267436	68	-90	69
MGA168	AC	357293	6268506	75	-90	53
MGA169	AC	357266	6269364	78	-90	15
MGA177	AC	353197	6267526	71	-90	51
MGA178	AC	353209	6266536	64	-90	20
MGA179	AC	353230	6265498	56	-90	80
MGA180	AC	353230	6264540	55	-90	65
MGA185	AC	347857	6268041	65	-90	50
MGA186	AC	347891	6267420	59	-90	79
MGA189	AC	348837	6264455	50	-90	41
MGA190	AC	348816	6265467	48	-90	63
MGA191	AC	348793	6266394	49	-90	74
MGA192	AC	348449	6267280	64	-90	45
MGA195	AC	342454	6261109	23	-90	25
MGA196	AC	342421	6262056	24	-90	26
MGA197	AC	342430	6263149	44	-90	33
MGA198	AC	342408	6264044	54	-90	54
MGA199	AC	342389	6265052	61	-90	15
MGA200	AC	342354	6265973	110	-90	17
MGA202	AC	342348	6267017	80	-90	29
MGA204	AC	342337	6267772	76	-90	47
MGA208	AC	328370	6258945	39	-90	14
MGA209	AC	328211	6260006	55	-90	6
MGA209	AC	328211	6260006	55	-90	6
MGA210	AC	327977	6260938	59	-90	45

MGA211	AC	327591	6261887	58	-90	60
MGA212	AC	317706	6262669	108	-90	3
MGA213	AC	317709	6261749	105	-90	15
MGA214	AC	317729	6260737	100	-90	8
MGA215	AC	317747	6259680	92	-90	6
MGA216	AC	317783	6258897	75	-90	13
MGA217	AC	317771	6257869	66	-90	11
MGA218	AC	317729	6256808	38	-90	44
MGA224	AC	305517	6256867	66	-90	11
MGA225	AC	304530	6256432	68	-90	5
MGA226	AC	303661	6256048	53	-90	18
MGA227	AC	302742	6255651	38	-90	45
MGA228	AC	301891	6255302	26	-90	46
MGA229	AC	300828	6254823	31	-90	23
MGA230	AC	299746	6254594	30	-90	20
MGA231	AC	298761	6254527	25	-90	19
MGA232	AC	298098	6254439	18	-90	11
MGA233	AC	296825	6254161	24	-90	4
MGA236	AC	300900	6256819	52	-90	42
MGA237	AC	301556	6256080	42	-90	61
MGA238	AC	302832	6254712	35	-90	45
MGA239	AC	303537	6254169	22	-90	6
MGA241	AC	305659	6257775	62	-90	36
MGA242	AC	305718	6258999	70	-90	26
MGA254	AC	325812	6267338	70	-90	65
MGA259	AC	313616	6256663	53	-90	31
MGA260	AC	314357	6256653	53	-90	4
MGA261	AC	315515	6256675	18	-90	45
MGA262	AC	316484	6256722	32	-90	4
MGA264	AC	308127	6267667	124	-90	16
MGA265	AC	308421	6268657	136	-90	11
MGA266	AC	321180	6262173	83	-90	44
MGA267	AC	321154	6262835	90	-90	51
MGA268	AC	321060	6264000	66	-90	47
MGA269	AC	320932	6264720	53	-90	64
MGA270	AC	320823	6265814	76	-90	82
MGA271	AC	320820	6266976	81	-90	4
MGA272	AC	320762	6267959	90	-90	32
MGA273	AC	320783	6268600	85	-90	4
MGA274	AC	320736	6269894	61	-90	39
MGA275	AC	320733	6270715	71	-90	57
MGA276	AC	321816	6267056	69	-90	84
MGA277	AC	322798	6267128	67	-90	72
MGA278	AC	323857	6267191	92	-90	11
MGA279	AC	324823	6267271	78	-90	60
MGA280	AC	326864	6267416	69	-90	22

MGA280	AC	326864	6267416	69	-90	22
MGA281	AC	327480	6267481	67	-90	67
MGA282	AC	328506	6267894	37	-90	16
MGA304	AC	312943	6264460	115	-90	5
MGA306	AC	311342	6265580	110	-90	14
MGA308	AC	310279	6265943	112	-90	19
MGA331	AC	348331	6267987	64	-90	30
MGR019	RAB	271135	6250115	35	-90	12
MGR039	RAB	279498	6251981	29	-90	6
MGR040	RAB	280398	6252166	39	-90	21
MGR056	RAB	281558	6252113	47	-90	6
MGR057	RAB	281511	6253047	65	-90	7
MGR058	RAB	281485	6254027	68	-90	4
MGR059	RAB	281457	6255086	74	-90	6
MGR060	RAB	281426	6256165	77	-90	12
MGR061	RAB	281414	6257163	95	-90	7

Table 2 – End of Hole REO and Scandium Oxide Results (TREO = La₂O₃ + CeO₂ + Y₂O₃)

Hole ID	Depth From	Depth To	La ₂ O ₃	CeO ₂	Pr ₆ O ₁₁	Nd ₂ O ₃	Sm ₂ O ₃	Eu ₂ O ₃	Gd ₂ O ₃	Tb ₄ O ₇	Dy ₂ O ₃	Ho ₂ O ₃	Er ₂ O ₃	Tm ₂ O ₃	Yb ₂ O ₃	Lu ₂ O ₃	Y ₂ O ₃	TREO	Sc ₂ O ₃
MGA041	21	22	65	112													35	212	38
MGA042	6	7	29	69													36	134	60
MGA050	17	18	181	168													27	376	3
MGA051	23	24	13	16													23	52	61
MGA060A	16	17	86	242													20	348	9
MGA061A	7	8	21	37													7	65	6
MGA062	22	23	30	58													18	106	5
MGA063	11	12	98	194													7	299	14
MGA064	8	9	101	179													9	289	3
MGA065	4	5	7	7													2	16	6
MGA066	5	6	6	11													3	20	6
MGA067	16	17	31	57													6	94	3
MGA068	11	12	62	114													94	270	69
MGA073	18	19	68	115													38	221	44
MGA074	47	48	75	140													30	245	9
MGA075	24	25	110	86													134	330	14
MGA076	31	32	406	771													98	1275	8
MGA076	32	33	275	515													71	861	8
MGA077	39	40	70	109													20	199	6
MGA078	38	39	51	122													72	245	66
MGA079	33	34	72	155													9	236	9
MGA080	53	54	89	123													51	263	18
MGA081	79	80	55	63													7	125	8
MGA082	6	7	83	161													15	259	6
MGA083	11	12	61	115													8	184	9
MGA084	23	24	102	209													6	317	8
MGA085	19	20	37	95													12	144	63
MGA086	6	7	61	95													3	159	6
MGA087	17	18	155	350													15	520	20
MGA088	15	16	127	260													9	396	12
MGA089	13	14	251	457													21	729	12
MGA090	23	24	410	829													21	1260	12
MGA095	21	22	102	209													10	321	29
MGA100	14	15	48	82													3	133	5
MGA101	29	30	73	140													9	222	6
MGA112	38	39	17	38													41	96	66
MGA113	8	9	57	125													11	193	11
MGA114	6	7	34	38													30	102	52
MGA115	39	40	27	64													64	155	63
MGA116	48	49	28	59													62	149	61
MGA117	70	71	42	55													12	109	6

MGA118	37	38	1090	1130	343	2563	74
MGA119	3	4	17	28	4	49	6
MGA130	20	21	19	52	17	88	37
MGA131	20	21	55	92	29	176	9
MGA131A	32	33	13	21	60	94	75
MGA132	56	57	28	754	23	805	106
MGA133	60	61	53	118	8	179	9
MGA134	43	44	5	11	8	24	26
MGA135	80	81	91	177	9	277	12
MGA135	79	80	8	20	16	44	31
MGA136	22	23	10	25	13	48	31
MGA137	2	3	7	20	6	33	12
MGA138	32	33	30	97	6	133	5
MGA146	15	16	213	564	91	868	35
MGA148	52	53	28	59	25	112	52
MGA152	16	17	72	144	22	238	14
MGA153	3	4	82	173	20	275	14
MGA154	50	51	43	103	30	176	31
MGA155	62	63	4	9	2	15	0
MGA163	30	31	34	79	22	135	23
MGA164	52	53	66	107	105	278	9
MGA165	50	51	17	39	16	72	18
MGA167	68	69	40	76	13	129	11
MGA168	52	53	22	48	4	74	5
MGA169	14	15	126	330	49	505	34
MGA177	50	51	45	97	17	159	5
MGA178	19	20	73	490	11	574	28
MGA179	79	80	108	182	15	305	3
MGA180	64	65	66	124	12	202	3
MGA185	49	50	105	185	20	310	5
MGA186	78	79	53	93	24	170	8
MGA189	40	41	98	101	115	314	84
MGA190	62	63	119	242	100	461	29
MGA191	73	74	5	12	18	35	20
MGA192	44	45	41	102	82	225	46
MGA195	24	25	27	82	46	155	63
MGA196	25	26	98	209	11	318	20
MGA197	32	33	82	243	218	543	64
MGA198	53	54	19	32	10	61	5
MGA199	14	15	67	124	7	198	5
MGA200	16	17	92	195	12	299	9
MGA202	28	29	117	129	55	301	20
MGA204	46	47	49	96	12	157	6
MGA208	13	14	125	598	40	763	44

MGA209	4	5	45	84	4	133	5
MGA209	4	5	45	84	4	133	5
MGA210	44	45	12	33	4	49	5
MGA211	5	6	39	72	4	115	8
MGA212	2	3	18	33	6	57	29
MGA213	14	15	82	146	34	262	66
MGA214	7	8	58	108	11	177	12
MGA215	5	6	14	28	26	68	54
MGA216	12	13	42	64	8	114	12
MGA217	10	11	24	65	8	97	34
MGA218	43	44	109	269	62	440	21
MGA224	10	11	43	65	6	114	107
MGA225	4	5	9	15	11	35	49
MGA226	17	18	50	113	12	175	8
MGA227	44	45	19	41	33	93	38
MGA228	45	46	43	38	54	135	26
MGA229	22	23	22	38	5	65	5
MGA230	19	20	84	183	43	310	75
MGA231	18	19	48	194	17	259	12
MGA232	10	11	7	12	4	23	3
MGA233	3	4	47	96	20	163	34
MGA236	41	42	103	241	34	378	11
MGA237	60	61	123	149	24	296	5
MGA238	44	45	90	231	94	415	46
MGA239	5	6	59	106	35	200	31
MGA241	35	36	27	65	74	166	74
MGA242	25	26	30	69	8	107	17
MGA254	64	65	2	5	4	11	11
MGA259	30	31	4	11	9	24	40
MGA260	3	4	5	7	4	16	5
MGA261	44	45	18	27	2	47	3
MGA262	3	4	37	63	4	104	5
MGA264	15	16	118	222	73	413	94
MGA265	10	11	39	96	10	145	26
MGA266	43	44	20	43	45	108	71
MGA267	80	81	58	119	33	210	14
MGA268	45	46	124	155	42	321	6
MGA269	63	64	57	129	23	209	3
MGA270	81	82	30	52	6	88	5
MGA271	3	4	20	33	3	56	6
MGA272	30	31	19	38	8	65	6
MGA273	3	4	66	129	16	211	8
MGA274	38	39	133	246	14	393	9
MGA275	56	57	56	86	27	169	5

MGA276	83	84	47	82	15	144	3
MGA277	71	72	196	361	92	649	11
MGA278	10	11	34	58	8	100	5
MGA279	59	60	148	299	36	483	5
MGA280	21	22	76	145	26	247	6
MGA281	66	67	15	28	5	48	14
MGA282	15	16	157	359	30	546	9
MGA304	4	5	14	20	1	35	6
MGA306	13	14	97	172	14	283	9
MGA308	18	19	5	12	18	35	18
MGA331	29	30	133	133	20	286	5
MGR019	11	12	72	177	6	255	5
MGR039	5	6	60	108	8	176	9
MGR040	20	21	22	79	7	108	5
MGR056	5	6	78	215	42	335	58
MGR057	5	6	52	106	29	187	49
MGR058	3	4	7	12	2	21	14
MGR059	5	6	120	226	8	354	18
MGR060	11	12	29	23	4	56	6
MGR061	6	7	48	82	3	133	5

JORC 2012 – TABLE 1: CASCADE

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
Sampling techniques	Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.	- Aircore and RAB drill chips collected through a cyclone and generally sampled at 1 or 4 metre intervals, cone split or spear sampled. - Where drill holes cross a lithology boundary, the sample may be composited over a shorter length to avoid sampling across two different lithologies.
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	- Drill sampling was conducted on at between 1 or 4 metre composite samples. - Where drill holes cross a lithology boundary, the sample may be composited over a shorter length to avoid sampling across two different lithologies.
	Aspects of the determination of mineralisation that are Material to the Public Report.	Mineralisation determined quantitatively via aqua regia (Au) and 4-acid digest ICP-MS (multielement).
	In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	- AC samples composites and 1m samples from which <3.5kg sample was analysed by Aqua Regia 0.5g sample split ICP-ES aliquot finish by ICP-MS (Au) or 4 Acid Digestion ICP-MS Analysis (ME). - Standard, duplicates and blank samples were submitted on a routine basis at a rate of 1 in 20 samples to monitor the precision and accuracy of the sample analysis. No bias in the analysis was identified from the control samples.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Air core drilling - 3 inch diameter hole to bit refusal (usually saprock to fresh rock).
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	Visual estimate of AC drill chip recovery recorded in database.

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
	Measures taken to maximise sample recovery and ensure representative nature of the samples.	AC chip recoveries monitored in the field and documented.
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	Unknown at this stage.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	- Holes logged qualitative: lithology, alteration, foliation. - All holes chipped for the entire hole to preserve a chip tray record of all holes drilled.
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	- Qualitative: lithology, alteration, foliation. - Quantitative: multielement geochemistry elements; no density measurements taken - Chip samples taken from every metre of every hole to maintain chip tray record.
	The total length and percentage of the relevant intersections logged.	All holes logged for entire length of hole.
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken.	No core drilling completed.
	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	- Chips cone and riffle split, sampled dry where possible. - AC sample were spear sampled in up to 4 m composite intervals. 1 m bottom of hole samples speared.
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	- The entire ~3.5kg AC sample is pulverized to 75µm (85% passing) - Gold analysis is determined by Aqua Regia 0.5g sample split ICP-ES aliquot finish by ICP-MS. - ME analysis by 4 Acid Digestion ICP-MS Analysis.
	Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	Standard, duplicates and blank samples were submitted on a routine basis at a rate of 1 in 20 samples to monitor the precision and accuracy of the sample analysis. No bias in the analysis was identified from the control samples.
	Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.	Standard, duplicates and blank samples were submitted on a routine basis at a rate of 1 in 20 samples to monitor the precision and accuracy of the sample analysis. No bias in the analysis was identified from the control

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		samples.
	Whether sample sizes are appropriate to the grain size of the material being sampled.	Sample size appropriate for grain size of samples material.
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	- Gold analysis is determined by Aqua Regia 0.5g sample split ICP-ES aliquot finish by ICP-MS. - ME analysis by 4 Acid Digestion ICP-MS Analysis.
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	No geophysical data reported here.
	Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	Standard, duplicates and blank samples were submitted on a routine basis at a rate of 1 in 20 samples to monitor the precision and accuracy of the sample analysis. No bias in the analysis was identified from the control samples.
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	Unknown.
	The use of twinned holes.	Unknown.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	Data stored in Datashed database, logging performed on auto-validating excel spreadsheets and synchronised to Datashed database, data validated by database administrator, import validate protocols in place. Visual validation by company geologists.
	Discuss any adjustment to assay data.	Multielement results (REE) are converted to stoichiometric oxide (REO) using element-to-stoichiometric conversion factors.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	Collars: surveyed with Garmin GPS accurate to +/- 3m.
	Specification of the grid system used.	MGA94 - Zone 51
	Quality and adequacy of topographic control.	Loose topographic control from geophysical data. Appropriate for this early stage exploration.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	>1km up to 10km dictated by road verge access.

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		Spacing appropriate for first pass reconnaissance drilling.
	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	The current drill spacing is not appropriate for use in resource estimation.
	Whether sample compositing has been applied.	Up to 4 m composite assays reported.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	- Drill holes oriented vertically. - Sampling believed to be unbiased.
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	Orientation currently unknown.
Sample security	The measures taken to ensure sample security.	Samples were delivered from the Company tenure directly to the laboratory using a freight company in sealed bulka bags.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No external QC reviews have been conducted on the project so far.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- The Cascade Project comprises total five Exploration Licence (EL) and EL applications, covering a land area of 2068km². - Meeka Gold Limited is the current holder, having a 100% interest in the EL and EL applications. - The EL predominantly overlies freehold agricultural land used for crop and livestock farming. - Prior to conducting ground disturbing exploration on private land, a land access agreement must be signed between the Company and the relevant landowner. - The Esperance Tjaltjraak Native Title Aboriginal Corporation RNTBC (ETNTAC) holds native title over 53 parcels of freehold and reserve land across

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
		Esperance Nyungar country and also has cultural heritage authority over this area. • Freehold land has extinguished native title. • The tenements are in good standing.
Exploration done by other parties	• <i>Acknowledgment and appraisal of exploration by other parties.</i>	• Exploration completed by Silver Lake Resources (ASX:SLR) between 2012 and 2015.
Geology	• <i>Deposit type, geological setting and style of mineralisation.</i>	• It is thought that the regolith hosted REE enrichment originates through weathering of underlying felsic rocks (granite, gneiss).
Drill hole Information	• <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	• All drill results are reported to the ASX in line with ASIC requirements.
Data aggregation methods	• <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	• No top-cuts have been applied when reporting results. • Individual 1m ME assay results have been reported. • All TREO calculations and assumptions are clearly stated through the text. Only 3 of the 15 REE elements have been analysed here.
Relationship between mineralisation widths and	• <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation</i>	• The Project has had limited exploration work completed over it. Exploration by previous operator Silver Lake Resources

CRITERIA	JORC CODE EXPLANATION	COMMENTARY
intercept lengths	with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	(ASX:SLR) between 2012 and 2015 focussed on gold and copper.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Drilling is presented in long-section and cross section as appropriate and reported quarterly to the ASX in line with ASIC requirements.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	The historical data has been assessed and is of good quality.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All meaningful and material data is reported.
Further work	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	- Follow up work will involve re-assaying sample pulps for the total REE suite of elements and reviewing the chiptrays to determine the potential for IAC-REE deposit formation. - Additional AC drilling to increase the sample density across the project tenure is planned.