
*Robotics 2*

# Visual servoing

Prof. Alessandro De Luca

Dipartimento di Ingegneria Informatica
Automatica e Gestionale Antonio Ruberti

Sapienza
Università di Roma

# Visual servoing


- objective

  use information acquired by vision sensors (cameras) for feedback control of the pose/motion of a robot (or of parts of it)

+ data acquisition ~ human eye, with very large information content in the acquired images

− difficult to extract essential data, nonlinear perspective transformations, high sensitivity to ambient conditions (lightening), noise

# Some applications

automatic navigation of robotic systems (agricolture, automotive)

video

video

surveillance

video

bio-motion synchronization (surgical robotics)

video

# Image processing


- real-time extraction of characteristic parameters useful for robot motion control
  - features: points, area, geometric center, higher-order moments, …
- low-level processing
  - binarization (threshold on grey levels), equalization (histograms), edge detection, …
- segmentation
  - based on regions (possibly in binary images)
  - based on contours
- interpretation
  - association of characteristic parameters (e.g., texture)
  - problem of correspondence of points/characteristics of objects in different images (stereo or on image flows)

# Configuration of a vision system


- one, two, or more cameras
  - grey-level or color
- 3D/stereo vision
  - obtained even with a single (moving) camera, with the object taken from different (known) points of view
- camera positioning
  - fixed (eye-to-hand)
  - mounted on the manipulator (eye-in-hand)
- robotized vision heads
  - motorized (e.g., stereo camera on humanoid head or pan-tilt camera on Magellan mobile robot)

# Camera positioning

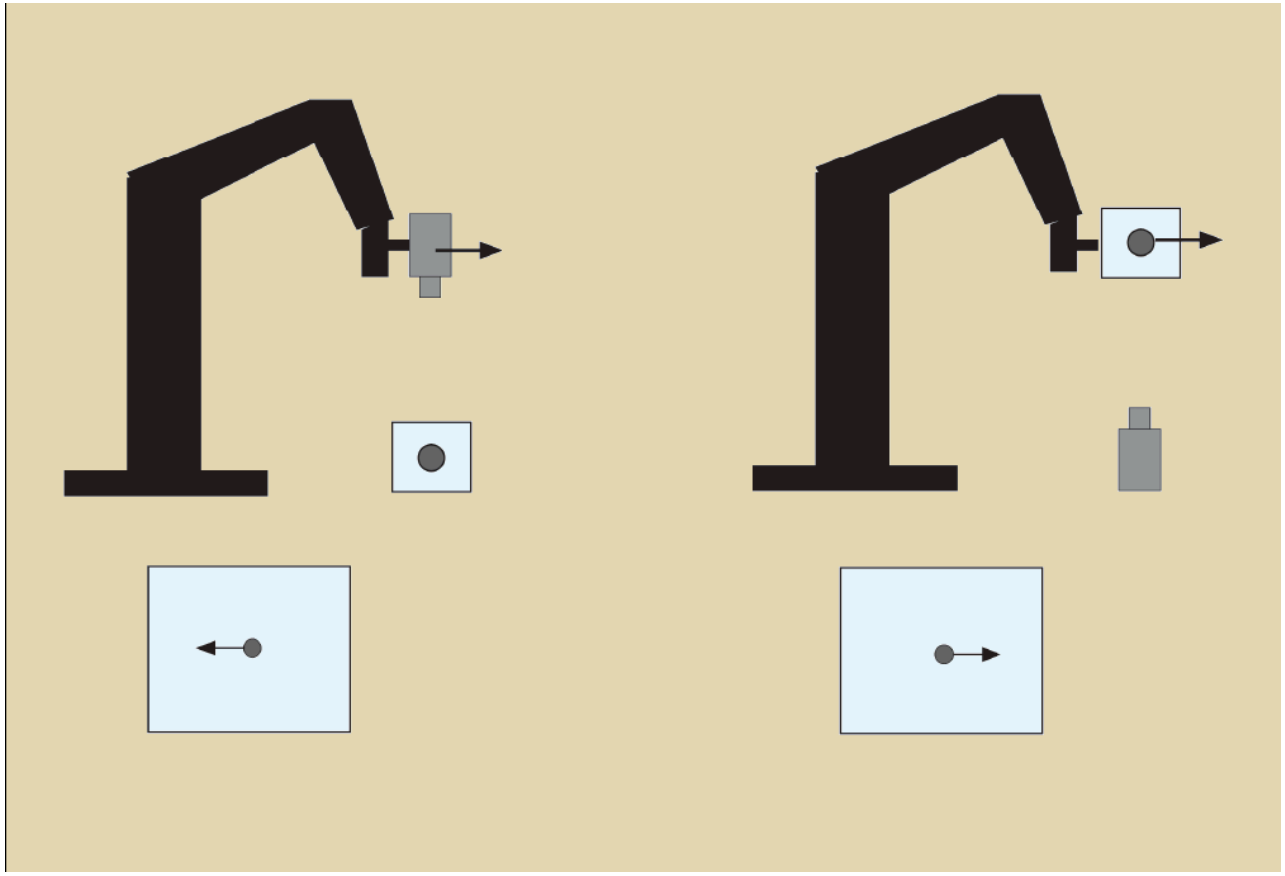

eye-in-hand

eye-to-hand

# Vision for assembly

video

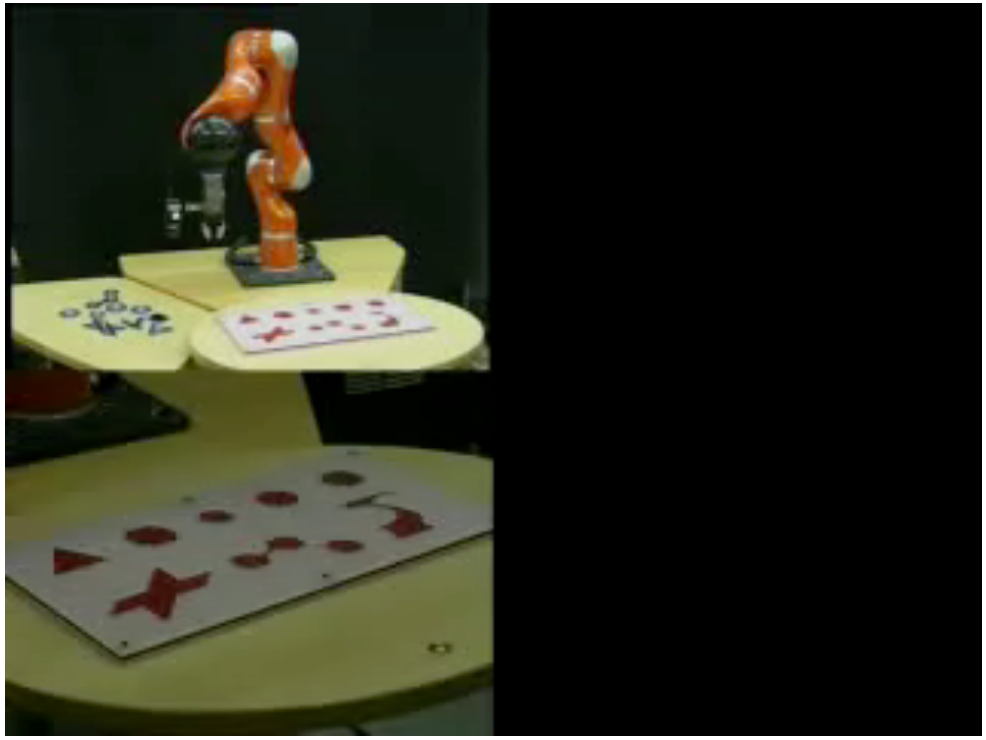

PAPAS-DLR system
(eye-in-hand, hybrid force-vision)

video

robust w.r.t. motion of
target objects

# Indirect/external visual servoing

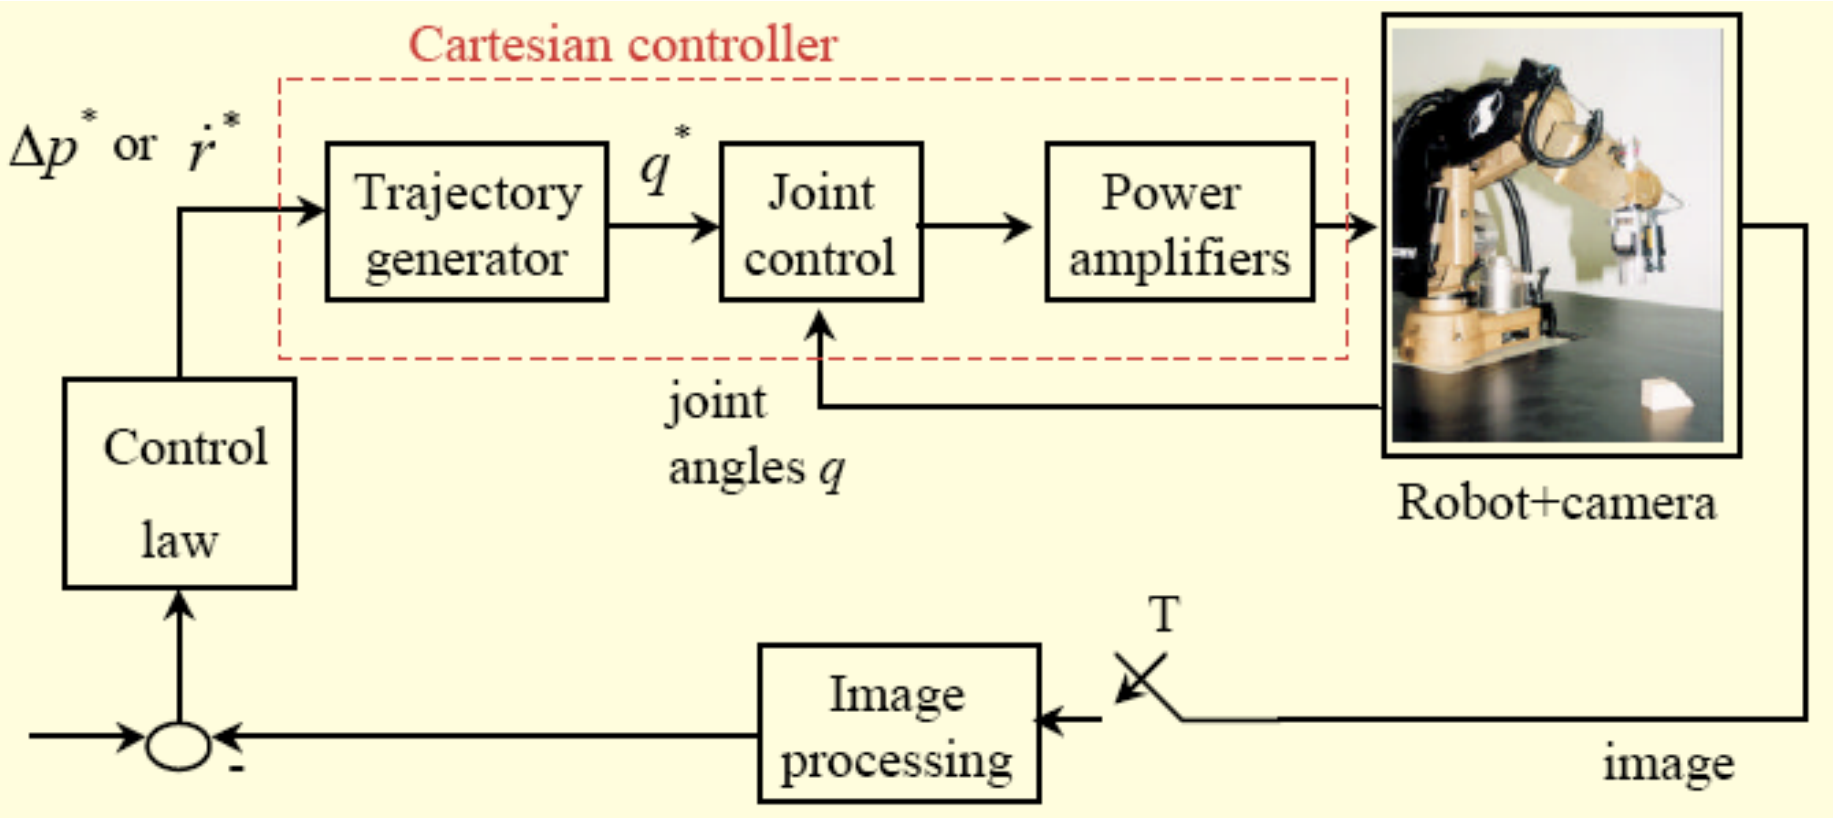


vision system provides set-point references to a Cartesian motion controller

- "easy" control law (same as without vision)
- appropriate for relatively slow situations (control sampling $f = 1/T <$ 50Hz)

# Direct/internal visual servoing

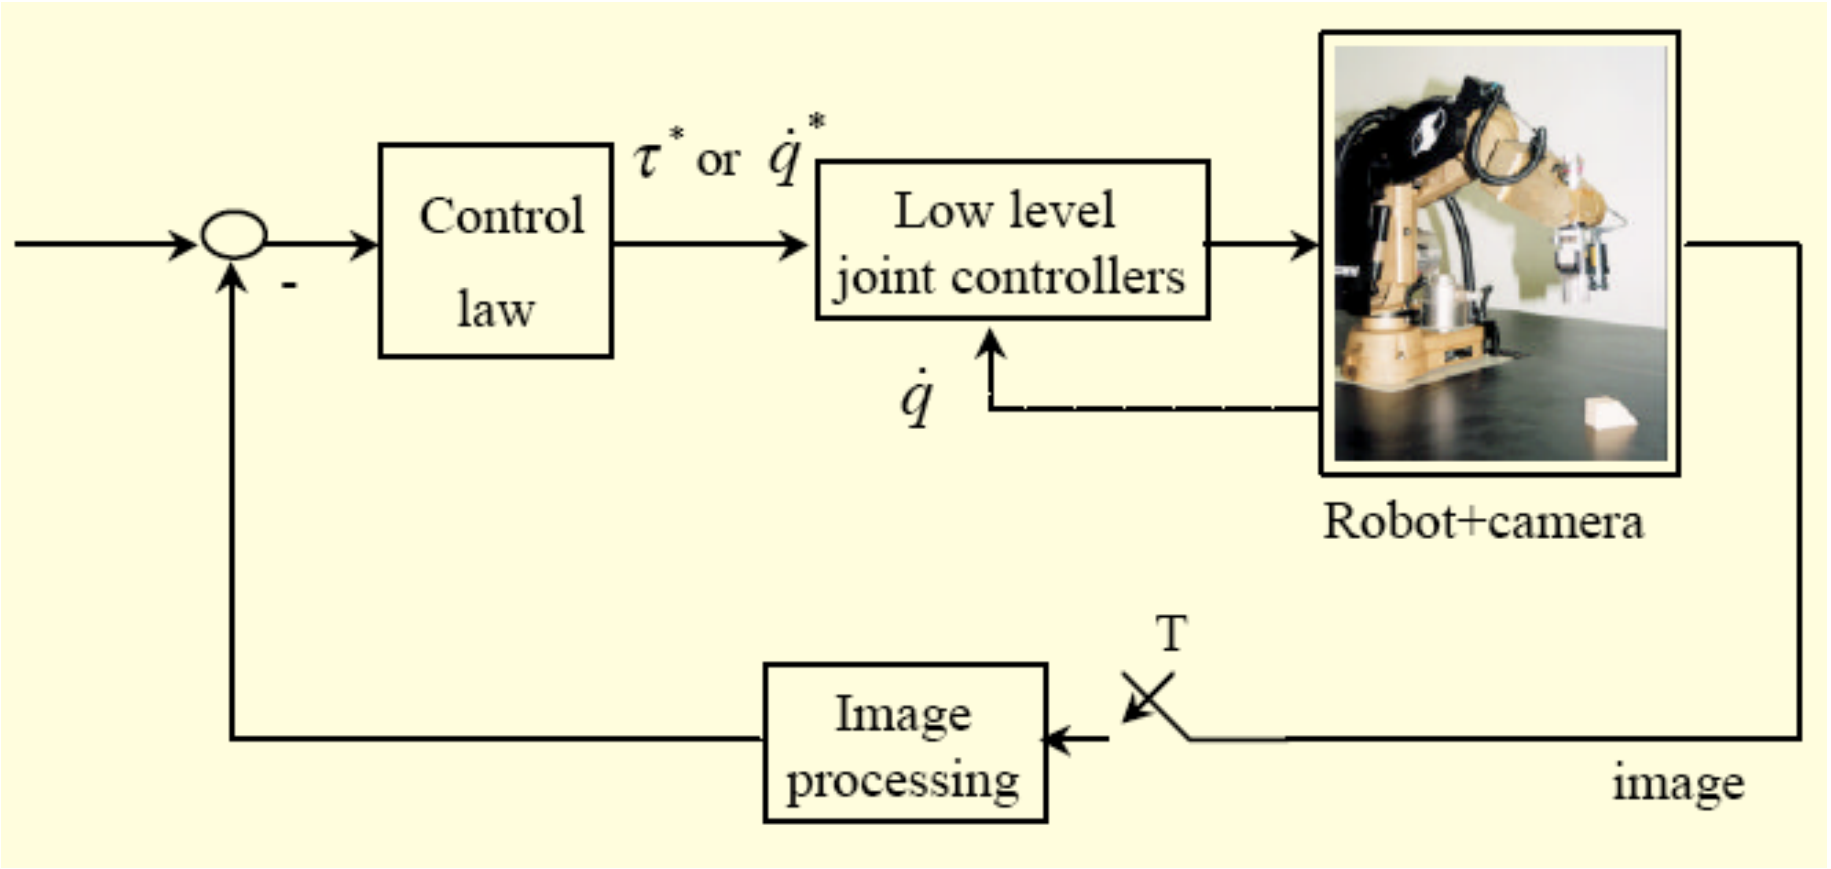


replace Cartesian controller with one based on vision that directly computes joint reference commands

- control law is more complex (involves robot kinematics/dynamics)
- preferred for fast situations (control sampling $f = 1/T >$ 50Hz)

# Classification of visual servoing schemes


- position-based visual servoing (**PBVS**)
  - information extracted from images (features) is used to reconstruct the current 3D pose (pose/orientation) of an object
  - combined with the knowledge of a desired 3D pose, we generate a Cartesian pose error signal that drives the robot to the goal
- image-based visual servoing (**IBVS**)
  - error is computed directly on the values of the features extracted on the 2D image plane, without going through a 3D reconstruction
  - the robot should move so as to bring the current image features (what it "sees" with the camera) to their desired values
- some mixed schemes are possible (e.g., 2½D methods)

# Comparison between the two schemes

- position-based visual servoing (**PBVS**)

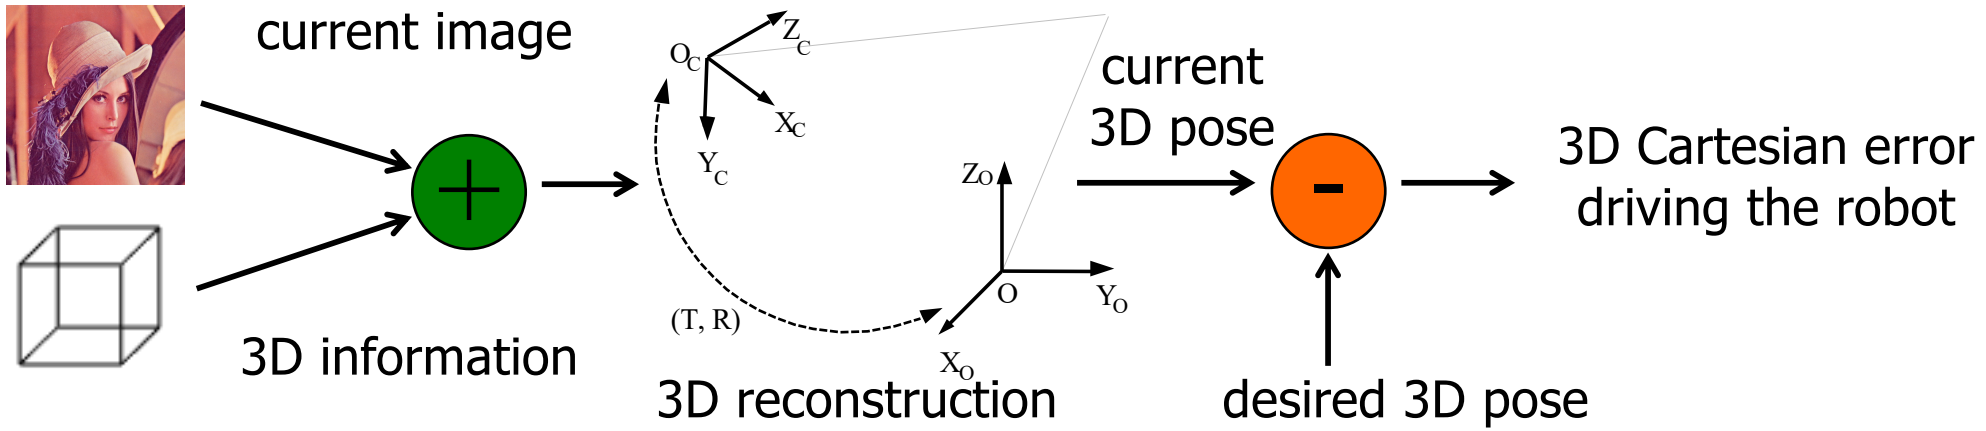


- image-based visual servoing (**IBVS**)

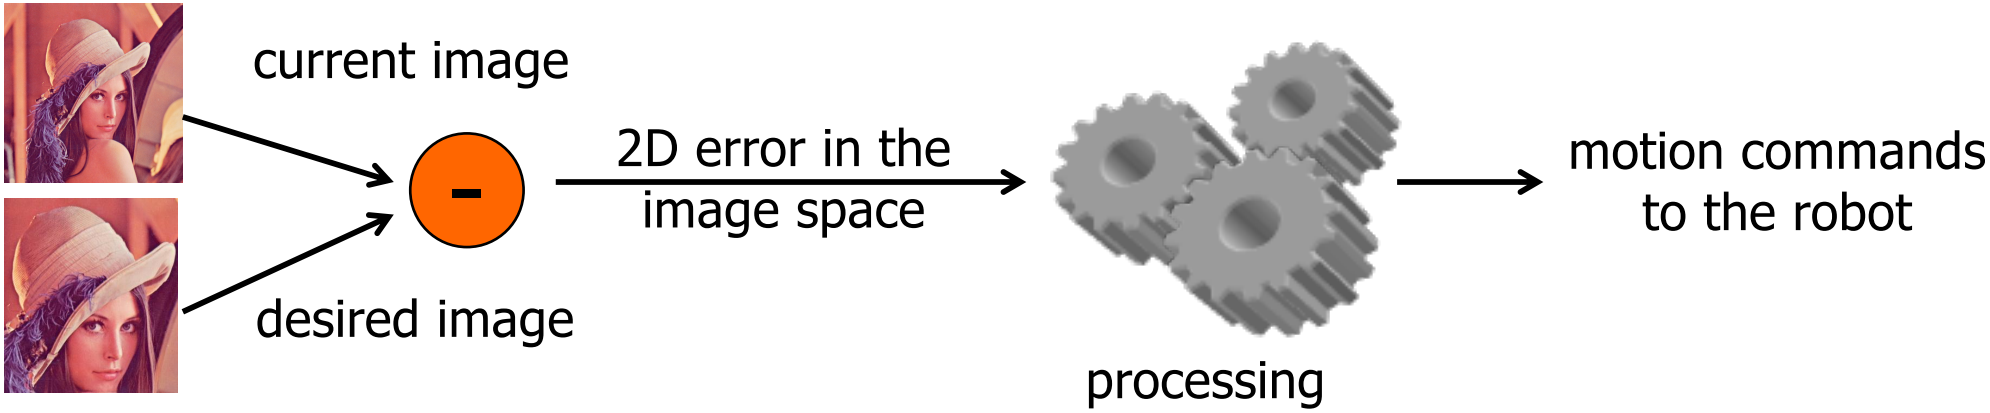

# PBVS architecture

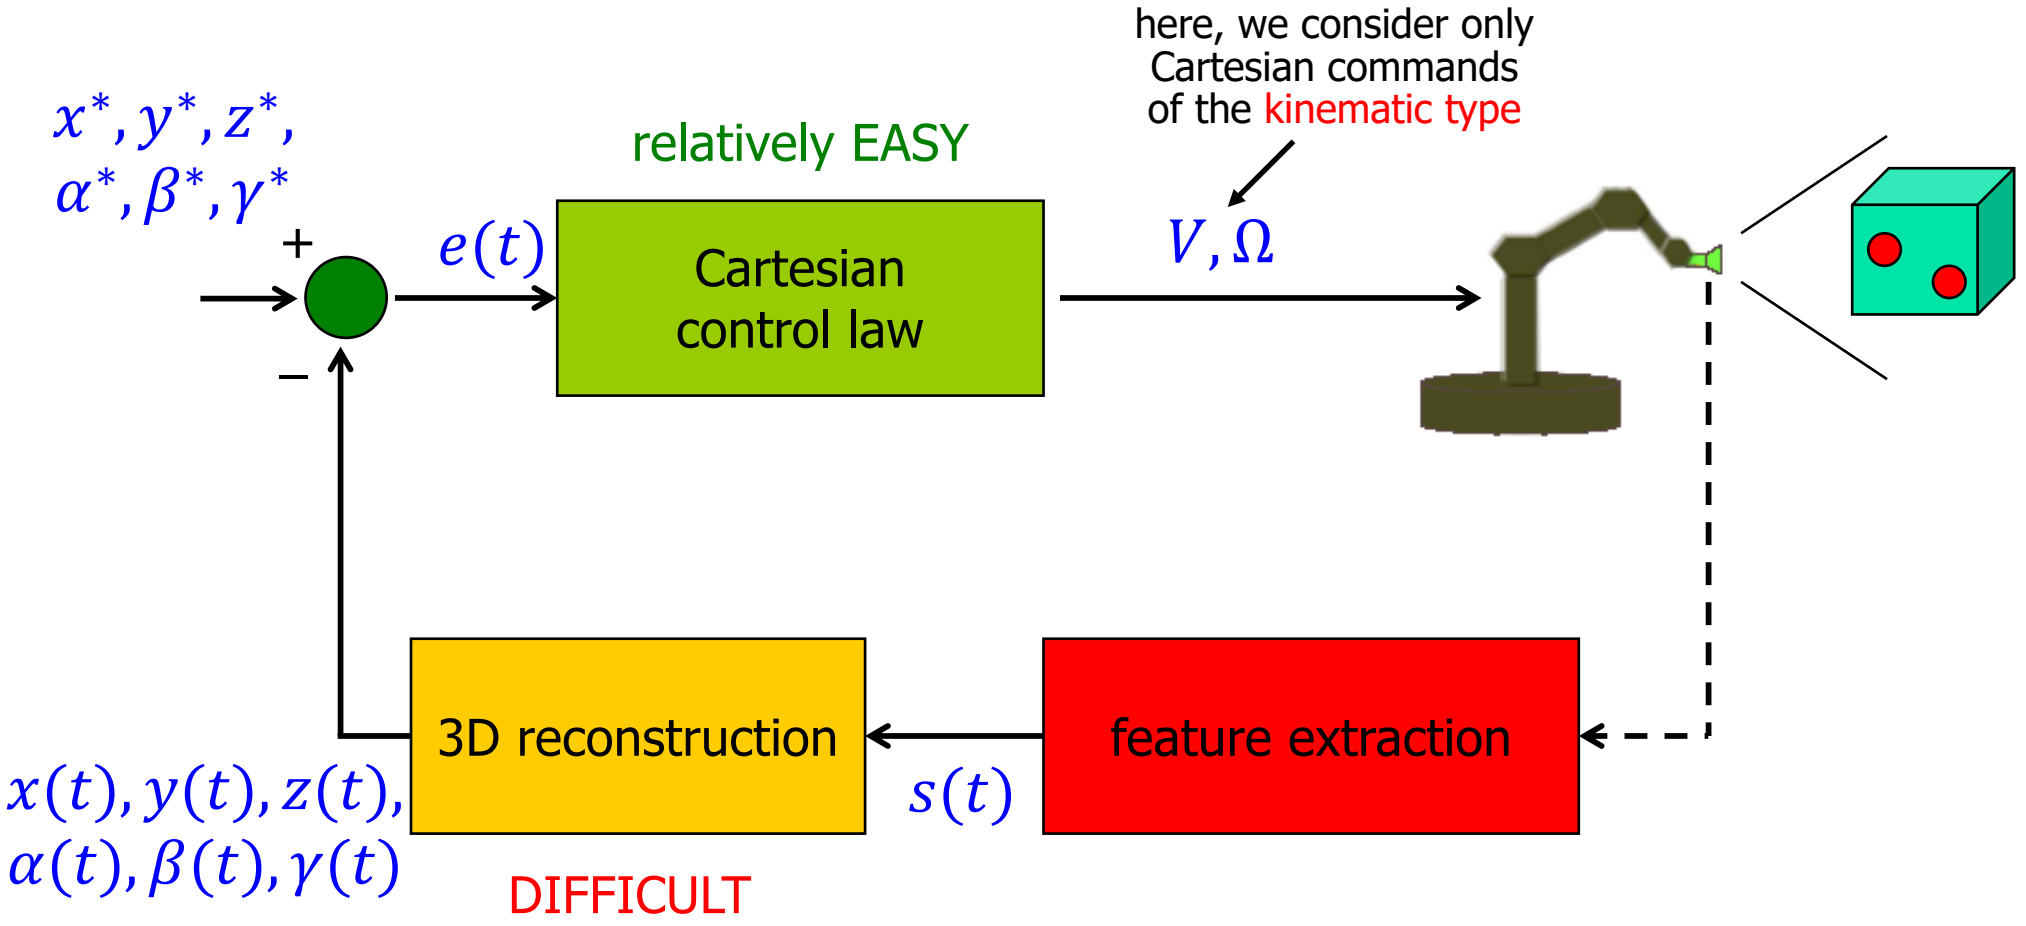


highly sensitive to camera calibration parameters

# Examples of PBVS

video

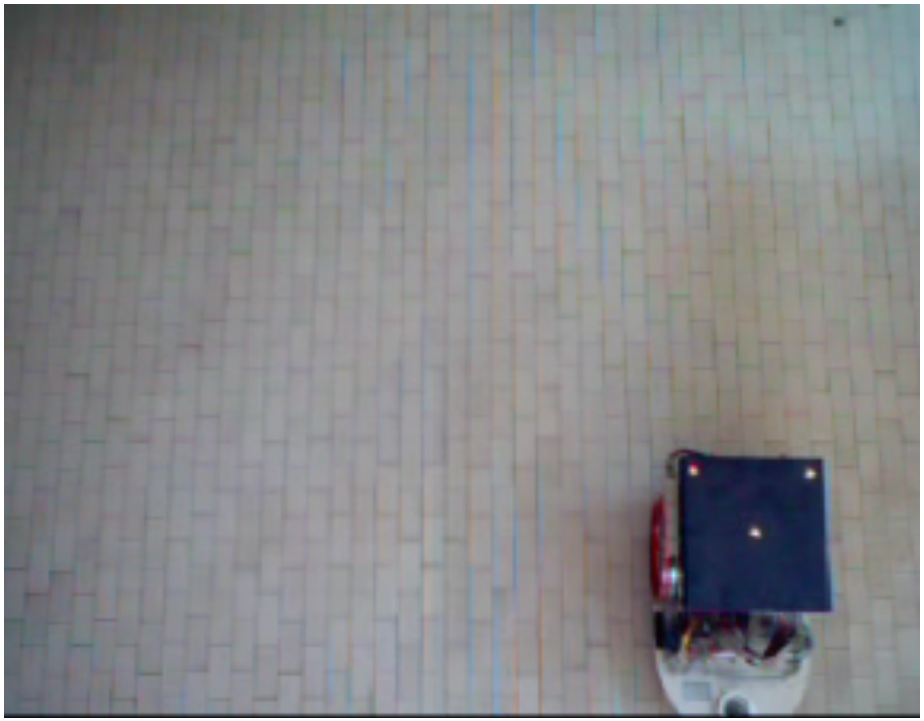

eye-to-“robot” (SuperMario)

video

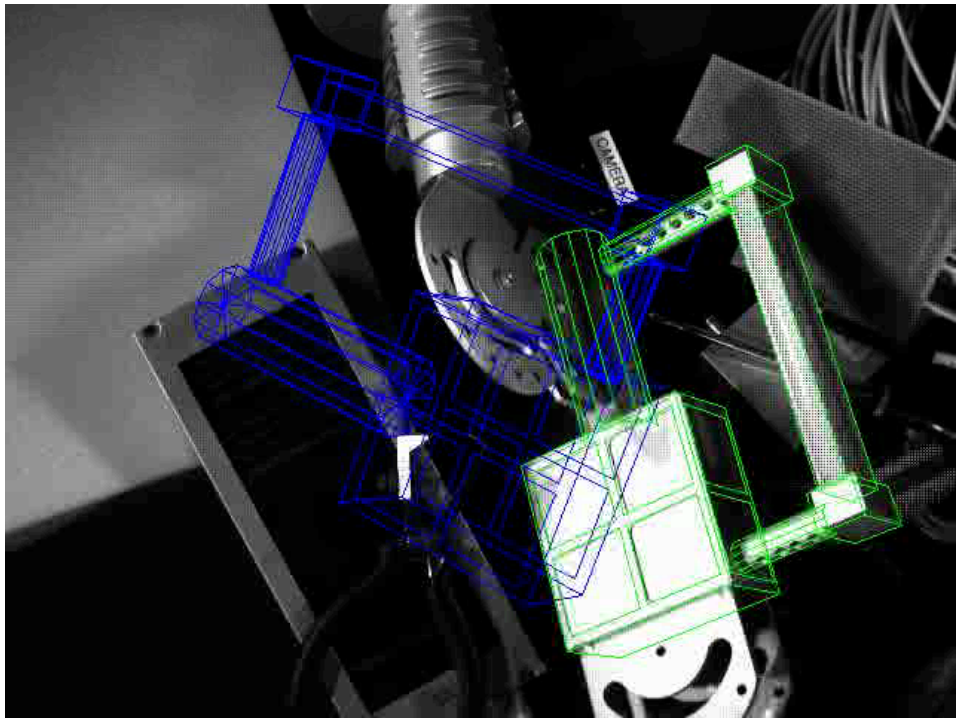

eye-in-hand (Puma robot)

position/orientation of the camera and scene geometry

known a priori!

position and orientation of the robot (with mobile or fixed base)

# IBVS architecture

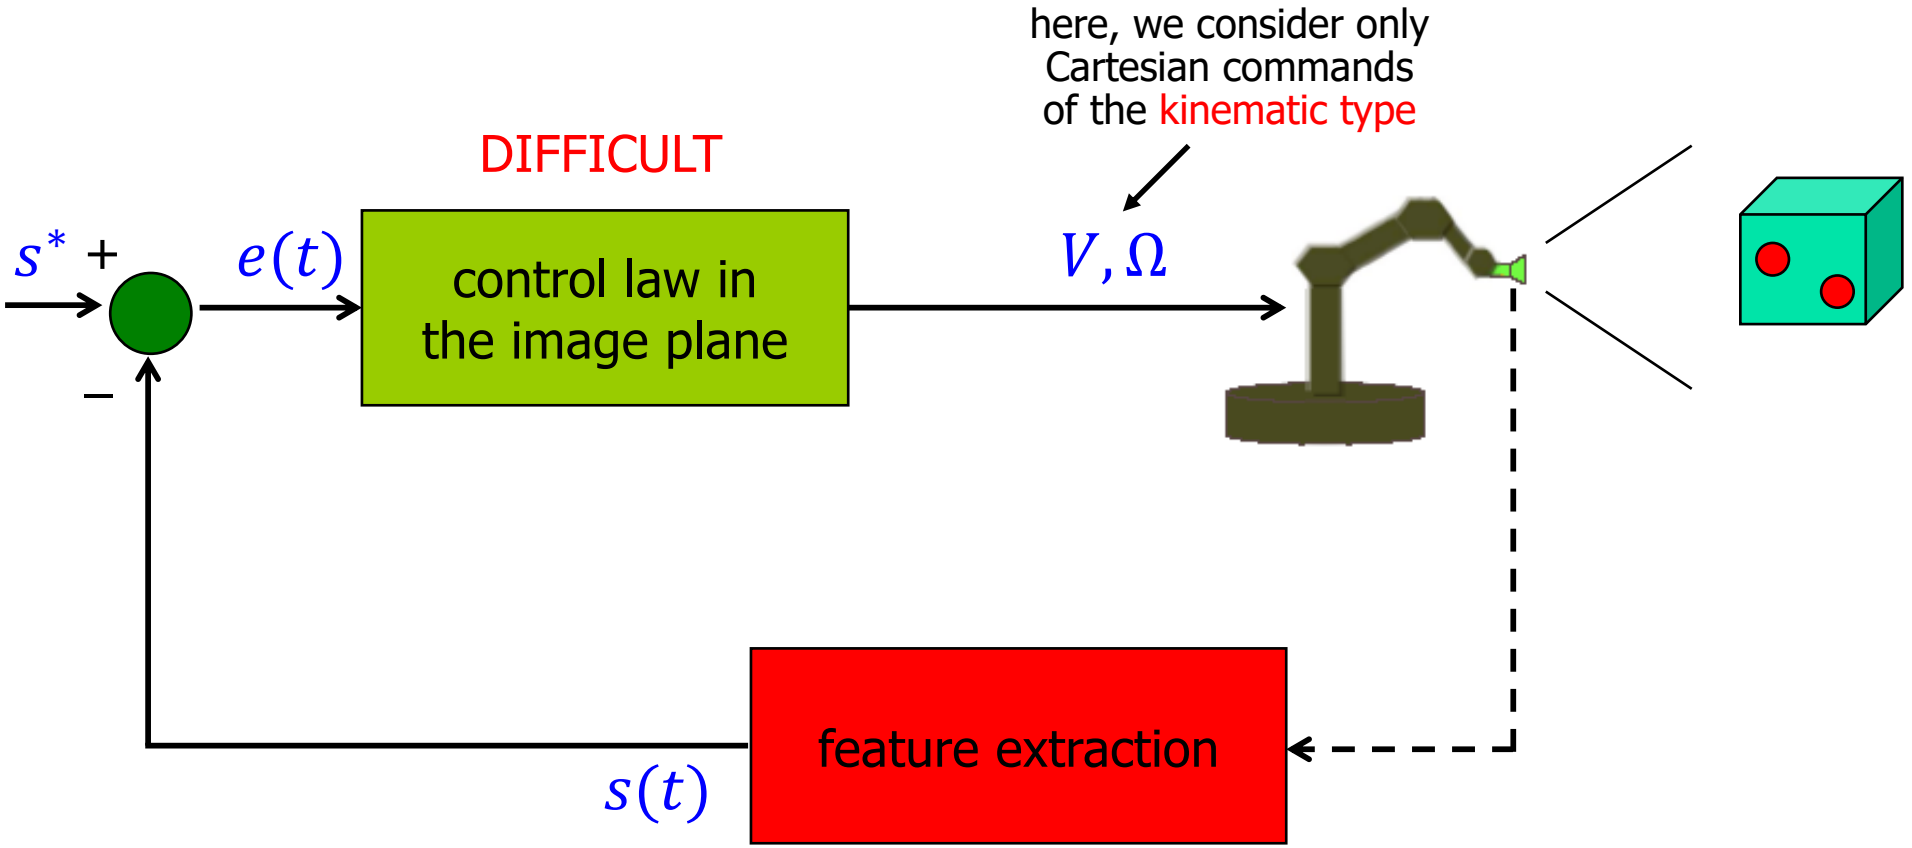


almost insensitive to intrinsic/extrinsic camera calibration parameters

# An example of IBVS

here, the features are points (selected from the given set, or in suitable combinations)

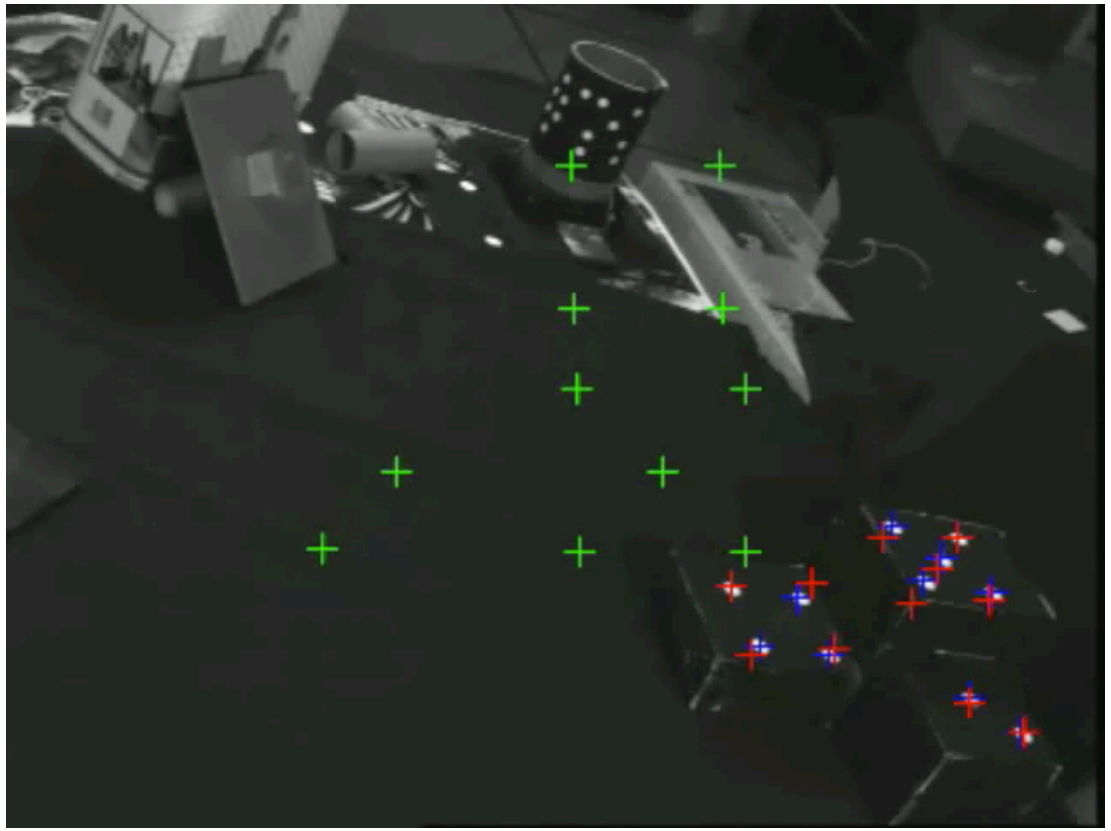

video

desired feature positions
current feature positions

→ the error in the image plane (task space!) drives/controls the motion of the robot

# PBVS vs IBVS

PBVS = position-based visual servoing

video

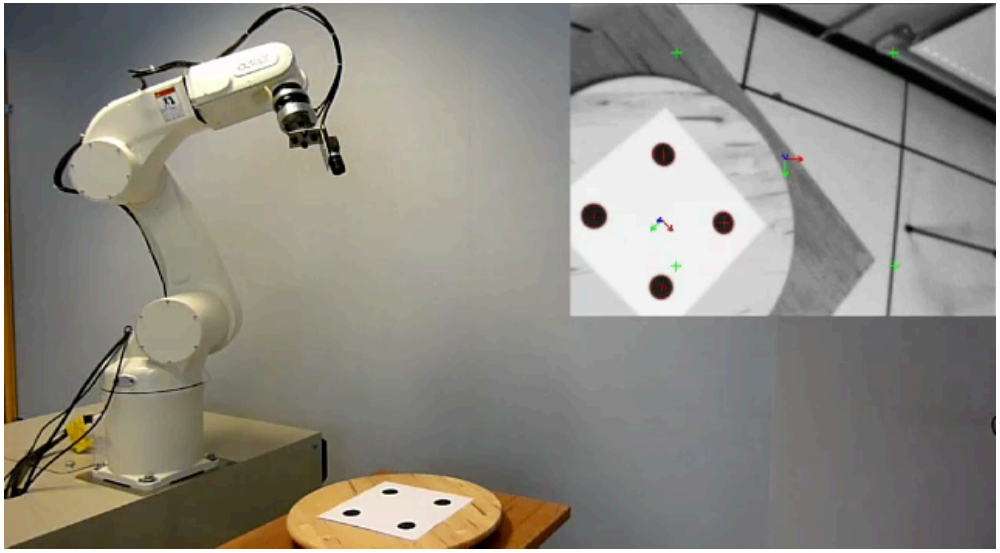

IBVS = image-based visual servoing

video

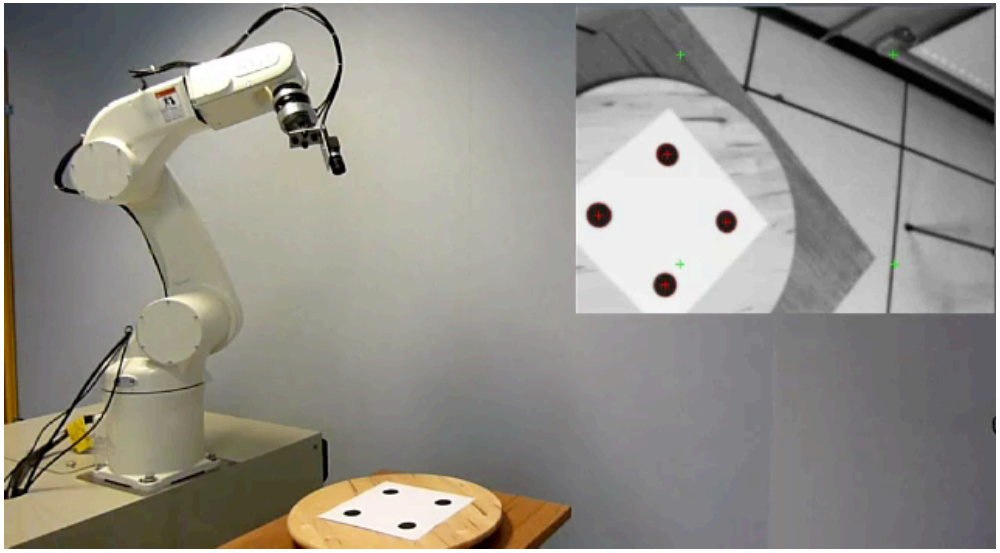

F. Chaumette, INRIA Rennes

reconstructing the instantaneous (relative) 3D pose of the object

using (four) point features extracted from the 2D image

...and intermediate 2½-D visual servoing...

# Steps in an IBVS scheme


- image acquisition
  - frame rate, delay, noise, ...
- feature extraction
  - with image processing techniques (it could be a difficult and time consuming step!)
- comparison with "desired" feature values
  - definition of an error signal in the image plane
- generation of motion of the camera/robot
  - perspective transformations
  - differential kinematics of the manipulator
  - control laws of kinematic (most often) or dynamic type (e.g., PD + gravity cancelation --- see reference textbook)

# Image processing techniques

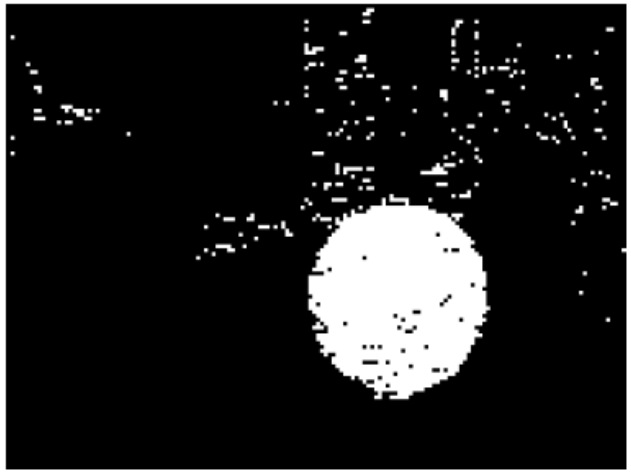

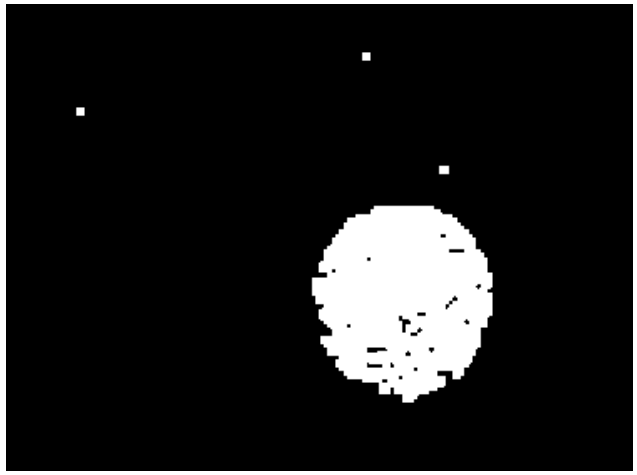

binarization in RGB space → erosion and dilation

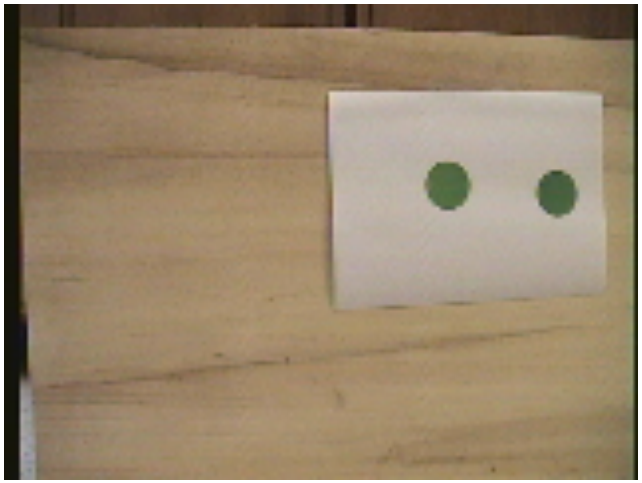

binarization in HSV space → dilation

# What is a feature?


- image feature: any interesting characteristic or geometric structure extracted from the image/scene
  - points
  - lines
  - ellipses (or any other 2D contour)
- feature parameter(s): any numerical quantity associated to the selected feature in the image plane
  - coordinates of a point
  - angular coefficient and offset of a line
  - center and radius of a circle
  - area and center of a 2D contour
  - generalized moments of an object in the image
    - can also be defined so as to be scale- and rotation-invariant

# Example of IBVS using moments

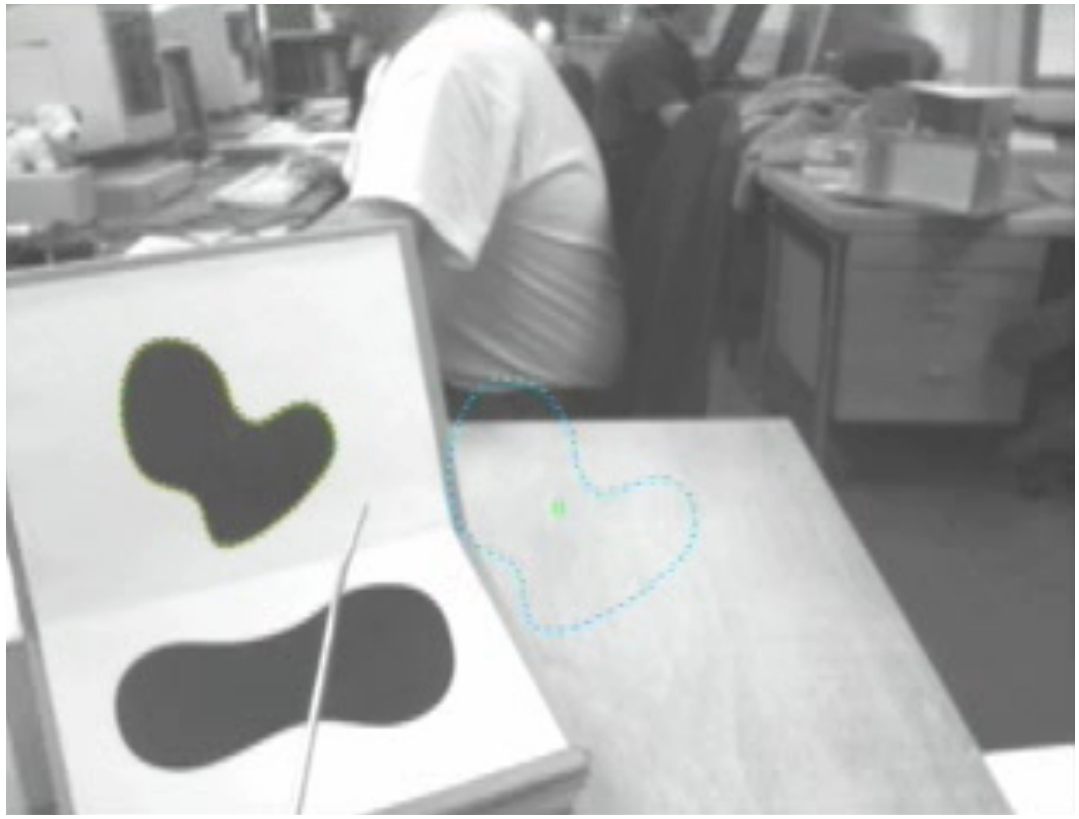

video

- avoids the problem of "finding correspondences" between points
- however, it is not easy to control the motion of all 6 dofs of the camera when using only moments as features

# Camera model


- set of lenses to focus the incoming light
  - (converging) thin lenses
  - pinhole approximation
  - catadioptric lens or systems (combined with mirrors)
- matrix of light sensitive elements (pixels in image plane), possibly selective to RGB colors ~ human eye
- frame grabber "takes shots": an electronic device that captures individual, digital still frames as output from an analog video signal or a digital video stream
  - board + software on PC
  - frame rate = output frequency of new digital frames
  - it is useful to randomly access a subset (area) of pixels

# Thin lens camera model

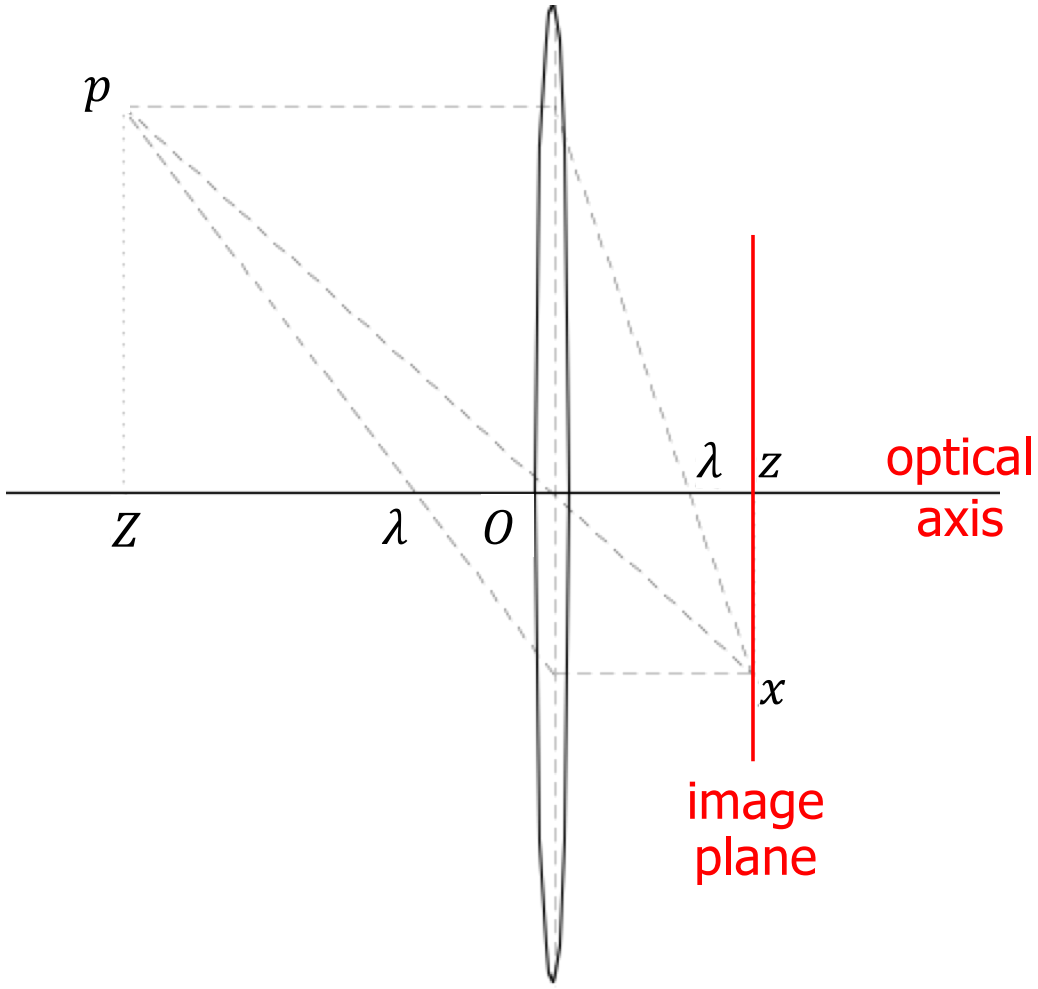


- geometric/projection optics
- rays parallel to the optical axis are deflected through a point at distance $\lambda$ (focal length)
- rays passing through the optical center $O$ are not deflected

fundamental equation of a thin lens

$$\frac{1}{Z}+\frac{1}{z}=\frac{1}{\lambda}$$

dioptric (optical) power

proof? left as exercise ...

# Pinhole camera model

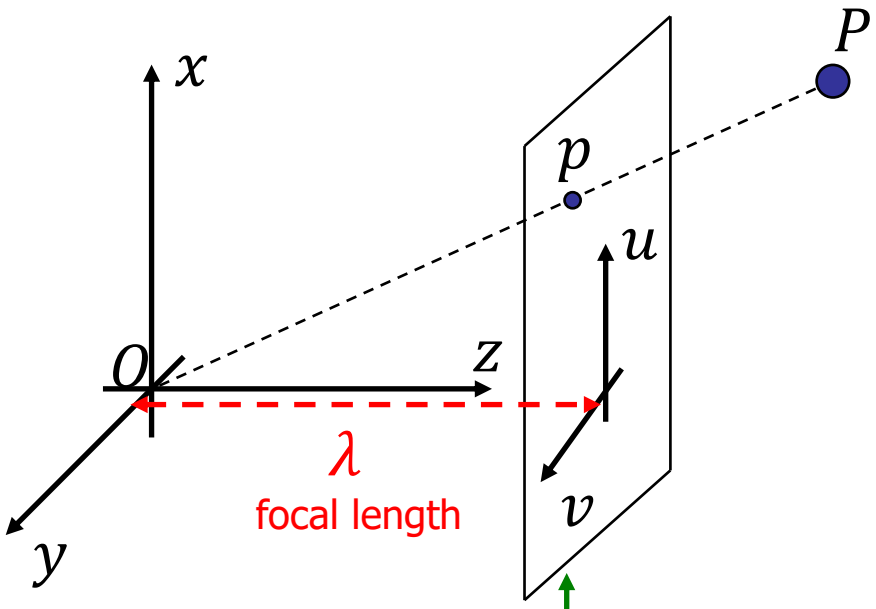


image plane with an array of light sensitive elements
(actually located symmetrically to the optical center $O$, but this model avoids a change of signs...)

- when thin lens wideness is neglected
- all rays pass through optical center
- from the relations on similar triangles one gets the perspective equations

$$u = \lambda \frac{X}{Z} \qquad v = \lambda \frac{Y}{Z}$$

to obtain these from discrete pixel values, an offset and a scaling factor should be included in each direction

sometimes normalized values $(u', v')$ are used (dividing by the focal length)

with

$$P = (X, Y, Z)$$ Cartesian point (in camera frame)

$$p = (u, v, \lambda)$$ representative point on the image plane

# Reference frames of interest

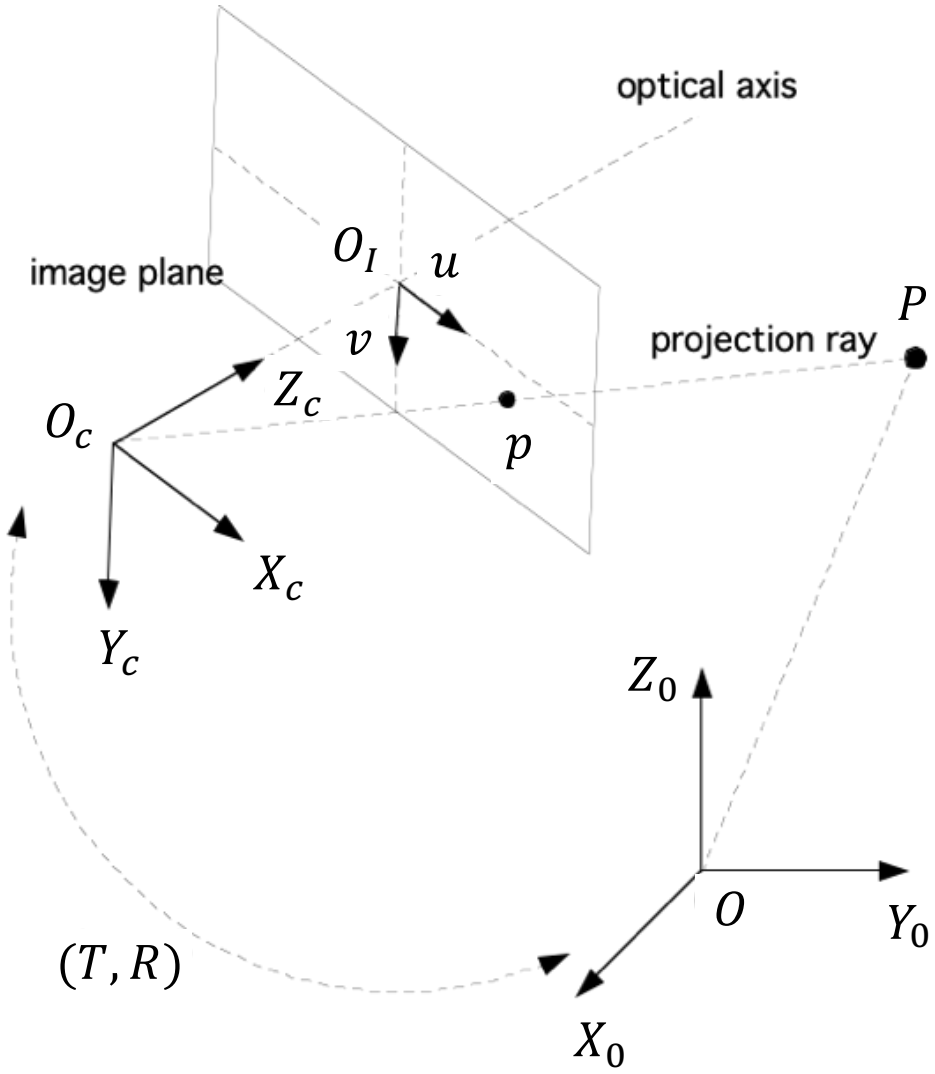


- absolute reference frame

$$\mathcal{F}_0: \{O, \vec{X}_0, \vec{Y}_0, \vec{Z}_0\}$$

- camera reference frame

$$\mathcal{F}_c: \{O_c, \vec{X}_c, \vec{Y}_c, \vec{Z}_c\}$$

- image plane reference frame

$$\mathcal{F}_I: \{O_I, \vec{u}, \vec{v}\}$$

- position/orientation of $\mathcal{F}_c$ w.r.t. $\mathcal{F}_0$

$$(T, R)$$

(translation, rotation)

# Interaction matrix


- given a set of feature(s) parameters $f = [f_1 \quad \cdots \quad f_k]^T \in \mathbb{R}^k$
- we look for the (kinematic) differential relation between motion imposed to the camera and motion of features on the image plane

$$\dot{f} = J(\cdot) \begin{bmatrix} V \\ \Omega \end{bmatrix}$$

- $(V, \Omega) \in \mathbb{R}^6$ is the camera linear/angular velocity, a vector expressed in $\mathcal{F}_c$
- $J(\cdot)$ is a $k \times 6$ matrix, known as interaction matrix
- in the following, we consider mainly point features
  - other instances (areas, lines, …) can be treated as extensions of the presented analysis

# Computing the interaction matrix
## point feature, pinhole model


- from the perspective equations $u = \lambda \frac{X}{Z}$ , $v = \lambda \frac{X}{Z}$ , we have

$$\begin{bmatrix} \dot{u} \\ \dot{v} \end{bmatrix} = \begin{bmatrix} \frac{\lambda}{Z} & 0 & -\frac{u}{Z} \\ 0 & \frac{\lambda}{Z} & -\frac{v}{Z} \end{bmatrix} \begin{bmatrix} \dot{X} \\ \dot{Y} \\ \dot{Z} \end{bmatrix} = J_1(u, v, \lambda) \begin{bmatrix} \dot{X} \\ \dot{Y} \\ \dot{Z} \end{bmatrix}$$

- the velocity $(\dot{X}, \dot{Y}, \dot{Z})$ of a point $P$ in frame $\mathcal{F}_c$ is actually due to the roto-translation $(V, \Omega)$ of the camera ($P$ is assumed fixed in $\mathcal{F}_0$)
- kinematic relation between $(\dot{X}, \dot{Y}, \dot{Z})$ and $(V, \Omega)$

$$\begin{bmatrix} \dot{X} \\ \dot{Y} \\ \dot{Z} \end{bmatrix} = -V - \Omega \times \begin{bmatrix} X \\ Y \\ Z \end{bmatrix}$$

Note: ALL quantities are expressed in the camera frame $\mathcal{F}_c$
without explicit indication of subscripts

# Computing the interaction matrix (cont)
## point feature, pinhole model


- the last equation can be expressed in matrix form

$$\begin{bmatrix} \dot{X} \\ \dot{Y} \\ \dot{Z} \end{bmatrix} = \begin{bmatrix} -1 & 0 & 0 & 0 & -Z & Y \\ 0 & -1 & 0 & Z & 0 & -X \\ 0 & 0 & -1 & -Y & X & 0 \end{bmatrix} \begin{bmatrix} V \\ \Omega \end{bmatrix} = J_2(X,Y,Z) \begin{bmatrix} V \\ \Omega \end{bmatrix}$$

- combining things, the interaction matrix for a point feature is

$$\begin{bmatrix} \dot{u} \\ \dot{v} \end{bmatrix} = J_1 J_2 \begin{bmatrix} V \\ \Omega \end{bmatrix} = \begin{bmatrix} -\frac{\lambda}{Z} & 0 & \frac{u}{Z} & \frac{uv}{\lambda} & -\left(\lambda + \frac{u^2}{\lambda}\right) & v \\ 0 & -\frac{\lambda}{Z} & \frac{v}{Z} & \lambda + \frac{v^2}{\lambda} & -\frac{uv}{\lambda} & -u \end{bmatrix} \begin{bmatrix} V \\ \Omega \end{bmatrix}$$

$$= J_p(u,v,Z) \begin{bmatrix} V \\ \Omega \end{bmatrix}$$

here, $\lambda$ is assumed to be known

$p$ = point (feature)

# Comments

- the interaction matrix in the map

$$\begin{bmatrix} \dot{u} \\ \dot{v} \end{bmatrix} = \boxed{J_p(u, v, Z)} \begin{bmatrix} V \\ \Omega \end{bmatrix}$$

  - depends on the actual value of the feature and on its depth $Z$
  - since $\dim \ker J_p = 4$, there exist $\infty^4$ motions of the camera that are unobservable (for this feature) on the image
    - for instance, a translation along the projection ray
  - when more point features are considered, the associated interaction matrices are stacked one on top of the other
    - $p$ point features: the interaction matrix is $k \times 6$, with $k = 2p$

# Other examples of interaction matrices

- distance between two point features

$$d = \sqrt{(u_1 - u_2)^2 + (v_1 - v_2)^2}$$

$$\dot{d} = \frac{1}{d}\begin{bmatrix} u_1 - u_2 & v_1 - v_2 & u_2 - u_1 & v_2 - v_1 \end{bmatrix} \begin{bmatrix} \dot{u}_1 \\ \dot{v}_1 \\ \dot{u}_2 \\ \dot{v}_2 \end{bmatrix}$$

$$= J_p(u_1, u_2, v_1, v_2) \begin{bmatrix} J_{p1}(u_1, v_1, Z_1) \\ J_{p2}(u_2, v_2, Z_2) \end{bmatrix} \begin{bmatrix} V \\ \Omega \end{bmatrix}$$

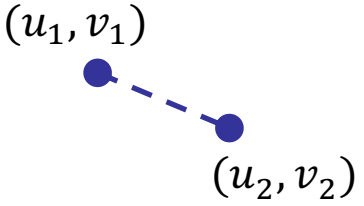


- image moments

$$m_{ij} = \iint_{\mathcal{R}(t)} x^i y^i dx\, dy$$

$\mathcal{R}(t)$ region of the image plane occupied by the object

  - useful for representing also qualitative geometric information (area, center, orientation of an approximating ellipse, …)
  - by using Green formulas and the interaction matrix of a generic point feature

$$\Rightarrow \quad \dot{m}_{ij} = L_{ij} \begin{bmatrix} V \\ \Omega \end{bmatrix}$$

(see F. Chaumette: "Image moments: A general and useful set of features for visual servoing", IEEE Trans. on Robotics, August 2004)

# IBVS with straight lines as features

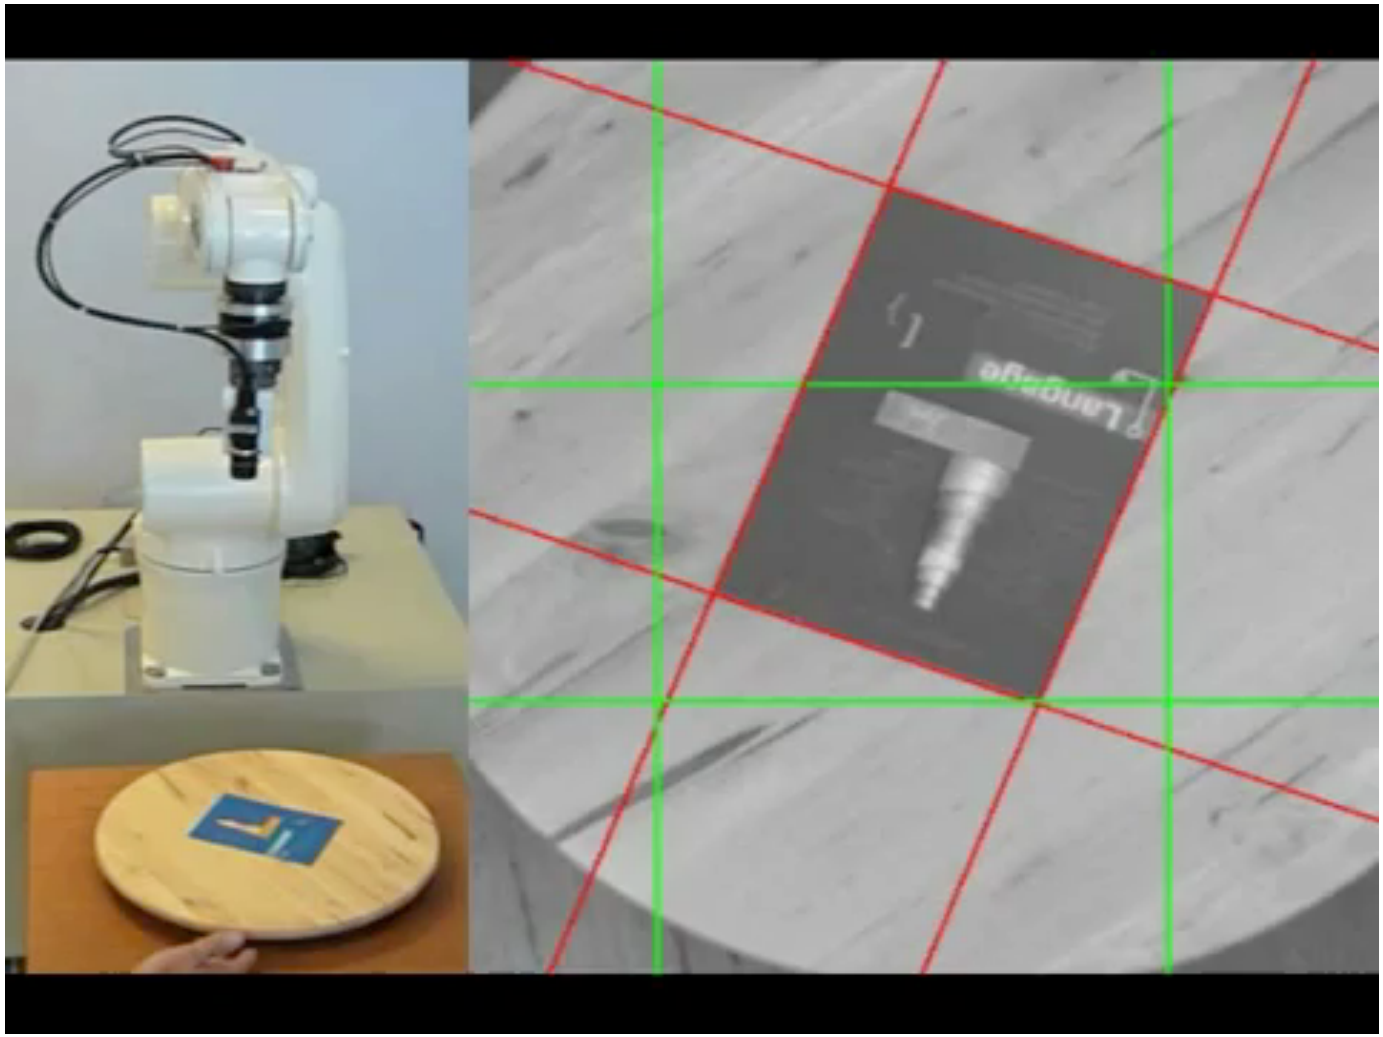

video

F. Chaumette, INRIA Rennes

# Robot differential kinematics


- eye-in-hand case: camera is mounted on the end-effector of a manipulator arm (with fixed base or on a wheeled mobile base)
- the motion $(V, \Omega)$ to be imposed to the camera coincides with the desired end-effector linear/angular velocity and is realized by choosing the manipulator joint velocity (or, more in general, the feasible velocity commands of a mobile manipulator)

$$\begin{bmatrix} V \\ \Omega \end{bmatrix} = J_m(q)\dot{q} = J_m(q)u$$

velocity control input

for consistency with the previous interaction matrix, these Jacobians must be expressed in the camera frame $\mathcal{F}_c$

Geometric Jacobian of a manipulator

... or the NMM Jacobian of a mobile manipulator

with $q \in \mathbb{R}^n$ being the robot configuration variables

- in general, an hand-eye calibration is needed for this Jacobian

# Image Jacobian


- combining the step involved in the passage from the velocity of point features on the image plane to the joint velocity/feasible velocity commands of the robot, we finally obtain

$$\dot{f} = J_p(f, Z) J_m(q) u = J(f, Z, q) u$$

- matrix $J(f, Z, q)$ is called the Image Jacobian and plays the same role of a classical robot Jacobian
- we can thus apply one of the many standard kinematic (or even dynamics-based) control techniques for robot motion
- the (controlled) output is given by the vector of features in the image plane (the task space!)
- the error driving the control law is defined in this task space

# Kinematic control for IBVS

- defining the error vector as $e = f_d - f$, the general choice

$$u = J^{\#}\left(\dot{f}_d + ke\right) + \left(I - J^{\#}J\right)u_0$$

minimum norm solution

term in $\ker J$ does not "move" the features

will exponentially stabilize the task error to zero (up to singularities, limit joint range/field of view, features exiting the image plane, ...)

- in the redundant case, vector $u_0$ (projected in the image Jacobian null space) can be used for optimizing behavior/criteria
- the error feedback signal depends only on feature values
- there is still a dependence of $J$ on the depths $Z$ of the features
  - use the constant and "known" values at the final desired pose

$$J(f, Z^*, q)$$

  - or, estimate on line their current values using a dynamic observer

# Example with NMM

- mobile base (unicycle) + 3R manipulator
- eye-in-hand configuration

- 5 commands
  - linear and angular velocity of mobile base
  - velocities of the three manipulator joints

- task specified by 2 point features ⟶ 4 output variables

$$f = [f_{u1} \quad f_{v1} \quad f_{u2} \quad f_{v2}]^T$$

- 5 – 4 = 1 degree of redundancy (w.r.t. the task)

# Simulation

view from camera

processed image

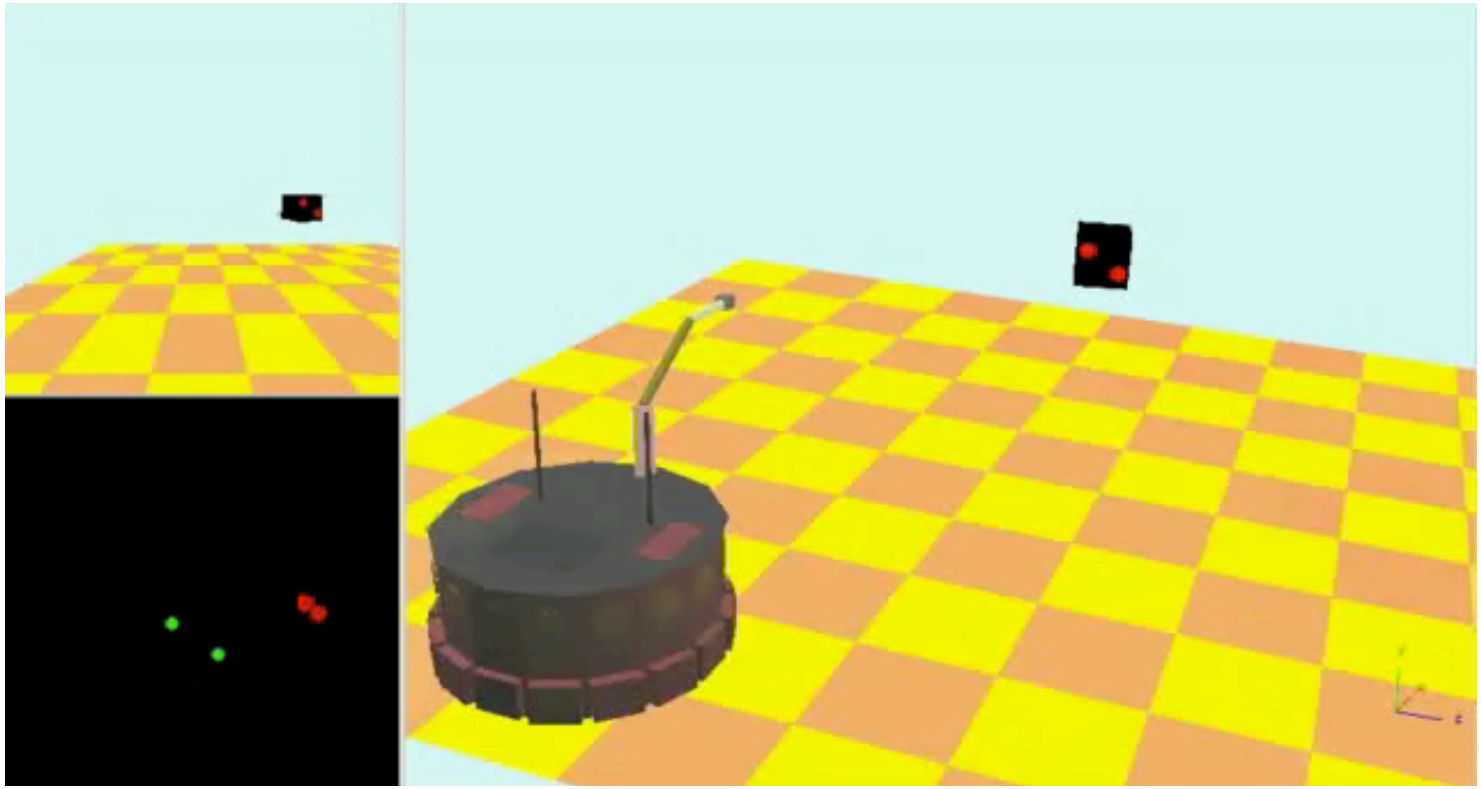

video

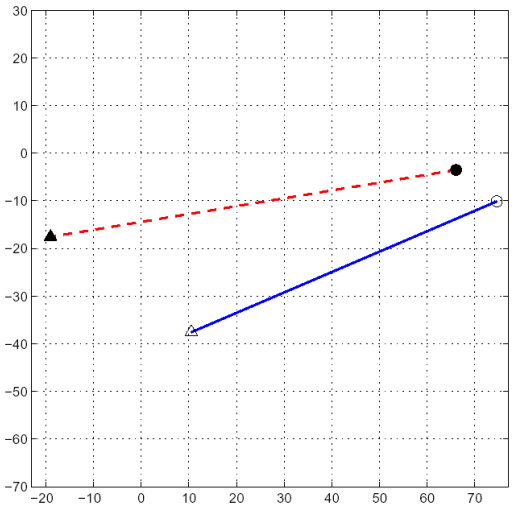


behavior of the 2 features

- simulation in Webots
- current value of $Z$ is supposed to be known
- diagonal task gain matrix $k$ (decoupling!)
- "linear paths" of features motion on the image plane

# IBVS control with Task Sequencing


- approach: regulate only one (some) feature at the time, while keeping "fixed" the others by unobservable motions in the image plane
- Image Jacobians of single point features (e.g., $p = 2$)

$$\dot{f}_1 = J_1 u, \qquad \dot{f}_2 = J_2 u$$

- the first feature $f_1$ is regulated during a first phase by using

$$u = J_1^{\#} k_1 e_1 + (I - J_1^{\#} J_1) u_0$$

- feature $f_2$ is then regulated by a command in the null-space of the first task

$$u = (I - J_1^{\#} J_1) J_2^T k_2 e_2$$

- in the first phase there are two (more) degrees of redundancy w.r.t. the "complete" case, which can be used, e.g., for improving robot alignment to the target
- if the complete case is not redundant: singularities are typically met without Task Sequencing, but possibly prevented with TS ...

# Simulation with TS scheme

mobile base (unicycle) + polar 2R arm: Image Jacobian is square ($4 \times 4$)

point feature 1
(regulated in
first phase)
point feature 2
(in second phase)

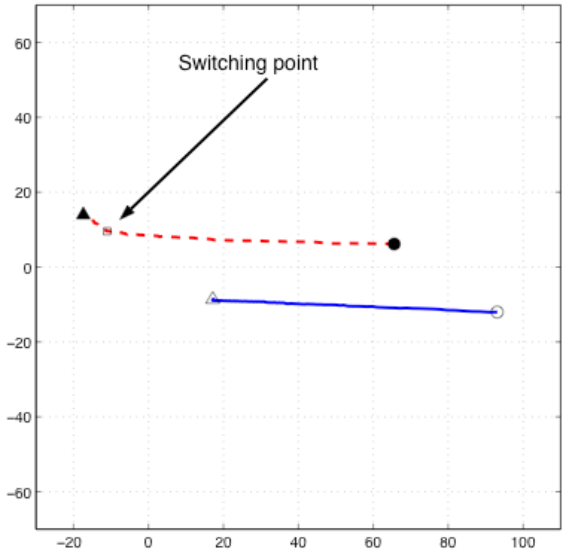


behavior of
the 2 features

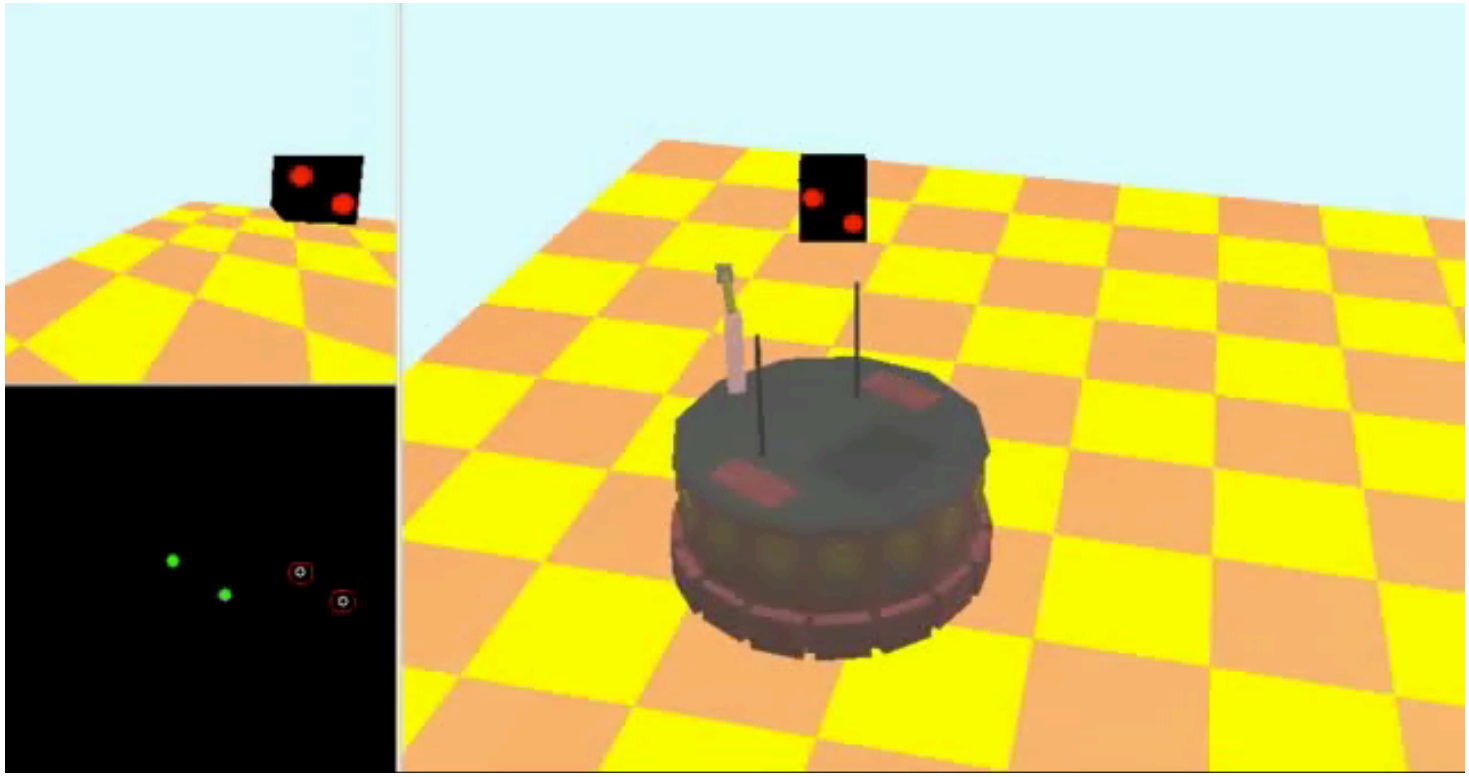

video

- simulation in Webots
- current value of $Z$ is supposed to be known

# Experiments

Magellan (unicycle) + pan-tilt camera (same mobility of a polar 2R robot)


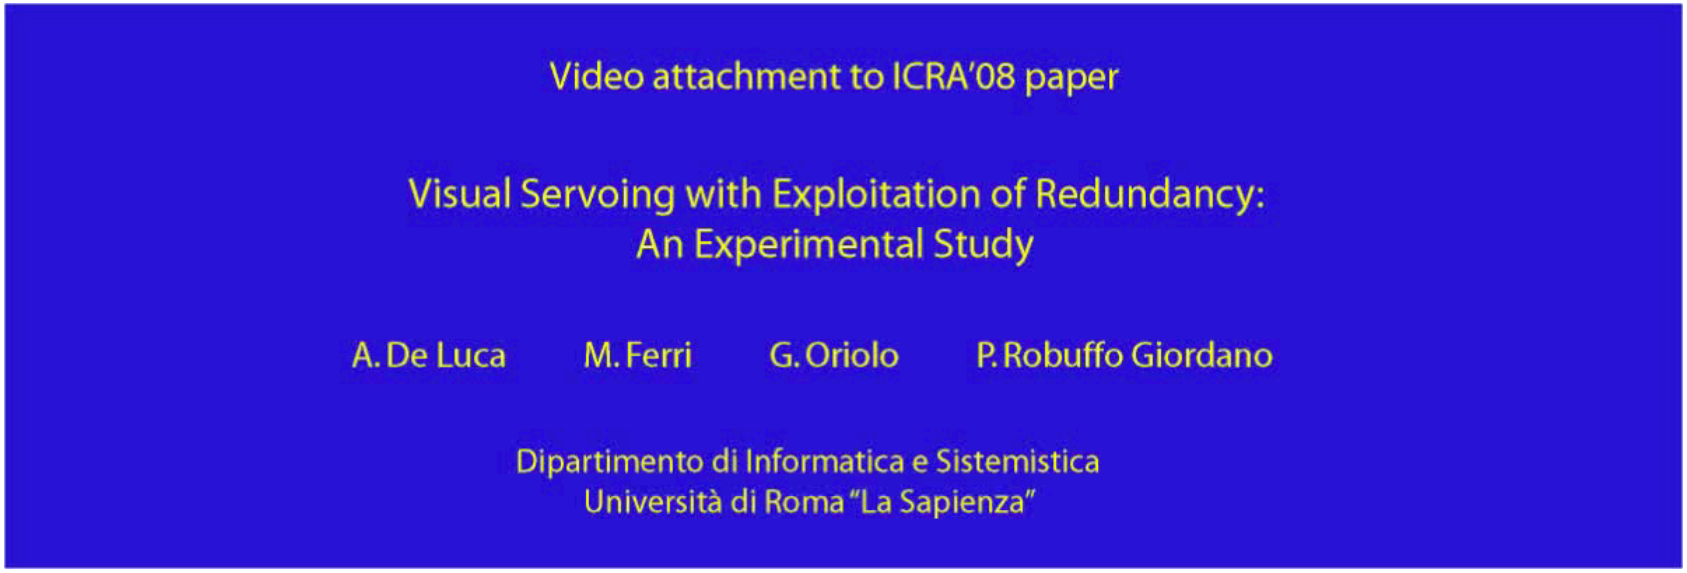


video

- comparison between Task Priority (TP) and Task Sequencing (TS) schemes
- both can handle singularities (of Image Jacobian) that are possibly encountered
- camera frame rate = 7 Hz

# In many practical cases…

- the uncertainty in a number of relevant data may be large
  - focal length $\lambda$ (intrinsic camera parameters)
  - hand-eye calibration (extrinsic camera parameters)
  - depth $Z$ of point features
  - ….
- one can only compute an approximation of the Image Jacobian (both in its interaction matrix part, as well as in the robot Jacobian part)
- in the closed loop, error dynamics on features becomes

$$\dot{e} = -J\,\hat{J}^{\#}Ke$$

  - ideal case: $J\,J^{\#} = I$ real case: $J\,\hat{J}^{\#} \neq I$
- it is possible to show that a sufficient condition for local convergence of the error to zero is

$$\boxed{J\,\hat{J}^{\#} > 0}$$

# Approximate Image Jacobian

- use a constant Image Jacobian $\hat{J}(Z^*)$ that is computed at the desired target $s^*$ (with a known, fixed depth $Z^*$)

$$\dot{q} = J^{\#}(Z)Ke$$

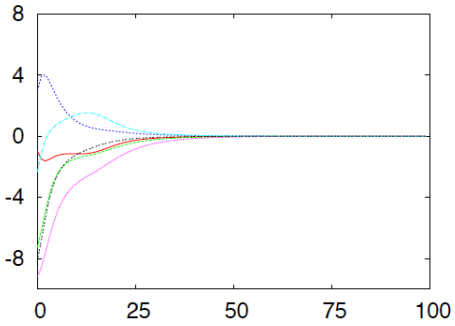


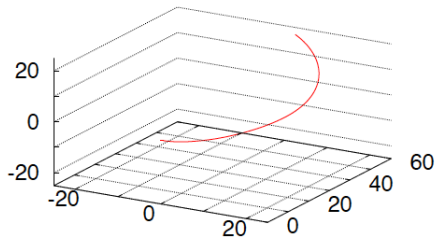


video

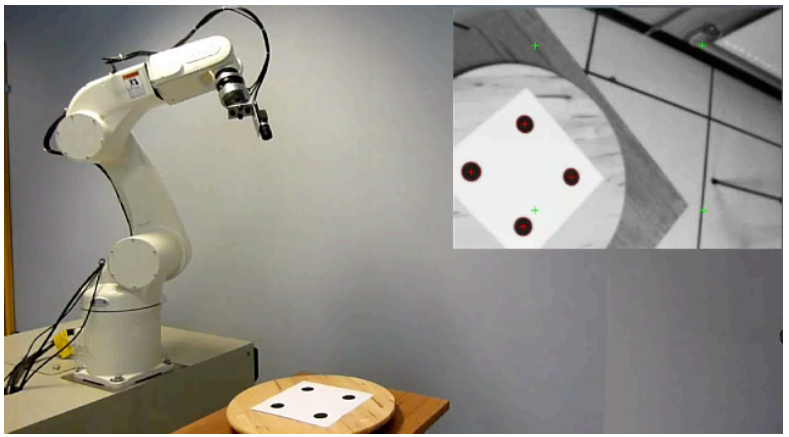

F. Chaumette, INRIA Rennes

$$\dot{q} = \hat{J}^{\#}(Z^*)Ke$$

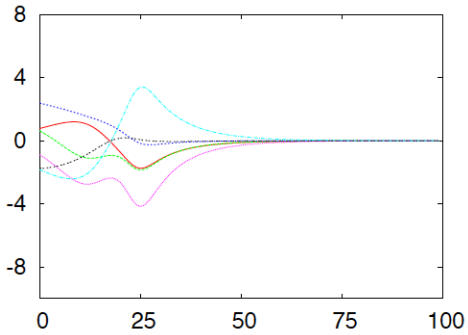


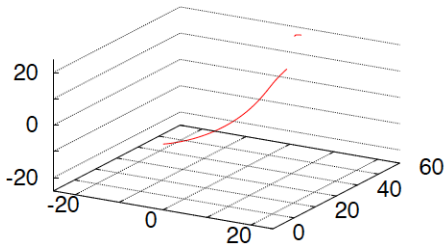


video

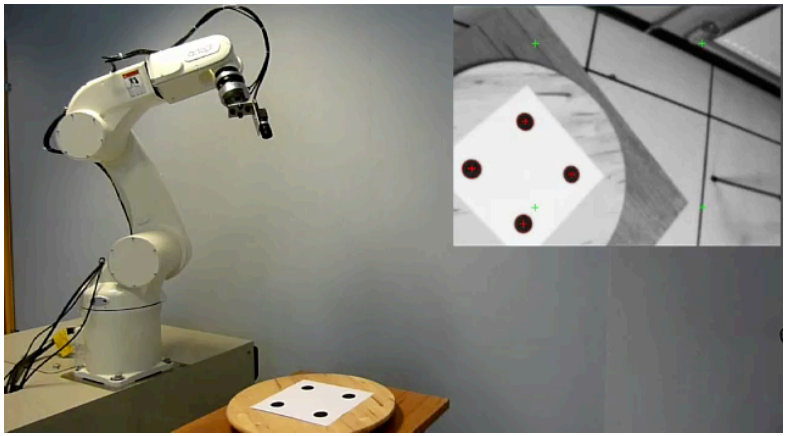

# An observer of the depth Z


- it is possible to estimate on line the current value (possibly time-varying) of the depth $Z$, for each considered point feature, using a dynamic observer
- define $x = [u \quad v \quad 1/Z]^T$, $\hat{x} = [\hat{u} \quad \hat{v} \quad 1/\hat{Z}]^T$ as current state and estimated state, and $y = [u \quad v]^T$ as measured output
- a (nonlinear) observer of $x$ with input $u_c = [V \quad \Omega]^T$

$$\dot{\hat{x}} = \alpha(\hat{x}, y)u_c + \beta(\hat{x}, y, u_c)$$

guarantees $\lim_{t\to\infty} \|x(t) - \hat{x}(t)\| = 0$ provided that

  - linear velocity of the camera is not zero
  - the linear velocity vector is not aligned with the projection ray of the considered point feature

⇒ these are persistent excitation conditions (~ observability conditions)

# Block diagram of the observer

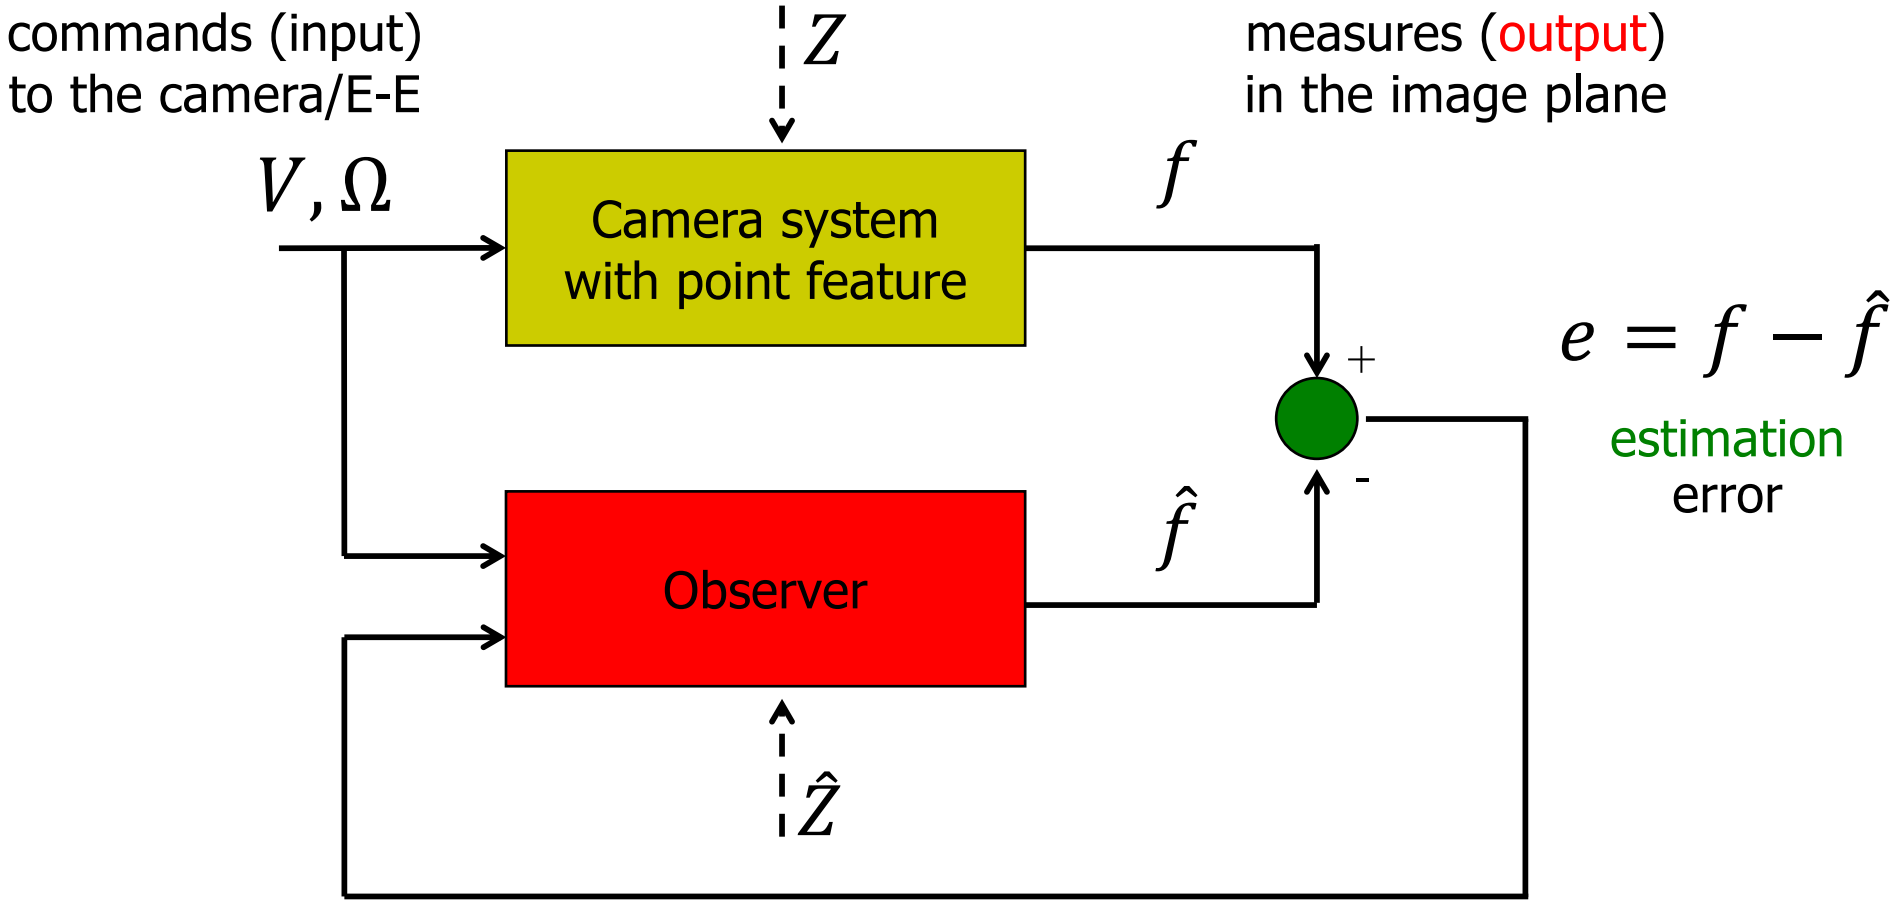

# Results on the estimation of $Z$

real and estimated initial state

$$x(t_0) = [10 \quad -10 \quad 2]^T$$
$$\hat{x}(t_0) = [10 \quad -10 \quad 1]^T$$

$$v_x(t) = 0.1 \cos 2\pi t$$
$$v_z(t) = 0.5 \cos \pi t$$
$$\omega_x(t) = 0.6 \cos(\pi/2)t$$
$$\omega_z(t) = 1$$

open-loop commands

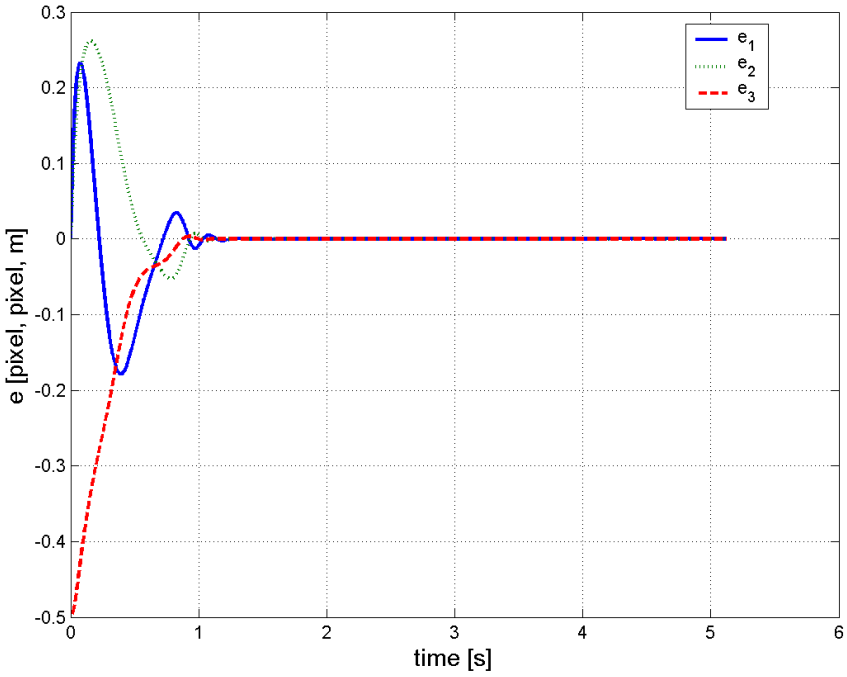


estimation errors $e(t)$

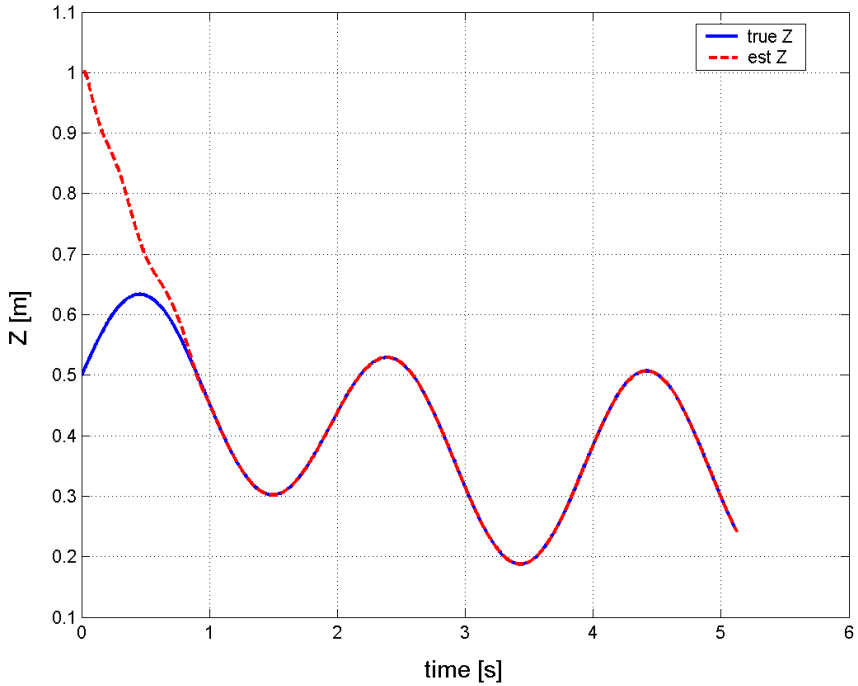


$Z(t)$ and $\hat{Z}(t)$

# Simulation of the observer

## with stepwise displacements of the target

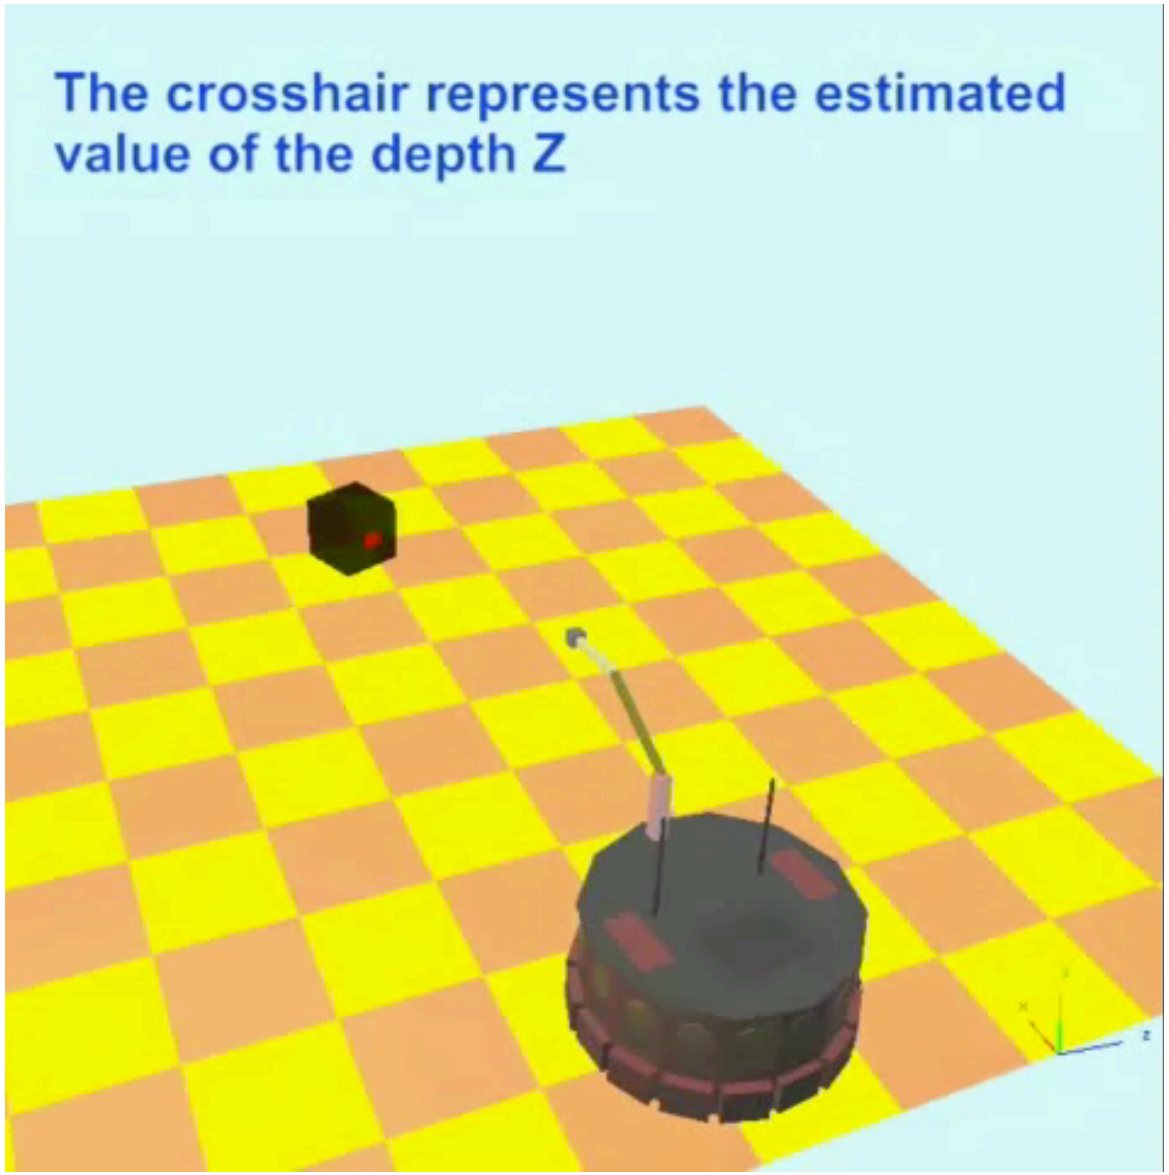


video

# IBVS control with observer

- the depth observer can be easily integrated on line with any IBVS control scheme

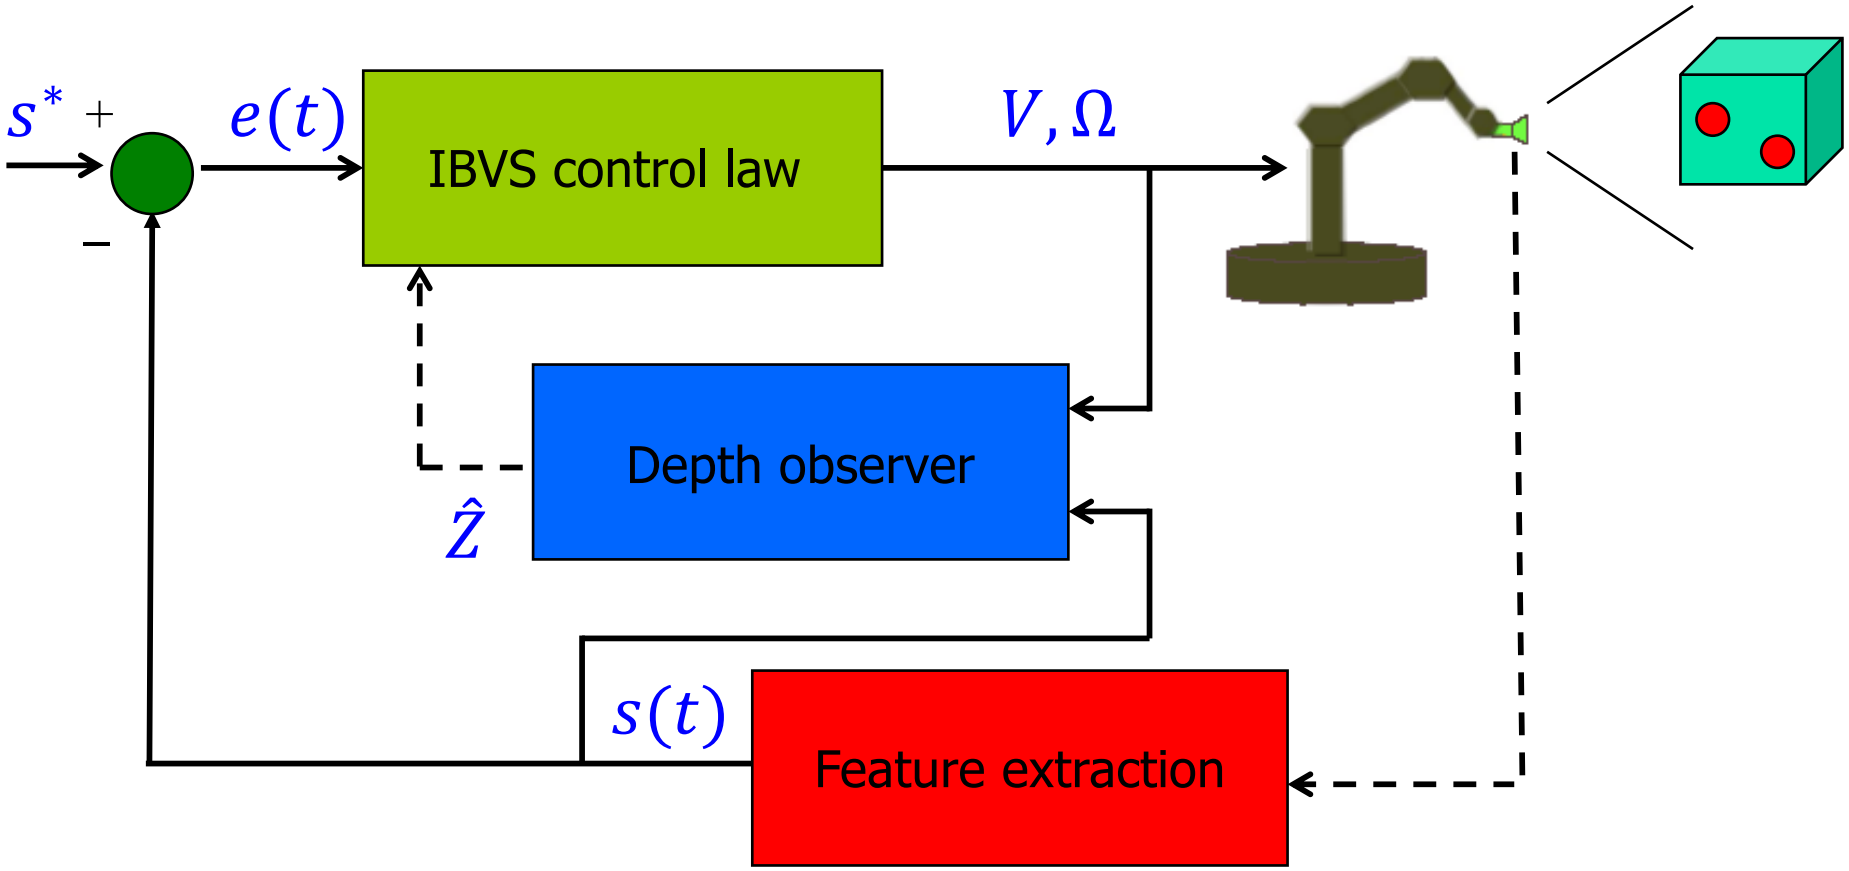

# Experimental set-up

- visual servoing with fixed camera on a skid-steering mobile robot
- very rough eye-robot calibration
- unknown depths of target points (estimated on line)



a "virtual" 5th feature is also used
as the average of the four point features

# Experiments

- motion of features on the image plane is not perfect...
- the visual regulation task is however correctly realized

external view

camera view

video (c/o Università di Siena)

# Evolution of features

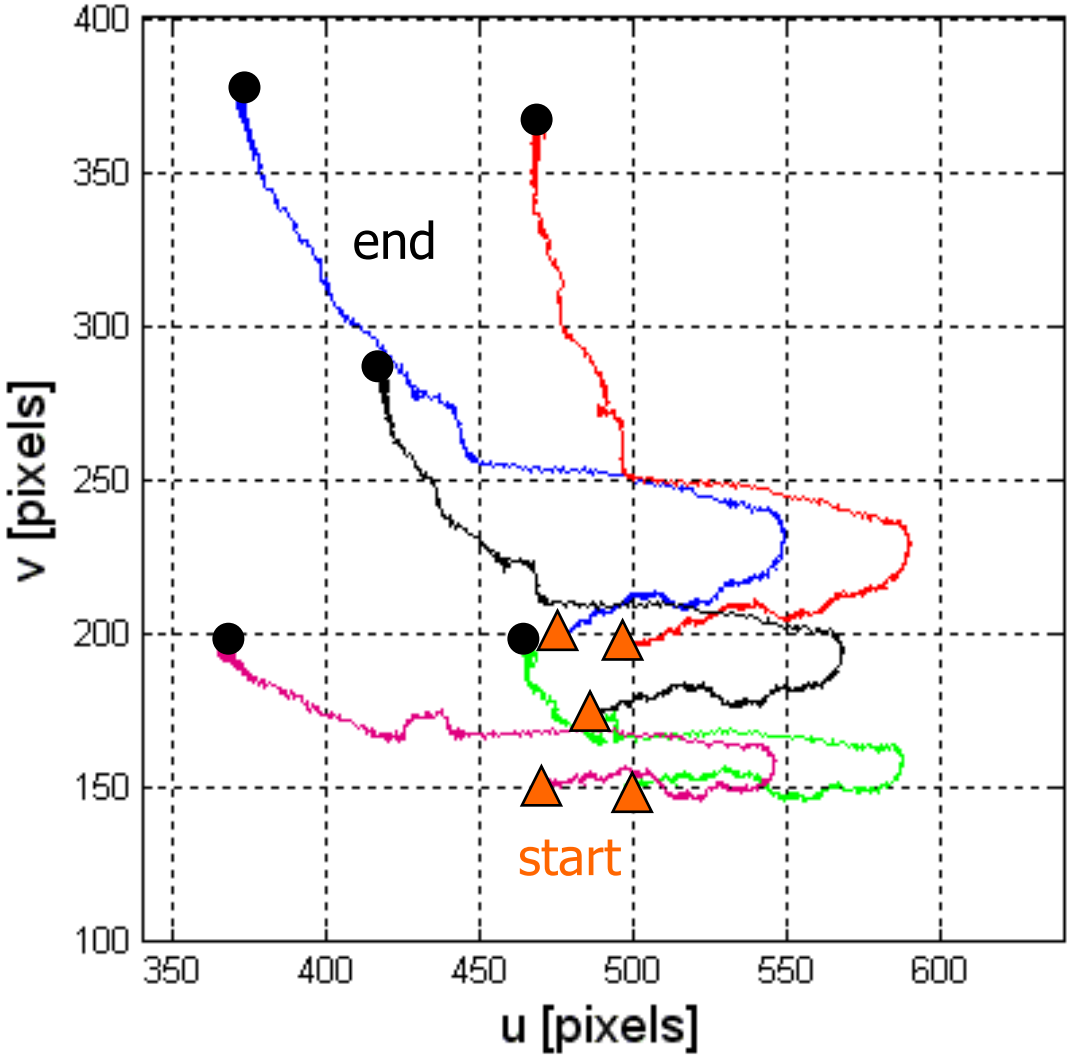


- motion of the 5 features (including the average point) in the image plane
- toward end, motion is ≈ linear since the depth observers have already converged to the true values
- computed Image Jacobian is close to the actual one

$$\hat{Z} \longrightarrow Z \implies \hat{J} \longrightarrow J$$

- "true" initial and final depths

$$Z(t_0) \cong 4 \text{ m} \quad Z_d \cong 0.9 \text{ m}$$

# Experiments with the observer

- the same task was executed with five different initializations for the depth observers, ranging between 0.9 m (= true depth in the final desired pose) and 16 m (much larger than in the true initial pose)

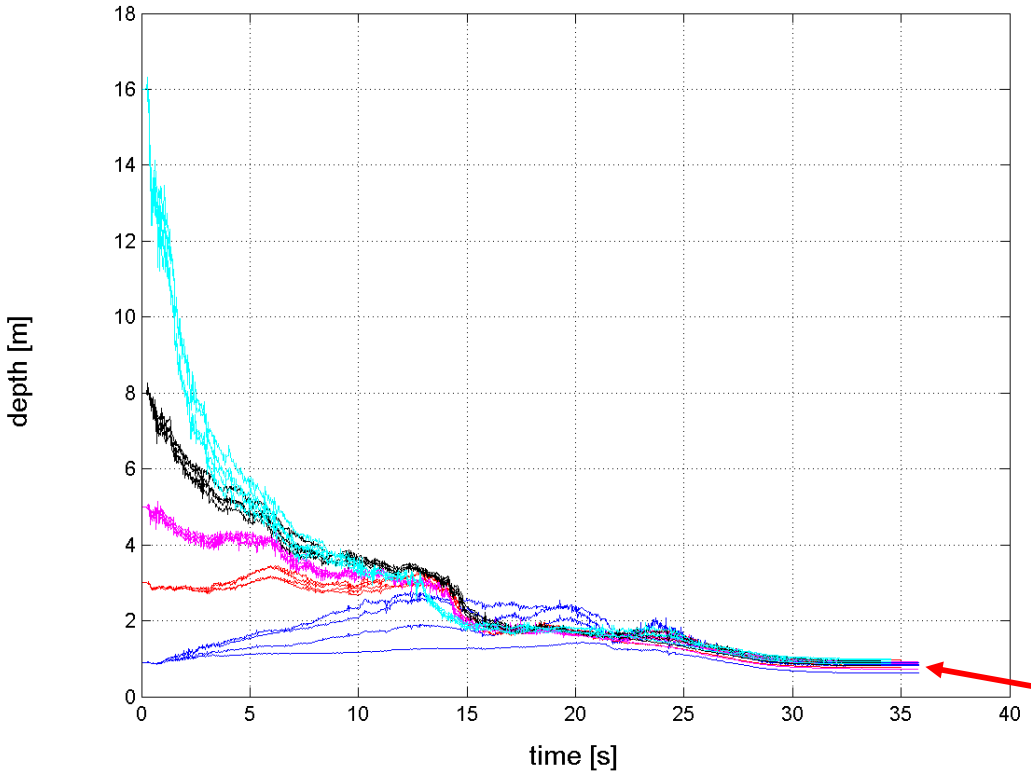


the evolutions of the estimated depths for the 4 point features

- initial values of depth estimates in the five tests

$$\begin{cases} \hat{Z}_1(t_0) = 16 \text{ m} \\ \hat{Z}_2(t_0) = 8 \text{ m} \\ \hat{Z}_3(t_0) = 5 \text{ m} \\ \hat{Z}_4(t_0) = 3 \text{ m} \\ \hat{Z}_5(t_0) = 0.9 \text{ m} \end{cases}$$

- true depths in initial pose

$$Z(t_0) \cong 4 \text{ m}$$

- true depths in final pose

$$Z_d \cong 0.9 \text{ m}$$

# Visual servoing with Kuka robot

## set-up

- Kuka KR5 sixx R650 manipulator (6 revolute joints, spherical wrist)
- Point Grey Flea©2 CCD camera, eye-in-hand (mounted on a support)
- Kuka KR C2sr low-level controller (RTAI Linux and Sensor Interface)
- image processing and visual servoing on PC (Intel Core2 @2.66GHz)
- high-level control data exchange every 12ms (via UDP protocol)


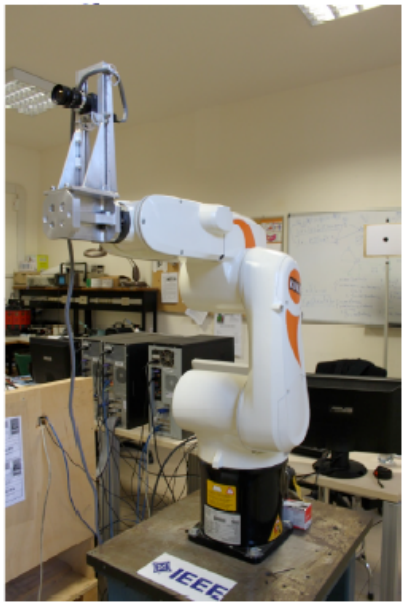




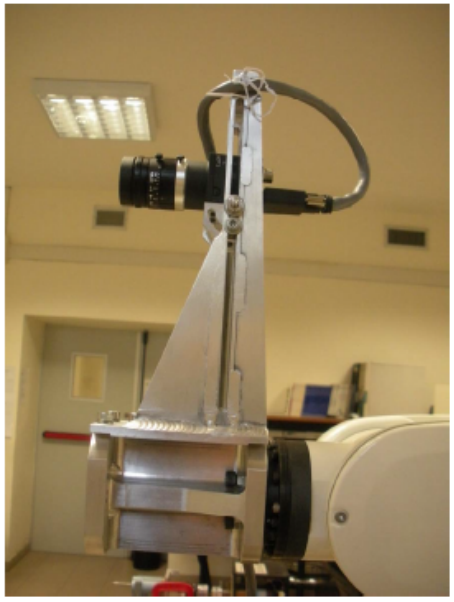

@ DIAG Robotics Laboratory

# Visual servoing with Kuka robot

## simulation and experiment with the observer

- depth estimation for a fixed target (single point feature)
- simulation using Webots first, then experimental validation
- sinusoidal motion of four robot joints so as to provide sufficient excitation

video

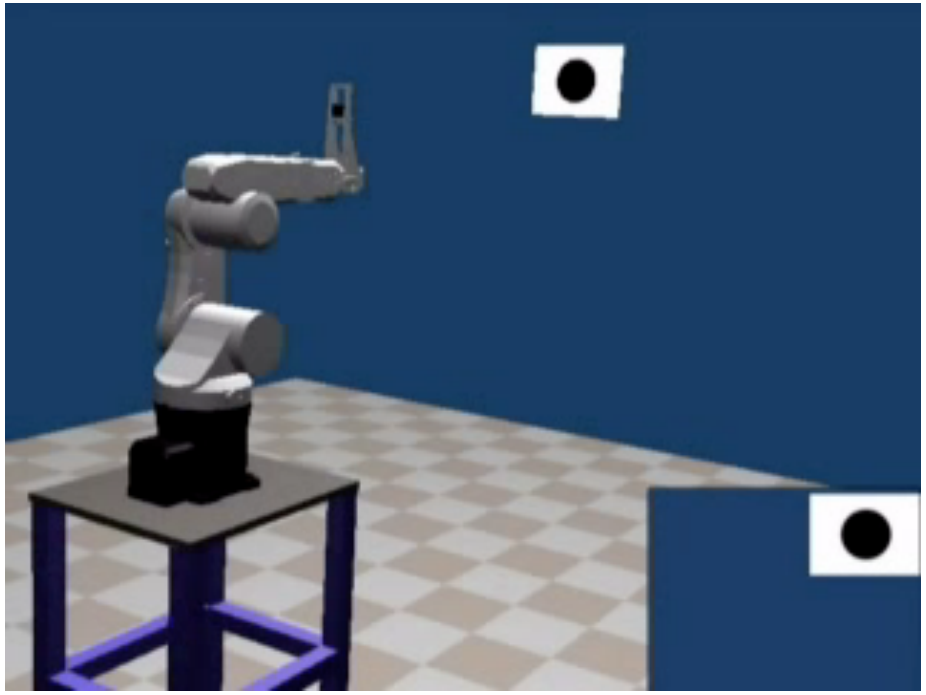

Webots simulation

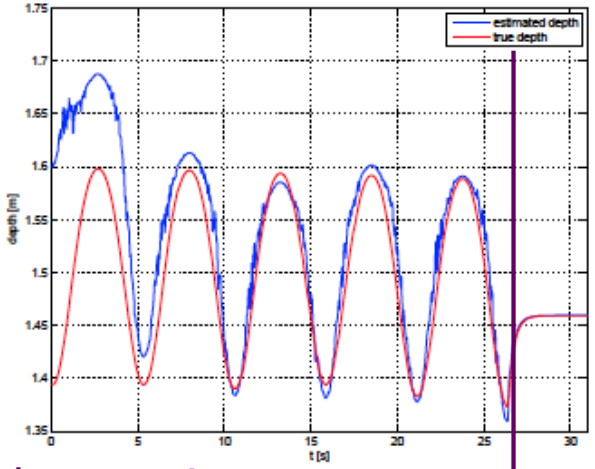


true and estimated depth

Kuka experiment

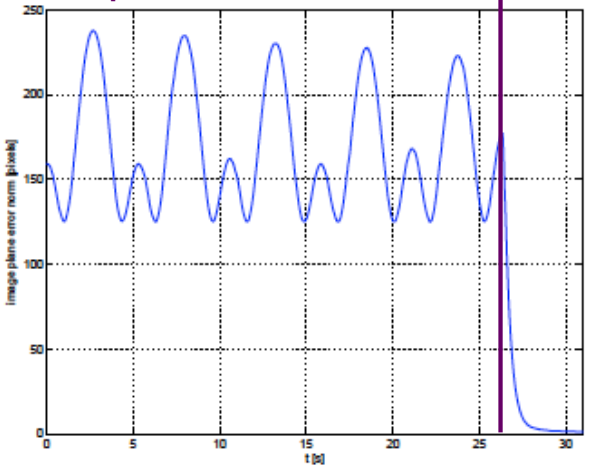


norm of centering error of feature point [in pixels]

goes to zero once control is activated

# Visual servoing with Kuka robot
## tracking experiment

- tracking a (slowly) time-varying target by visual servoing, including the depth observer (after convergence)

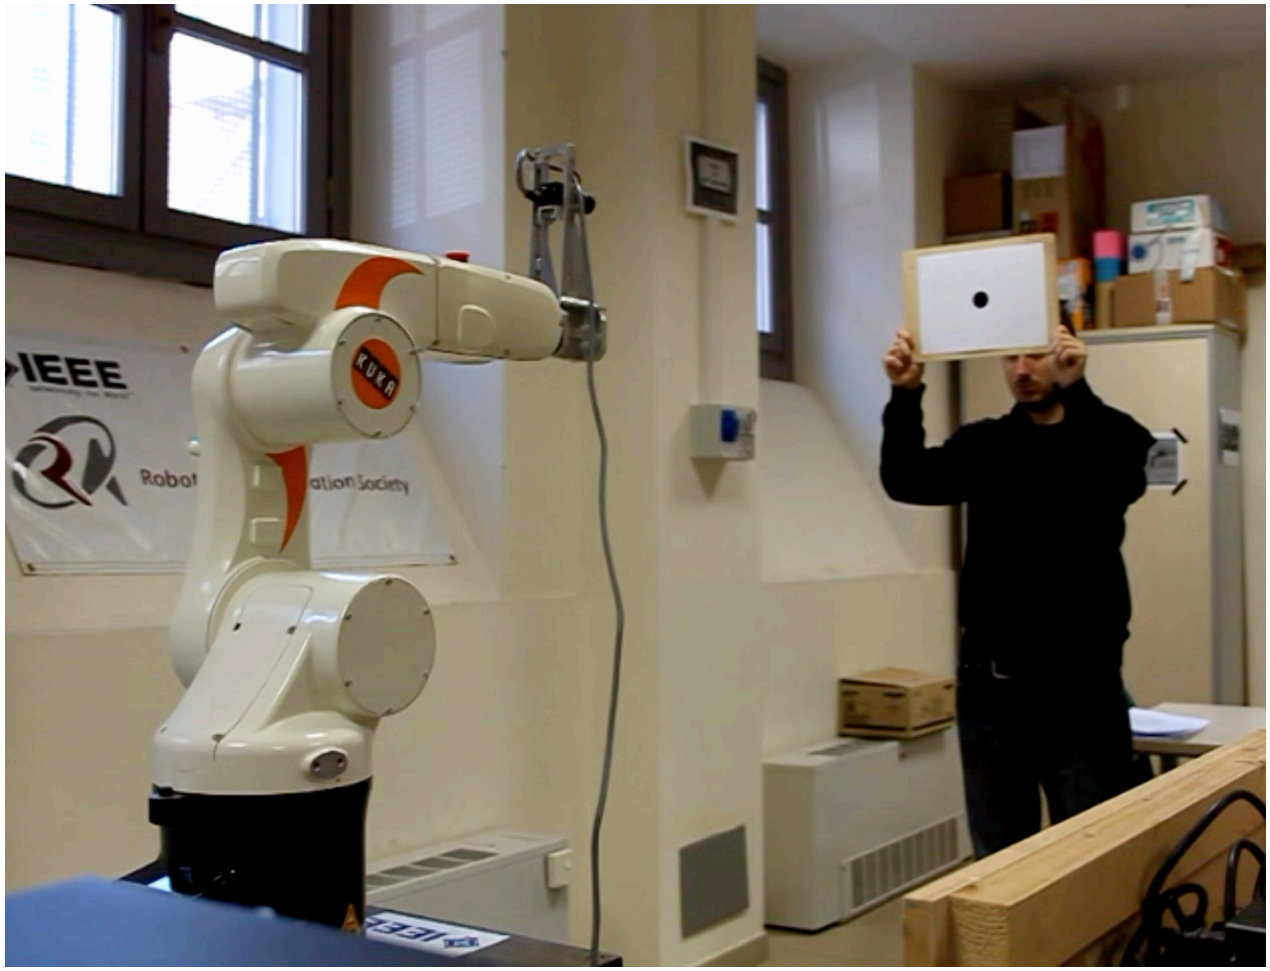


video

# Gazing with humanoid head

## stereo vision experiment

- gazing with a robotized head (7 joints, with $n = 6$ independently controlled) at a moving target (visual task dimension $m = 2$), using redundancy (to keep a better posture and avoid joint limits) and a predictive feedforward


video (c/o Fraunhofer IOSB, Karlsruhe)

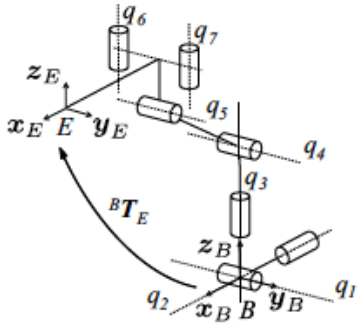


$$\dot{\boldsymbol{q}} = \boldsymbol{J}_W^{\dagger}(\boldsymbol{q})\left(\dot{\boldsymbol{\theta}}_{\text{fb}} + \dot{\boldsymbol{\theta}}_{\text{ff}}\right) - k_0\left(\boldsymbol{I} - \boldsymbol{J}_W^{\dagger}(\boldsymbol{q})\boldsymbol{J}(\boldsymbol{q})\right)\nabla_{\boldsymbol{q}} H_0(\boldsymbol{q})$$





final head posture
without and with self-motions