


Camera Holder

For Raspberry pi

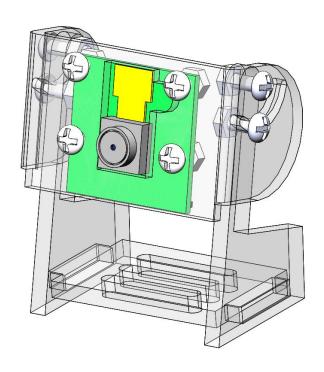

WWW.COKOINO.COM

Email: cokoino@outlook.com

1.Product List

1.1 Module

Picture	Name	Description	Qty
	camera	5MP Raspberry Pi Camera	1

1.2 Components of the holder

Picture	Name	Description	Qty
	screw	M2*8MM round head	5
	nut	M2	5
	nylon screw	M2*6	5

nylon nut		M2	5
	acrylic	A set of acrylic components	1

1.3 Cable

Picture	Name	Description	Qty
	flexible cable	for Raspberry Pi Zero	1
	flexible cable	FPC/FFC 15CM flexible cable for Raspberry Pi 2/3/4 B+	1

1.4 Tool

Picture	Name	Description	Qty
	screwdriver	M2 Phillips	1

2.Assemble

2.1 Assembly steps


Note: 1. Before assembly, we need to use a screwdriver to peel off the protective paper of the acrylic;


No.	1	Name	Assemble the camera with acrylic A		Tool	M2 phillips screwdriver
	Part	Qty	Unit		Pi	cture
	acrylic A	1	PCS	PCS		
Part List	camera	1	PCS			
	M2 nut 4		PCS		00	
	M2*6 round head screw	4	PCS	9999		99
Step	ep Description				D	remo

Α

Use M2*6 nylon screws and M2 nylon nuts to fix the camera on the acrylic A;


Pay attention to the installation direction of the camera;

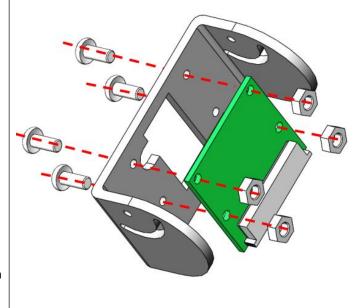

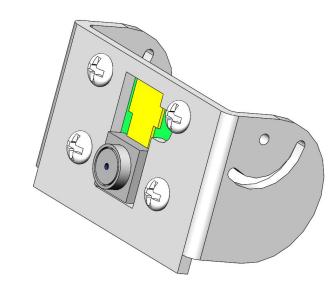


No.	2	Name	Assemble acrylic B and acrylic A		Tool	M2 phillips screwdriver
	Part	Qty	Unit	Picture		
Part list	No. 1 assembly part	1	PCS			


	acrylic B	1	PCS	
	M2 nut	2	PCS	
	M2*8MM round head screw	2	PCS	Communition of the state of the
Step	Description		1	Demo
Α	Use M2*8 metal screws and M2 metal nuts to assemble the acrylic B on the No. 1 assembly part (pay attention to the installation direction);			

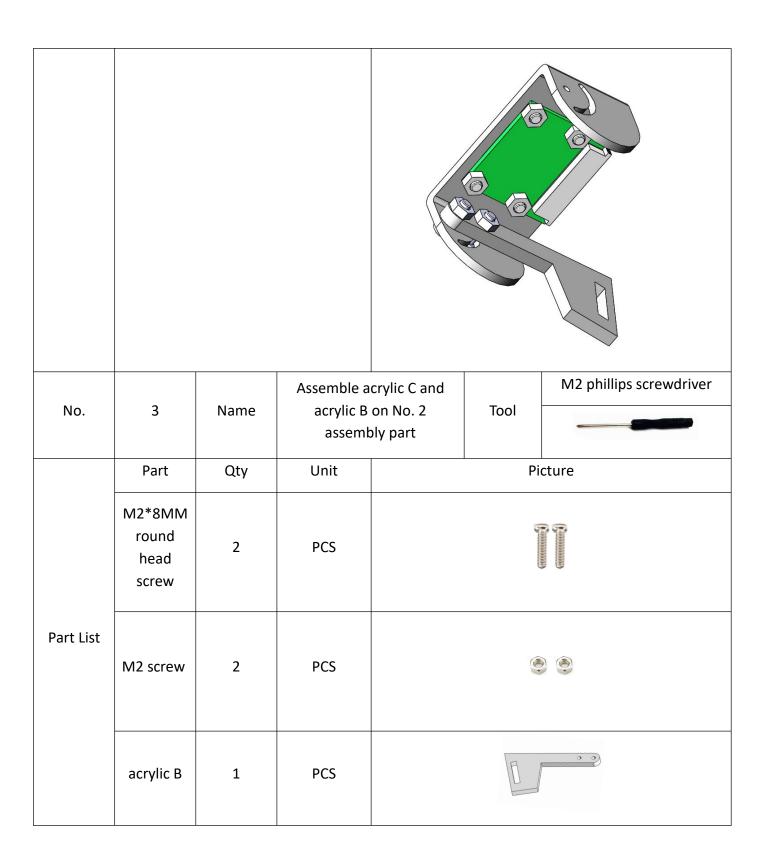

	No. 2 assembly part	1	PCS	
Step		Description	า	Demo
A	Insert acrylic C into the hole on acrylic B, and use M2*8 metal screws and M2 metal nuts to install acrylic B on acrylic A (pay attention to the installation direction);		s and M2 metal crylic A (pay	

Congratulations, a useful camera holder is assembled!

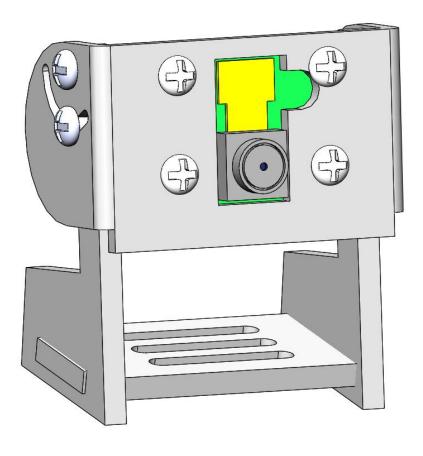

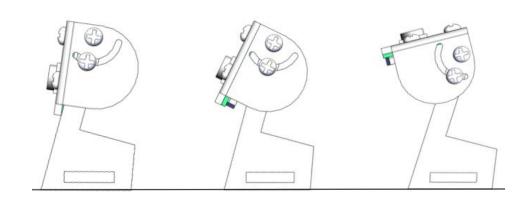

You can also adjust the angle of the camera.