



EAI absolute median error (deployment): \$3.89

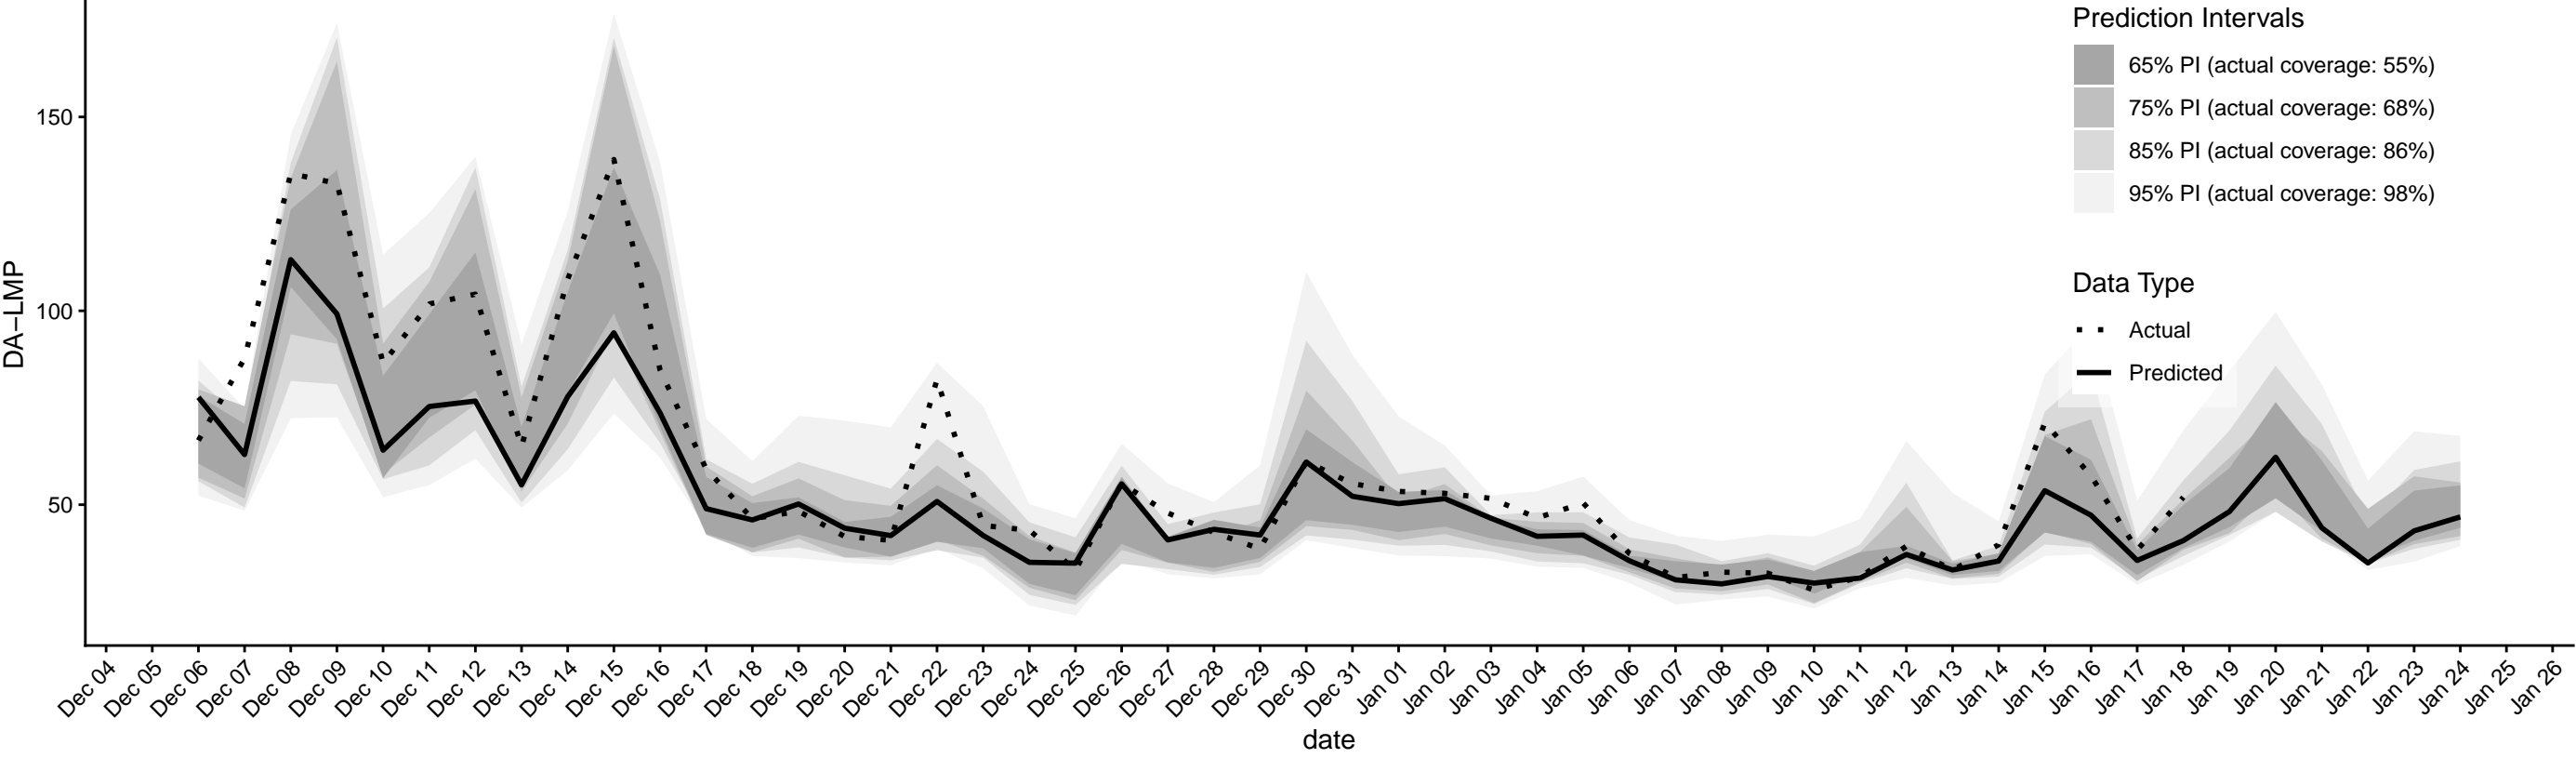


2026-01-19 prediction : \$48.23 / MWh

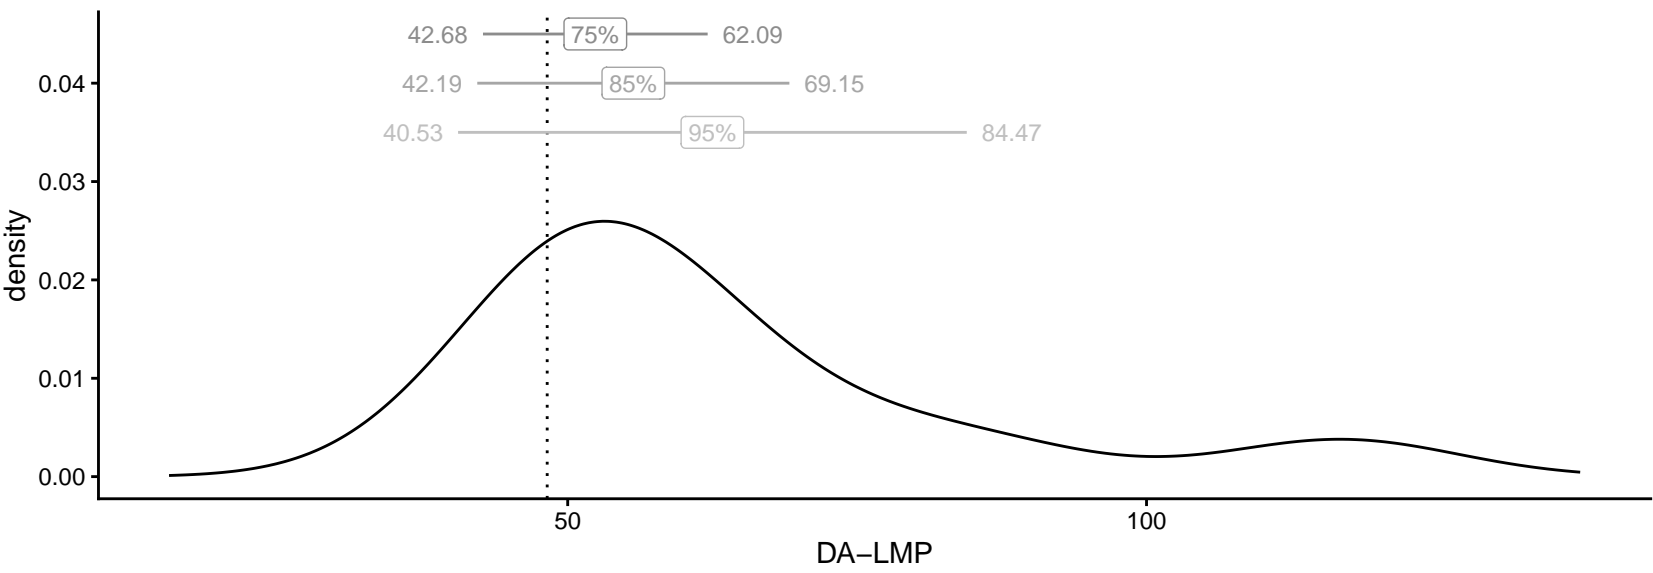


prediction interval width	tested accuracy	lo	hi
95	0.977	40.53	84.47
85	0.864	42.19	69.15
75	0.682	42.68	62.09
65	0.545	44.23	59.44

2026-01-20 prediction : \$62.25 / MWh

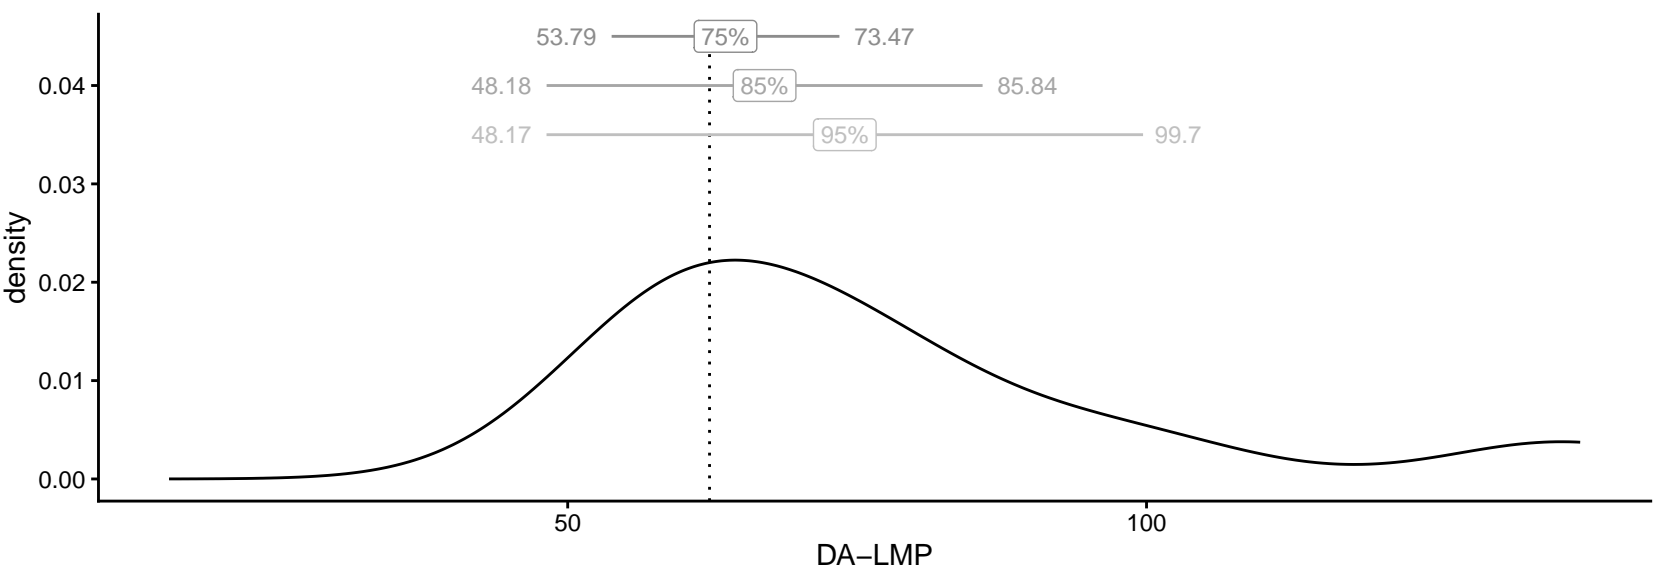


prediction interval width	tested accuracy	lo	hi
95	0.977	48.17	99.7
85	0.864	48.18	85.84
75	0.682	53.79	73.47
65	0.545	51.64	76.45

2026-01-21 prediction : \$44.03 / MWh

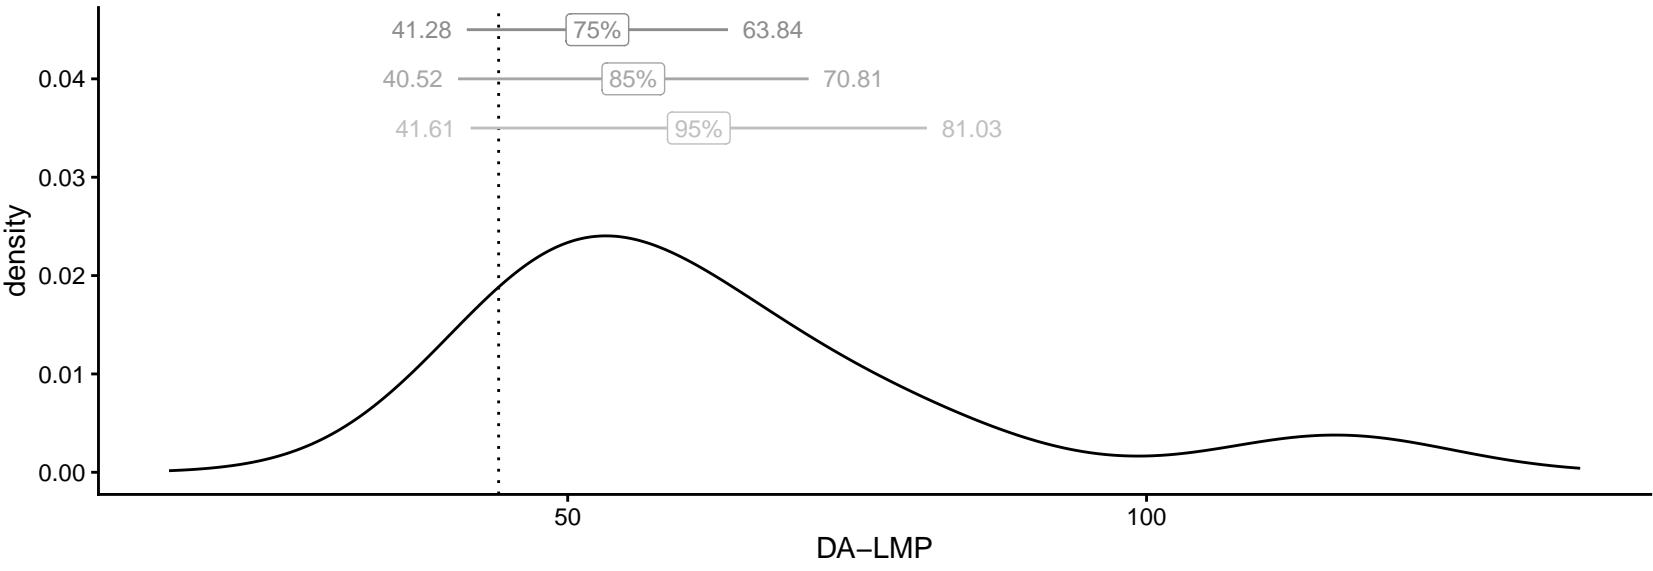


prediction interval width	tested accuracy	lo	hi
95	0.977	41.61	81.03
85	0.864	40.52	70.81
75	0.682	41.28	63.84
65	0.545	43.25	61.46

2026-01-22 prediction : \$34.97 / MWh

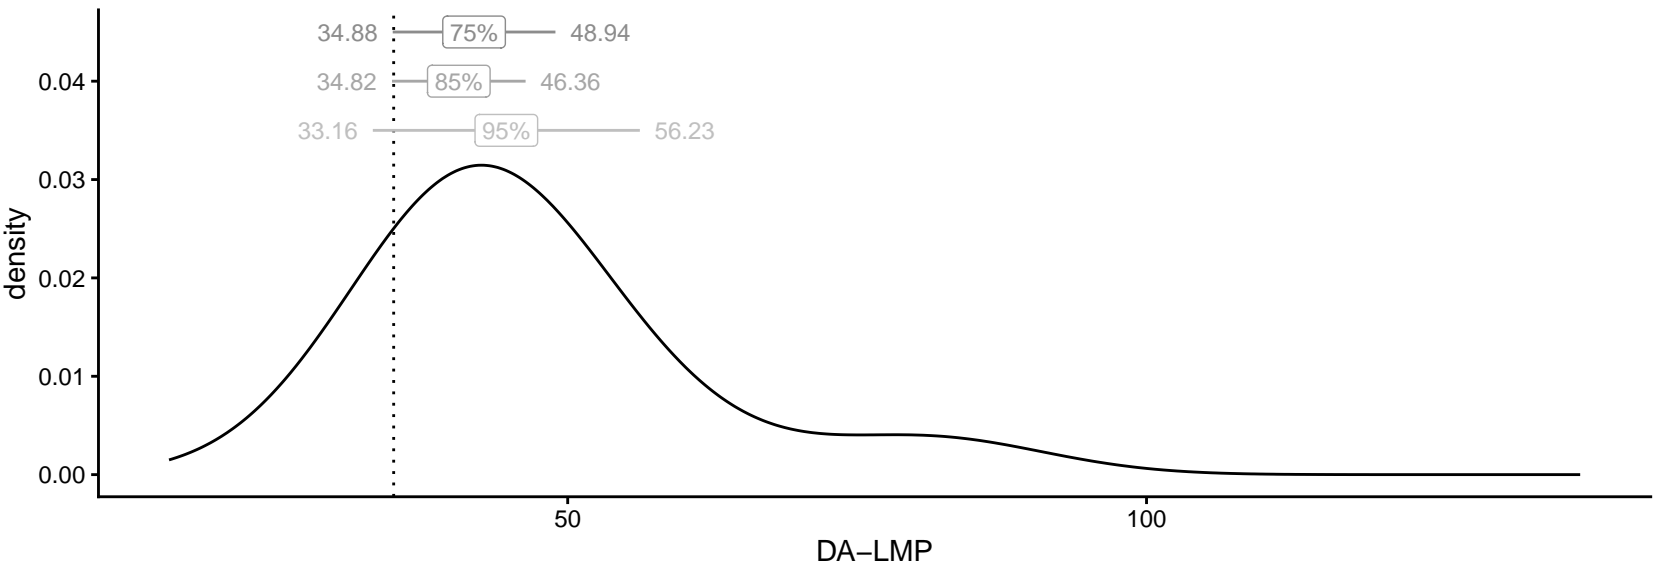


prediction interval width	tested accuracy	lo	hi
95	0.977	33.16	56.23
85	0.864	34.82	46.36
75	0.682	34.88	48.94
65	0.545	36.03	43.82

2026-01-23 prediction : \$43.25 / MWh

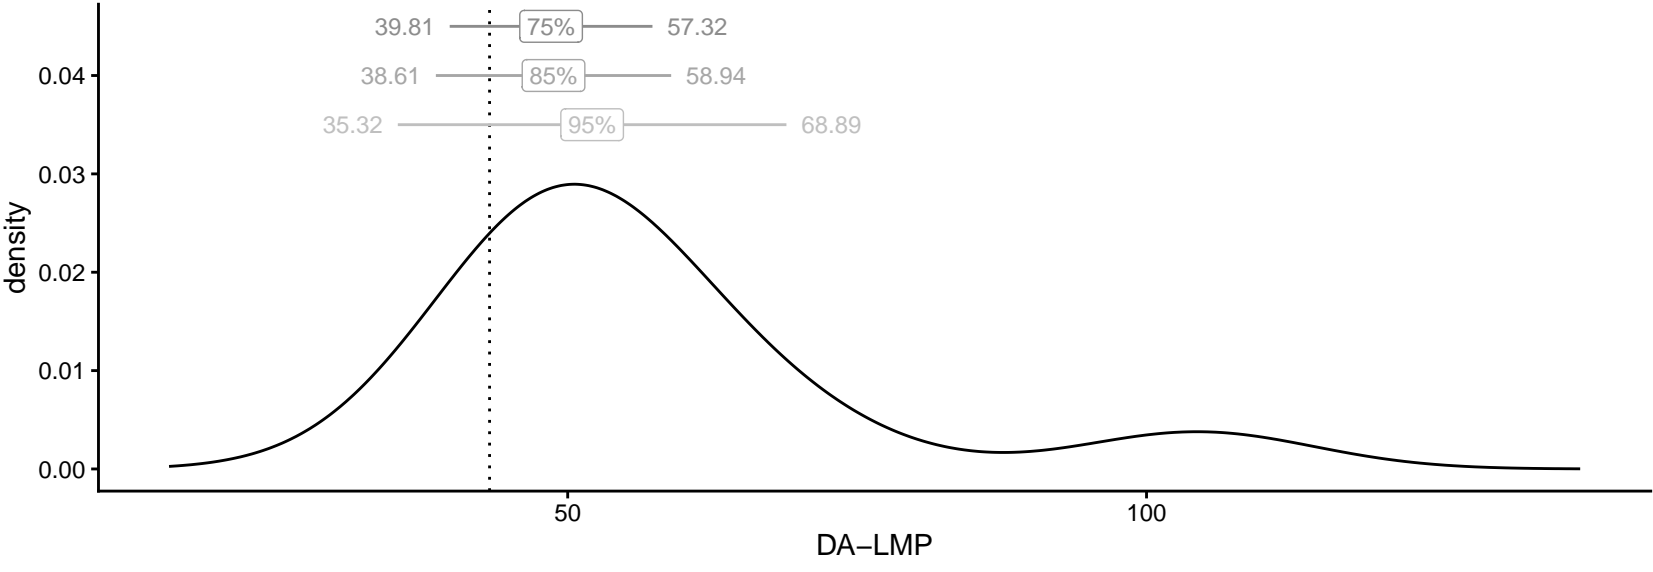

prediction interval width	tested accuracy	lo	hi
95	0.977	35.32	68.89
85	0.864	38.61	58.94
75	0.682	39.81	57.32
65	0.545	40.69	53.62

2026-01-24 prediction : \$46.85 / MWh

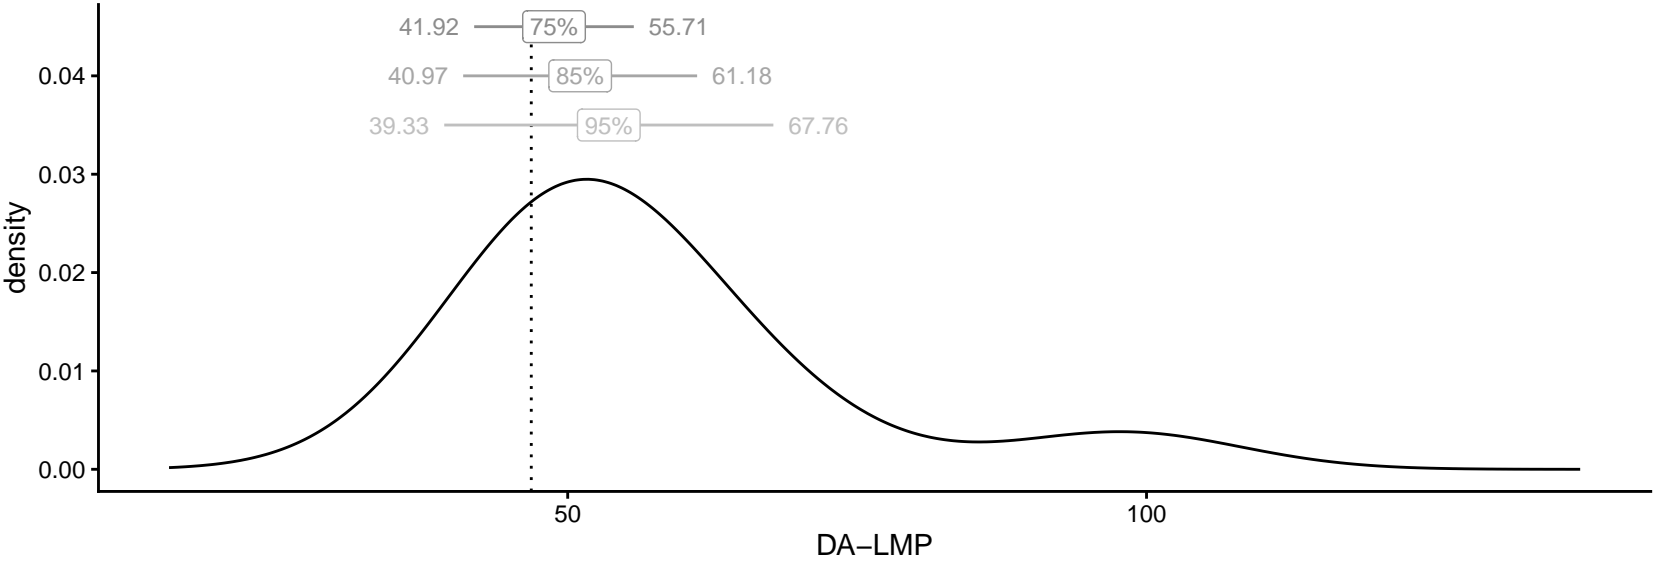

prediction interval width	tested accuracy	lo	hi
95	0.977	39.33	67.76
85	0.864	40.97	61.18
75	0.682	41.92	55.71
65	0.545	44.04	54.98

### 2026-01-19 sensitivity analyses

load_delta	width	lo	hi
-15000	65	42.87	56.6
-10000	65	43.32	57.56
-5000	65	43.77	58.51
5000	65	44.68	60.5
10000	65	45.13	61.72
15000	65	45.58	62.94
-15000	75	41.35	59.29
-10000	75	41.77	60.2
-5000	75	42.16	61.12
5000	75	43.2	63.17
10000	75	43.71	64.36
15000	75	44.23	65.59
-15000	85	40.9	65.73
-10000	85	41.33	66.89
-5000	85	41.76	68.03
5000	85	42.62	70.45
10000	85	43.02	71.96
15000	85	43.39	73.53
-15000	95	38.91	79.85
-10000	95	39.45	81.39
-5000	95	39.99	82.92
5000	95	41	86.18
10000	95	41.45	88.02
15000	95	41.9	89.96

gas_delta	width	lo	hi
-1.5	65	40.83	54.64
-1	65	41.81	56.12
-0.5	65	42.89	57.68
0.5	65	45.56	61.42
1	65	46.86	63.4
1.5	65	48.13	65.38
-1.5	75	39.41	56.94
-1	75	40.4	58.51
-0.5	75	41.42	60.12
0.5	75	44.27	64.42
1	75	45.88	66.79
1.5	75	47.58	69.1
-1.5	85	38.22	63.13
-1	85	39.16	64.93
-0.5	85	40.65	66.84
0.5	85	43.73	71.58
1	85	45.26	73.96
1.5	85	46.96	76.41
-1.5	95	35.93	80
-1	95	37.33	81.58
-0.5	95	38.93	83.13
0.5	95	42.1	86.07
1	95	43.65	87.77
1.5	95	45.2	89.5

solar_delta	width	lo	hi
-1500	65	44.77	60.81
-1000	65	44.59	60.36
-500	65	44.41	59.91
500	65	44.05	59
1000	65	43.87	58.55
1500	65	43.69	58.11
-1500	75	43.11	62.64
-1000	75	42.92	62.45
-500	75	42.74	62.27
500	75	42.75	61.93
1000	75	42.83	61.77
1500	75	42.9	61.59
-1500	85	41.85	69.85
-1000	85	41.96	69.63
-500	85	42.08	69.41
500	85	42.3	68.89
1000	85	42.41	68.61
1500	85	42.52	68.33
-1500	95	40.21	84.83
-1000	95	40.32	84.79
-500	95	40.42	84.62
500	95	40.63	84.4
1000	95	40.72	84.32
1500	95	40.8	84.25

wind_delta	width	lo	hi
-3000	65	44.81	61.57
-2000	65	44.58	60.82
-1000	65	44.4	60.14
1000	65	44.05	58.83
2000	65	43.88	58.27
3000	65	43.7	57.75
-3000	75	44.79	64.27
-2000	75	43.77	63.56
-1000	75	43.13	62.81
1000	75	42.27	61.5
2000	75	41.95	60.97
3000	75	41.71	60.59
-3000	85	44.59	70.33
-2000	85	43.65	69.99
-1000	85	42.71	69.57
1000	85	41.89	68.72
2000	85	41.6	68.34
3000	85	41.27	68.04
-3000	95	42.44	84.59
-2000	95	41.8	84.5
-1000	95	41.16	84.47
1000	95	39.87	84.56
2000	95	39.18	84.74
3000	95	38.5	84.79