




prediction interval width	tested accuracy	lo	hi
95	0.977	40.53	84.47
85	0.864	42.19	69.15
75	0.682	42.68	62.09
65	0.545	44.23	59.44

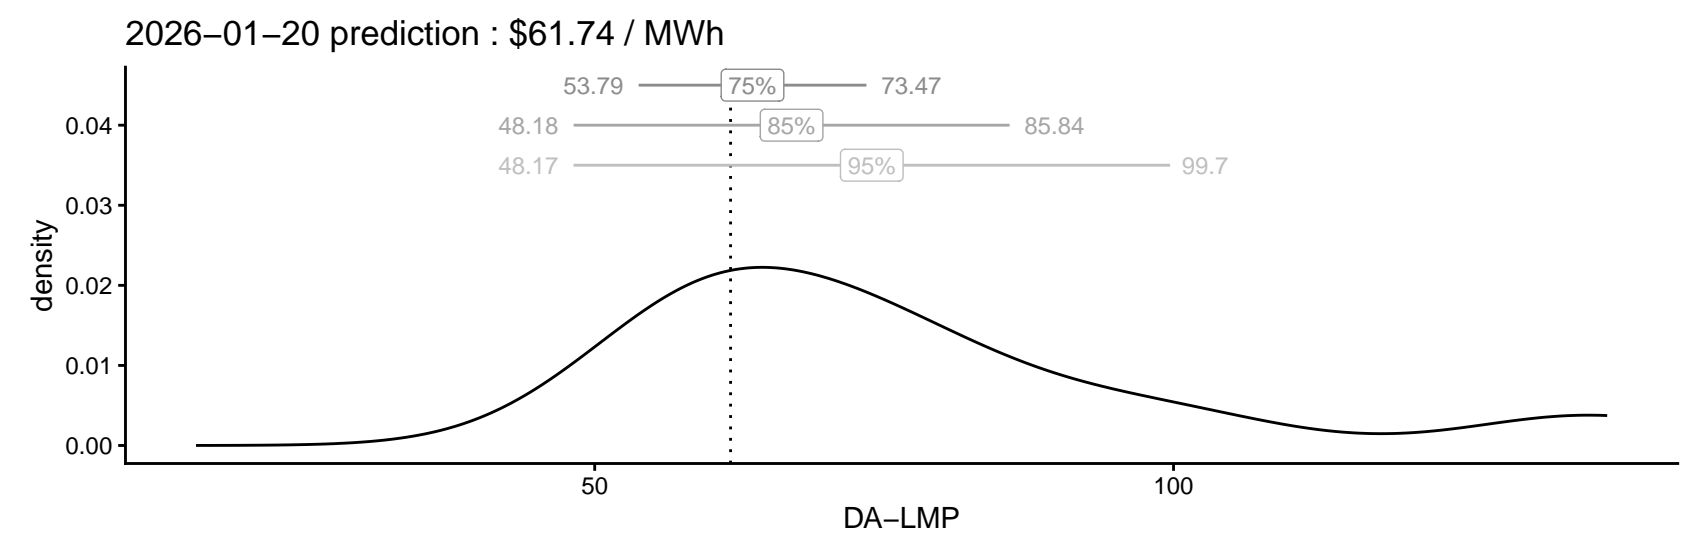


prediction interval width	tested accuracy	lo	hi
95	0.977	48.17	99.7
85	0.864	48.18	85.84
75	0.682	53.79	73.47
65	0.545	51.64	76.45

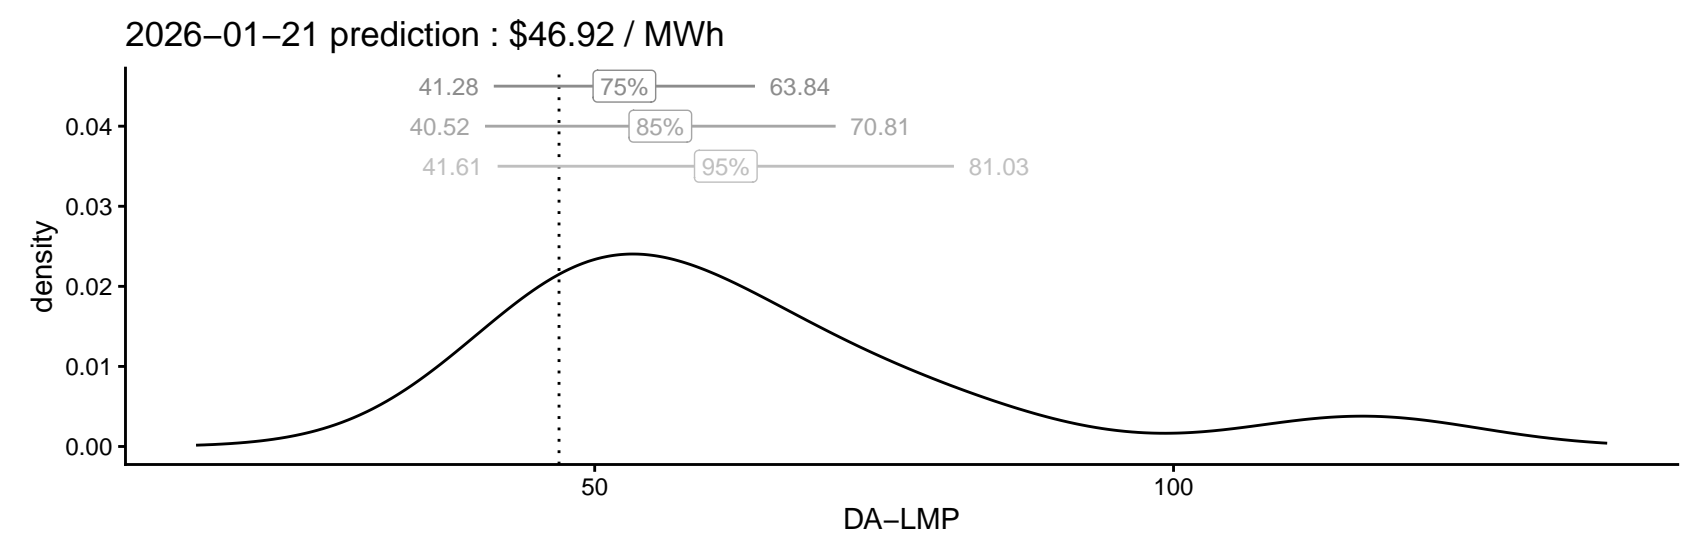


prediction interval width	tested accuracy	lo	hi
95	0.977	41.61	81.03
85	0.864	40.52	70.81
75	0.682	41.28	63.84
65	0.545	43.25	61.46

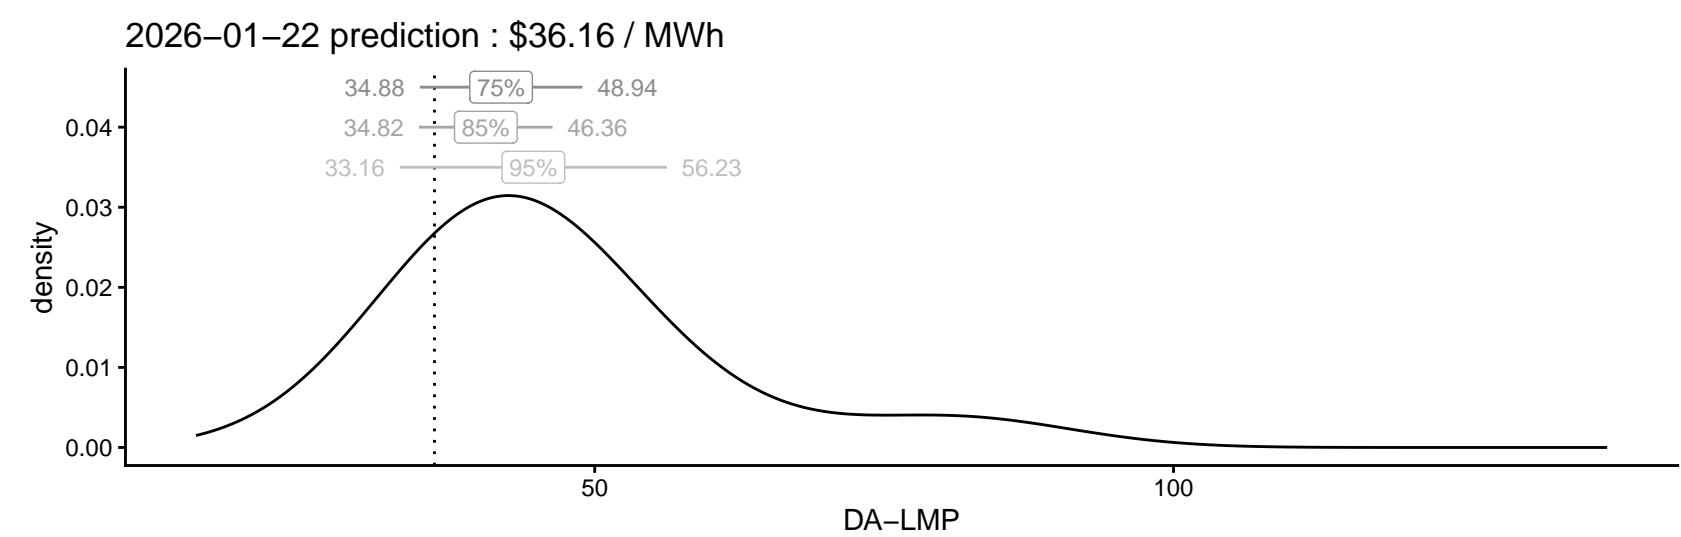

prediction interval width	tested accuracy	lo	hi
95	0.977	33.16	56.23
85	0.864	34.82	46.36
75	0.682	34.88	48.94
65	0.545	36.03	43.82

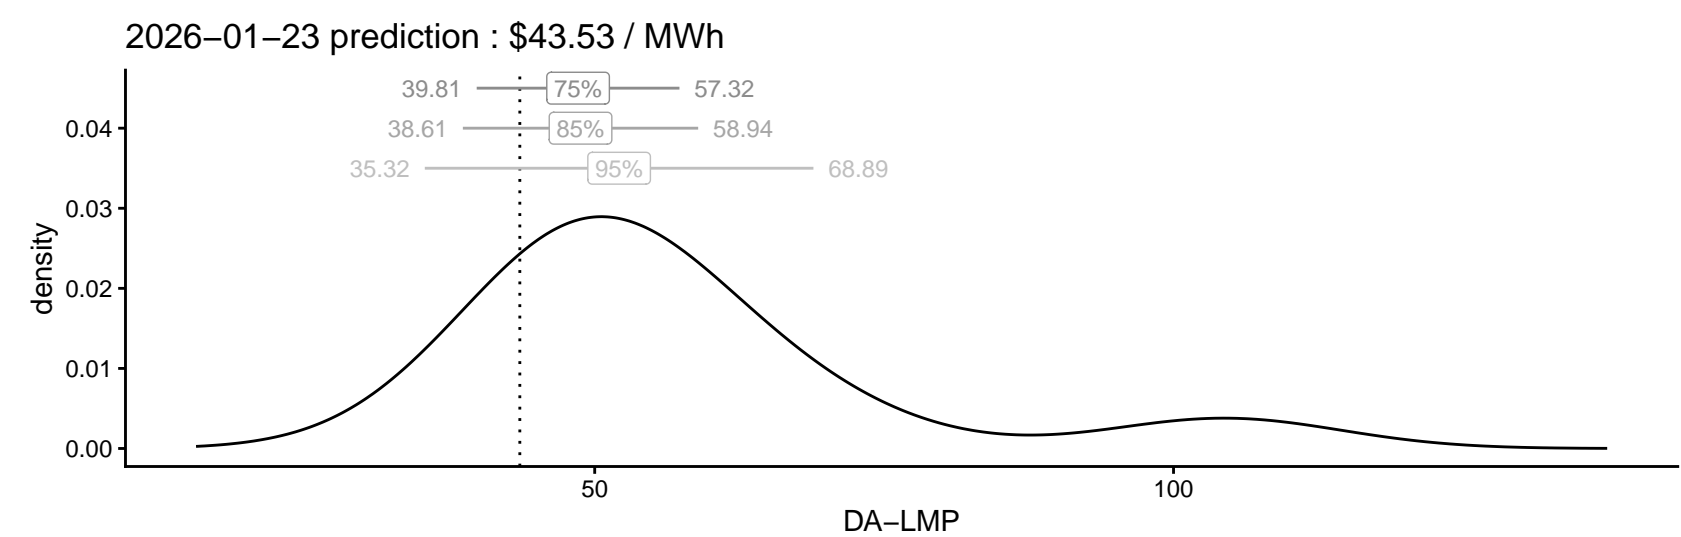

prediction interval width	tested accuracy	lo	hi
95	0.977	35.32	68.89
85	0.864	38.61	58.94
75	0.682	39.81	57.32
65	0.545	40.69	53.62

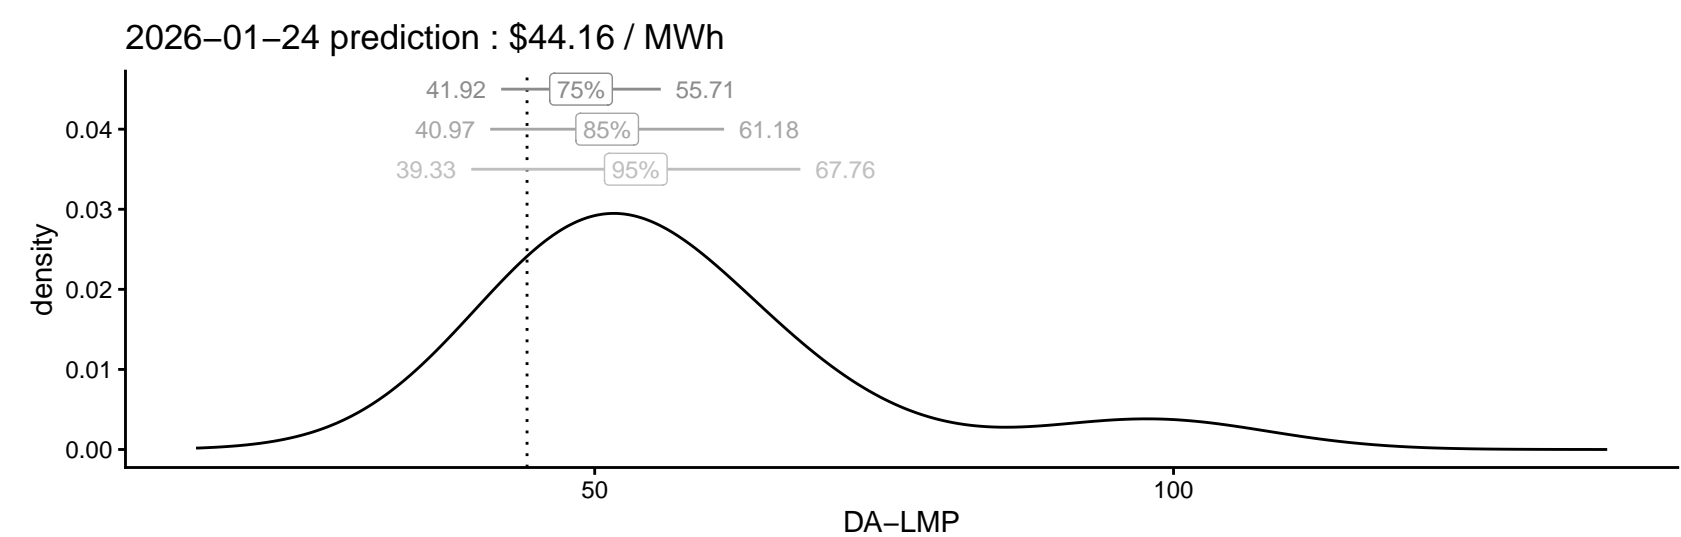

prediction interval width	tested accuracy	lo	hi
95	0.977	39.33	67.76
85	0.864	40.97	61.18
75	0.682	41.92	55.71
65	0.545	44.04	54.98

2026-01-19 sensitivity analyses

load_delta	width	lo	hi
-15000	65	42.87	56.6
-10000	65	43.32	57.56
-5000	65	43.77	58.51
5000	65	44.68	60.5
10000	65	45.13	61.72
15000	65	45.58	62.94
-15000	75	41.35	59.29
-10000	75	41.77	60.2
-5000	75	42.16	61.12
5000	75	43.2	63.17
10000	75	43.71	64.36
15000	75	44.23	65.59
-15000	85	40.9	65.73
-10000	85	41.33	66.89
-5000	85	41.76	68.03
5000	85	42.62	70.45
10000	85	43.02	71.96
15000	85	43.39	73.53
-15000	95	38.91	79.85
-10000	95	39.45	81.39
-5000	95	39.99	82.92
5000	95	41	86.18
10000	95	41.45	88.02
15000	95	41.9	89.96

gas_delta	width	lo	hi
-1.5	65	40.83	54.64
-1	65	41.81	56.12
-0.5	65	42.89	57.68
0.5	65	45.56	61.42
1	65	46.86	63.4
1.5	65	48.13	65.38
-1.5	75	39.41	56.94
-1	75	40.4	58.51
-0.5	75	41.42	60.12
0.5	75	44.27	64.42
1	75	45.88	66.79
1.5	75	47.58	69.1
-1.5	85	38.22	63.13
-1	85	39.16	64.93
-0.5	85	40.65	66.84
0.5	85	43.73	71.58
1	85	45.26	73.96
1.5	85	46.96	76.41
-1.5	95	35.93	80
-1	95	37.33	81.58
-0.5	95	38.93	83.13
0.5	95	42.1	86.07
1	95	43.65	87.77
1.5	95	45.2	89.5

solar_delta	width	lo	hi
-1500	65	44.77	60.81
-1000	65	44.59	60.36
-500	65	44.41	59.91
500	65	44.05	59
1000	65	43.87	58.55
1500	65	43.69	58.11
-1500	75	43.11	62.64
-1000	75	42.92	62.45
-500	75	42.74	62.27
500	75	42.75	61.93
1000	75	42.83	61.77
1500	75	42.9	61.59
-1500	85	41.85	69.85
-1000	85	41.96	69.63
-500	85	42.08	69.41
500	85	42.3	68.89
1000	85	42.41	68.61
1500	85	42.52	68.33
-1500	95	40.21	84.83
-1000	95	40.32	84.79
-500	95	40.42	84.62
500	95	40.63	84.4
1000	95	40.72	84.32
1500	95	40.8	84.25

wind_delta	width	lo	hi
-3000	65	44.81	61.57
-2000	65	44.58	60.82
-1000	65	44.4	60.14
1000	65	44.05	58.83
2000	65	43.88	58.27
3000	65	43.7	57.75
-3000	75	44.79	64.27
-2000	75	43.77	63.56
-1000	75	43.13	62.81
1000	75	42.27	61.5
2000	75	41.95	60.97
3000	75	41.71	60.59
-3000	85	44.59	70.33
-2000	85	43.65	69.99
-1000	85	42.71	69.57
1000	85	41.89	68.72
2000	85	41.6	68.34
3000	85	41.27	68.04
-3000	95	42.44	84.59
-2000	95	41.8	84.5
-1000	95	41.16	84.47
1000	95	39.87	84.56
2000	95	39.18	84.74
3000	95	38.5	84.79