

How to clear a paper jam inside the printer

SOP-001: Clearing Internal Paper Jams (HP OfficeJet 3830)

This guide provides users with steps on how to resolve a paper jam with the business printer. Please ensure you have gone through this guide intended for non-technical users before contacting IT Support.

1. Issue


Printer stops mid-print and displays a "Paper Jam" error.

2. Solution

1. Press the **Power** button to turn off the printer, then press **Shut Down** on the touch screen.



1.a)

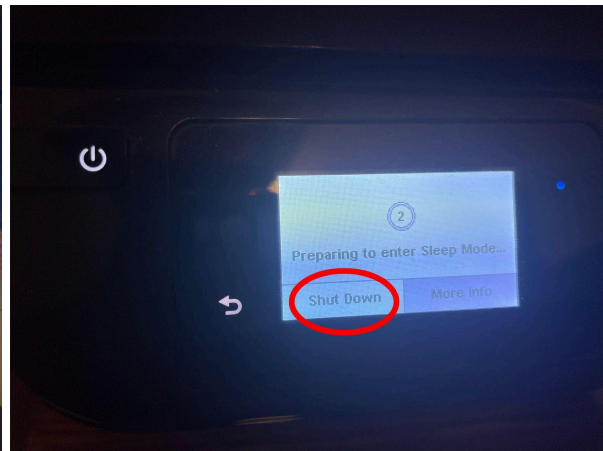

1. b)

2. **Unplug** the printer power cord from the outlet.



2.a)

3. Fold the output tray into the printer.



3.a)




3.b)



3.c)

4. Carefully turn the printer over to access the bottom panel.

5. Locate the cleanout door on the bottom, pull both tabs, and open the door.

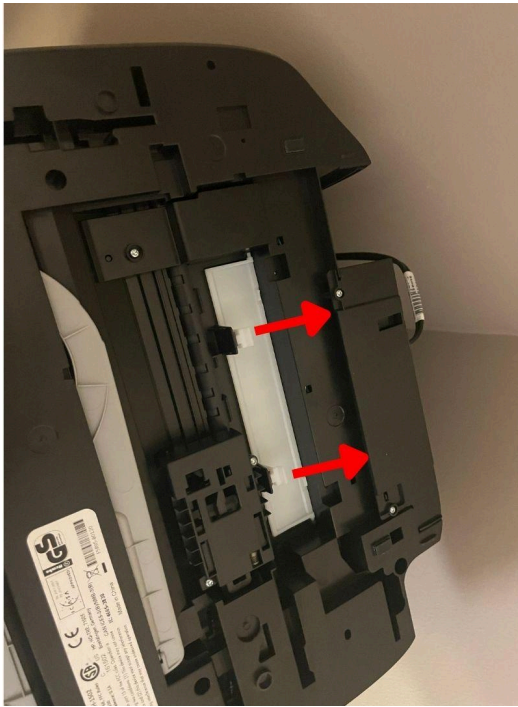


5.a)




5.b)

6. Gently remove the jammed paper by pulling slowly in the direction of the normal paper path to avoid tearing.

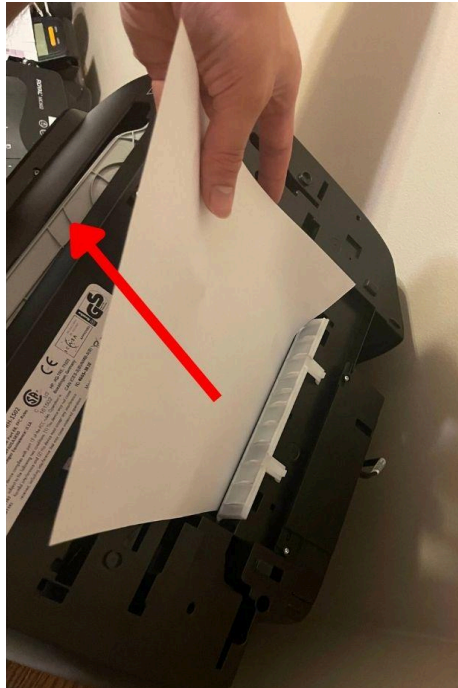


6.a)

7. Check for small paper scraps remaining on the rollers.
8. Close the cleanout door and gently push until both latches snap firmly into place.

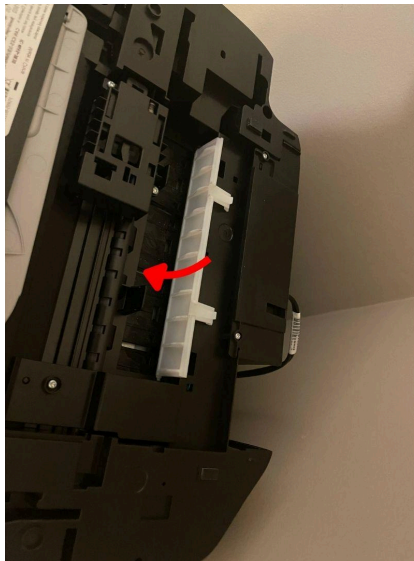

8.a)

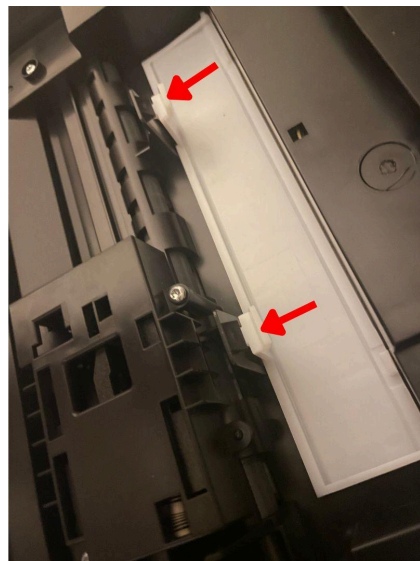

8.b)

9. Return the printer to its upright position, **Plug In** the power cable, and press **Power**

10. Verify that the issue is resolved:

- Turn on the printer.
- Test page prints successfully.

3. Prevention Best Practices

- Do not overfill the paper input tray beyond its capacity.
- Ensure paper is stored in a dry environment to prevent damage to pages.

Contact HP business or IT Support if:

- Hardware damage is visible.
- Error persists after completing all steps in this guide.

Version	Date	Author	Changes
1.0	June 2026	Coleton Vowles	Initial release