BS-4,8

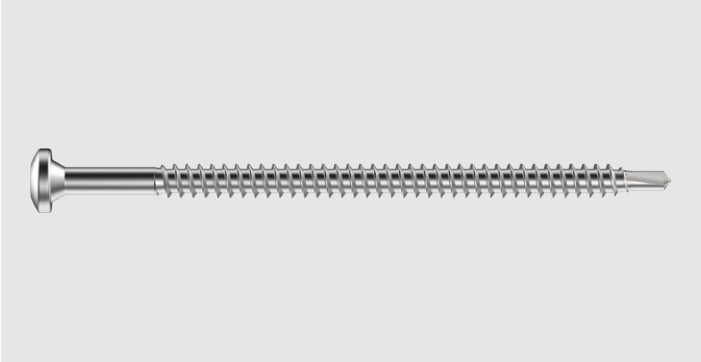

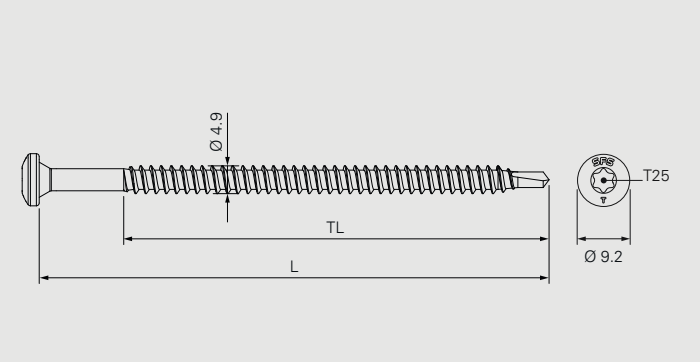

Application 1

Carbon steel fastener for waterproof membrane and insulation securement on steel substrates.



Substrate quality:	S235–S320GD
Substrate thickness (t):	min. 0.6 mm
	max. 2×1.25 mm or 1×2.0 mm
Setting depth (SD):	min. 20 mm

Application 2

Carbon steel fastener for waterproof membrane and insulation securement on timber substrates.



Substrate thickness (t):	min. 18 mm
Setting depth (SD):	min. 30 mm

Product Information

Material:	Case hardened carbon steel
Corrosion protection:	Durocoat® Resistance 15 cycles Kesternich test according to • EAD 030351-00-0402, A2.4 • FM Approval Standard 4470

Approvals/Assessments

CE 23
ETA-23/0859

FM APPROVED

TEKNISK GODKJENNING TG 2137 SINTEF Certification

Declaration of Performance (DoP)

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.

Features and Benefits

- Fast and easy installation due to optimised drill tip
- High pull-out values with asymmetric fastener thread
- High quality corrosion protection, environment friendly, free of Chromium VI
- FM approved with exceptional high ratings

Product Range

Product Code	L mm	TL mm		PU	Material No.
BS-4,8×50	50	45		1000	1746712
BS-4,8×60	60	55		500	1746728
BS-4,8×70	70	65			1746729
BS-4,8×80	80	75			1746742
BS-4,8×90	90				1746743
BS-4,8×100	100				1746747
BS-4,8×110	110				1746774
BS-4,8×120	120				1746775
BS-4,8×130	130				1746908
BS-4,8×140	140				1746909
BS-4,8×150	150				1746911
BS-4,8×170	170			250	1746912
BS-4,8×190	190				1746913
BS-4,8×200	200				1746928
BS-4,8×220	220				1746942
BS-4,8×240	240				1747514
BS-4,8×260	260				1747515
BS-4,8×300	300				1747516

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.

Products to combine with

Product Code	Description	
MW-40-R	Stress plate for waterproof membrane securement, with recess. For seam fastening application, on compressible insulation.	
FI-P-6,8	Stress plates for PVC, TPO and EPDM based water-proof membranes. For isoweld® field fastening application.	
RP48n	Sleeve with 3 peaks for waterproof membrane and insulation securement. For seam fastening application.	
RP50n	Sleeve for waterproof membrane and insulation securement. For seam fastening application. For use with installation tool IT260 and for manual installation.	
RP75n	Sleeve for insulation securement.	
TPA50n	Sleeve for waterproof membrane and insulation securement. For seam fastening applications.	
FI-R-20n	Sleeve for waterproof membrane and insulation securement. For isoweld® field fastening and seam fastening applications.	

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.

Tools and Accessories

Product Code	Description	
IT260	Automated setting tool for the fast and economic installation of fasteners and sleeves. For pre-assembled combination of fasteners BS-4,8, BS3-4,8, BS-S-4,8 and sleeve RP50n. Sleeve length max. 150 mm, total roof build-up max. 260 mm.	
ZA¼"-M6-300 ZA¼"-M6-750	Drive bar for installation of fastener and sleeve, length 300 mm and 750 mm	
ZA¼"-M6-EXT100	Drive bar extension, length 100 mm	
T25-32-M6	Insert bit with T25 drive	
T25-32-M6-RING n	Insert bit with T25 drive and ring to hold sleeves RP48n, RP50n, RP75n onto bit	
ZH-12-RING	Adapter to hold sleeve FI-R-20n and TPA50n onto drive bar	
Bit holder ZA¼"	Bit holder for bits with HEX shaft	
T25-25-HEX¼"	Insert bit with T25 drive and HEX shaft	

Recommendations for Installation

Operating process	Recommendation	
Screwing in	Power screwdriver • 1000–3000 rpm (Steel), 300–700 rpm (Timber) • Min. 500 W Battery tool • 1000–3000 rpm (Steel), 300–700 rpm (Timber) • Min. 18 V • Battery with min. 2,5 Ah Do not use impact driver	

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.