

GEOTECHNICAL ASSET MANAGEMENT – UNSTABLE SLOPE RATING CATEGORY DESCRIPTIONS FOR FEDERAL LAND MANAGEMENT AGENCIES

October 24, 2014

CONTENTS

1	Site Information	1
1.1	Hazard Type	1
1.2	Length of Affected Road/Trail	2
1.3	Slope Height/Axial Length	2
1.4	Slope angle	3
1.5	Sight Distance	3
1.6	Roadway/Trail Width	3
1.7	Ditch Width/Depth/Foreslope	3
1.8	Block Size/Rockfall Volume	3
1.9	Annual Rainfall	4
1.10	Sole Access Route	4
1.11	Mitigation Present	4
2	Preliminary Ratings	5
2.1	Landslide-Specific Preliminary Ratings	5
A.	Roadway Width Affected	5
B.	Slide/Erosion Effects	5
C.	Roadway Length Affected	6
2.2	Rockfall-Specific Preliminary Ratings	6
D.	Ditch Effectiveness	6
E.	Rockfall History	7
F.	Block Size or Volume per Event	7
2.3	Common Preliminary Slope Ratings	8
G.	Impact on Use	8
H.	Annual Average Daily Traffic (AADT) or Usage/Economic/Recreational Importance	8
3	Detailed Hazard Ratings	10
3.1	Common Hazard Ratings	10
I.	Slope Drainage	10
J.	Annual Rainfall	10
K.	Slope Height or Axial Length of Slide	10
3.2	Landslide-Specific Hazards	11
L.	Thaw Stability (Cold Climates)	11
M.	Instability-Related Maintenance Frequency	11
N.	Movement History	12
3.3	Rockfall-Specific Hazards	12
O.	Rockfall Related Maintenance Frequency	12
P.	Case 1 - Structural Condition	13
Q.	Case 1 - Rock Friction	14
R.	Case 2 - Structural Condition	14
S.	Case 2 - Differential Erosion Rate	15
4	Detailed Risk Ratings	16
V.	Route Width or Trail Width	16
W.	Human Exposure Factor	16
X.	Percent Decision Sight Distance (PDS) or Avoidance Ability on Trails	17
Y.	Right of Way Impacts if Left Unattended	18
Z.	Environmental/Cultural Impacts if Left Unattended	18

AA.	Maintenance Complexity	19
BB.	Event Cost	20

LIST OF FIGURES

Figure 1: Simplified rock slope failure types (planar, wedge, toppling, and circular adapted from Hoek and Bray, 1981).	1
Figure 2: Simplified landslide failure types (modified from Ohio DOT, California Geological Survey and Cornforth, 2005).	2
Figure 3: Examples of measuring vertical slope height on a rock slope and axial length on a landslide.	3

LIST OF TABLES

Table 2-1: Preliminary Landslide Slope Rating – Roadway Impedance Category Narratives	5
Table 2-2: Preliminary Landslide Slope Rating – Slide/Erosion Effects Category Narratives.....	6
Table 2-3: Preliminary Landslide Slope Rating – Roadway Length Affected Sample Calculated Scores	6
Table 2-4: Preliminary Rock Slope Rating – Ditch Effectiveness Category Narratives.....	7
Table 2-5: Preliminary Rock Slope Rating – Rockfall History Category Narratives	7
Table 2-6: Preliminary Rock Slope Rating – Block Size or Volume Size Sample Calculated Scores	8
Table 2-7: Common Preliminary Rating – Traffic Impacts Category Narratives	8
Table 2-8: Common Preliminary Rating – AADT Sample Calculated Scores	9
Table 3-1: Common Hazard Rating - Slope Drainage Category Narratives.....	10
Table 3-2: Common Hazard Rating – Annual Rainfall	10
Table 3-3: Common Hazard Rating - Slope Height or Axial Length of Slide Sample Calculated Scores.....	11
Table 3-4: Detailed Landslide Slope Rating – Thaw Stability Category Narratives	11
Table 3-5: Detailed Landslide Slope Rating – Maintenance Frequency Category Narratives.....	12
Table 3-6: Detailed Landslide Slope Rating – Movement History Category Narratives	12
Table 3-7: Detailed Rock Slope Rating – Rockfall-Related Maintenance Frequency Category Narratives .	13
Table 3-8: Detailed Rock Slope Rating – Case 1 Structural Condition Category Narratives	14
Table 3-9: Detailed Rock Slope Rating – Case 1 Rock Friction Category Narratives	14
Table 3-10: Detailed Rock Slope Rating – Case 2 Structural Category Narratives	15
Table 3-11: Detailed Rock Slope Rating – Case 2 Differential Erosion Rate Category Narratives	15
Table 4-1: Risk Rating – Roadway Width Sample Calculated Scores	16
Table 4-2: Risk Rating – Human Exposure Factor Sample Calculated Scores	17
Table 4-3: Risk Rating – Percent Decision Sight Distance Sample Calculated Scores	18
Table 4-4: Risk Rating – Right of Way Impacts Category Narratives.....	18
Table 4-5: Risk Rating – Environmental/Cultural Impacts Category Narratives	19
Table 4-6: Risk Rating – Maintenance Complexity Category Narratives	19
Table 4-7: Risk Rating – Event Costs Category Narratives	20

LIST OF EQUATIONS

Equation 2-1: Length of Roadway Affected Score	6
Equation 2-2: Block Size and Volume Size Score	8
Equation 2-3: Annual Average Daily Traffic Score	9
Equation 3-1: Slope Height or Axial Length Score	11
Equation 4-1: Roadway Width Score	16
Equation 4-2: Human Exposure Factor Score	17
Equation 4-3: Percent Decision Sight Distance Score	18

1 SITE INFORMATION


The top of the field data collection sheet contains fields for the collection of location and site information that both records location information and field measurements critical for later rating criteria. Many of the fields should be self-evident to the geological or engineering personnel that will be performing the ratings, but some of the fields are explained in more detail below.

1.1 Hazard Type


The section is divided into two unstable slope hazard types, rockfall and landslides. Rockfall failure types included follow the classic failure mechanism (planar, wedge, and toppling)¹ and also include raveling rock slopes (i.e. talus slopes), rock avalanche, differential erosion (interlayered weak and stronger rock), and indeterminate rock failures. See Figure 1 for simplified schematic drawings of each rock failure type. Note that the 'indeterminate rock failure' classification is primarily for where the rockfall mechanism is a complex interaction between multiple joints where the straightforward planar, wedge, or toppling models are not sufficient to describe the failure. This classification may be quite common in steep, hard, jointed rock cut slopes.

Landslides can be generally classified by both their location relative to the route in question and in the broad terms describing the failure mode. Translational slides are typically


Planar

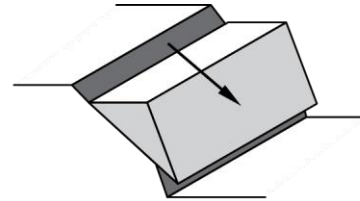


Wedge




Topple



Circular



Ravelling

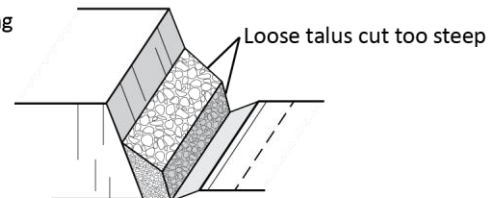

Ravelling

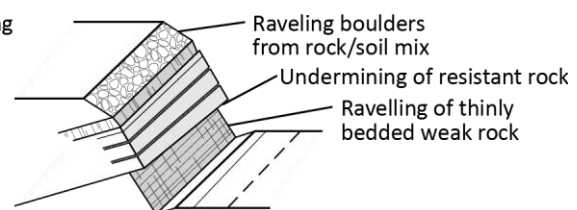


Figure 1: Simplified rock slope failure types (planar, wedge, toppling, and circular adapted from Hoek and Bray, 1981).

¹ See reference material for additional explanation, such as Rock Slope Engineering, Hoek and Bray, 1981 or Rockfall: Characterization and Control, Part 1: Section 2 Rockfall Types and Causes (pg 21-55), Transportation Research Board, 2012.

composed of intact blocks that are moving on a flat or inclined discrete failure plane weaker than the surrounding geologic material. Rotational slides are typically formed by a circular failure surface, often on steep slopes. Debris flows are sudden, fast moving flows comprised of rock, soil, water and woody debris. Shallow slumps are common on transportation systems where the shoulder or outside lane are failing within the fill material. Erosional failures are typical where the river system or culvert outfall is eroding the embankment or slope below the road which currently or may threaten the route in the future². See Figure 2 for simplified schematic drawings of each rock failure type.

1.2 Length of Affected Road/Trail

This is measured as the length of the road or trail adjacent to the hazard. For rockfall, it is measured from the start to the end of the cut slope or outcrop, not just where the highest level of rockfall activity is present. For landslides, it is measured from the beginning to the end of the slide where it is affecting both the paved surface and the embankment it is founded on. For slides above the road, it is measured from one end to the other to where the slide would likely impact the road. This measure is used in rating calculations.

1.3 Slope Height/Axial Length

This is measured as the maximum vertical height of the rock slope or the maximum axial length of a landslide feature. On short embankments where it appears that a fill failure is at fault, this measure is typically the axial length from the its top to the base of fill; engineering judgment may be needed. For debris flows, this measure could be in the thousands of

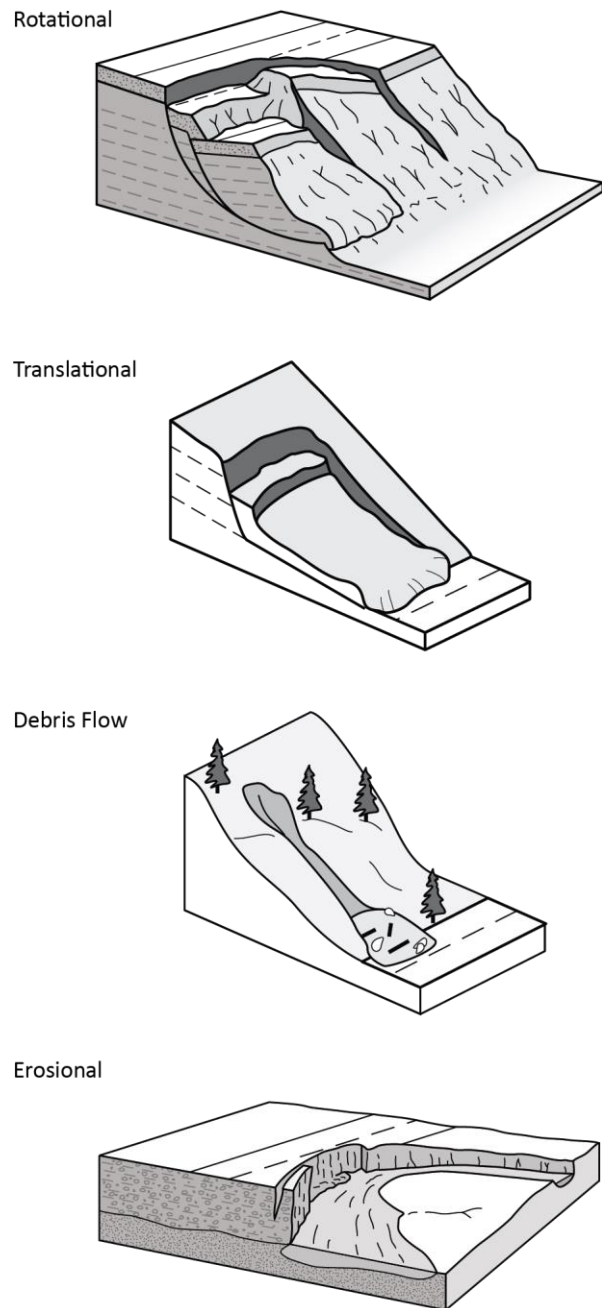


Figure 2: Simplified landslide failure types (modified from Ohio DOT, California Geological Survey and Cornforth, 2005).

² Landslides: Investigation and Mitigation, Transportation Research Board Special Report 247 Part 1: Section 3 Landslide Types and Processes (pg 36-75), 1996 or Landslides in Practice, Investigation, Analysis and Remedial/Preventative Options in Soils, Chapter 1: Landslides (pg 3 -6), Cornforth, 2005.

feet due to the channel length (i.e. axial length) being quite long. This measure is used in rating calculations. See Figure 3 for an example for evaluating slope height for rock slopes or landslides.

1.4 Slope angle

This the average or representative angle of the rock cut slope/outcrop or the angle of the failing embankment or soil slope. This measure is not used in rating calculations.

1.5 Sight Distance

Sight distance is measured as the length of roadway from when a 6-inch object is first seen from a driving position (3.5 feet from the surface) until the object is reached. Sight distance is typically hindered by narrow shoulders, poor ditch vegetation control, and vertical and horizontal roadway curvature. The location's sight distance should be measured in the lane direction with the worst visibility. This measure is used in rating calculations.

1.6 Roadway/Trail Width

This is measured as the full paved width of the roadway or trail, including paved shoulders. On unpaved routes, it would be measured as the drivable or navigable width. Where width changes within a section, it should be taken at the narrowed section. This measure is used in rating calculations.

1.7 Ditch Width/Depth/Foreslope

For rockfall areas, the roadside catchment ditch is an important rockfall mitigation measure. A clean, wide ditch with a well maintained foreslope is one of the most common mitigation measures on transportation systems. Provide a measure of the range of ditch widths and depths and a representative foreslope angle. If needed, provide a note on the cleanliness of the ditch in the comments area. This measure is not used in rating calculations.

1.8 Block Size/Rockfall Volume

For rockfall only. Enter a reasonable value for the largest rock size (in feet) that could enter the roadway. This can be estimated by observation of rocks in the ditch, rocks that appear loose on the slope, or interviews with maintenance personnel. If a volumetric event is the dominant failure mechanism, enter the number of cubic yards that have or reasonably could enter the roadway.

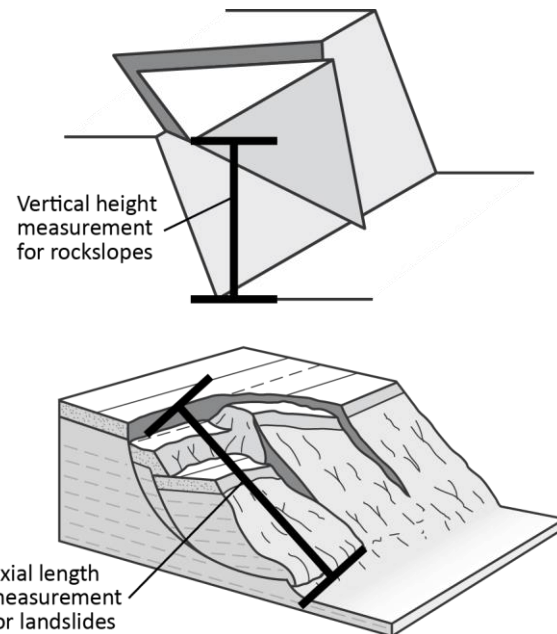


Figure 3: Examples of measuring vertical slope height on a rock slope and axial length on a landslide.

1.9 Annual Rainfall

Enter the average rainfall for the location. This measure is used in rating calculations.

1.10 Sole Access Route

If there are no alternative routes or detours in the event of a road closure, indicate as such.

1.11 Mitigation Present

If there have been mitigation measures to halt or slow down a landslide, stabilize the rock slope, prevent rocks from reaching the roadway, or other mitigation measures installed, check the appropriate box. Typically, asphalt patches do not offer any appreciable stabilization effect on landslides and eventually can accelerate movement, so do not include patching or crack sealing as mitigation for landslides.

2 PRELIMINARY RATINGS

The preliminary ratings are a select subset of the comprehensive rating categories. This subset is intended to provide guidance on whether to continue the rating assessment or to include or exclude a candidate unstable slope location. If a site falls below the suggested cutoffs, an Agency may opt to completely exclude the site from the unstable slope database. If a site later becomes more of an issue, it should be assumed that the site has degraded from an acceptable to an unacceptable condition. If the site's Preliminary Rating is above the suggested cutoff, the full filed rating should be completed.

2.1 Landslide-Specific Preliminary Ratings

A. Roadway Width Affected

When a part of the roadway or trail is lost or blocked the following can occur: impacting the debris, driving off a scarp, attempting an evasive maneuver where the driver goes off the road or into oncoming traffic, or a hiker is forced into a hazardous situation that can lead to an accident. The hazard is related to the percentage of the roadway or trail affected.

Table 2-1: Preliminary Landslide Slope Rating – Roadway Impedance Category Narratives

3 points	<u>0-5 percent</u> The travel lanes are generally not affected by the landslide feature, but the available paved surface is reduced. A detour or traffic control (flagging) is typically not required except during maintenance activities. Trails typically are only slightly affected.
9 points	<u>6-25 percent</u> Events affect up to 25% of the travel lanes. Adequate paved surface is available to maneuver around the event. A detour is typically not required but traffic control may need to be utilized until the roadway is reestablished. A visual cue for tripping hazards may be needed on trails.
27 points	<u>26-50 percent</u> Events affect up to half of the surface dedicated to travel lanes. Maneuvering actions may still be possible by using paved or unpaved shoulders, if available. A detour or complete vehicle stoppage may be required. A visual cue for tripping hazards may be needed on trails and maintenance may be considered.
81 points	<u>51-100 percent</u> Events affect more than half of the road with limited paved surface available to maneuver around the event. A detour or stopping traffic flow is required. Trails may be closed and maintenance may be required to keep the trail open.

B. Slide/Erosion Effects

Unanticipated obstructions in a travel lane can result in unsafe maneuvers or loss of vehicle control. Larger obstructions increase the likelihood of an accident and require more maintenance effort and cost to repair. *For trails, the slower driving indicated in the table below may be tripping hazards rather than lower speed limits.*

Table 2-2: Preliminary Landslide Slope Rating – Slide/Erosion Effects Category Narratives

3 points	<u>Visible crack or slight deposit of material on road/minor erosion.</u> Slight pavement cracking or heaving, or a thin deposit of slide debris has occurred but they are small enough not to disturb traffic flow or require evasive maneuvers. Scheduled roadway maintenance is required.
9 points	<u>1 inch offset, or 6-inch deposit of material on road/major erosion will affect travel in <5 years.</u> A noticeable drop or heave in the pavement or a deposit of slide debris has occurred that requires lower speeds to traverse. Maintenance attention is required.
27 points	<u>2-inch offset or 12-inch deposit of material on road/moderate erosion impacting travel annually.</u> A large drop or heave in the pavement or a deposit of slide debris has occurred that requires significantly lower speeds to traverse and may elicit unsafe driver reactions. Immediate maintenance attention is required.
81 points	<u>4-inch offset or 24-inch deposit of material on road/severe erosion impacting traffic consistently.</u> A major drop or heave in the pavement or deposit of slide debris has occurred that cannot be traversed. Unsafe driver reactions are likely and immediate maintenance attention is required to reestablish safe traffic flow.

C. Roadway Length Affected

The length of the roadway (or trail) affected poses a hazard to the travelling public by increasing the likelihood of encountering the hazard, diversion into an adjacent lane, or increasing the distance or length of time the hazard will need to be avoided. To the agency, the length is proportional to the maintenance and costs associated with treatment. Longer slides will also require longer (both duration and length) lane closures during maintenance or repair activities. Score is directly calculated from field measurements.

$$Score = 3^x (\max 100); x = \sqrt{\frac{\text{length of roadway affected}}{25 (\text{feet})}}$$

Equation 2-1: Length of Roadway Affected Score

Table 2-3: Preliminary Landslide Slope Rating – Roadway Length Affected Sample Calculated Scores

3 points	25 feet
9 points	100 feet
27 points	225 feet
81 points	400 feet

2.2 Rockfall-Specific Preliminary Ratings

D. Ditch Effectiveness

The effectiveness of a ditch is measured by its ability to restrict falling rock from reaching the roadway. Many factors must be considered in evaluating this category. The reliability of the result depends heavily on the rater's experience. Ditch Effectiveness is a subjective category.

The risk associated with a particular rock slope section is dependent on how well the ditch is performing in capturing rockfall. When little rock reaches the roadway, no matter how much rockfall is released from the slope, the danger to the public is low and the score assessed is low. Conversely, if rockfall events are

rare occurrences but the ditch is nonexistent, the resulting hazard is greater and a higher score is assigned to this category.

A wide fallout area does not necessarily guarantee that rockfall will be restricted from the highway. In estimating the ditch effectiveness, the rater should consider several factors, such as: 1) slope height and angle; 2) ditch width, depth and shape; 3) anticipated volume of rockfall per event; and 4) impact of slope irregularities (launching features) on falling rocks. Evaluating the effect of slope irregularities is especially important because they can completely negate the benefits expected from a fallout area. Valuable information on ditch performance can be obtained from maintenance personnel.

Table 2-4: Preliminary Rock Slope Rating – Ditch Effectiveness Category Narratives

3 points	<u>Good Catchment.</u> All or nearly all falling rocks are retained in the catch ditch.
9 points	<u>Moderate Catchment.</u> Falling rocks occasionally reach the roadway.
27 points	<u>Limited Catchment.</u> Falling rocks frequently reach the roadway.
81 points	<u>No Catchment.</u> No ditch, or ditch is totally ineffective. All or nearly all falling rocks reach the road.

E. Rockfall History

The rockfall history directly represents the known rockfall activity at the site. This information is an important check on the potential for future rockfalls. If the score you give a section does not compare well with the rockfall history, a review of the rating is advisable.

This information is best obtained from the maintenance person responsible for the slope. There may be no history available at newly constructed sites or where documentation practices are poor. The maintenance cost at a site may be the only information that reflects the rockfall activity.

Table 2-5: Preliminary Rock Slope Rating – Rockfall History Category Narratives

3 points	<u>Few Falls.</u> Rockfalls occur only a few times a year (or less), or only during severe storms. This category is also used if no rockfall history data is available.
9 points	<u>Occasional Falls.</u> Rockfall occurs regularly. Rockfall can be expected several times per year and during most storms.
27 points	<u>Many Falls.</u> Typically, rockfall occurs frequently during a certain season, such as the winter or spring wet period, or the winter freeze/thaw, etc. This category is for sites where frequent rockfalls occur during a certain season but are not a significant problem during the rest of the year. This category may also be used where severe rockfall events have occurred.
81 points	<u>Constant Falls.</u> Rockfalls occur frequently throughout the year. This category is also for sites where severe rockfall events are common.

F. Block Size or Volume per Event

Larger blocks or volumes of falling rock produce more total kinetic energy and greater impact force than smaller events. In addition, the larger events obstruct more of the roadway reducing the possibility of safely avoiding the rock(s). In either case, the larger the blocks or volume; the greater the hazard created; thus the higher the assigned score.

This measurement should be representative of the type of rockfall event most likely to occur. If individual blocks are typical of the rockfall, block size should be used for scoring. If a mass of blocks tends to be the dominant type of rockfall, volume per event should be used. A decision on which to use can be determined from the maintenance history, or estimated from observed conditions when no history is available. This measurement will also be beneficial in determining remedial measures.

The category score is calculated according to the following equations. If the rater is uncertain, rate both categories and only use the higher score of the two.

$$\text{Block Size Score} = 3^x \text{ (max 100)}; x = \text{block size (ft)}$$

$$\text{Volume Size Score} = 3^x \text{ (max 100)}; x = \left(\frac{\text{yds}^3}{3}\right)$$

Equation 2-2: Block Size and Volume Size Score

Table 2-6: Preliminary Rock Slope Rating – Block Size or Volume Size Sample Calculated Scores

	Block Size	Volume Size
3 points	1 foot	3 cubic yards
9 points	2 feet	6 cubic yards
27 points	3 feet	9 cubic yards
81 points	4 feet	12 cubic yards

2.3 Common Preliminary Slope Ratings

G. Impact on Use

Impacts on the transportation system due to a failure can be minimized if a detour around the site is available or the expected impacts would be minimal. The scoring should take into account a *probable* worst case scenario, rockfall history, and geologic conditions when judging the impacts on traffic.

Table 2-7: Common Preliminary Rating – Traffic Impacts Category Narratives

3 points	<u>Full use continues with minor delay.</u> A wide shoulder is available for traffic diversion for large slide events; small rockfall events contained in the ditch; nearby detours are available.
9 points	<u>Partial use remains. Use modification required, short (<3mile/30min.) detour available.</u> Traffic control for a lane closure or detour is required for maintenance or clean-up. Detours are less than 3 miles or under 30 minutes in length for up to 1 day.
27 points	<u>Use is blocked – long (>30 min) detour available or less than 1 day closure for up to 1 week.</u>
81 points	<u>Use is blocked – no detour available or closure longer than 1 week.</u> Major reconstruction efforts with weeks or months closure with no detour score 100 points.

H. Annual Average Daily Traffic (AADT) or Usage/Economic/Recreational Importance

The AADT of a roadway provides a rough quantitative indicator of its impact on the regional economy and mobility of people, goods, and services. High traffic corridors will receive a higher risk score. Where AADT information is not available, a qualitative score relating to usage and relative economic/recreational importance is applied. The highest rating from the two categories for a given site is applied in areas where

AADT information is available (e.g. a roadway that is the only route to a popular trail may be of moderate recreational importance (27 pts), but the AADT is only 200 (9 pts), the higher score of 27 would be used). The AADT score is based on the following equation:

$$Score = 3^x \text{ (max 100)}; x = \sqrt{\frac{AADT}{50}}$$

Equation 2-3: Annual Average Daily Traffic Score

Table 2-8: Common Preliminary Rating – AADT Sample Calculated Scores

	AADT Score	Qualitative Score
3 points	50	Rarely used. Insignificant economic and/or recreational importance
9 points	200	Occasionally used. Minor economic and/or recreational importance
27 points	450	Frequently used. Moderate economic and/or recreational importance
81 points	800	Constantly used. Significant economic and/or recreational importance

*The highest rating of the two categories is applied

3 DETAILED HAZARD RATINGS

3.1 Common Hazard Ratings

I. Slope Drainage

In conjunction with rainfall quantity, the ability of the slope materials to be free draining and the presence of seeps and/or springs (indicating a relatively constant water source) provides information on the ability of the slope to cope with rainfall and freeze thaw events. This subcategory is based on subjective evaluations. Note that rating this category at different times of the year may produce different results as creeks and springs may dry up during late summer months.

Table 3-1: Common Hazard Rating - Slope Drainage Category Narratives

3 points	<u>Well Drained.</u> Slope appears dry or well drained; surface runoff well controlled; slope is dry hours after rain events.
9 points	<u>Moderately Well Drained.</u> Water is intermittently on slope; moderately well drained; surface runoff moderately controlled; slope is dry days after rain events.
27 points	<u>Moderately Poorly Drained.</u> Water usually on slope; poorly drained; surface runoff poorly controlled; slope is still wet a week or two following rain events, but may dry during prolonged dry spells.
81 points	<u>Poorly Drained.</u> Water always on slope; very poorly drained; or surface water runoff control not present.

J. Annual Rainfall

The amount of annual rainfall is a rough indicator of the frequency of potential for high pore water pressures to accumulate. Areas with frequent, intense storms typically produce more unstable rock and soil slopes. This subcategory is rated based on rainfall ranges.

Table 3-2: Common Hazard Rating – Annual Rainfall

3 points	0-10 inches of rain annually
9 points	10-30 inches of rain annually
27 points	30-60 inches of rain annually
81 points	60+ inches of rain annually

K. Slope Height or Axial Length of Slide

This category evaluates the risk associated with the height of a rock slope or axial length of a landslide or debris flow. The slope height measurement is to the highest point from which rockfall is expected or the axial length (slope distance) of a landslide. If rockfall is generated from the natural slope above the cut slope, the measurement should include both the cut height and the additional vertical height on the natural slope to the rockfall source. On a landslide, the distance from scarp to toe should be measured. For debris flows the approximate axial or channel distance from the roadway to the source area should be entered (note that this doesn't have to be precise for scoring purposes since a length of 1,000 feet or

one mile will both max out and score 100 pts). See Figure 3 for an example of measuring this quantity. This category is directly measured and scored.

$$Score = 3^x \text{ (max 100)}; x = \frac{\text{slope height or axial length}}{25}$$

Equation 3-1: Slope Height or Axial Length Score

Table 3-3: Common Hazard Rating - Slope Height or Axial Length of Slide Sample Calculated Scores

3 points	25 feet
9 points	50 feet
27 points	75 feet
81 points	100 feet

3.2 Landslide-Specific Hazards

L. Thaw Stability (Cold Climates)

Roads become rough and wavy and embankments founded on melting permafrost become unstable and create roadway hazards. Melting slopes above the road become unstable and have the potential to impact the roadway. Depending on the gradation, soils containing frozen water pose maintenance problems if the ice thaws. The magnitude and likelihood of related problems is higher for finer-grained soils that contain larger amounts of ice or for materials containing ice layers. Where the layers are not visible, base the thaw stability on the relative performance of the roadway.

Table 3-4: Detailed Landslide Slope Rating – Thaw Stability Category Narratives

3 points	<u>Unfrozen / Thaw Stable.</u> Soil may be coarse- or fine-grained. No ice is visible with the naked eye but if present, it does not occupy space in excess of the original voids. These soils are usually thaw-stable.
9 points	<u>Slightly Thaw Unstable.</u> Soil is coarse-grained. Ice occupies space equal to, or in excess of, the original voids. It is present as crystals or lenses visible with the naked eye. These soils may be thaw-unstable depending on soil density.
27 points	<u>Moderately Thaw Unstable.</u> Soil is fine-grained. Ice occupies space equal to, or in excess of the original voids and is present as crystals or lenses visible with the naked eye. These soils are typically thaw-unstable.
81 points	<u>Highly Thaw Unstable.</u> Soil layers contain significant quantities of ice well in excess of the original void space. The ice is readily visible with the naked eye and is present as large lenses or as separate ice layers. These materials are highly thaw-unstable.

M. Instability-Related Maintenance Frequency

Slide maintenance puts staff and equipment in or near the road that may impede or be hazardous to traffic. The more often this activity is required the greater the hazards posed to the public and maintenance staff and the greater the maintenance cost.

Table 3-5: Detailed Landslide Slope Rating – Maintenance Frequency Category Narratives

3 points	<u>Every 10 years.</u> Events requiring maintenance intervention are relatively rare or nonrecurring and/or the repair activities can typically be completed using standard equipment with minimal impacts to traffic flow.
9 points	<u>Every 5 years.</u> Maintenance intervention is required occasionally and/or the repair activities can usually be completed in less than a day using standard equipment but traffic flow is reduced and flagging is required.
27 points	<u>Every 2 years.</u> Maintenance action is routinely required and/or the repair activities require non-standard equipment or more than one day to complete; or the traffic flow is significantly impeded for more than a day and flagging is required.
81 points	<u>Every year.</u> Maintenance is required one or more times per year or wherever major events have occurred requiring several days to restore traffic. This category also applies if an outside contractor is required.

N. Movement History

The rate of slide movement per event and the frequency of events relate to public hazard and maintenance requirements. Higher rates of movement are more likely to create unanticipated roadway conditions that require immediate, unscheduled maintenance.

Table 3-6: Detailed Landslide Slope Rating – Movement History Category Narratives

3 points	<u>Minor movement or sporadic creep.</u> The rate of movement is low and non-continuous. Pavement disturbance is minor on an annual basis and maintenance requirements are minimal and carried out as a scheduled activity.
9 points	<u>Up to 1 inch annually or steady annual creep.</u> The rate of movement is low but continuous. Roadway maintenance is routinely required to avoid road closures but maintenance action can generally be on a scheduled basis.
27 points	<u>Up to 3 inches per event, one event per year.</u> The rate of movement is moderately high. Events occurring more than twice a year that require immediate and unscheduled maintenance are a persistent maintenance problem.
81 points	<u>>3 inches per event, >6 inches annually, or more than 1 event per year (includes all debris flows).</u> The rate of movement is high with significant roadway disturbance developing quickly. Aggressive, unscheduled maintenance intervention is required to maintain traffic flow and correct unsafe conditions.

3.3 Rockfall-Specific Hazards

O. Rockfall Related Maintenance Frequency

The required frequency of maintenance is an indicator of both rockfall activity and long-term cost to the agency. When there is little to no maintenance required and only scheduled ditch cleaning required, both maintenance staff and the travelling public are typically not put at risk and little cost to the agency is required. As rockfall activity increases at a site, additional road patrols may be warranted after storm events and rockfall clean-up activities increase.

Table 3-7: Detailed Rock Slope Rating – Rockfall-Related Maintenance Frequency Category Narratives

3 points	<u>Normal, scheduled ditch maintenance.</u> Only routine, scheduled ditch maintenance is required on an infrequent (3-5 year) basis. Few, if any rocks accumulate in ditch between maintenance intervals.
9 points	<u>Road Patrols conducted after storm events.</u> Maintenance staff only actively search for rock within the ditch or roadway after extreme storm events. Ditch cleanout of rock debris is infrequently required beyond scheduled ditch cleaning.
27 points	<u>Routine seasonal road patrols.</u> Maintenance staff routinely patrol for rock during typically high rockfall seasons (fall, winter, spring). Ditch cleanout of rock debris is occasionally required beyond scheduled ditch cleaning.
81 points	<u>Year-round road patrols.</u> Maintenance staff routinely patrol for rock year round. Ditch cleanout of rock debris is frequently required beyond scheduled ditch cleaning.

Geologic Character

The geologic conditions of the rockfall section are evaluated with these categories. Since the conditions that cause rockfall generally fit into two categories, Case One and Case Two rating criteria have been developed. Case One is for slopes where joints, bedding planes, or other discontinuities, are the dominant structural features that lead to rockfall. Case Two is for slopes where differential erosion or oversteepening is the dominant condition that controls rockfall.

Whichever case best fits the slope should be used for the rating. If both situations are present, and it is unclear which dominates, both can be scored, but only the worst case (highest score) is used in the rating.

Case 1

Rockfall from Case One slopes occurs as a result of movement along discontinuities. The word “joint” as applied here, represents all possible types of discontinuities, including bedding planes, foliations, fractures, and faults. The term “continuous” refers to joints that are greater than 10 feet in length. The term “adverse” applies not only to the joint's spatial relationship to the slope, but also to such things as rock friction angle, joint infilling, and the effects of water on slope stability, if present.

P. Case 1 - Structural Condition

Jointed rock is much more prone to rockfall than massive rock. Movement occurs along these joints where the resistance to movement is significantly less than the intact strength of the rock itself. When the joints are orientated adversely to the slope, the potential for rockfall is greater. Adverse joints are those that singularly, or in combination with other joints, make planar, circular, block, wedge or toppling failures kinematically possible.

Table 3-8: Detailed Rock Slope Rating – Case 1 Structural Condition Category Narratives

3 points	<u>Discontinuous joints with favorable orientations.</u> Slope contains jointed rock with no adversely oriented joints.
9 points	<u>Discontinuous joints with random (both favorable and unfavorable) orientations.</u> Slope contains randomly oriented joints creating a variable pattern. The slope is likely to have some scattered blocks with adversely oriented joints, but no dominant adverse pattern is present.
27 points	<u>Discontinuous joints with adverse orientations.</u> Rock slope exhibits a prominent joint pattern with an adverse orientation. These features have less than 10 feet of continuous length.
81 points	<u>Continuous joints with adverse orientations.</u> Rock slope exhibits a dominant joint pattern with an adverse orientation and a length greater than 10 feet.

Q. Case 1 - Rock Friction

The potential for rockfall by movement along discontinuities is controlled by the condition of the joints. The condition of the joints is described in terms of micro and macro roughness.

This parameter directly affects the potential for a block to move relative to another. Friction along a joint, bedding plane, or other discontinuity is governed by the macro and micro roughness of the surfaces. Macro roughness is the degree of undulation of the joint relative to the direction of possible movement. Micro roughness is the texture of the surface. On slopes where the joints contain hydrothermally altered or weathered material, movement has occurred causing slickensides or fault gouge to form, or the joints are open or filled with water, the rockfall potential is greater.

Table 3-9: Detailed Rock Slope Rating – Case 1 Rock Friction Category Narratives

3 points	<u>Rough. Irregular.</u> The surface of the joints are rough and the joint planes are irregular enough to cause interlocking.
9 points	<u>Undulating Macro.</u> Rough but without the interlocking ability.
27 points	<u>Planar.</u> Macro smooth and micro rough joint surfaces. Friction is derived strictly from the roughness of the rock surface.
81 points	<u>Clay Infilling, Open, or Slickensides.</u> Low friction materials separate the rock surfaces, negating any micro or macro roughness of the joint surfaces. Slickensided joints also have a lower friction angle, and belong in this category.

Case 2

This case is used for slopes where differential erosion or oversteepening is the dominant condition that leads to rockfall. Erosion features include oversteepened slopes, unsupported rock units (overhangs), or exposed resistant rocks on a slope, which may eventually lead to a rockfall event.

R. Case 2 - Structural Condition

Rockfall is commonly caused by erosion that leads to a loss of support, either locally or throughout a slope. The types of slopes that may be susceptible to this condition are: layered geologic units containing more easily erodible units that undermine more durable rock; talus slopes; highly variable geologic units, such

as conglomerates, and mudflows, that weather differentially, allowing resistant rocks and blocks to fail, and rock/soil slopes that weather allowing rocks to fall as the soil matrix material is eroded.

Table 3-10: Detailed Rock Slope Rating – Case 2 Structural Category Narratives

3 points	<u>Few Differential Erosion Features.</u> Minor differential erosion features that are not distributed throughout the slope.
9 points	<u>Occasional Differential Erosion Features.</u> Minor differential erosion features that are widely distributed throughout the slope.
27 points	<u>Many Differential Erosion Features.</u> Differential erosion features that are large and numerous throughout the slope.
81 points	<u>Major Differential Erosion Features.</u> Severe cases such as dangerous erosion-created overhangs, or significantly oversteepened soil/rock slopes or talus slopes.

S. Case 2 - Differential Erosion Rate

The materials comprised in a slope can have markedly different characteristics that control how rapidly weathering and erosion occur. As erosion progresses, resulting in portions of the slope becoming unsupported, the likelihood of a rockfall event increases.

The rate of erosion on a Case Two slope directly relates to the potential for a future rockfall event. As erosion progresses, unsupported or oversteepened slope conditions develop. The impact of the common physical and chemical erosion processes, as well as the effects of man's actions, should be considered. The degree of hazard caused by erosion and thus the score given this category, should reflect the rate at which erosion is occurring; the size of rocks, blocks, or units being exposed; the frequency of rockfall events; and the amount of material released during an event.

Table 3-11: Detailed Rock Slope Rating – Case 2 Differential Erosion Rate Category Narratives

3 points	<u>Small Difference.</u> Erosion features take many years to develop. Slopes that are near equilibrium with their environment are covered by this category.
9 points	<u>Moderate Difference.</u> The difference in erosion rates allows erosion features to develop over a period of a few years.
27 points	<u>Large Difference.</u> The difference in erosion rates allows noticeable changes in the slope to develop annually.
81 points	<u>Extreme Difference.</u> The difference in erosion rates allows rapid and continuous development of erosion features.

4 DETAILED RISK RATINGS

V. Route Width or Trail Width

The roadway or trail width is measured perpendicular to the highway centerline and the edges of pavement define the roadway. It is difficult to get uniform estimates among different raters about what is unpaved shoulder and what is an unmaneuverable side slope. For that reason, the unpaved shoulders are not included in the measurement. When the roadway width varies throughout the unstable slope section, the width measured should be the minimum width. On divided roadways, only the portion available to the driver is measured.

This category captures the ability for a traveler to navigate around unforeseen roadway or trail hazards. For example, if a traveler notices rocks in the road, or rocks falling, it is possible for the driver or hiker to react and take evasive action to avoid them. The more room there is for this maneuver, the greater the likelihood the driver will successfully miss the rock without hitting some other roadside hazard or oncoming vehicle. The measurement represents the available maneuvering width of the roadway.

This category score is based on direct measurements according to the equation below:

$$\text{Score} = 3^x (\text{max } 100); \text{ where}$$
$$x = \frac{44 - \text{Road width (ft)}}{8} \text{ for vehicles, or } x = \frac{18 - \text{Trail width (ft)}}{4} \text{ for trail traffic}$$

Equation 4-1: Roadway Width Score

Table 4-1: Risk Rating – Roadway Width Sample Calculated Scores

	Roadway Width	Trail Width
3 points	36 feet	14 feet
9 points	28 feet	10 feet
27 points	20 feet	6 feet
81 points	12 feet	2 feet

W. Human Exposure Factor

With the Human Exposure Factor category, the risk associated with the percentage of time a route user is present in the rockfall section is evaluated. The percentage is obtained by using the formula based on slope length, average annual daily traffic (AADT), and the posted speed limit (or average walking speed, 2.7 mph³) at the site.

Combining the AADT, the length of the unstable slope section and the travel speed produces a category that represents the potential for a roadway user to be involved in an unstable slope event. The average percent of time a user is present within the unstable slope section is calculated. Another way of looking at this is that it shows how many roadway users are in the unstable slope section at any one time. A rating

³ Knoblauch, R.L., et al, 1996, Field Studies of Pedestrian Walking Speed and Start-Up Time, Transportation Research Record: Journal of the Transportation Research Board

of 100% means that, on average, a user will be within the defined rockfall section 100% of the time. Where high AADT's or longer slope lengths exist, values greater than 100% will result. When this occurs, it means that at any particular time, more than one user is present within the measured section. The result approximates the likelihood of vehicles or trail users being present and involved in an unstable slope incident. The result also reflects the significance of the route.

This category score is based on direct measurements according to the equation below.

$$Score = 3^x \text{ (max 100)}; x = \frac{\left(\frac{AADT}{24} \times slope \text{ length (miles)} \times 100 \right)}{\text{speed limit or walking speed}} \div 12.5$$

Equation 4-2: Human Exposure Factor Score

Table 4-2: Risk Rating – Human Exposure Factor Sample Calculated Scores

3 points	Human Exposure 12.5% of the time
9 points	Human Exposure 25% of the time
27 points	Human Exposure 37.5% of the time
81 points	Human Exposure 50% of the time

X. Percent Decision Sight Distance (PDSD) or Avoidance Ability on Trails

The Percent Decision Sight Distance (PDSD) category compares the amount of sight distance available through an unstable slope section to the optimal sight distance for a speed/path/direction change on a rural road as prescribed by AASHTO. Sight distance is the shortest distance that a six-inch object is continuously visible to a driver along a roadway. Decision sight distance (DSD) is the length of roadway, in feet, required by a driver to perceive a problem and then bring a vehicle to a stop.

Avoidance ability on trails should be estimated qualitatively based on observations at the time of rating. Since comparable design standards for trails do not exist, the rater should judge the ability for a hiker to avoid a sudden rockfall, broken down into easily, moderately, difficult, or very difficult to avoid. For example, a hiker traversing a trail through flat grassy area would easily avoid sudden hazards by leaving the trail into predictable surroundings; a trail next to a shallow stream without a drop off may be moderately difficult to avoid a hazard; a boardwalk trail next with handrails and a five foot drop to wetlands below may be difficult to avoid a sudden hazard; and a narrow trail with a tall cliff below and loose rocks may be very difficult to avoid a sudden hazard.

The DSD is critical when obstacles on the road are difficult to see, or when unexpected or unusual maneuvers are required. Throughout an unstable slope section the sight distance can change appreciably. Horizontal and vertical highway curves along with obstructions such as rock outcrops and vegetation can severely limit a driver ability to notice and react to a rock in the road.

First, record the posted speed limit throughout the rockfall section and then decide where the sight distance is most restricted and which direction has the shortest line of sight. Both horizontal and vertical

sight distances should be evaluated. Normally an object will be most obscured when it is located just beyond the sharpest part of a curve. Formally, the AASHTO standards require placing the object in the travel lanes and measuring it from a driver's position near the centerline, however ratings are typically performed under live traffic and this would be an unsafe practice for both the rater and the public. Therefore, place the six-inch object in that position on the fogline or on the edge of pavement if there is no fogline. Then walk along the fogline (edge of pavement) in the opposite direction to the traffic flow, measuring the distance it takes for the object to disappear at an eye height of 3.5 feet above the road surface. A roller wheel or laser range finder is helpful for making this measurement.

This category score based on direct measurements according to the equation below.

$$Score = 3^x; x = \frac{120 - \left(\frac{Measured Minimum Sight Distance}{AASHTO Recommended Decision Sight Distance} \times 100 \right)}{20}$$

Equation 4-3: Percent Decision Sight Distance Score

Table 4-3: Risk Rating – Percent Decision Sight Distance Sample Calculated Scores

	Roadways	Trails
3 points	Adequate, 100% of design value	Hazards easily avoided
9 points	Moderate, 80% of design value	Hazards moderately difficult to avoid
27 points	Limited, 60% of design value	Hazards difficult to avoid
81 points	Very Limited, 40% of design value	Hazards very difficult to avoid

Y. Right of Way Impacts if Left Unattended

Adjacent land owners may be impacted by unstable slopes retrogressing to property boundaries and beyond. If structures or transportation systems are potentially impacted by unstable slopes, then the risk to the agency increases. Maps displaying ROW are helpful when performing evaluations.

Table 4-4: Risk Rating – Right of Way Impacts Category Narratives

3 points	<u>No ROW implications.</u> Unstable slopes very unlikely to extend beyond agency ROW.
9 points	<u>Minor effects beyond ROW.</u> Retrogressing unstable slopes impacting non-agency ROW, but adjoining landowner indifferent to minor impacts. Minor impacts include overburden slumping, minor drainage changes, or rock slope crest retrogression.
27 points	<u>Private property, no structures affected.</u> Unstable slopes actively retrogressing into private property but not impacting or likely to threaten structures. ROW acquisition of private lands may be a remote option.
81 points	<u>Structures, roads, RR, utilities, or parks affected.</u> Retrogressing unstable slopes actively threatening adjacent structures, transportation systems, or Federal or State Park lands. In this score range, ROW acquisition of private lands may be a viable option. Coordination of mitigation approaches with outside agency landowner(s) will likely be required.

Z. Environmental/Cultural Impacts if Left Unattended

If the unstable slope is left unattended, impacts to the environment or cultural resources may occur. These impacts can include siltation of streams, culvert plugging, subsequent fish passage blocking, habitat

impacts, damage to historic features or sites, etc. Due to the highly variable nature of potential environmental impacts, a range of environmental and cultural descriptions are used for this category. The rater should select the category containing the highest environmental or cultural impact if left unattended. If these impacts are anticipated, a review by environmental and/or cultural resource professionals may be recommended.

Table 4-5: Risk Rating – Environmental/Cultural Impacts Category Narratives

3 points	<u>None/No potential to cause effects.</u> No known sensitive environmental issues are present or anticipated if a <i>probable</i> worst case scenario occurs. Hazard does not have the potential to cause effects on historic properties, assuming such historic properties are present (36 CFR 800.3(a)(1)).
9 points	<u>Likely to affect/No historical property affected.</u> If a probable or historically common failure occurs or the slope retrogresses, minor environmental impacts are anticipated, but adverse impacts are not anticipated. Historic properties are present but the hazard will have no effect upon them (36 CFR 800.4(d)(1)).
27 points	<u>Likely to Adversely Affect/Finding of No Adverse Effect.</u> If a probable or historically common failure occurs or the slope retrogresses adverse impacts are anticipated. Historic properties are present but the hazard will require modification or conditions imposed should the hazard continue untreated (36 CFR 800.5(a)(2)(vii)(b)).
81 points	<u>Current adverse effects/Adverse Effect.</u> Current conditions are causing adverse environmental effects. An adverse effect is found when an undertaking may alter, directly or indirectly, any of the characteristics of a historic property (36 CFR 800.5(a)(1)).

AA. Maintenance Complexity

Complexity of maintenance following rockfall or landslide events is indicative of the maintenance costs and associated hazards. Maintenance could be as simple as cleaning rocks off the road during routine road patrols to the maintenance of unstable slope remediation systems such as rockfall attenuator fences or MSE walls to remediate an embankment landslide

Table 4-6: Risk Rating – Maintenance Complexity Category Narratives

3 points	<u>Routine effort/in-house.</u> Maintenance staff typically deal with unstable slopes with road-going equipment such as a pickup with a blade, particularly effective with rockfall incidences.
9 points	<u>In-house maintenance/special project.</u> Maintenance of the site requires mobilization of specialized equipment such as a backhoe, excavator, paver, guardrail post driver, etc.
27 points	<u>Specialized equipment/contract.</u> Maintenance requires specialized equipment to be mobilized a significant distance or requires assistance from an outside contractor. More involved maintenance may require basic engineering efforts (subgrade design, asphalt mixes, etc.).
81 points	<u>Complex or dangerous effort/location/contract.</u> Specialty contractor is required to perform maintenance activities (i.e. maintaining rockfall attenuator fences); more complex maintenance designs (such as subgrade reinforcement, MSE walls, rockfall mitigation, etc.) requiring geotechnical design efforts; or difficult/dangerous access (rope access, spider hoe, etc.) is required.

BB. Event Cost

The estimated, or actual cost, to maintain or repair a *probable* worst case scenario or a historically bad failure should be considered. The costs should be considered at comparable private-sector equipment rental and operator rates. If an extreme event requires outside assistance (planning, design, and/or construction) the costs should include both those outside costs and the agency contracting and supervisory costs.

Table 4-7: Risk Rating – Event Costs Category Narratives

3 points	<u>\$0-2k.</u> Maintenance efforts and costs involve only agency maintenance staff using existing equipment. No design work required.
9 points	<u>\$2-25k.</u> Event cost and response is more involved and may include input from agency engineering staff.
27 points	<u>\$25-100k.</u> Costs indicate extensive, multiday efforts and likely input from engineering staff. Costs may include outside contractors and engineering costs.
81 points	<u>\$>100k.</u> Large contract with significant outside contractor and engineering costs.