



Input Pins




V_{dd} needs to be 5V or 3.3V

The multiplexer is disabled when EN is LOW


Output Pins




Metal Element Resistors




Metal Film Resistors



Metal Foil Resistors




IC1
ADG706BRUZ-REEL7

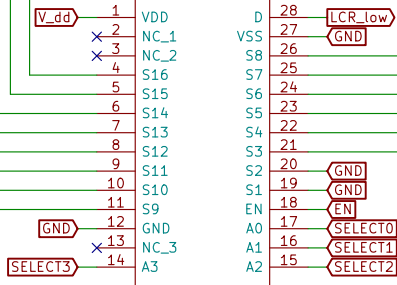

R_{on} is 2.5Ω (typically)
Deviation between channels is ±0.8Ω

Metal Film Resistors



Metal Foil Resistors

