
VOICE FILTER SHIELD

Thomas passive filter / second schematic / all connections drawn as wires

01 VOICE CONNECTOR

02 TWO-STAGE RC FILTER

Same components, values and pin numbers as the original.

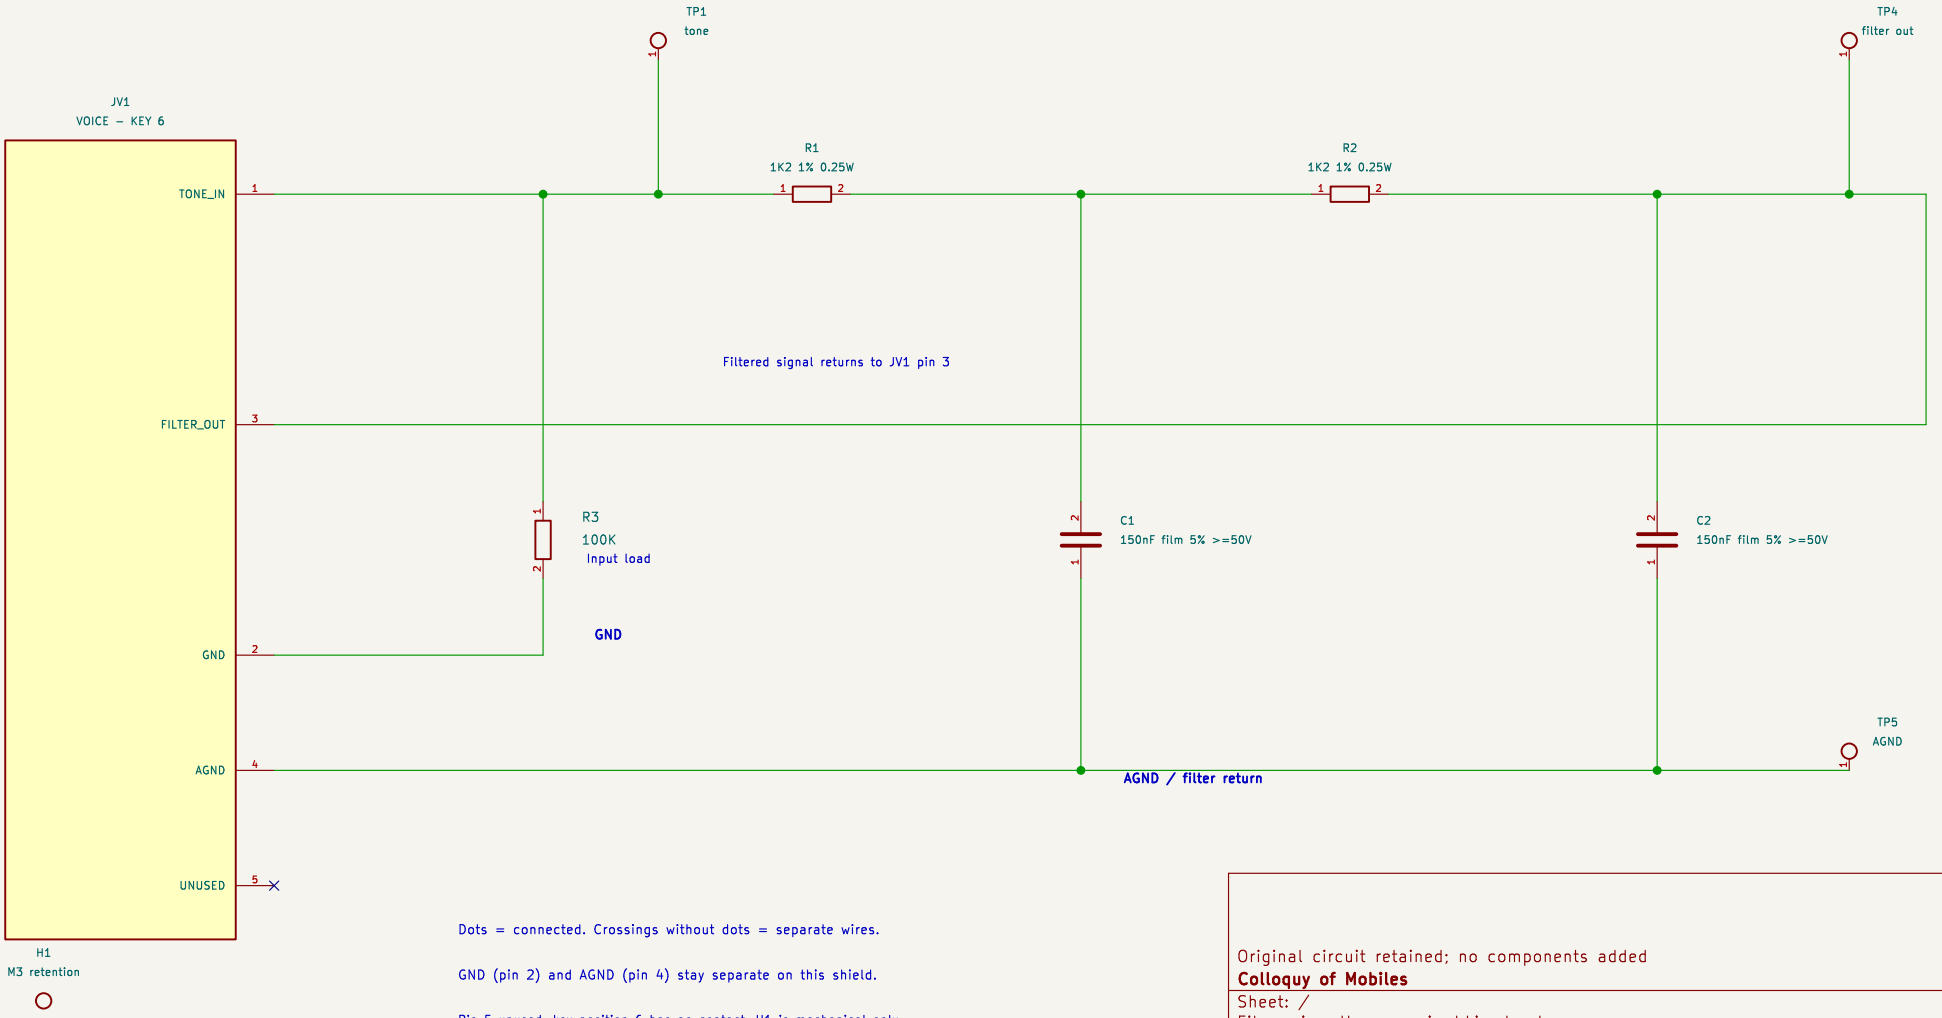

Dots = connected. Crossings without dots = separate wires.

GND (pin 2) and AGND (pin 4) stay separate on this shield.

Pin 5 unused; key position 6 has no contact. H1 is mechanical only.

Original circuit retained; no components added

Colloquy of Mobiles

Sheet: /
File: voice-thomas-wired.kicad_sch

Title: Voice filter shield / continuous wiring

Size: A4	Date: 2026-10-20	**Rev: W1**
KiCad E.D.A. 9.0.7		Id: 1/1