



Female Header 1.27mm 1 Row H=3.4mm SMT Type

Specifications

Current Rate:1 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:500V AC for one minute

Operation Temperature:-40°C to +105°C




Material

Insulator:Polyester,UL 94V-0





◎Standard:Nylon 6T

Terminal:Copper Alloy

Plating:Gold Plated

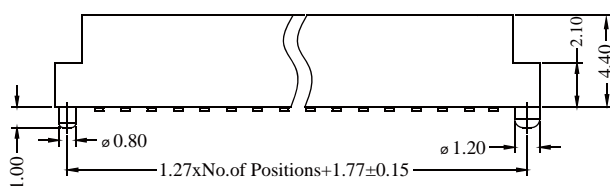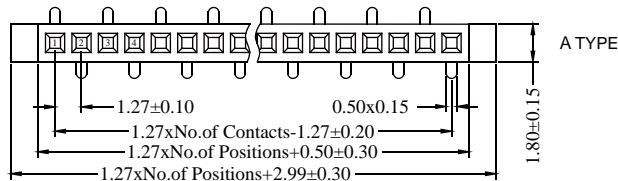

Section A-A

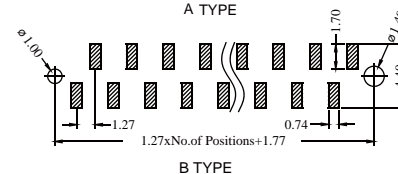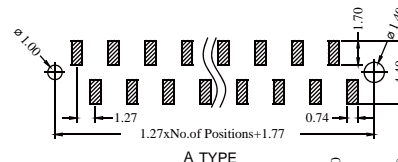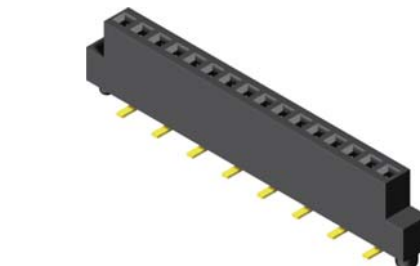



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)


Part No.:PS3M34/44-1XX-U

Female Header 1.27mm 2 Row H=3.4/4.4mm SMT Type





H	Dim. A
3.4	0.42x0.15
4.4	0.50x0.15

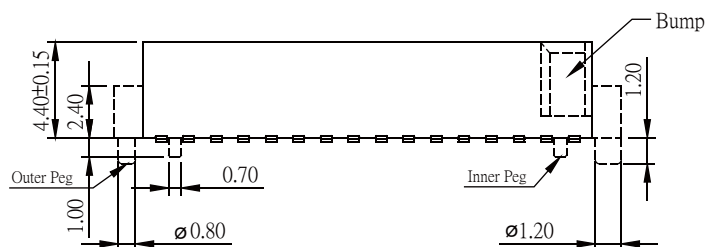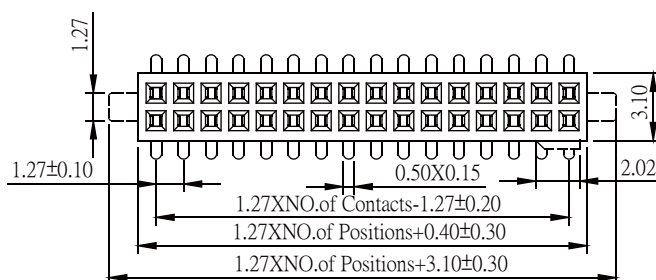

Inner Peg



External Peg

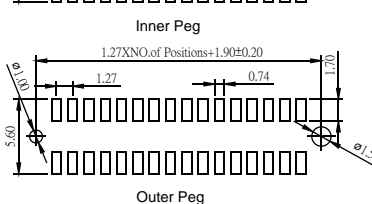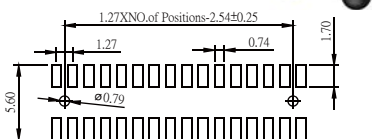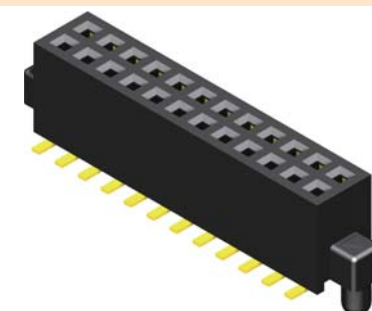

Recommended P.C.B Layout
(PCB TOLERANCE ±0.05)

Part No.:PS3M34/44-2XX-U

ORDER INFORMATION

