


Beam Analysis Report

1. Verification Model and Input Details

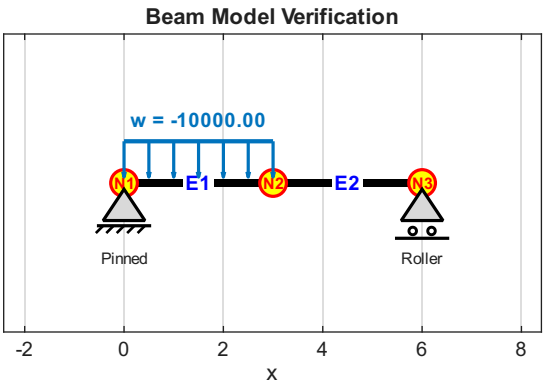

Node Data

Node	x
1	0.0000
2	3.0000
3	6.0000

Element Data

Elem	Start N	End N	E	I
1	1	2	2.000e+11	8.000e-06
2	2	3	2.000e+11	8.000e-06

Support Data

Node	Fixed	Pinned	Roller
1	N	Y	N
2	N	N	N
3	N	N	Y

Nodal Load Data


No nodal load data available

Distributed Load Data

Element	w
1	-1.0000e+04

Beam Analysis Report

2. Analysis Results and Output Details

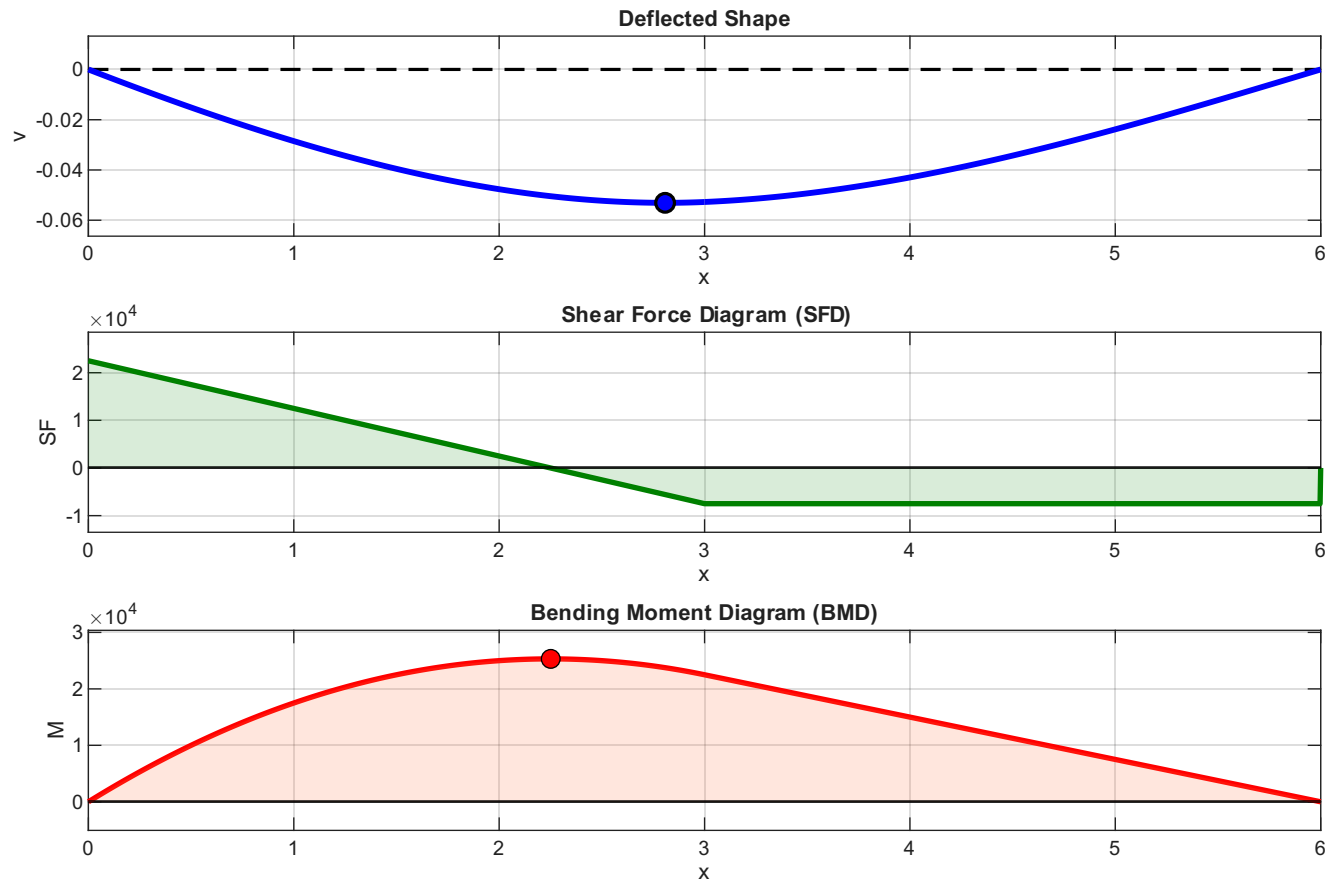

Nodal Deflections

Node	x	v	θ
1	0.0000	0.0000	-0.0316
2	3.0000	-0.0527	0.0035
3	6.0000	0.0000	0.0246

Nodal Reactions

Node	x	Ry	RM
1	0.0000	22500.0000	0.0000
2	3.0000	0.0000	0.0000
3	6.0000	7500.0000	0.0000

Element End Forces

Elem	Start N	End N	V1	M1	V2	M2
1	1	2	22500.0000	0.0000	7500.0000	22500.0000
2	2	3	-7500.0000	-22500.0000	7500.0000	0.0000

Summary

Max abs defl: 5.306930e-02 at x=2.8079

Max abs SF: 2.250000e+04 at x=0.0000

Max abs BM: 2.531249e+04 at x=2.2511