


USB-C AND LDO

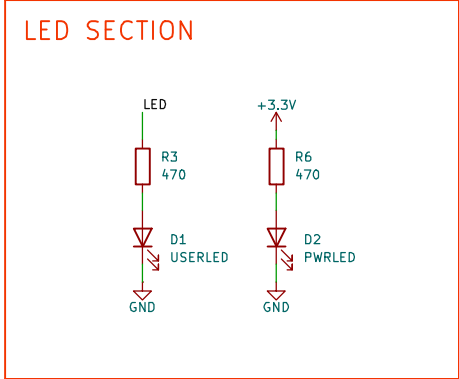

ESP32-C3-WROOM-2 MODULE

The diagram illustrates the pin configuration for the ESP32-C3-WROOM-02 module. The module is represented by a yellow rectangle with pins numbered 1 through 19. The connections are as follows:

- Power:** Pin 1 (VCC) is connected to +3.3V. Pin 9 (GND) is connected to GND.
- Reset:** Pin 2 (EN) is connected to a reset circuit consisting of a switch (SW1) labeled 'RESET' and a pull-up resistor (R4, 10K) to +3.3V. The other end of the switch is connected to GND.
- I/O:**
 - Pins 18 (IO0), 17 (IO1), 16 (IO2), 15 (LED), 3 (IO4), 4 (IO5), 5 (IO6), 6 (IO7), 7 (IO8/SDA), 8 (BOOT), 10 (IO10/SCL), 13 (USB D-), and 14 (USB D+) are connected to GND.
 - Pins 11 (IO20/RXD) and 12 (IO21/TXD) are connected to RXD and TXD respectively.
- Other:** Pin 19 (IO19) is connected to GND. Pin 0 (PWR_FLAG) is connected to GND.

