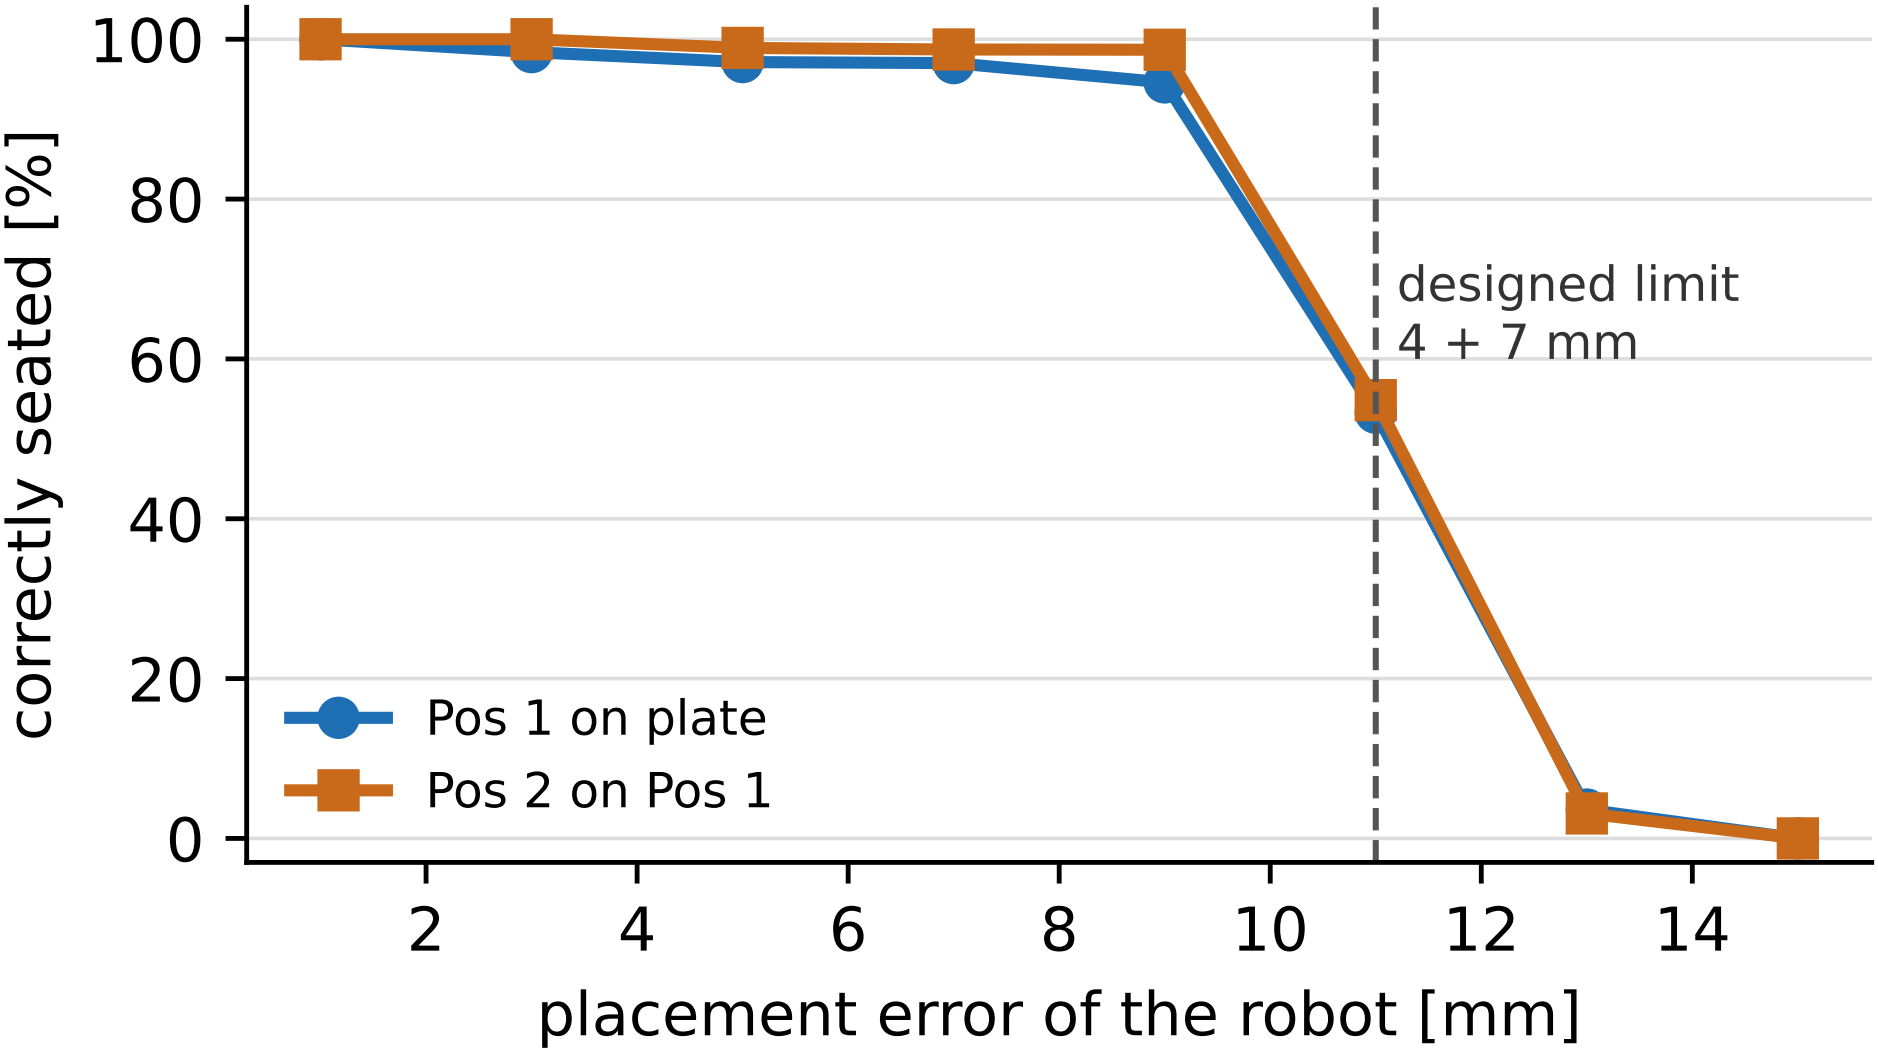
100
80
60
40
20
0
correctly seated [%]
designed limit
4 + 7 mm
Pos 1 on plate
Pos 2 on Pos 1
2
4
6
8
10
12
14
placement error of the robot [mm]