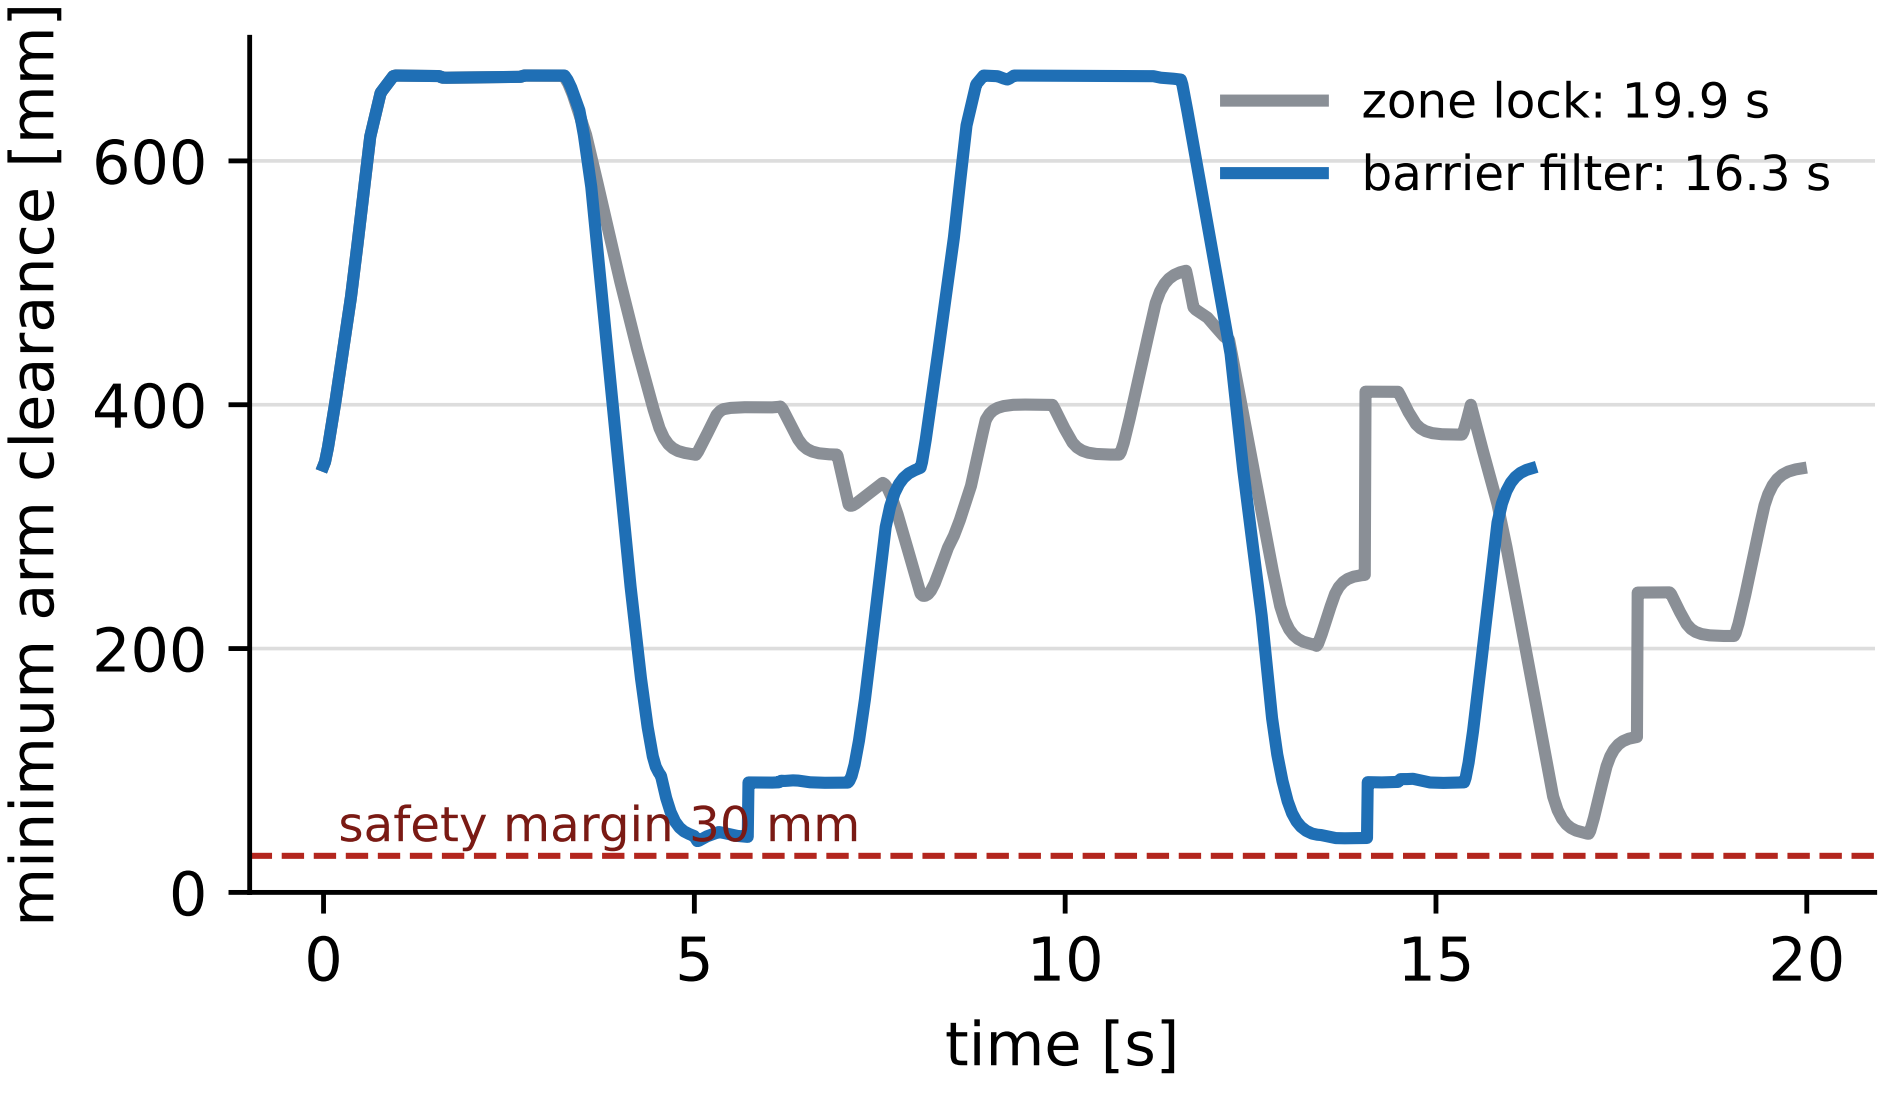
minimum arm clearance [mm]
600
400
200
0
0
5
10
15
20
time [s]
zone lock: 19.9 s
barrier filter: 16.3 s
safety margin 30 mm