


# SmartX Labs for Computer Systems

Box Lab v09

(2016, Spring)

NetCS Lab

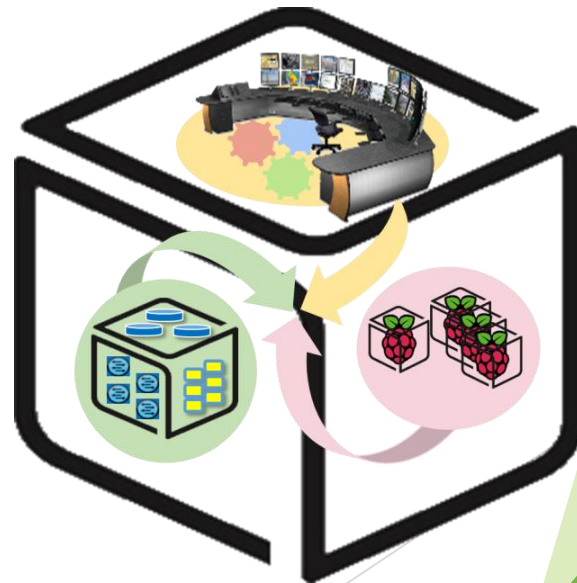


# History and Contributor of Box Lab


## (2016. 04. 27)

Version	Updated Date	Updated Contents	Contributor
v01	2015/09	OvS, Docker 자료 초안 작성	배 정 주
v02	2015/09	KVM 자료 초안 작성	윤 희 범
v03	2015/10	자료 취합 및 Functions Lab 초안 제작	배 정 주
v04	2015/10	Functions Lab 자료 편집 및 수정	윤 희 범
v05	2016/03	Function Lab → Box Lab 이전 작업, 세부자료 수정	남 택 호
v06	2016/04	추가 설명자료 및 단어 교정, History 작성	남 택 호
v07	2016/04	Outline 추가, 검수자 피드백 반영	남 택 호
v08	2016/04	실습 중 발생한 이슈에 대한 개선사항 추가 (docker container command, if configuration 충돌)	남 택 호
v09	2016/06	불필요한 Prerequisite 제거, Appendix 추가 (mirror site 변경코드 제거)	남 택 호 김 병 돈

# Box Lab: Outline

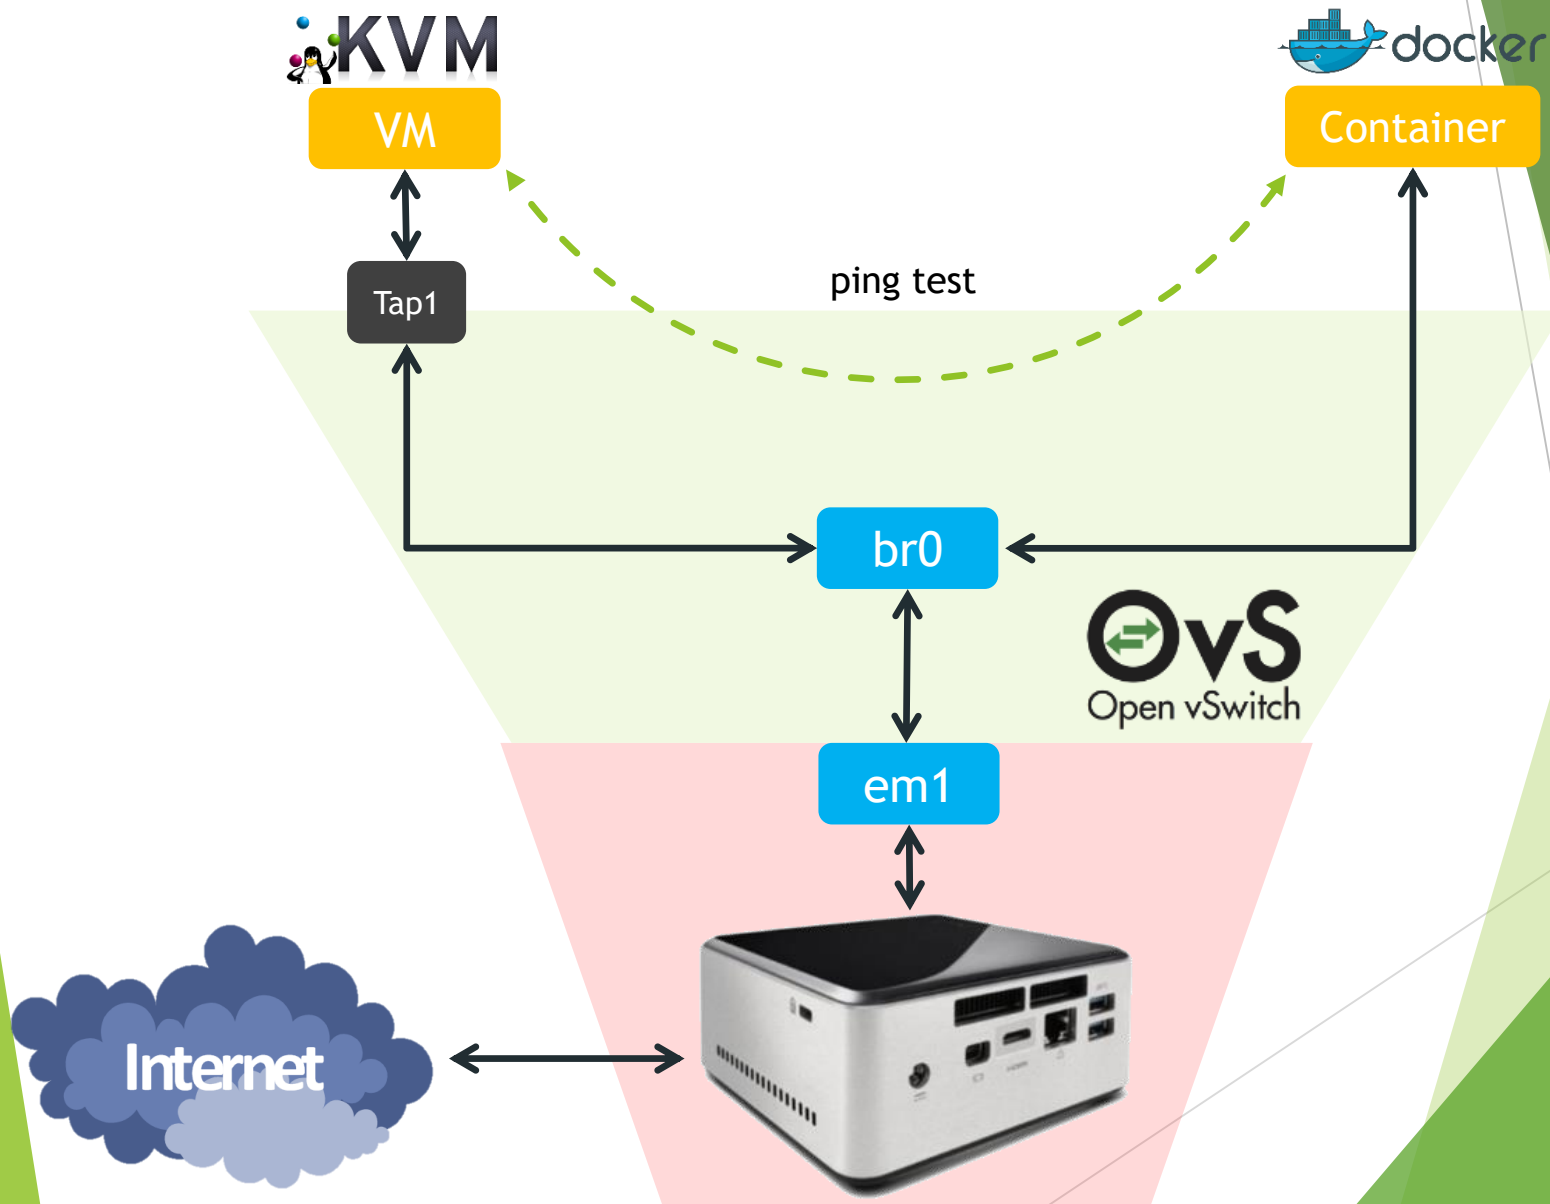


# Virtualization: Basic Concept

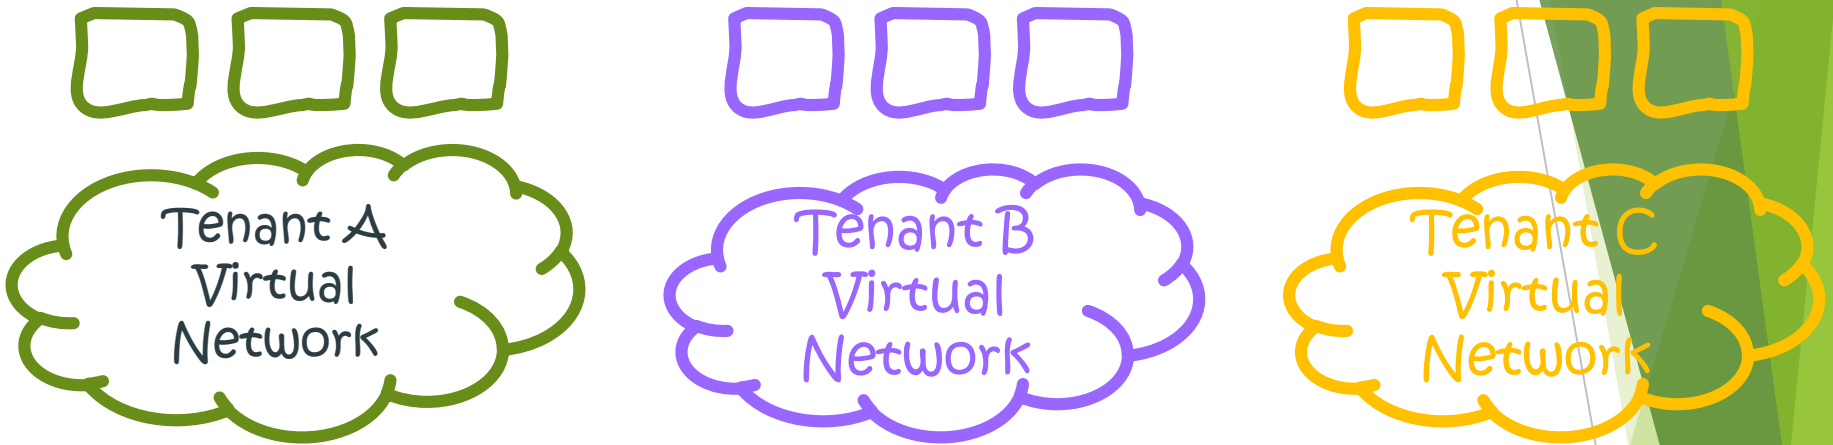

Network Virtualization


Any Physical Network  
(Packet Forwarding)

# Virtualization: Basic Concept

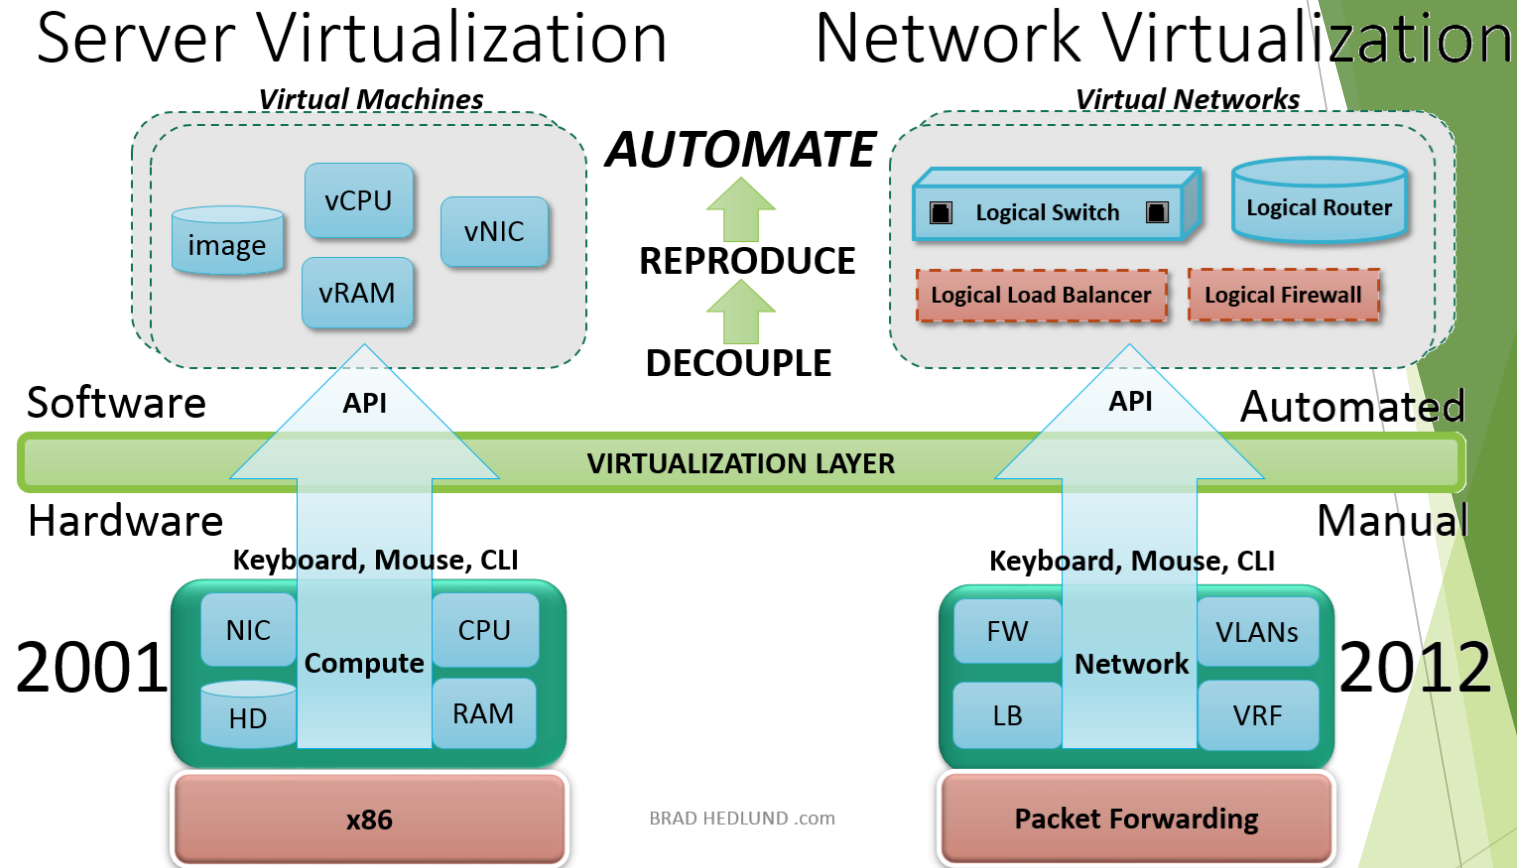


- Virtualization is the basic act of **decoupling** an infrastructure service from the physical assets on which that service operates. With the virtual network fully decoupled, the physical network configuration is simplified to provide packet forwarding service from one hypervisor to the next

# Box Lab: Final Goal

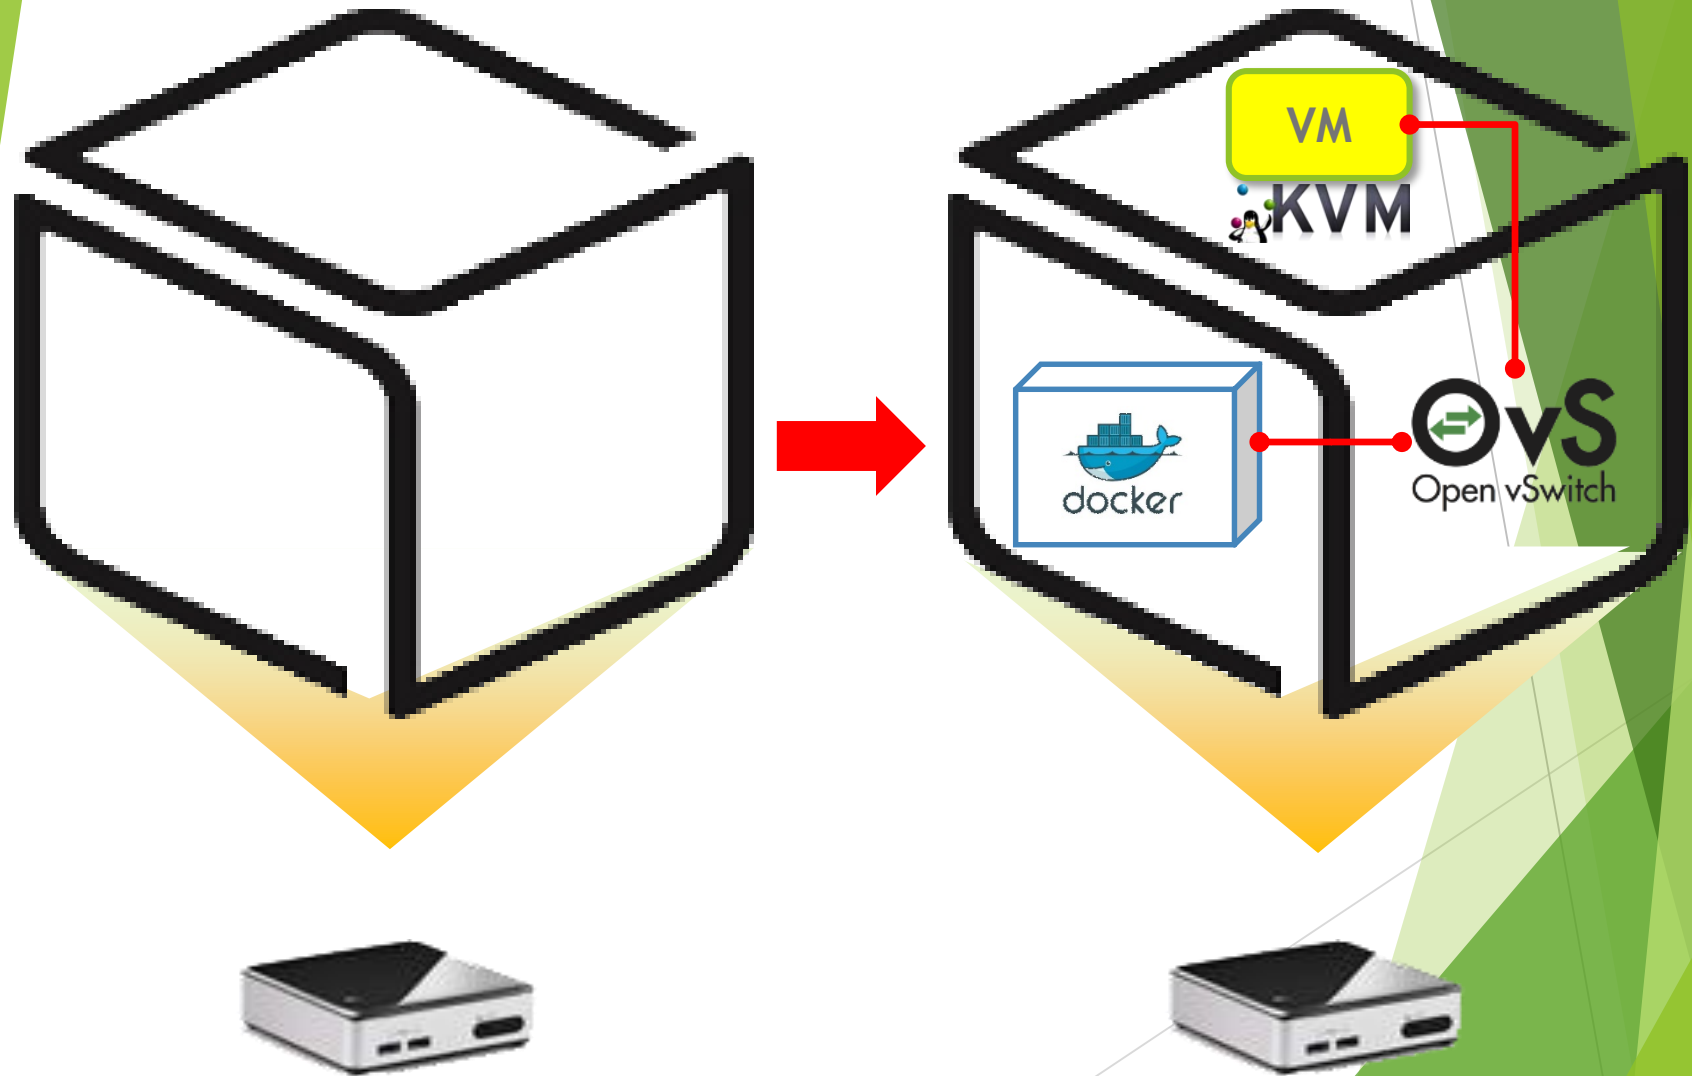

# Open vSwitch: Goal of this part

- Update and Configuration

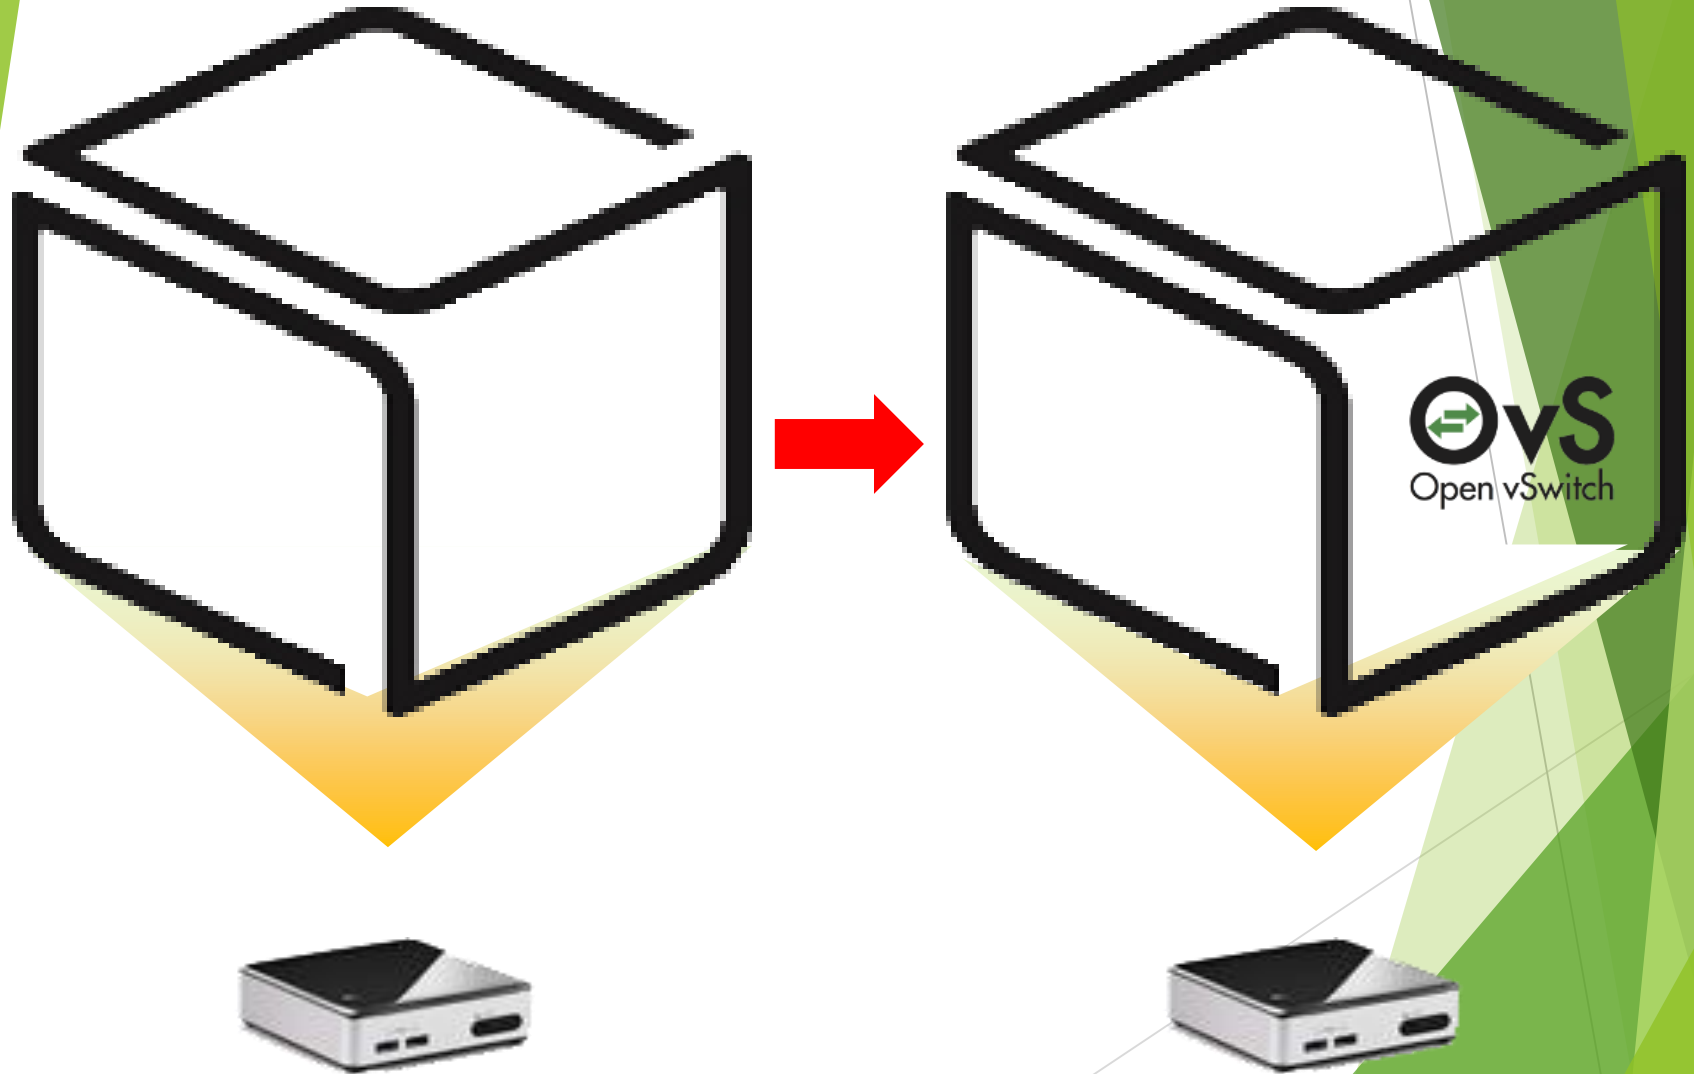

# vSwitches: Virtual(soft) Switches

- ▶ A switch for every server means a 50:1 (virtual : physical) ratio; Approaching feature-parity with hardware switches: Visibility, ACLs, Quality of Service; Optionally leveraging hardware off-loading
- ▶ Tight integration with hypervisor → Good for virtual edge (e.g., inter-VM) networking, network overlay: the leading initial NV use case
- ▶ Centralized management
- ▶ VMWare, Nicira (open & proprietary), Cisco, IBM, Microsoft
  - ▶ VMware vSwitch (vDS), Cisco Nexus 1000V, **Open vSwitch**




# Virtual Switches: Soft vs Hardware


- ▶ H/W Switches: With an approach like pass through + tagging + switching in the NIC (with enforcement in the first hop switch); Latency is reduced to the wire speed; Packet classification noticeably outperforms x86-based software switches.
- ▶ S/W Switches: Flexibility and upgrade cycle of software + Benefits of virtualization (memory overcommit, page sharing, etc.); Simple resource efficiency
  - ▶ Can saturate a 10G link from a guest to the wire with less than a x86 CPU core (assuming MTU size packets), Can saturate a 1G link with less than 20% of a core. In the case of Open vSwitch, these numbers include full packet lookup over L2, L3 and L4 headers.

# Virtual Switch: Basic Architecture


Virtual L2 network

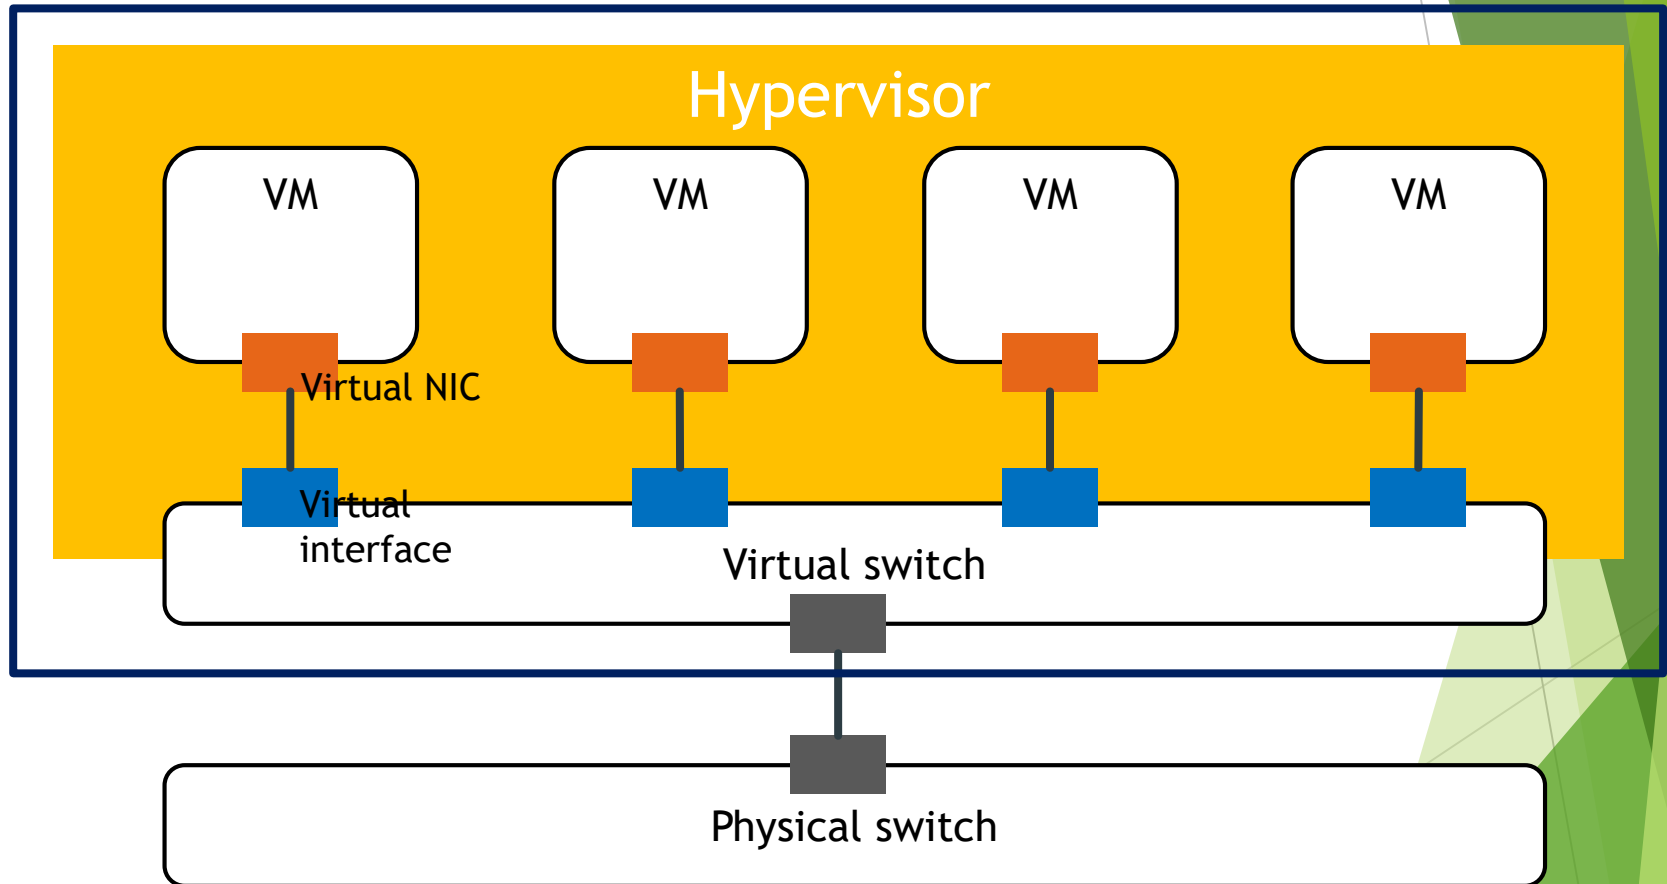


# Open vSwitch: Introduction

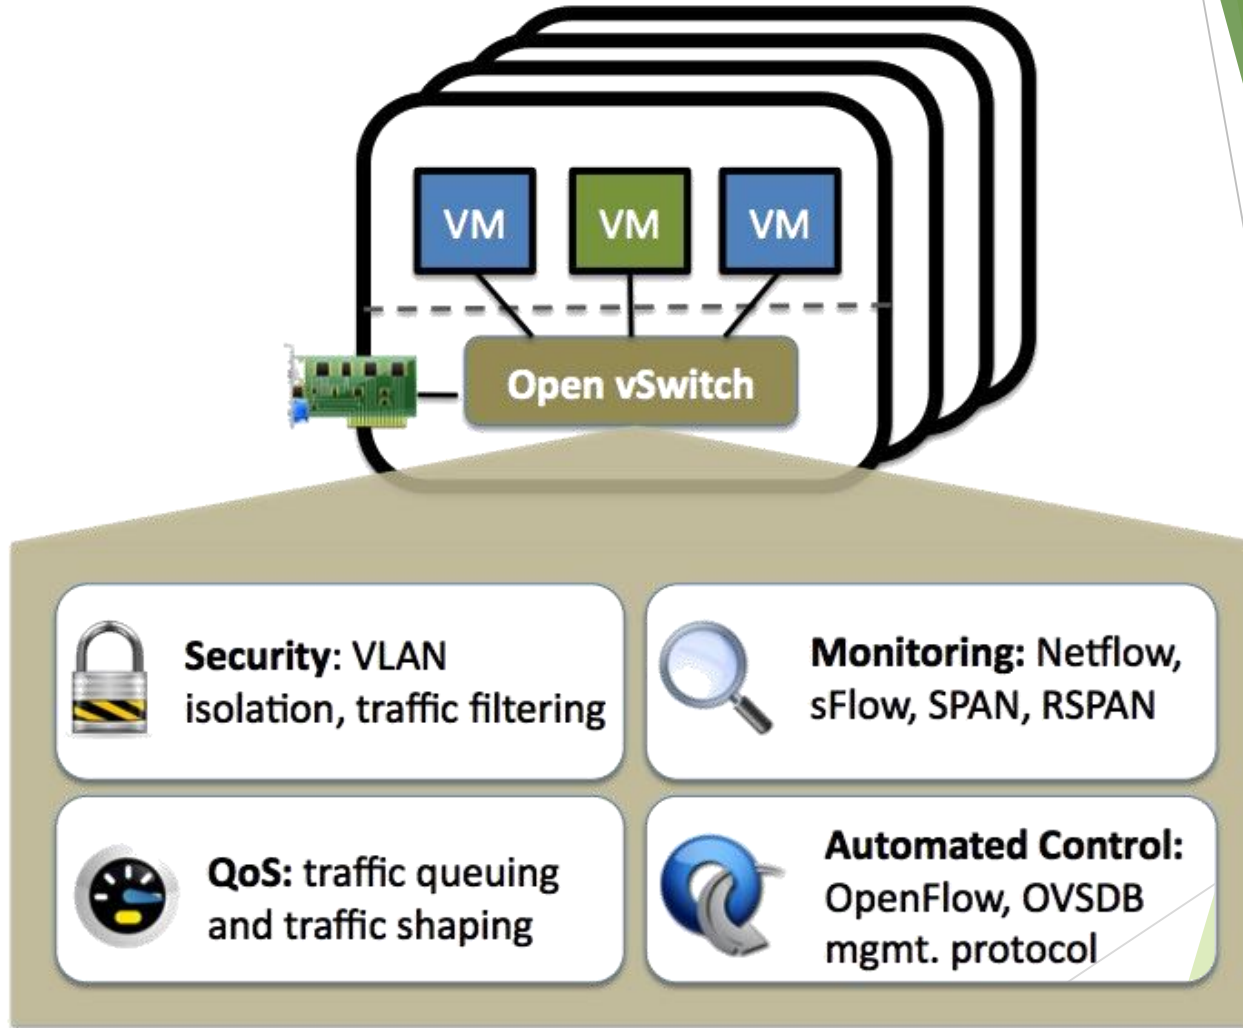

# Open vSwitch: Main Components

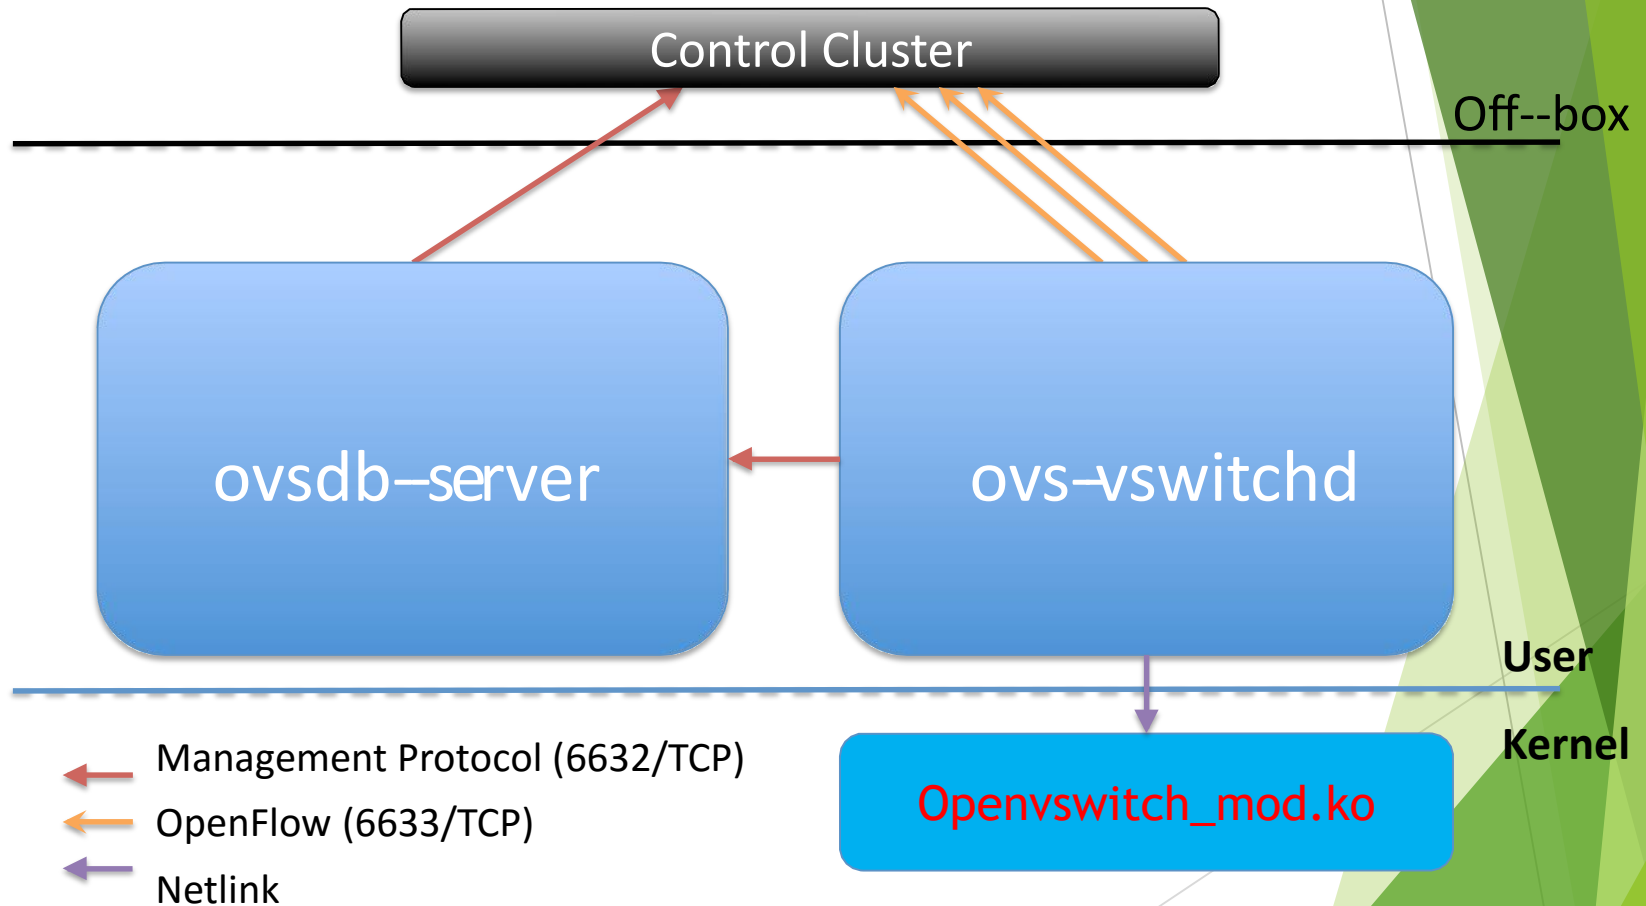

# Open vSwitch: All Components

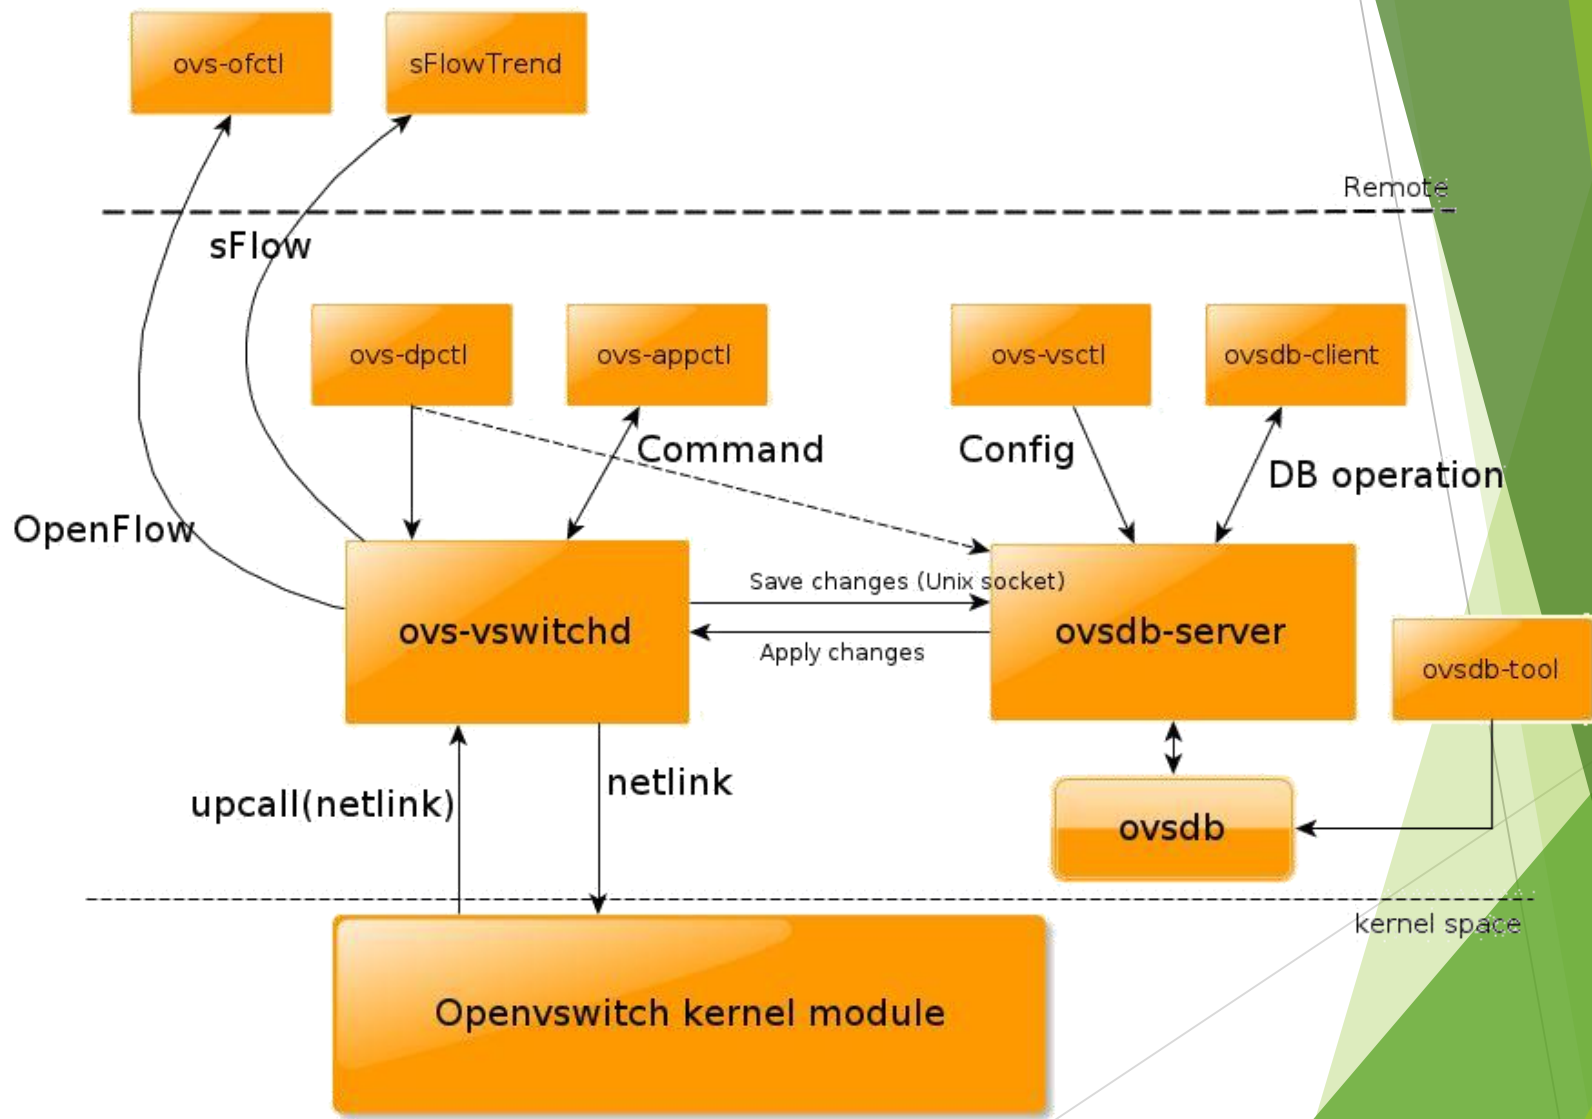

# Prerequisite for Box Lab



Installed 64bit Ubuntu 14.04 LTS in Intel **NUC**  
(We recommend to use desktop version)


# Prerequisite for Box Lab



Do not check 'Enable Networking'

```
$sudo vi /etc/network/interfaces
----- /etc/network/interfaces -----
auto lo
iface lo inet loopback

auto eth0
iface eth0 inet static
    address [ip address]
    netmask [subnet mask]
    gateway [gateway]
    dns-nameservers [DNS nameserver]
-----
```

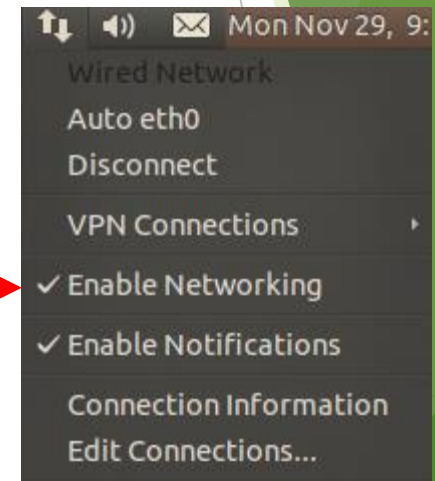

```
$sudo ifdown eth0
$sudo ifconfig eth0 down
$sudo ifup eth0
```

# OpenVswitch

## - Update & Install



Update index information of Open vSwitch package.  
Install a Open vSwitch package, **openvswitch-switch**.  
Other dependencies are automatically installed.

```
$sudo apt-get update  
$sudo apt-get install openvswitch-switch
```

```
tein@SmartXCIServer:~$ sudo apt-get install openvswitch-  
openvswitch-common          openvswitch-ipsec  
openvswitch-controller       openvswitch-pki  
openvswitch-datapath-dkms    openvswitch-switch  
openvswitch-datapath-source  openvswitch-test  
openvswitch-dbg
```



# Open vSwitch

## - Basic command (ovs-vsctl)

```
$sudo ovs-vsctl add-br <bridge_name>  
$sudo ovs-vsctl add-port <bridge_name> <NIC>  
$sudo ovs-vsctl add-port <bridge_name> <port_name>  
$sudo ovs-vsctl del-br <bridge_name>  
$sudo ovs-vsctl del-port <port_name>
```


### Example)

✖ **You don't need to follow below command.**

```
$sudo ovs-vsctl add-br br0
```

```
$sudo ovs-vsctl add-port br0 eth0
```

```
$sudo ovs-vsctl add-port br0 po_to_anotherBr
```

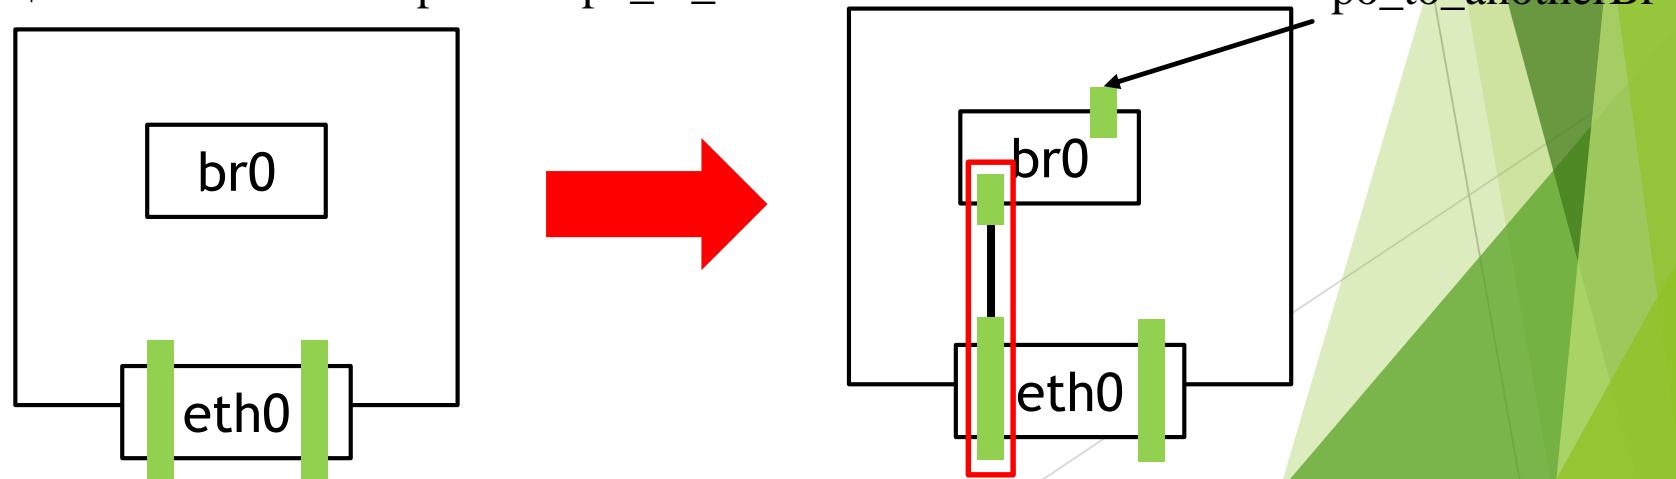

# Open vSwitch

## - Interface configuration setting

**Example)**

**✗You don't need to follow below command.**

```
$sudo ifconfig eth0 0
```


```
$sudo ifconfig br0 0
```

```
$sudo ifup br0
```

```
$sudo ifconfig br0 up
```

```
$sudo ifconfig br0 203.237.x.x
```

```
$sudo ifconfig eth0 up
```

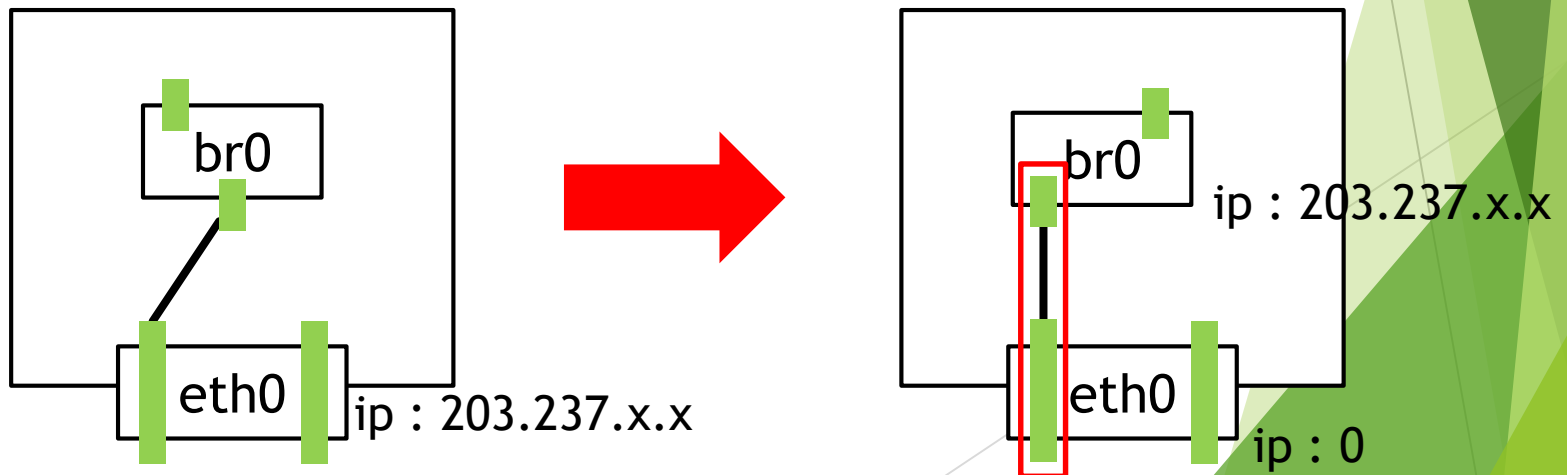

# Open Vswitch

## - Configure bridged networking



Modify network interface configuration.

```
$sudo vi /etc/network/interfaces
```

```
----- /etc/network/interfaces -----  
# The primary network interface  
auto (eth0->)br0  
iface (eth0->)br0 inet static  
...
```

before

```
# The loopback network interface  
auto lo  
iface lo inet loopback  
  
# The primary network interface  
auto eth0  
iface eth0 inet static  
    address 123.45.67.89  
    netmask 255.255.255.0  
    network 123.45.67.0  
    broadcast 123.45.67.255  
    gateway 123.45.67.1  
    dns-nameservers 8.8.8.8
```

After

```
# The loopback network interface  
auto lo  
iface lo inet loopback  
  
# The primary network interface  
auto br0  
iface br0 inet static  
    address 123.45.67.89  
    netmask 255.255.255.0  
    network 123.45.67.0  
    broadcast 123.45.67.255  
    gateway 123.45.67.1  
    dns-nameservers 8.8.8.8
```

# Open Vswitch

## - Configure bridged networking



```
$sudo ovs-vsctl add-br br0
```

```
nuc@nuc:~$  
nuc@nuc:~$ sudo su -  
[sudo] password for nuc:  
root@nuc:~# ovs-vsctl show  
3bb93923-3eac-420a-9da9-9143aff14209  
    Bridge "br0"  
        Port "br0"  
            Interface "br0"  
                type: internal  
    ovs_version: "2.0.2"
```

# Open Vswitch

## - Configure bridged networking



\$sudo ovs-vsctl add-port br0 eth0

```
root@nuc:~# ifconfig
br0      Link encap:Ethernet  HWaddr 86:f9:ed:3c:74:42
        inet addr:210.125.84.255  Bcast:210.125.84.255  Mask:255.255.255.0
        inet6 addr: fe80::fccc:4fff:fe23:4e1c/64  Scope:Link
        UP BROADCAST RUNNING MTU:1500 Metric:1
        RX packets:0 errors:0 dropped:0 overruns:0 frame:0
        TX packets:8 errors:0 dropped:0 overruns:0 carrier:0
        collisions:0 txqueuelen:0
        RX bytes:0 (0.0 B)  TX bytes:648 (648.0 B)

em1      Link encap:Ethernet  HWaddr ec:a8:6b:fb:a2:09
        inet addr:210.125.84.255  Bcast:210.125.84.255  Mask:255.255.255.0
        inet6 addr: fe80::eea8:6bff:fe23:4e1c/64  Scope:Link
        UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
        RX packets:10899 errors:0 dropped:0 overruns:0 frame:0
        TX packets:566 errors:0 dropped:0 overruns:0 carrier:0
        collisions:0 txqueuelen:1000
        RX bytes:3485825 (3.4 MB)  TX bytes:78389 (78.3 KB)
        Interrupt:20 Memory:f7c00000-f7c20000

lo        Link encap:Local Loopback
        inet addr:127.0.0.1  Mask:255.0.0.0
        inet6 addr: ::1/128  Scope:Host
        UP LOOPBACK RUNNING MTU:65536 Metric:1
        RX packets:4 errors:0 dropped:0 overruns:0 frame:0
        TX packets:4 errors:0 dropped:0 overruns:0 carrier:0
        collisions:0 txqueuelen:0
        RX bytes:366 (366.0 B)  TX bytes:366 (366.0 B)
```

eth0 인터페이스가 global 영역에서 bridge 영역으로 이동하기 때문에 연결이 끊김

# Open Vswitch


## - Configure bridged networking



```
$sudo ifconfig eth0 0           // IP of eth0 → None
$sudo ifconfig br0 0           // IP of br0 → None
$sudo ifup br0                 // interface br0 turn on
$sudo ifconfig br0 up          // interface br0 turn on
$sudo ifconfig eth0 up
```


# Open Vswitch

## - Situation

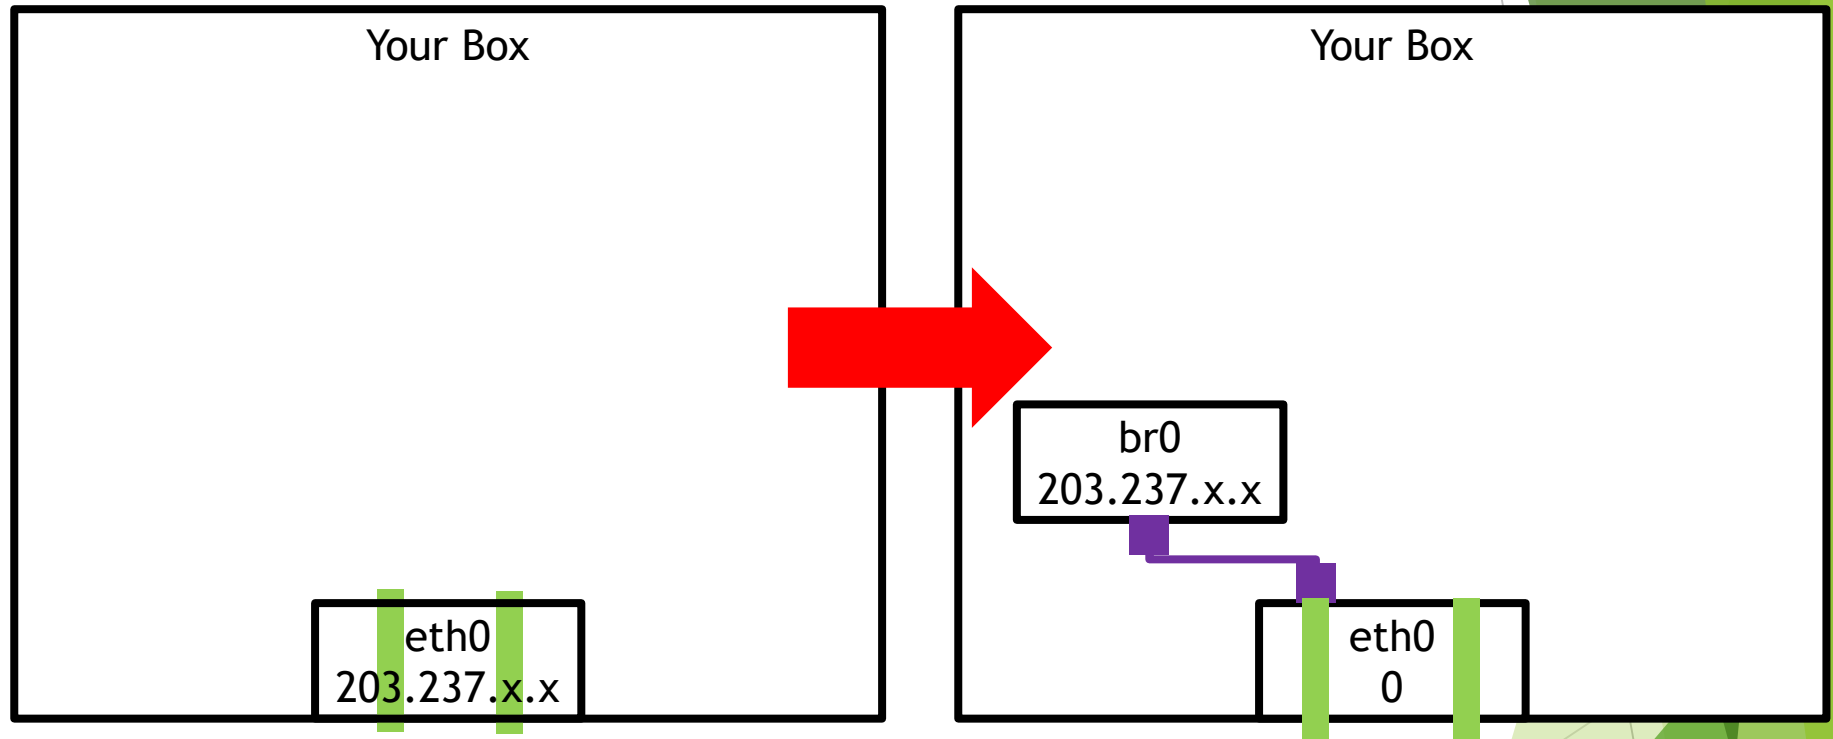

# Open Vswitch

- Goal of this section

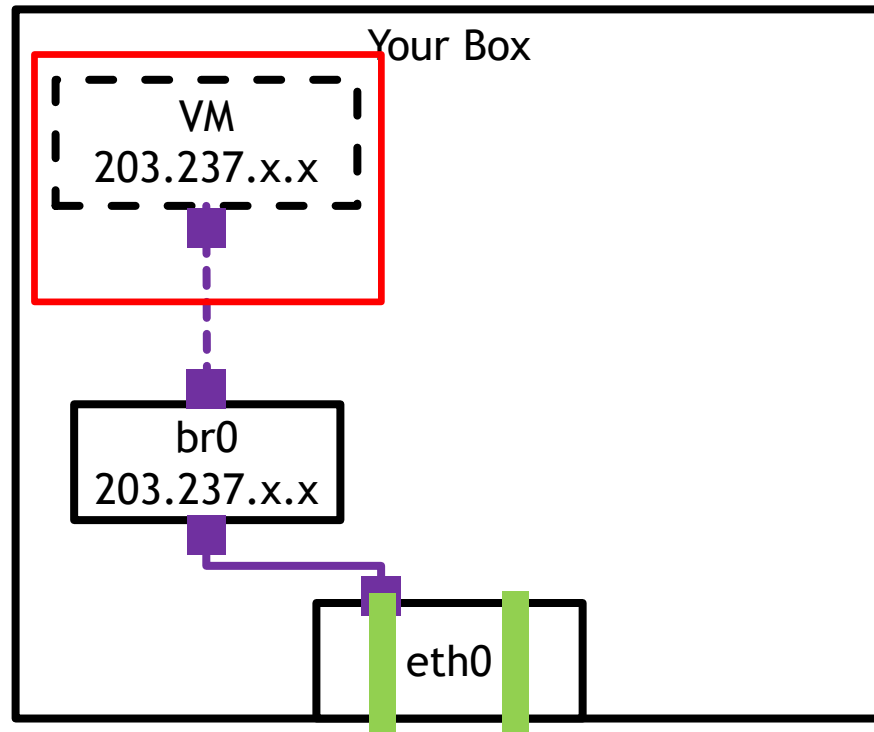

Stop OvS setting, Now need to build **KVM**



# Modify

- /etc/rc.local




Modify /etc/rc.local

```
$sudo vi /etc/rc.local
```

```
ifconfig eth0 up
```

Whenever NUC is rebooted,  
interface configuration is initialized  
by executing commands in **rc.local**

# KVM: Goal of this part

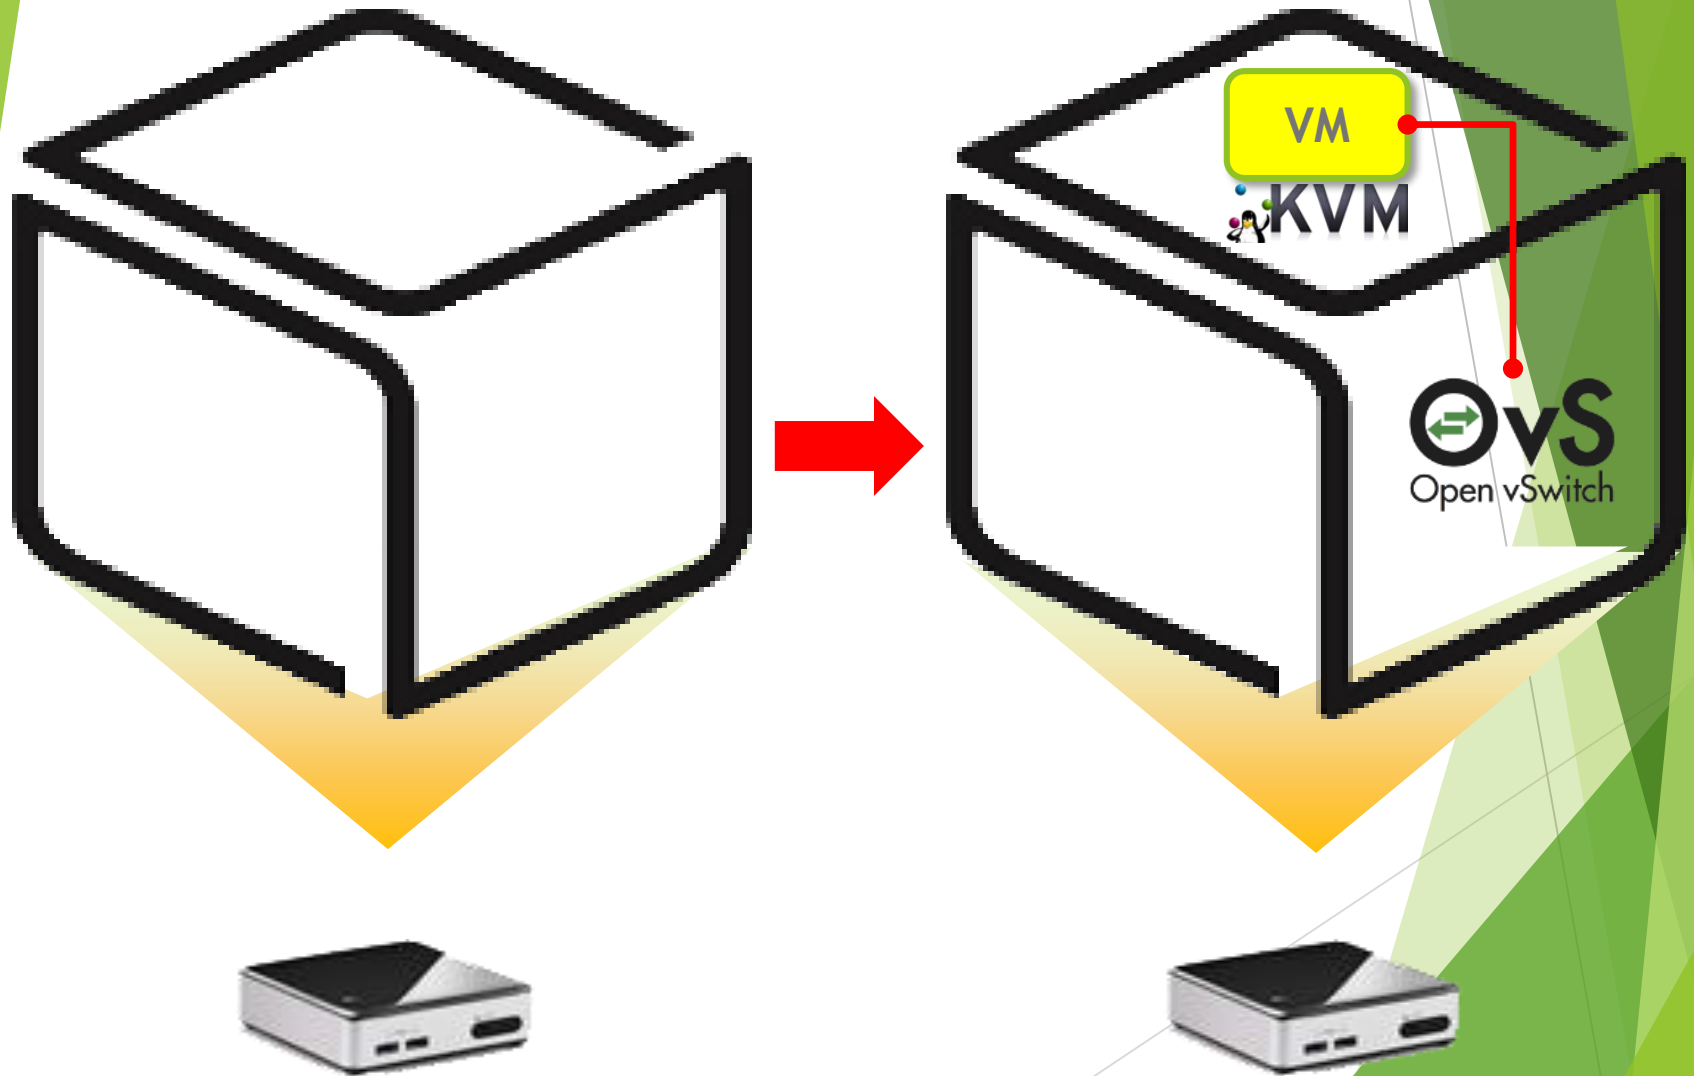

# What is KVM?



- ▶ KVM (for Kernel-based Virtual Machine) is a full virtualization solution for Linux on x86 hardware containing virtualization extensions (Intel VT or AMD-V). It consists of a loadable kernel module, `kvm.ko`, that provides the core virtualization infrastructure and a processor specific module, `kvm-intel.ko` or `kvm-amd.ko`.
- ▶ Using KVM, one can run multiple virtual machines running unmodified Linux or Windows images. Each virtual machine has private virtualized hardware: a network card, disk, graphics adapter, etc.
- ▶ KVM is open source software. The kernel component of KVM is included in mainline Linux, as of 2.6.20. The userspace component of KVM is included in mainline QEMU, as of 1.3.

# KVM

## - install dependency to upgrade KVM



Install dependency & download Ubuntu 14.04.3 64bit server image.

```
$sudo apt-get install qemu-kvm libvirt-bin           //upgrade KVM
                                                    //qemu is open-source emulator
```

```
$wget http://releases.ubuntu.com/14.04.3/ubuntu-14.04.3-server-amd64.iso
(official)
```

//If above URL is can't be downloaded, try below URL(dropbox link)

```
$wget https://www.dropbox.com/s/v6pwrksl9xdnvux/ubuntu-14.04.3-server-amd64.iso
(dropbox link, recommended)
```

Now we are ready to make VM. So continue the setting.

# Open Vswitch


## - Configure bridged networking



Make a tap and attach to VM.

```
$sudo ip tuntap add mode tap [tap_name]
$sudo ifconfig [tap_name] up
$sudo ovs-vsctl add-port br0 [tap_name] // Turn on and attach to br0
```

This tap device will be attached VM. You can think this tap as a NIC of VM.

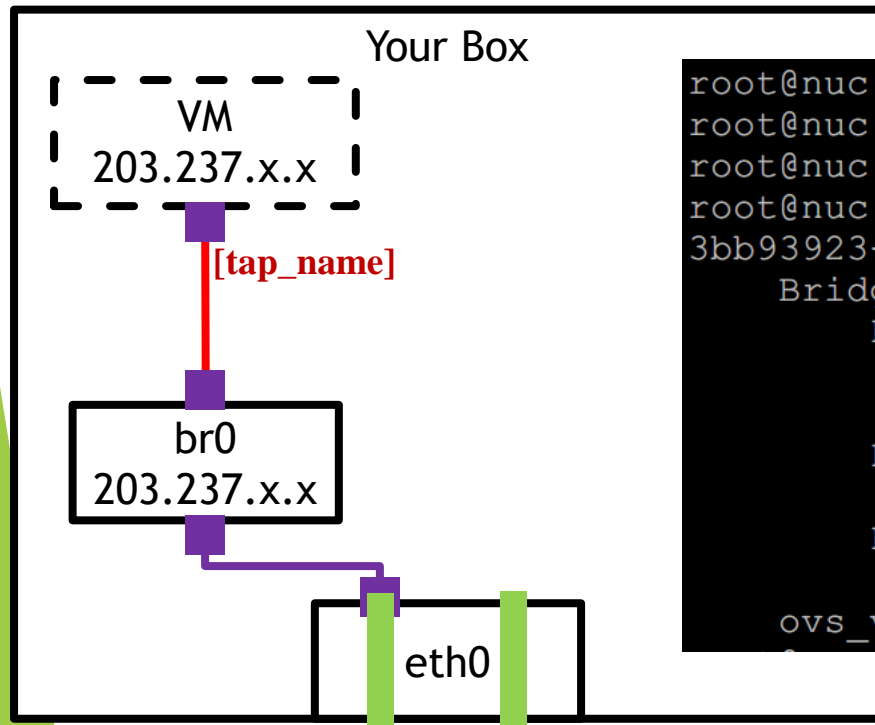

```
root@nuc:~# ip tuntap add mode tap vport_vFunction
root@nuc:~# ifconfig vport_vFunction up
root@nuc:~# ovs-vsctl add-port br0 vport_vFunction
root@nuc:~# ovs-vsctl show
3bb93923-3eac-420a-9da9-9143aff14209
    Bridge "br0"
        Port "br0"
            Interface "br0"
                type: internal
        Port "em1"
            Interface "em1"
        Port vport_vFunction [tap_name]
            Interface vport_vFunction
    ovs_version: "2.0.2"
```



# KVM

## - Prepare for Ubuntu VM

Make a VM image.

```
$sudo qemu-img create [img_name].img -f qcow2 [storage_capacity]
```

```
nuc@nuc:~/VMs$ sudo qemu-img create vFunction20.img -f qcow2 10G
Formatting 'vFunction20.img', fmt=qcow2 size=10737418240 encryption=off cluster size=65536 lazy_refcounts=off
```

Boot VM image from Ubuntu iso file (mac should be different from others).

```
$sudo kvm -m [memory_capacity] -name [vm_name] -smp cpus=[#cpu],maxcpus= [#maxcpu] -
device virtio-net-pci,netdev=net0,mac= [EE:EE:EE:EE:EE:EE] -netdev tap,id=net0,ifname=
[tap_name],script=no -boot d [img_name].img -cdrom ubuntu-14.04.3-server-amd64.iso -vnc :[#]
-daemonize
```

```
sudo kvm -m 512 -name tt -smp cpus=1,maxcpus=1 -device virtio-net-pci,netdev=net0,mac='EE:EE:EE:EE:EE:77'
-netdev tap,id=net0,ifname=vport_vFunction,script=no -boot d vFunction20.img -cdrom ubuntu-14.04.3-server-
amd64.iso -vnc :5 -daemonize
```

Download VNC viewer to see inside of VM

**Windows :** <https://www.dropbox.com/s/h2mr0g8obm5mgpe/vncviewer.exe?dl=0>


**Ubuntu :** `sudo apt-get install xvnc4viewer`


# KVM

## - Install Ubuntu to VM



IP address:vnc number  
ex) 210.203.x.x:5

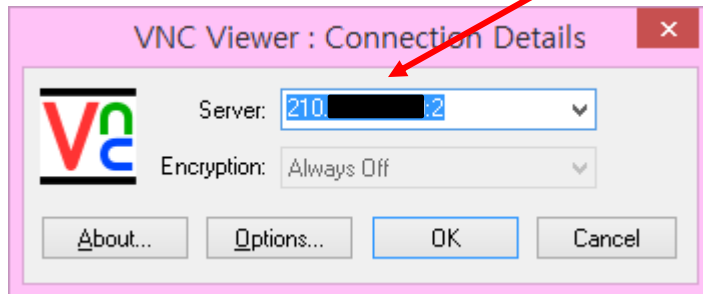

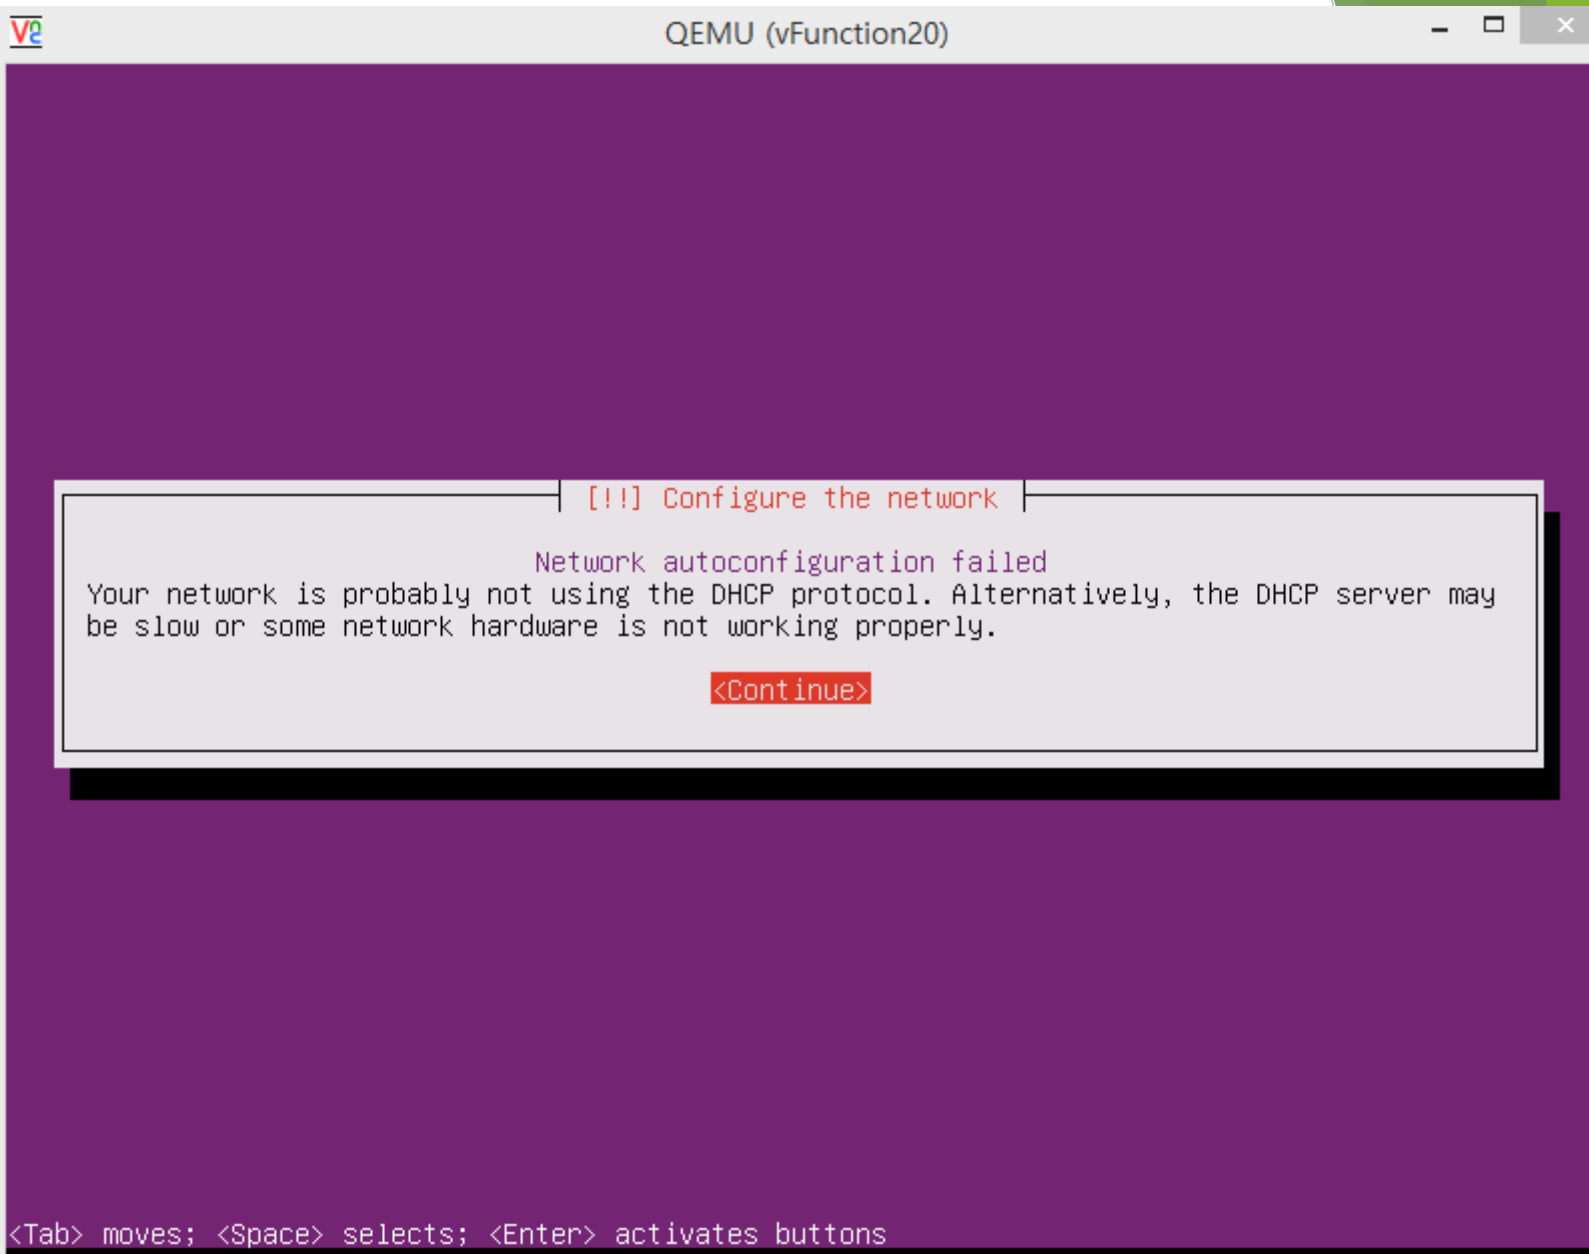



### [!!] Configure the network

From here you can choose to retry DHCP network autoconfiguration (which may succeed if your DHCP server takes a long time to respond) or to configure the network manually. Some DHCP servers require a DHCP hostname to be sent by the client, so you can also choose to retry DHCP network autoconfiguration with a hostname that you provide.


Network configuration method:


Retry network autoconfiguration  
Retry network autoconfiguration with a DHCP hostname  
**Configure network manually**

Do not configure the network at this time

<Go Back>

<Tab> moves; <Space> selects; <Enter> activates buttons

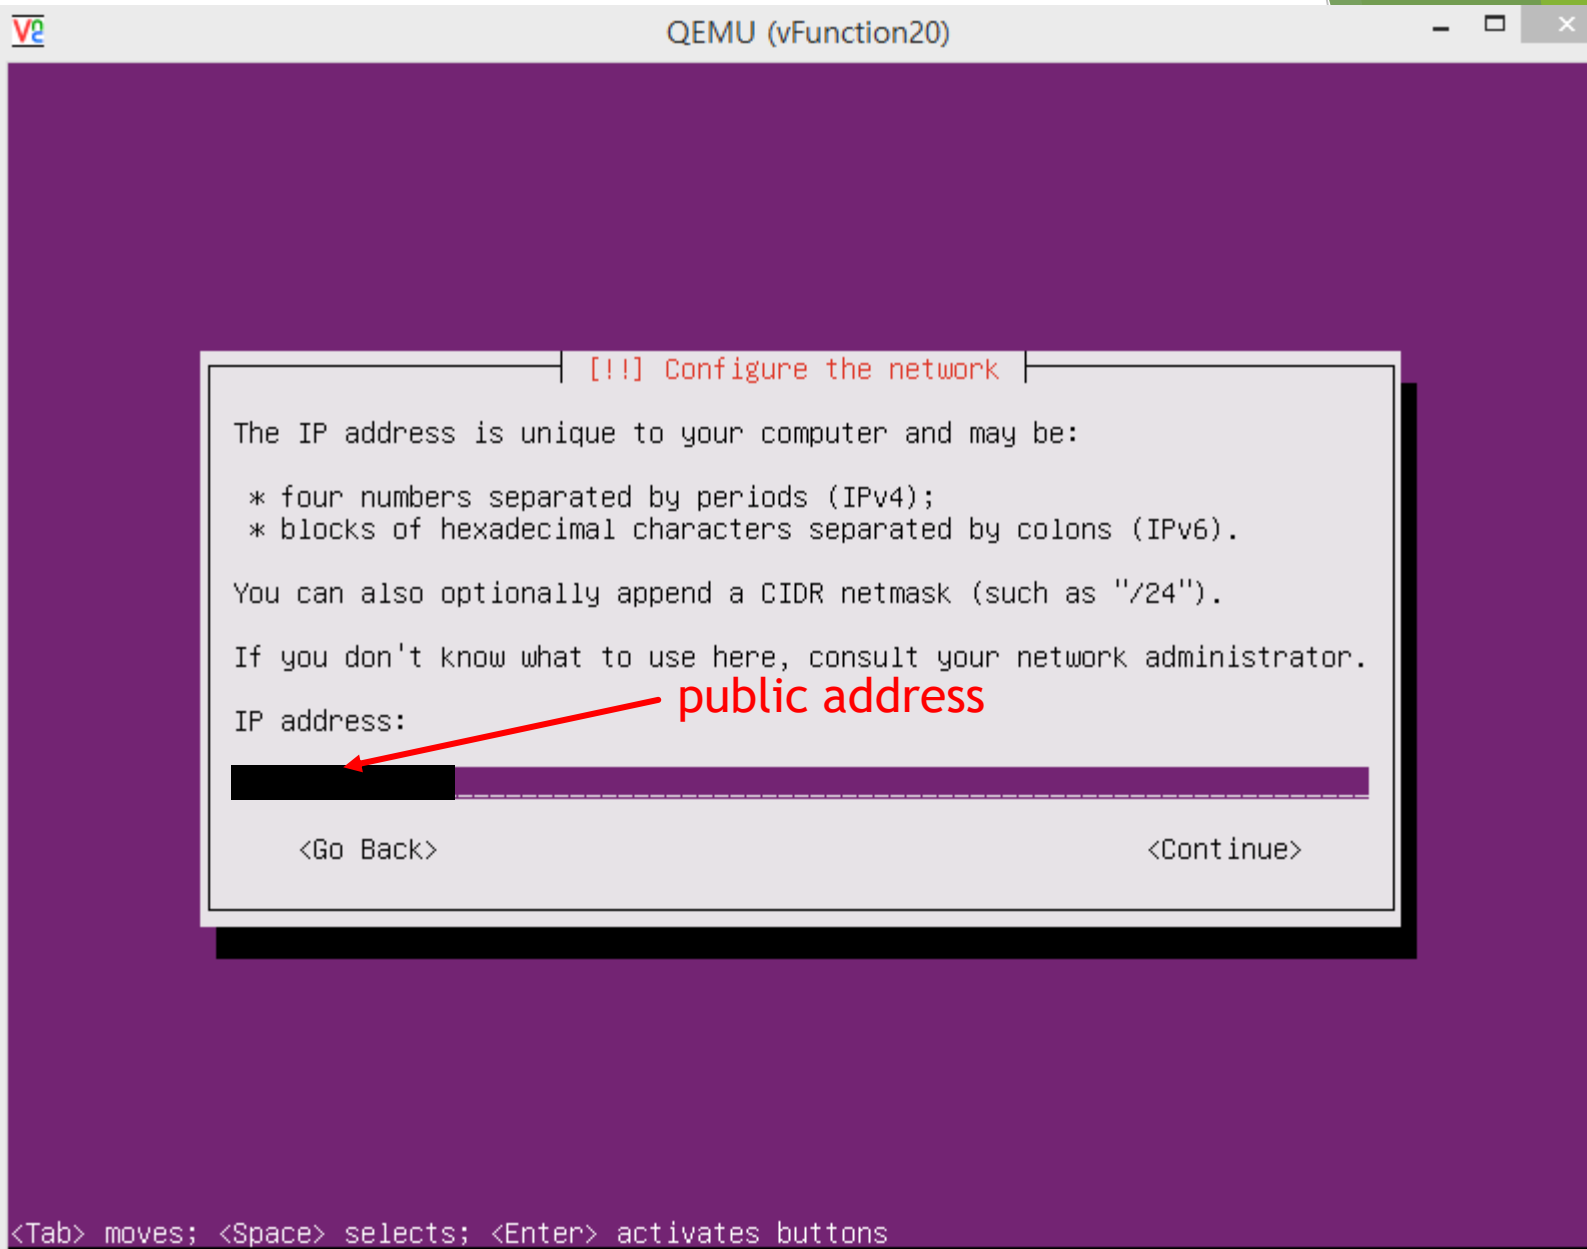

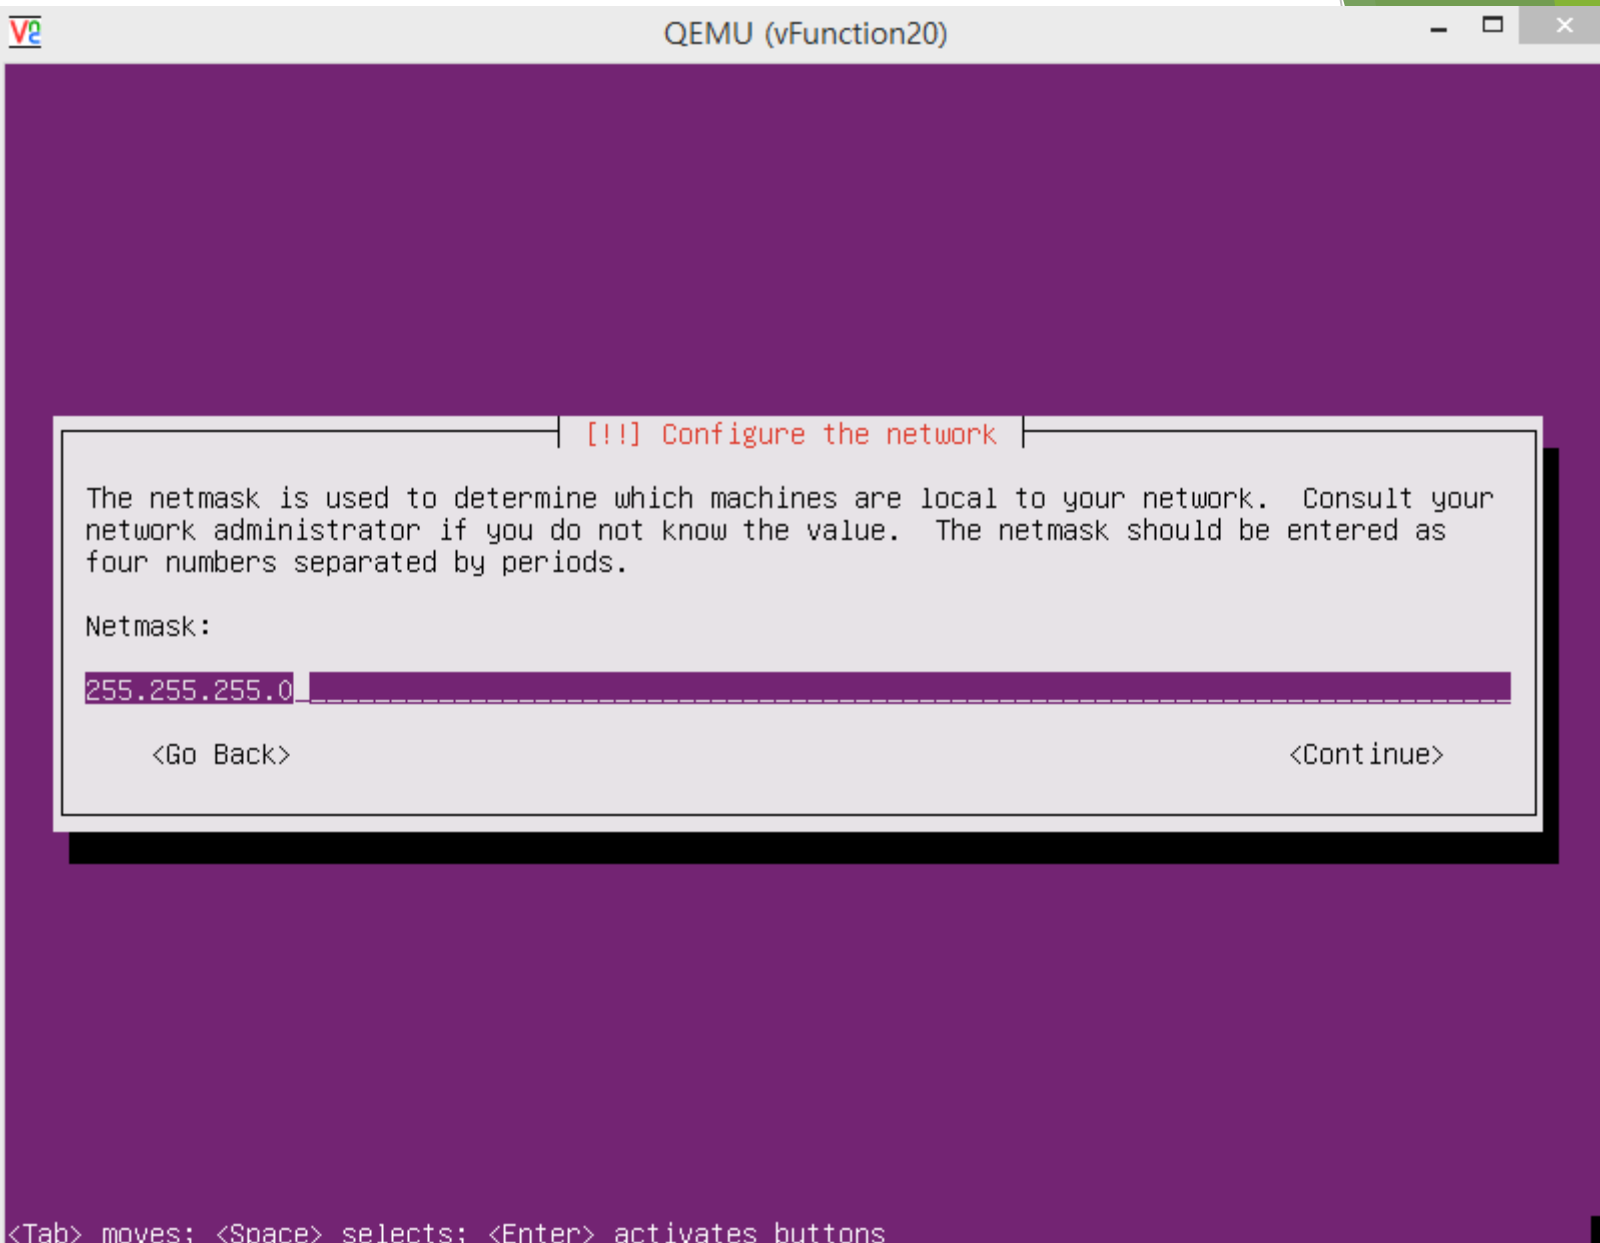

## [!!] Configure the network

The gateway is an IP address (four numbers separated by periods) that indicates the gateway router, also known as the default router. All traffic that goes outside your LAN (for instance, to the Internet) is sent through this router. In rare circumstances, you may have no router; in that case, you can leave this blank. If you don't know the proper answer to this question, consult your network administrator.

Gateway:

Gateway ip of your public network

<Go Back>

<Continue>

<Tab> moves; <Space> selects; <Enter> activates buttons

## [!!] Configure the network

The name servers are used to look up host names on the network. Please enter the IP addresses (not host names) of up to 3 name servers, separated by spaces. Do not use commas. The first name server in the list will be the first to be queried. If you don't want to use any name server, just leave this field blank.

Name server addresses:

Google DNS server

8.8.8.8


<Go Back>

<Continue>

<Tab> moves; <Space> selects; <Enter> activates buttons

Language			
Amharic	Français	Македонски	Tamil
Arabic	Gaeilge	Malayalam	தமிழ்
Asturiano	Galego	Marathi	Thai
Беларуская	Gujarati	Burmese	Tagalog
Български	ᱚᱱᱟᱜᱟᱲ	Nepali	Türkçe
Bengali	Hindi	Nederlands	Uyghur
Tibetan	Hrvatski	Norsk bokmål	Українська
Bosanski	Magyar	Norsk nynorsk	Tiếng Việt
Català	Bahasa Indonesia	Punjabi (Gurmukhi)	中文(简体)
Čeština	Íslenska	Polski	中文(繁體)
Dansk	Italiano	Português do Brasil	
Deutsch	日本語	Português	
Dzongkha	தமிழ்	Română	
Ελληνικά	Қазақ	Русский	
English	Khmer	Sámegillii	
Esperanto	ಕನ್ನಡ	සිංහල	
Español	한국어	Slovenčina	
Eesti	Kurdî	Slovenščina	
Euskara	Lao	Shqip	
فارسی	Lietuviškai	Српски	
Suomi	Latviski	Svenska	

F1 Help F2 Language F3 Keymap F4 Modes F5 Accessibility F6 Other Options

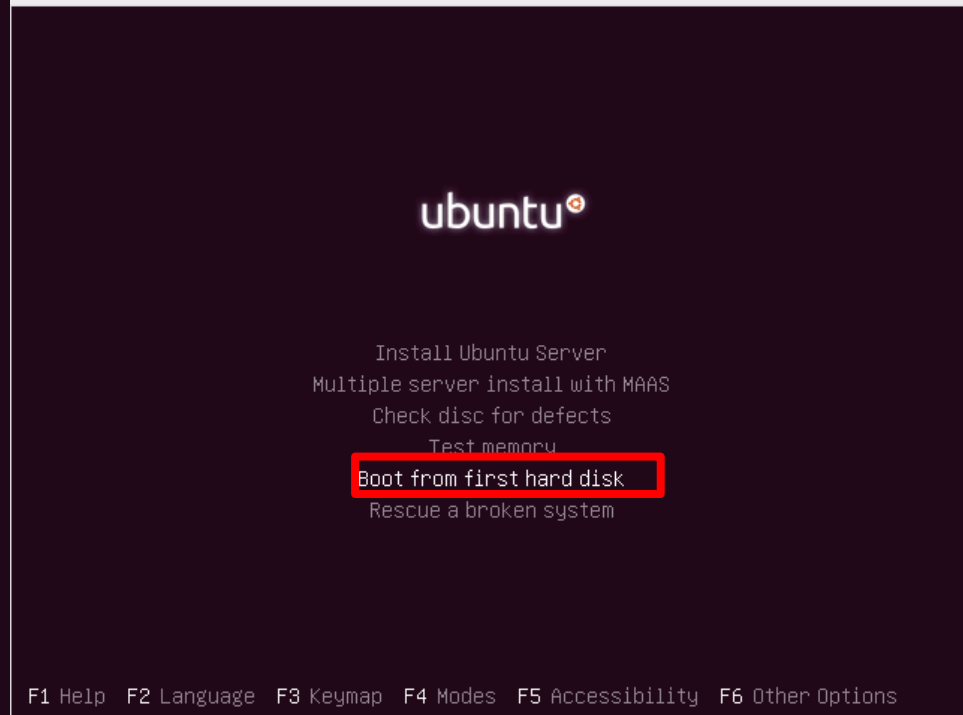

F1 Help F2 Language F3 Keymap F4 Modes F5 Accessibility F6 Other Options

Push esc

# KVM

## - VM boot command




If you want boot VM again (mac should be different from others).

```
$sudo kvm -m [memory capacity] -name [name] -smp cpus=[#cpu],maxcpus= [#maxcpu] -  
device virtio-net-pci,netdev=net0,mac= [EE:EE:EE:EE:EE:EE] -netdev tap,id=net0,ifname=  
[tap_name],script=no -boot d [name].img -vnc : [#] -daemonize
```

# Open Vswitch connects with KVM

## - Situation


```
root@nuc:~# ovs-vsctl show
3bb93923-3eac-420a-9da9-9143aff14209
  Bridge "br0"
    Port "br0"
      Interface "br0"
        type: internal
    Port "em1"
      Interface "em1"
    Port vport_vFunction
      Interface vport_vFunction
  ovs_version: "2.0.2"
```

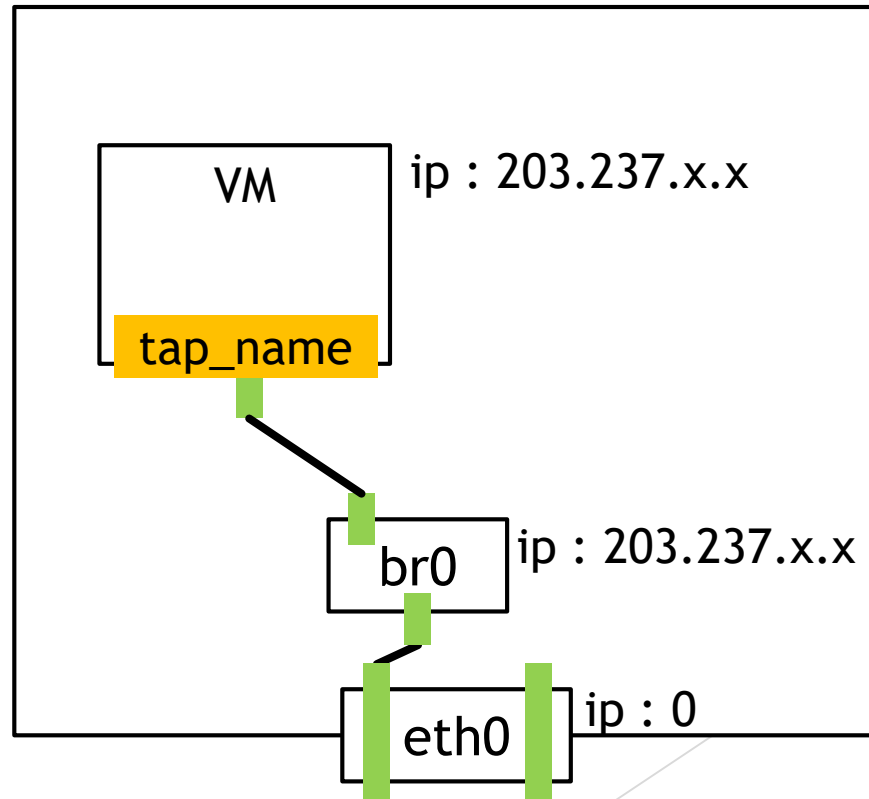



# Open Vswitch connects with KVM

## - Situation

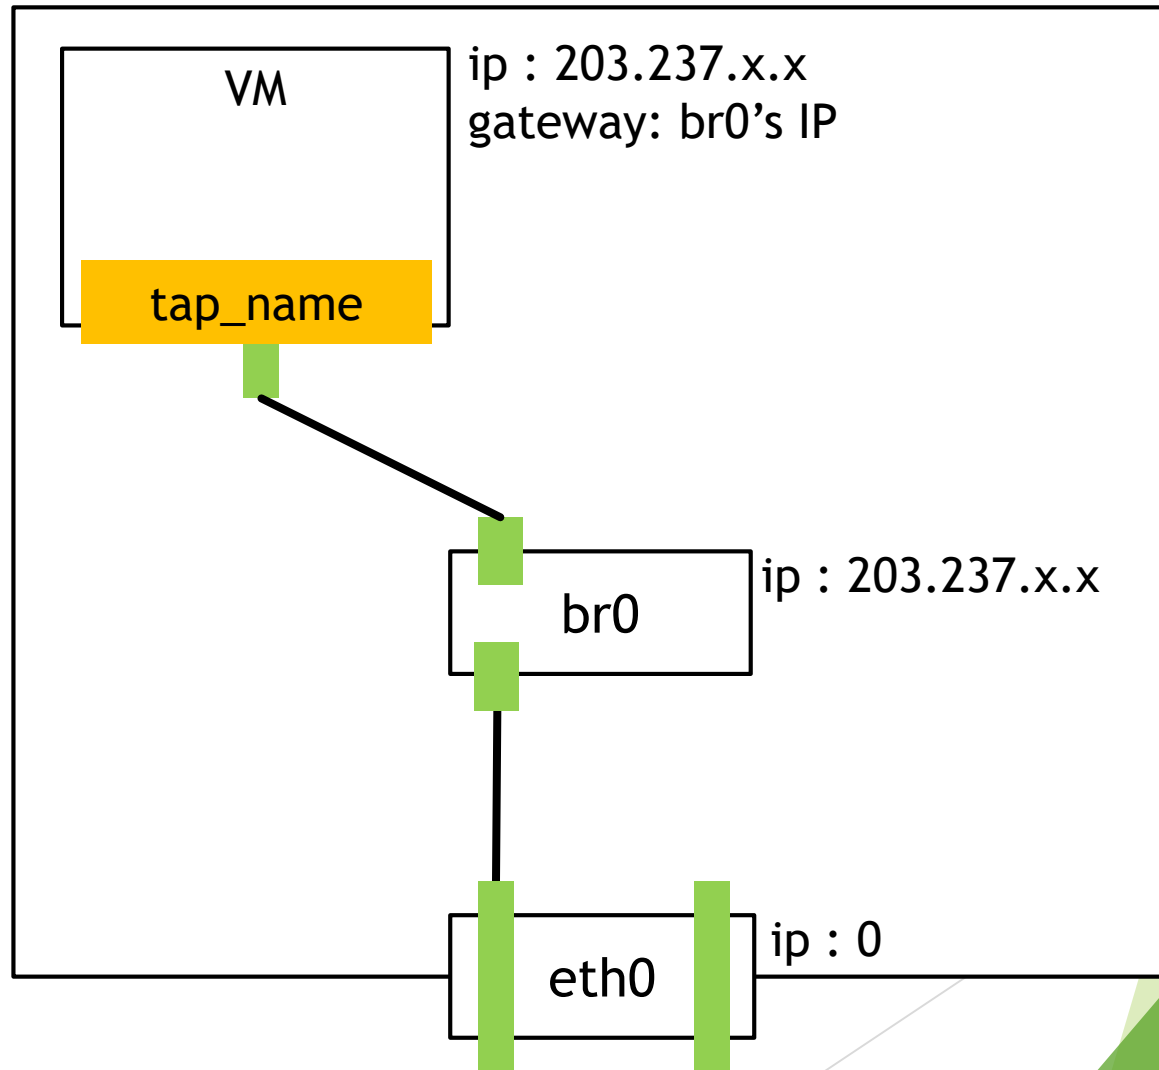

# KVM

- Don't forget to install ssh in VM!



In VMs,

```
$sudo apt-get update  
$sudo apt-get install ssh
```

```
nuc@nuc:~$ ssh vbox@192.168.0.3  
The authenticity of host '192.168.0.3 (192.168.0.3)' can't be established.  
ECDSA key fingerprint is da:c5:2c:53:5a:6f:b4:3c:03:02:04:f3:6a:17:ca:ab.  
Are you sure you want to continue connecting (yes/no)? yes  
Warning: Permanently added '192.168.0.3' (ECDSA) to the list of known hosts.  
vbox@192.168.0.3's password: █
```

# Modify

- /etc/rc.local




Modify /etc/rc.local

```
$sudo vi /etc/rc.local  
  
ip tuntap add mode tap [tap_name]  
ifconfig [tap_name] up  
ovs-vsctl del-port br0 [tap_name]  
ovs-vsctl add-port br0 [tap_name]
```

Whenever NUC is rebooted,  
interface configuration and OvS ports are initialized  
by executing commands in **rc.local**

# Docker: Goal of this part

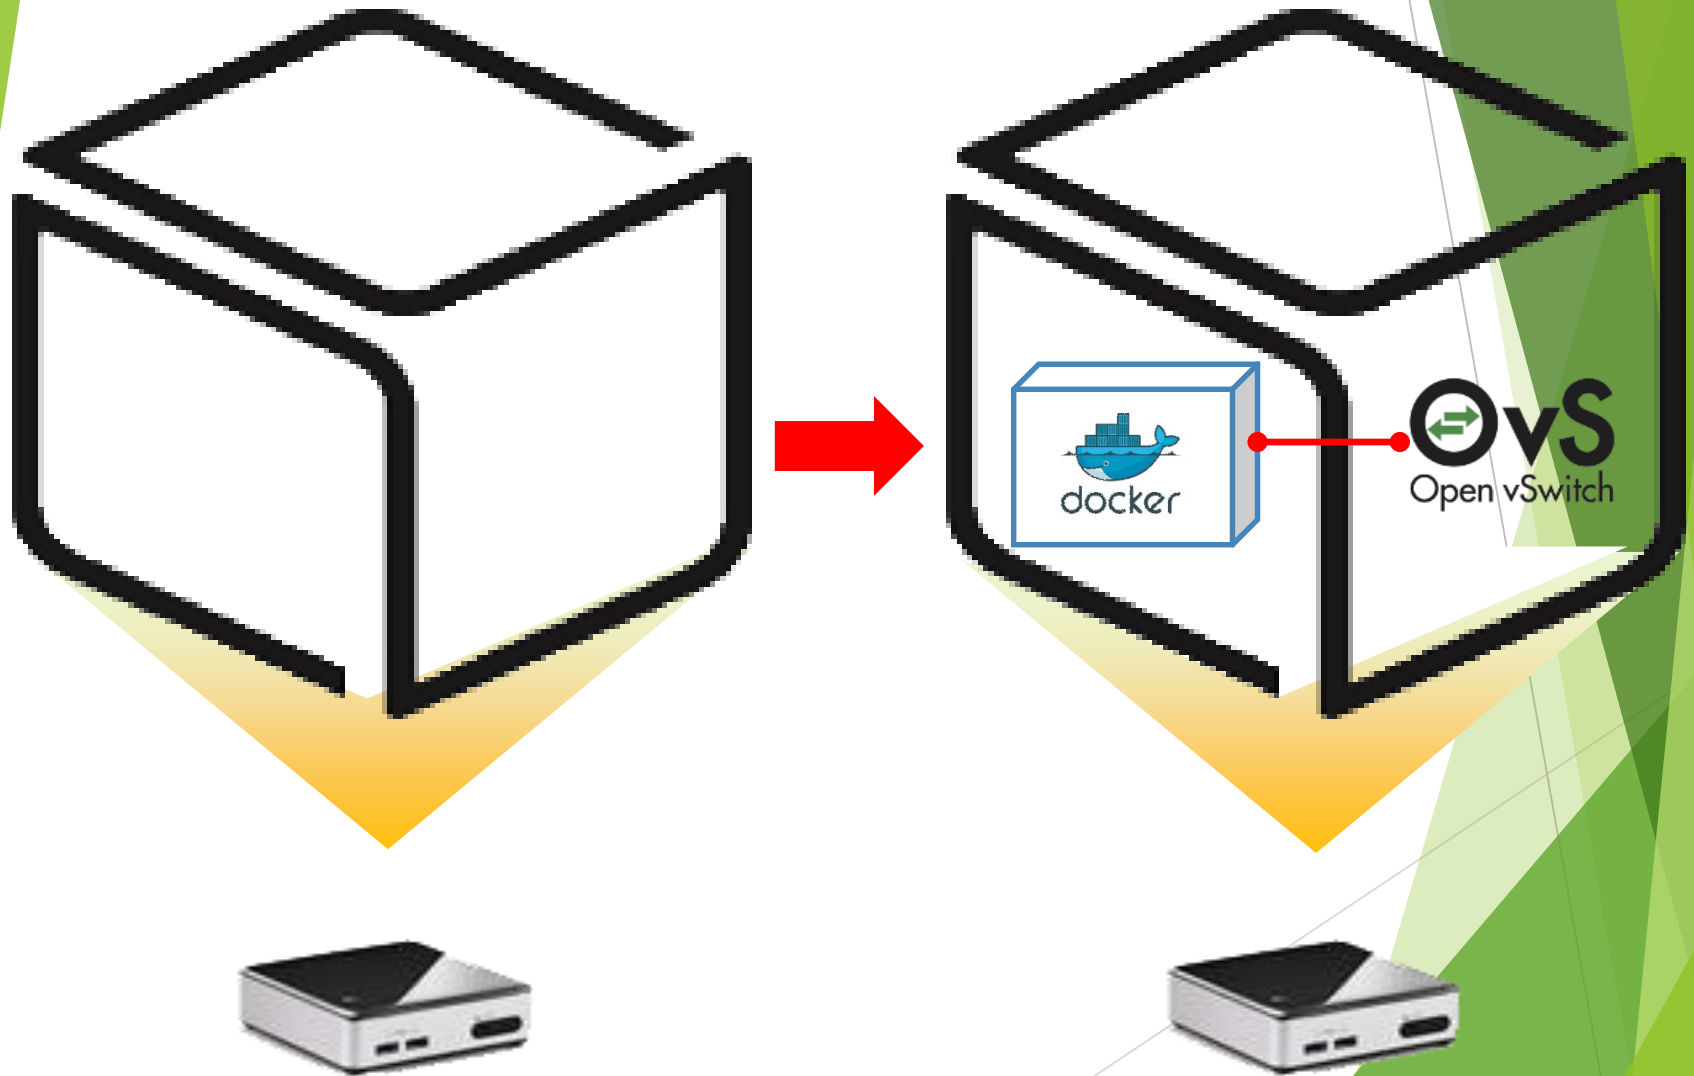

# What is Docker ?



- ▶ Docker is an open platform for building, shipping and running distributed applications. It gives programmers, development teams and operations engineers the common toolbox they need to take advantage of the distributed and networked nature of modern applications.

# Docker

## - Installation



Docker installation.

```
$sudo wget -qO- https://get.docker.com/ | sh  
$sudo service docker start  
$sudo adduser [your_id] docker
```

(Session restart)

```
$sudo docker run hello-world
```

reference: [http://docs.docker.com/linux/step\\_one/](http://docs.docker.com/linux/step_one/)

# Docker

## - Installation

```
Hello from Docker.  
This message shows that your installation appears to be working correctly.  
  
To generate this message, Docker took the following steps:  
1. The Docker client contacted the Docker daemon.  
2. The Docker daemon pulled the "hello-world" image from the Docker Hub.  
3. The Docker daemon created a new container from that image which runs the  
   executable that produces the output you are currently reading.  
4. The Docker daemon streamed that output to the Docker client, which sent it  
   to your terminal.  
  
To try something more ambitious, you can run an Ubuntu container with:  
$ docker run -it ubuntu bash  
  
Share images, automate workflows, and more with a free Docker Hub account:  
https://hub.docker.com  
  
For more examples and ideas, visit:  
https://docs.docker.com/userguide/
```

# Docker

## - Make containers



Run docker container.

```
$sudo docker run -it --net=none --name [container_name] ubuntu /bin/bash
```

```
nuc@nuc:~$ docker run -it --net=none --name c1 ubuntu /bin/bash
root@8346684676d8:/#
```

I want to make interface that has 203.237.x.x IP address.

※ctrl + p, q → detach docker container

※docker attach [container\_name] → get into docker container console



# Docker

## - About [--net host] option

- ▶ Pros
  - ▶ Easy to use
- ▶ Cons
  - ▶ Security problem (Violate docker's strong point:isolated)
- ▶ Solution?
  - ▶ Establish L2 tunneling  
(Can easily achieved by using ovs.  
However, ovs doesn't support raspberry pi officially.  
That's why we are using this option.)  
Related keyword : GRE, vlan, vxlan

# Docker

## - Connect docker container to ovs bridge



Install ovs-docker utility in host machine. (Not in inside of Docker container.)

```
$cd /usr/bin
$sudo wget https://raw.githubusercontent.com/openvswitch/ovs/master/utilities/ovs-docker
$sudo chmod a+rwX ovs-docker

$sudo ovs-docker add-port br0 eth0 [containerName] --ipaddress=[IP_address/24] --gateway=[Gateway_address]

$sudo docker attach [containerName]
#apt-get update
#apt-get install net-tools
#apt-get install iputils-ping
```

# Modify

- /etc/rc.local



Modify /etc/rc.local

```
$sudo vi /etc/rc.local
```

```
docker start [container_name]  
ovs-docker del-port br0 eth0 [containerName]  
ovs-docker add-port br0 eth0 [containerName] --ipaddress=[IP_address/24] --gateway=[Gateway_address]
```

Whenever NUC is rebooted,  
network configuration of Docker container is initialized  
by executing commands in **rc.local**

# Docker

## - Check connectivity

```
root@nuc:/usr/bin# ovs-docker add-port br0 eth0 docker1 --ipaddress=210.125.84.70/24 --gateway=210.125.84.1
root@nuc:/usr/bin# docker attach docker1

root@b8c3bab8204b:/# ifconfig
eth0      Link encap:Ethernet  HWaddr ae:e5:9c:cc:88:b7
          inet addr:210.125.84.70  Bcast:0.0.0.0  Mask:255.255.255.0
          inet6 addr: fe80::ace5:9cff:fecc:88b7/64 Scope:Link
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:120 errors:0  dropped:0  overruns:0 frame:0
          TX packets:8 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:8842 (8.8 KB)  TX bytes:648 (648.0 B)

lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          inet6 addr: ::1/128 Scope:Host
          UP LOOPBACK RUNNING  MTU:65536  Metric:1
          RX packets:0 errors:0 dropped:0 overruns:0 frame:0
          TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:0
          RX bytes:0 (0.0 B)  TX bytes:0 (0.0 B)

root@b8c3bab8204b:/# ping google.com
PING google.com (216.58.221.238) 56(84) bytes of data.
64 bytes from hkg07s21-in-f14.1e100.net (216.58.221.238): icmp_seq=1 ttl=52 time=41.3 ms
64 bytes from hkg07s21-in-f14.1e100.net (216.58.221.238): icmp_seq=2 ttl=52 time=41.3 ms
^C
--- google.com ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1001ms
rtt min/avg/max/mdev = 41.306/41.343/41.380/0.037 ms
```



# Docker connect with KVM

## - Check connectivity

```
root@b8c3bab8204b:/# ifconfig
eth0      Link encap:Ethernet  HWaddr a2:86:d9:c2:33
          inet addr:192.168.0.3  Bcast:0.0.0.0  Mask
          inet6 addr: fe80::a086:d9ff:fec2:337b/64 S
          UP BROADCAST RUNNING MULTICAST  MTU:1500
          RX packets:136 errors:0 dropped:0 overruns:
          TX packets:13 errors:0 dropped:0 overruns:
          collisions:0 txqueuelen:1000
          RX bytes:10448 (10.4 KB)  TX bytes:1043 (1

lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          inet6 addr: ::1/128 Scope:Host
          UP LOOPBACK RUNNING  MTU:65536  Metric:1
          RX packets:0 errors:0 dropped:0 overruns:0
          TX packets:0 errors:0 dropped:0 overruns:0
          collisions:0 txqueuelen:0
          RX bytes:0 (0.0 B)  TX bytes:0 (0.0 B)

root@b8c3bab8204b:/# ping google.com
PING google.com (216.58.221.238) 56(84) bytes of data:
64 bytes from hkg07s21-in-f238.1e100.net (216.58.221.238): icmp_seq=1 ttl=64 time=0.573 ms
64 bytes from hkg07s21-in-f238.1e100.net (216.58.221.238): icmp_seq=2 ttl=64 time=0.590 ms
64 bytes from hkg07s21-in-f238.1e100.net (216.58.221.238): icmp_seq=3 ttl=64 time=0.585 ms
^C
--- google.com ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1.730 ms
rtt min/avg/max/mdev = 0.573/0.588/0.590/0.004 ms
root@b8c3bab8204b:/# ping 192.168.0.2
PING 192.168.0.2 (192.168.0.2) 56(84) bytes of data:
64 bytes from 192.168.0.2: icmp_seq=1 ttl=64 time=0.872 ms
64 bytes from 192.168.0.2: icmp_seq=2 ttl=64 time=0.590 ms
64 bytes from 192.168.0.2: icmp_seq=3 ttl=64 time=0.585 ms
^C
--- 192.168.0.2 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 1.730 ms
rtt min/avg/max/mdev = 0.651/1.028/1.519/0.365 ms
root@b8c3bab8204b:/#


vbox@vFunction:~$ ifconfig
eth0      Link encap:Ethernet  HWaddr ee:ee:ee:ee:01
          inet addr:192.168.0.2  Bcast:192.168.0.255  Mask:255.255.255.0
          inet6 addr: fe80::ecee:eeff:feee:ee01/64 Scope:Link
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:18857 errors:0 dropped:0 overruns:0 frame:0
          TX packets:69 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:1323453 (1.3 MB)  TX bytes:3507 (3.5 KB)

lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          inet6 addr: ::1/128 Scope:Host
          UP LOOPBACK RUNNING  MTU:65536  Metric:1
          RX packets:38 errors:0 dropped:0 overruns:0 frame:0
          TX packets:38 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:0
          RX bytes:3512 (3.5 KB)  TX bytes:3512 (3.5 KB)


vbox@vFunction:~$ ping 192.168.0.3
PING 192.168.0.3 (192.168.0.3) 56(84) bytes of data:
64 bytes from 192.168.0.3: icmp_seq=1 ttl=64 time=0.872 ms
64 bytes from 192.168.0.3: icmp_seq=2 ttl=64 time=0.590 ms
64 bytes from 192.168.0.3: icmp_seq=3 ttl=64 time=0.585 ms
64 bytes from 192.168.0.3: icmp_seq=4 ttl=64 time=0.573 ms
^C
--- 192.168.0.3 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3004 ms
rtt min/avg/max/mdev = 0.573/0.655/0.872/0.125 ms
vbox@vFunction:~$
```

Docker container

KVM VM




# Box Lab: Final Goal

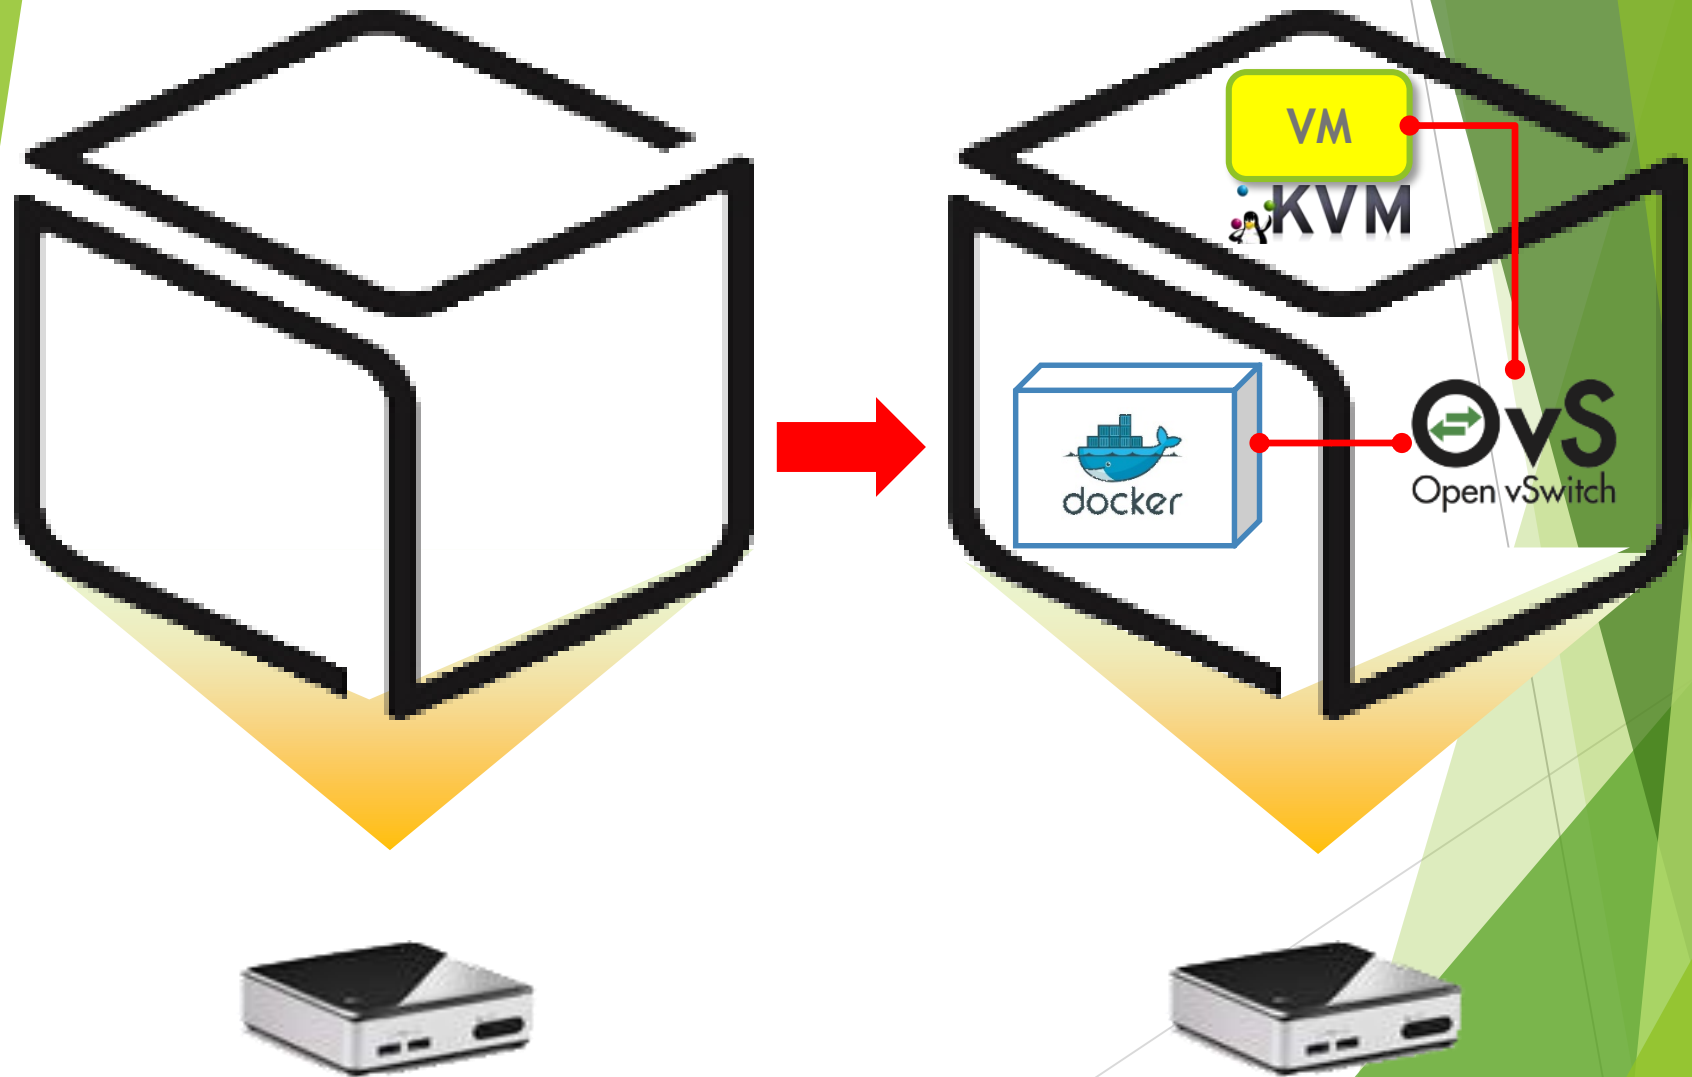

# Appendix

# NUC OS Setting

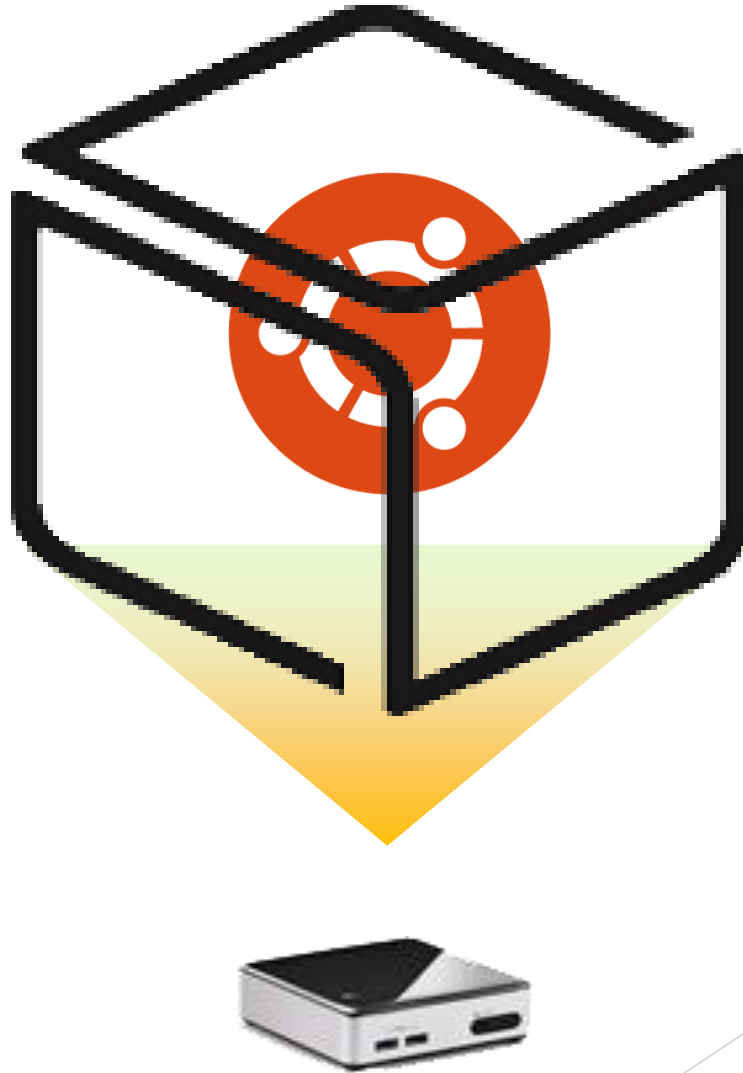



# NUC OS Setting



- ▶ BIOS Setting (**64bit OS 설치시 필요**)
  - ▶ Booting 후 F2 버튼을 통해 BIOS Setting 화면으로 접속
  - ▶ UEFI boot 체크 해제, (Legacy 방식으로 부팅)



# NUC OS Setting



- ▶ OS : Ubuntu Desktop 14.04.4 LTS(64bit)

- ▶ Download Site : <http://www.ubuntu.com/download/desktop>

Download Ubuntu Desktop

Ubuntu 14.04.4 LTS

The Long Term Support (LTS) version of the Ubuntu operating system for desktop PCs and laptops, Ubuntu 14.04.4 LTS comes with five years of security and maintenance updates, guaranteed.

Recommended for most users.

[Ubuntu 14.04.4 LTS release notes](#)


Choose your flavour

64-bit — recommended

Download

[Alternative downloads and torrents](#)

- ▶ OS 설치를 위해 download 된 파일(ubuntu-14.04.4-desktop-amd64.iso, 0.99Gb)을 이용하여 bootable USB 구성 (bootable CD 는 불가능, NUC에 CD-Rom이 없음)
- ▶ NUC에 설치

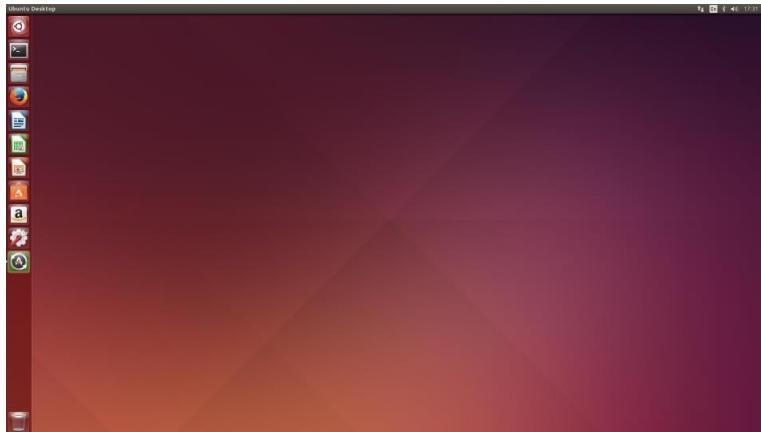

설치 완료 후  
Ubuntu 초기화면

# NUC & Pi2 IP address Setting



- ▶ Pi2 IP address 설정을 위해 필요한 파일(편집은 root 만 가능)

- ▶ /etc/network/interfaces

**\$cd /etc/network**  
**\$sudo vi interfaces**

```
HypriotOS: pi@black-pearl in ~  
$ cd /etc/network/  
HypriotOS: pi@black-pearl in /etc/network  
$ sudo vi interfaces
```

#iface eth0 inet dhcp ← # 은 주석

auto eth0

iface eth0 inet static

address 172.29.0.X ← ip address

netmask 255.255.255.0 ← subnet mask

gateway 172.29.0.254 ← Gateway

dns-nameservers 203.237.32.100 203.237.32.101



입력 예

```
auto lo  
iface lo inet loopback  
  
#allow-hotplug eth0  
#iface eth0 inet dhcp  
  
auto eth0  
iface eth0 inet static  
    address 172.29.1.9  
    netmask 255.255.255.0  
    gateway 172.29.1.254  
    dns-nameservers 203.237.32.100  
  
iface eth0 inet6 auto  
  
allow-hotplug wlan0  
iface wlan0 inet dhcp  
pre-up /usr/bin/occi  
wpa-conf /etc/wpa_supplicant/wpa_suppl  
iface default inet dhcp
```

- ▶ 일반적으로 dns-nameservers 를 입력하면 9 page 는 필요 없으나, Hypriot OS 는 삽입되지 않으므로 resolv.conf 파일에 직접 nameserver를 입력해야 함!

# NUC & Pi2 IP address Setting



## ▶ Pi2 IP address 설정을 위해 필요한 파일

### ▶ /etc/resolv.conf

**\$cd /etc/**

**\$sudo vi resolv.conf**

```
# nameserver config
```

```
nameserver 203.237.32.100
```

```
nameserver 203.237.32.101
```

기존의 nameserver  
는 #을 추가하여  
주석처리

```
# nameserver config
#nameserver 213.133.98.98
#nameserver 213.133.99.99
#nameserver 213.133.100.100

nameserver 203.237.32.100
nameserver 203.237.32.101
```

**\$sudo /etc/init.d/networking restart** 입력 또는 **rebooting** 후 **network** 확인  
**\$sudo reboot** (rebooting command)


```
$ sudo /etc/init.d/networking restart
[....] Restarting networking (via systemctl): networking.serviceWarni
ce changed on disk, 'systemctl daemon-reload' recommended.
. ok
HyprIoTOS: pi@black-pearl in /etc
```

# NUC & Pi IP address Setting



## ► NUC IP address Setting



1. Pi와 동일하게 진행
2. GUI 환경에서 setting

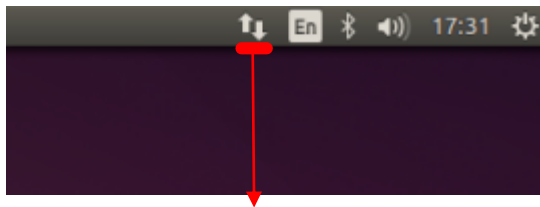

**Network icon**  
Edit Connection.. 선택



**System Setting icon**

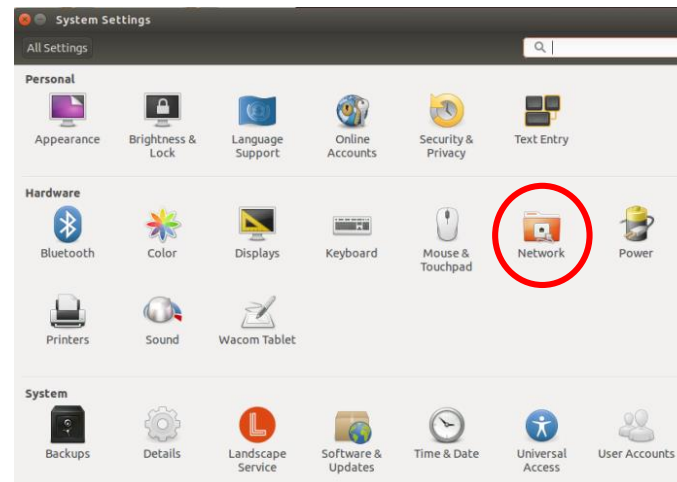


# Linux Setting(NUC & Pi)



- ▶ Ubuntu & Hypriot OS : Debian 계열 linux
  - ▶ Package 관리 관련 명령어 (apt-get : Advanced Packaging Tool)  
**\$sudo apt-get update**
    - ▶ Update package index 갱신 (/etc/apt/sources.list)**\$sudo apt-get upgrade**
    - ▶ Package 목록을 비교하여 package upgrade 실행**\$sudo apt-get dist-upgrade**
    - ▶ Package 간의 의존성 검사를 하며 upgrade(optional)
  - ▶ Package 설치 (/var/cache/apt/archive/에 설치)  
**\$sudo apt-get install <package\_name>**
  - ▶ 자신에 맞는 기본적인 package 설치
    - ▶ Kernel Lab(Pi2)을 위한 package : gcc-4.9, make
    - ▶ Editor : vim(vi iMproved), emacs, gedit, etc.
    - ▶ SSH(Secure Shell) : openssh

# Linux Beginner Guide

## ▶ Terminal 창

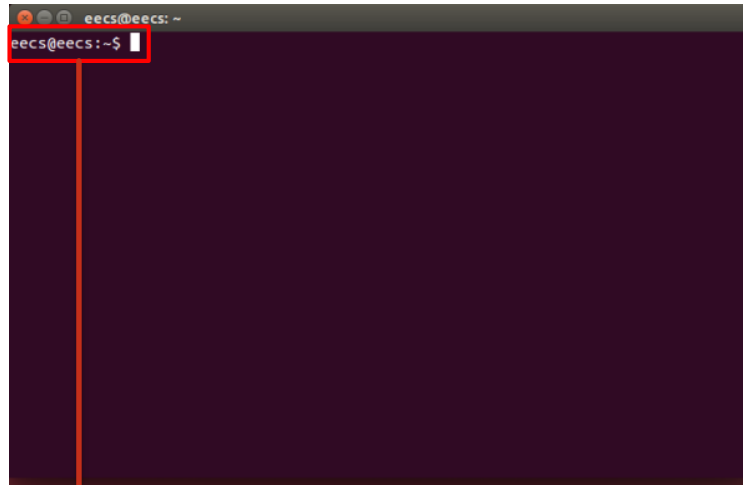

eecs@eecs:~\$

user

hostname

home directory



### < 간단한 명령어 모음 >

\$pwd : 현재위치  
\$cd : **C**hange **d**irectory  
\$ls : **d**irectory 보기  
\$mkdir : **d**irectory 생성  
\$su : **r**oot 계정으로 이용  
\$apt-get : **p**ackage 설치 및 삭제  
\$poweroff  
\$shutdown -h now



# Linux Beginner Guide



- ▶ gcc-4.9 설치 (NUC & Pi2)
  - ▶ gcc 설치 **\$sudo apt-get install gcc-4.9**
  - ▶ gcc version 확인 : **\$gcc --version**

```
root@eecs:/home/eecs# clear
root@eecs:/home/eecs# gcc --version
gcc (Ubuntu 4.8.4-2ubuntu1~14.04.1) 4.8.4
Copyright (C) 2013 Free Software Foundation
This is free software; see the source for c
warranty; not even for MERCHANTABILITY or F
```

< NUC >

```
HyprIoTOS: pi@black-pearl in ~
$ gcc --version
gcc (Raspbian 4.9.2-10) 4.9.2
Copyright (C) 2014 Free Software
This is free software; see the s
warranty; not even for MERCHANTA
```

< pi2 >

- ▶ NUC 에 gcc 설치를 위해 아래의 command 실행

**\$sudo add-apt-repository ppa:ubuntu-toolchain-r/test**

**\$sudo apt-get update**

**\$sudo apt-get install gcc-4.9**

```
eecs@eecs:~$ sudo add-apt-repository ppa:ubuntu-toolchain-r/test
[sudo] password for eeecs:
Toolchain test builds; see https://wiki.ubuntu.com/ToolChain

More info: https://launchpad.net/~ubuntu-toolchain-r/+archive/ubuntu/test
Press [ENTER] to continue or ctrl-c to cancel adding it

gpg: keyring '/tmp/tmpkwcjvts6/secring.gpg' created
gpg: keyring '/tmp/tmpkwcjvts6/pubring.gpg' created
gpg: requesting key BA9EF27F from hkp server keyserver.ubuntu.com
gpg: /tmp/tmpkwcjvts6/trustdb.gpg: trustdb created
gpg: key BA9EF27F: public key "Launchpad Toolchain builds" imported
gpg: Total number processed: 1
gpg:      imported: 1 (RSA: 1)
OK
eecs@eecs:~$
```



# Linux Beginner Guide



## ▶ gcc-4.9 설치(NUC & Pi2)

```
eecs@eecs:~$ sudo apt-get install gcc-4.9
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following extra packages will be installed:
  cpp-4.9 gcc-4.9-base gcc-5-base lib32gcc1 libasan1 libatomic1 libcilkrts5
  libgcc-4.9-dev libgcc1 libgomp1 libisl15 libitm1 liblsan0 libmpfr4
  libquadmath0 libtsan0 libubsan0 libx32gcc1
Suggested packages:
  gcc-4.9-locales gcc-4.9-multilib gcc-4.9-doc libgcc1-dbg libgomp1-dbg
  libitm1-dbg libatomic1-dbg libasan1-dbg liblsan0-dbg libtsan0-dbg
  libubsan0-dbg libcilkrts5-dbg libquadmath0-dbg
The following NEW packages will be installed:
  cpp-4.9 gcc-4.9 gcc-5-base libasan1 libcilkrts5 libgcc-4.9-dev libisl15
  liblsan0 libubsan0
The following packages will be upgraded:
  gcc-4.9-base lib32gcc1 libatomic1 libgcc1 libgomp1 libitm1 libmpfr4
  libquadmath0 libtsan0 libx32gcc1
10 upgraded, 9 newly installed, 0 to remove and 46 not upgraded.
Need to get 14.7 MB of archives.
After this operation, 49.6 MB of additional disk space will be used.
Do you want to continue? [Y/n] Y
```

## ▶ version 확인

```
eecs@eecs:~$ gcc --version
gcc (Ubuntu 4.8.4-2ubuntu1~14.04.1) 4.8.4
Copyright (C) 2013 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
```

## ▶ link 설정을 해주면 된다.



# Linux Beginner Guide



## ▶ gcc-4.9 link 설정

- ▶ 현재 gcc-4.8 version 이 link 되어 있음
- ▶ 현재의 link 를 지우고 4.9 version으로 재설정

**\$sudo rm /usr/bin/gcc**

**: link 삭제**

**\$sudo ln -s /usr/bin/gcc-4.9 /usr/bin/gcc**

**: link 설정**

```
eecs@eecs:~$ ls -al /usr/bin/gcc
lrwxrwxrwx 1 root root 16 3월 14 16:06 /usr/bin/gcc -> /usr/bin/gcc-4.8
eecs@eecs:~$ sudo rm /usr/bin/gcc
eecs@eecs:~$
eecs@eecs:~$ sudo ln -s /usr/bin/gcc-4.9 /usr/bin/gcc
eecs@eecs:~$
eecs@eecs:~$ ls -al /usr/bin/gcc
lrwxrwxrwx 1 root root 16 3월 14 16:07 /usr/bin/gcc -> /usr/bin/gcc-4.9
eecs@eecs:~$
eecs@eecs:~$ gcc --version
gcc (Ubuntu 4.9.3-8ubuntu2~14.04) 4.9.3
Copyright (C) 2015 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
```



# Vi/vim editor 명령어 모음



- ▶ 입력 모드 : 원하는 글자를 입력
  - ▶ **a** : 현재 위치의 다음부터 입력 시작
  - ▶ **i** : 현재 위치의 앞에서부터 입력 시작
- ▶ 명령 모드 : 문서 편집을 할 수 있으며, 입력 모드 상태에서 **ESC**키를 누르면 명령모드로 전환됨
  - ▶ **x** : 커서가 있는 문자 삭제
  - ▶ **dd** : 현재 줄 전체 삭제
- ▶ 라인 모드 : **ESC** 키를 누른 후 **colon(:)** prompt 에서 명령을 입력하며 저장, 편집, 검색 기능 제공
  - ▶ **:q** : 그대로 종료하기
  - ▶ **:q!** : 변경된 내용을 저장하지 않고 종료하기
  - ▶ **:wq** : 변경된 내용을 저장하고 종료하기
- ▶ 보다 다양한 명령어가 있으며, 직접 실습을 하는 것이 좋은 방법

Thank You for  
Your Attention  
Any Questions?

