

LOW-COST LORA GATEWAY: A STEP-BY-STEP TUTORIAL



PROF. CONG DUC PHAM
[HTTP://WWW.UNIV-PAU.FR/~CPHAM](http://WWW.UNIV-PAU.FR/~CPHAM)
UNIVERSITÉ DE PAU, FRANCE





CONTENTS

- ❑ We will show how to build a low-cost LoRa gateway to collect data from end-devices
- ❑ Configuration and update procedures will also be shown
- ❑ The device part will be shown in a separate tutorial
- ❑ The hardware platform is a Raspberry PI. RPI 1B/B+, 2B and 3B have been successfully tested
- ❑ Let's get started...

ASSEMBLING THE HARDWARE





GET THE RASPBERRY

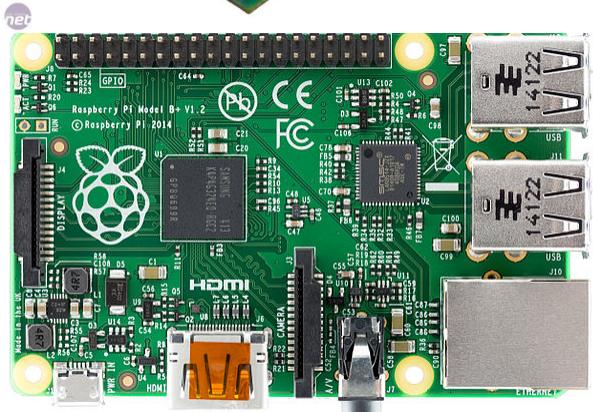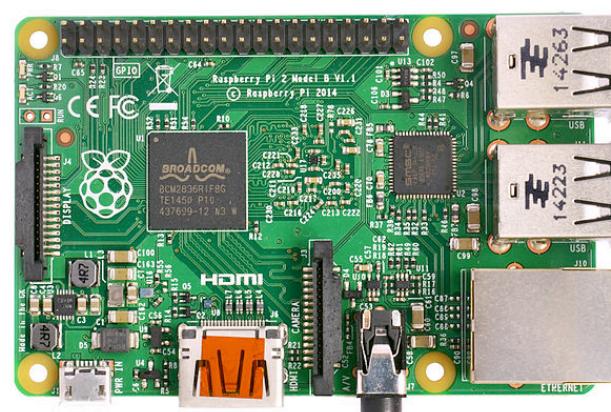



You can use Raspberry 1 model B or B+ or Raspberry 2 model B or Raspberry 3 model B. The most important usefull feature is the Ethernet interface for easy Internet connection. You can use WiFi to get Internet connection by adding a WiFi USB dongle. With the Raspberry 3, WiFi and Bluetooth are embedded on the board.

NOW THE RADIO MODULE (1)

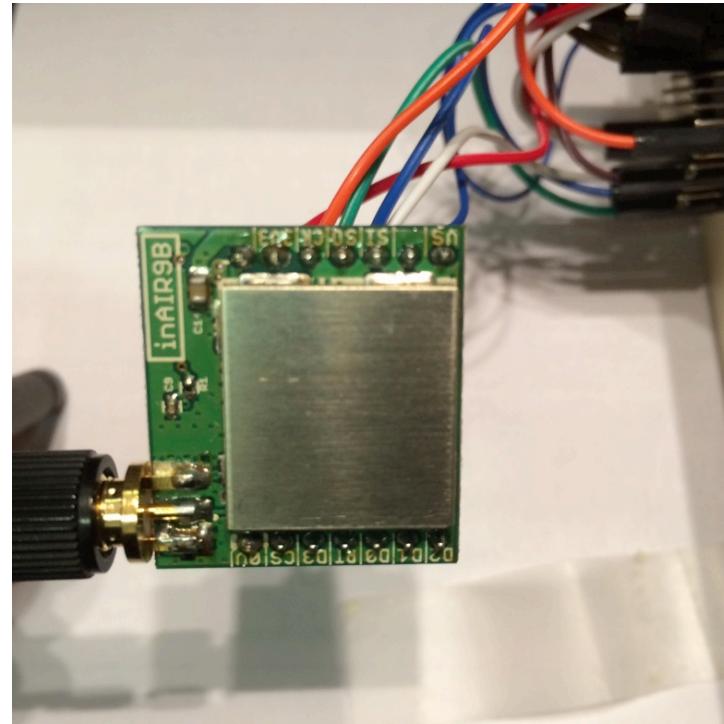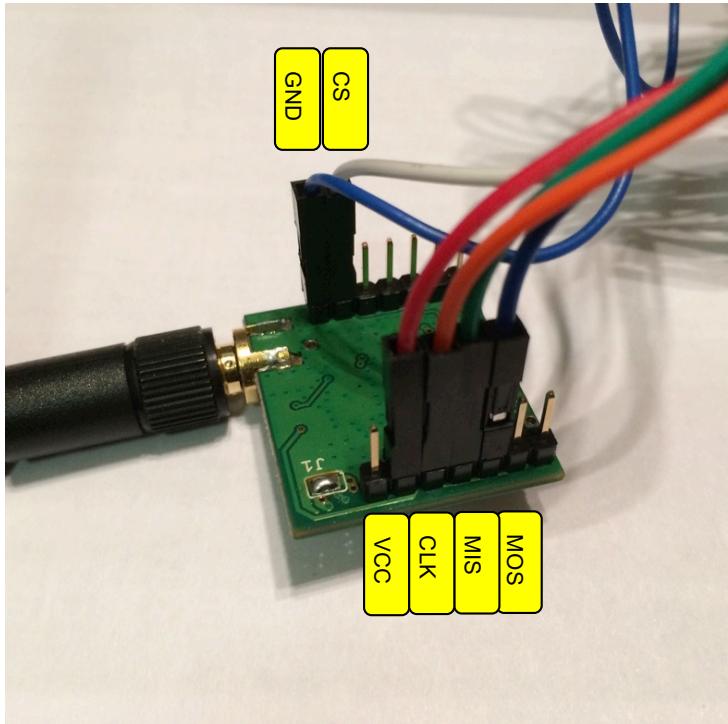


If you go for the inAir9 from Modtronix, then the header pins can come fully assembled. Take the 6mm header pins to have enough length to connect F/F breadboard cables (left). Connect the SPI pins with the F/F cables. Try to use different colors. I use the following colors: MOSI (blue), MISO (green), CS (white), CLK (orange). Then connect also the VCC (red) and the GND (black or any other dark color) of the radio board.

NOW THE RADIO MODULE (2)

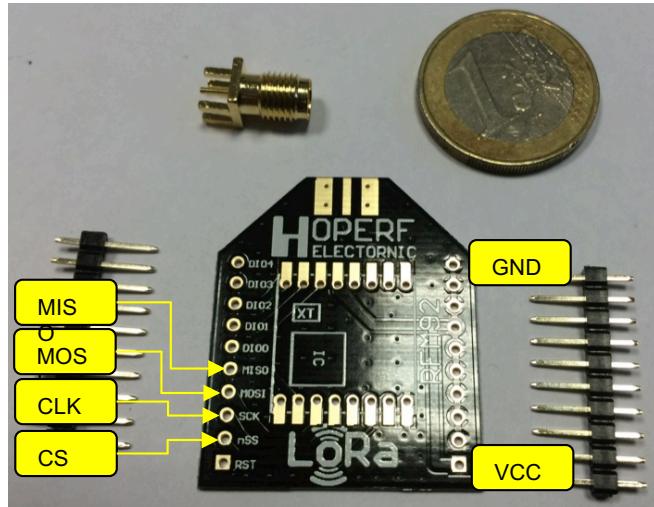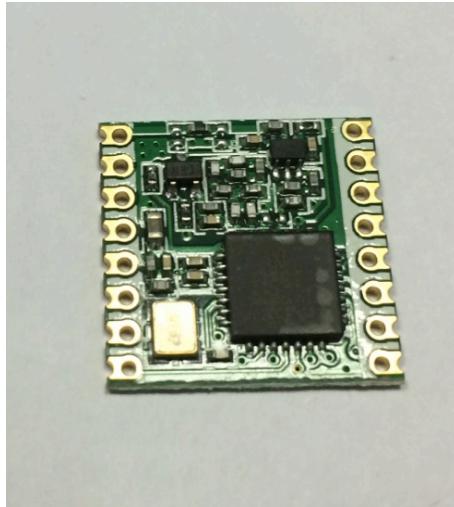

If you take the HopeRF RFM 92W/95W you will need the adaptor breakout and you have to go though some delicate but simple soldering tasks! It is not difficult but you have to trained a bit before! Then, like for the inAir9, use F/F breadboard cable to connect the SPI pins, using different colors as explained previously.

CONNECTING THE RADIO MODULE (1)

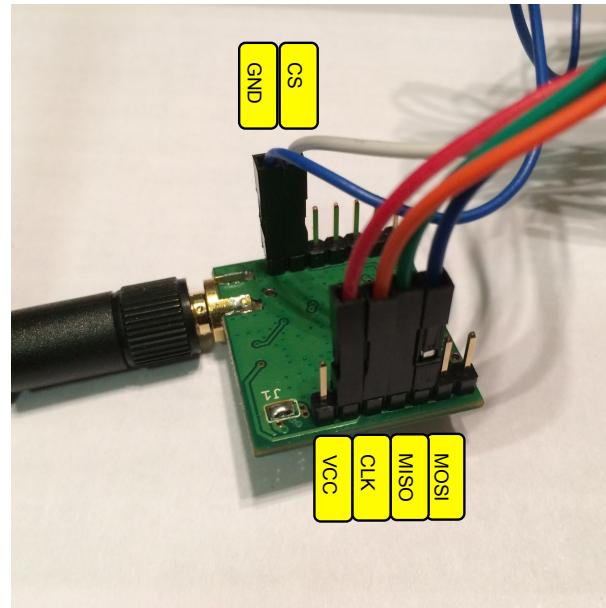


GPIO#	2nd func.	Pin#	Pin#	2nd func.	GPIO#
	+3.3 V	1	2	+5 V	
2	SDA1 (I2C)	3	4	+5 V	
3	SCL1 (I2C)	5	6	GND	
4	GCLK	7	8	TXD0 (UART)	14
	GND	9	10	RXD0 (UART)	15
17	GEN0	11	12	GEN1	18
27	GEN2	13	14	GND	
22	GEN3	15	16	GEN4	23
	+3.3 V	17	18	GEN5	24
10	MOSI (SPI)	19	20	GND	
9	MISO (SPI)	21	22	GEN6	25
11	SCLK (SPI)	23	24	CE0_N (SPI)	8
	GND	25	26	CE1_N (SPI)	7

(RPI1 Models A and B stop here)


EEPROM	ID_SD	27	28	ID_SC	EEPROM
5	N/A	29	30	GND	
6	N/A	31	32		12
13	N/A	33	34	GND	
19	N/A	35	36	N/A	16
26	N/A	37	38	Digital IN	20
	GND	39	40	Digital OUT	21

Depending on the model, you can have the « short » or the « long » GPIO interface. However, the SPI pins are at the same location therefore it does not change the way you connect the radio module if you take pin 1 as the reference. Connect the SPI pins (MOSI, MISO, CLK, CS) of the radio to the corresponding pins on the RPI. Note that CS goes to CE0_N on the RPI.

CONNECTING THE RADIO MODULE (2)

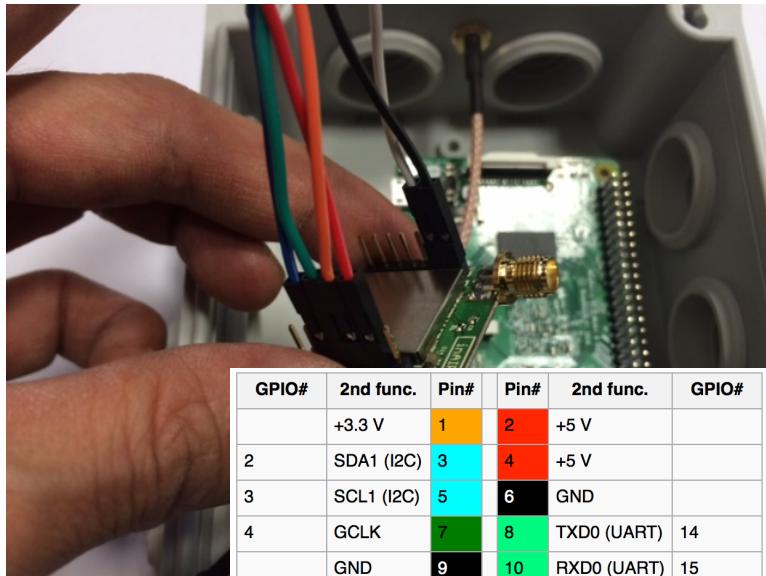


GPIO#	2nd func.	Pin#	Pin#	2nd func.	GPIO#
+3.3 V		1	2	+5 V	
2	SDA1 (I2C)	3	4	+5 V	
3	SCL1 (I2C)	5	6	GND	
4	GCLK	7	8	TXDO (UART)	14
	GND	9	10	RXD0 (UART)	15
17	GEN0	11	12	GEN1	18
27	GEN2	13	14	GND	
22	GEN3	15	16	GEN4	23
+3.3 V		17	18	GEN5	24
10	MOSI (SPI)	19	20	GND	
9	MISO (SPI)	21	22	GEN6	25
11	SCLK (SPI)	23	24	CE0_N (SPI)	8
	GND	25	26	CE1_N (SPI)	7
(RPi 1 Models A and B stop here)					
EEPROM	ID_SD	27	28	ID_SC	EEPROM
5	N/A	29	30	GND	
6	N/A	31	32		12
13	N/A	33	34	GND	
19	N/A	35	36	N/A	16
26	N/A	37	38	Digital IN	20
	GND	39	40	Digital OUT	21

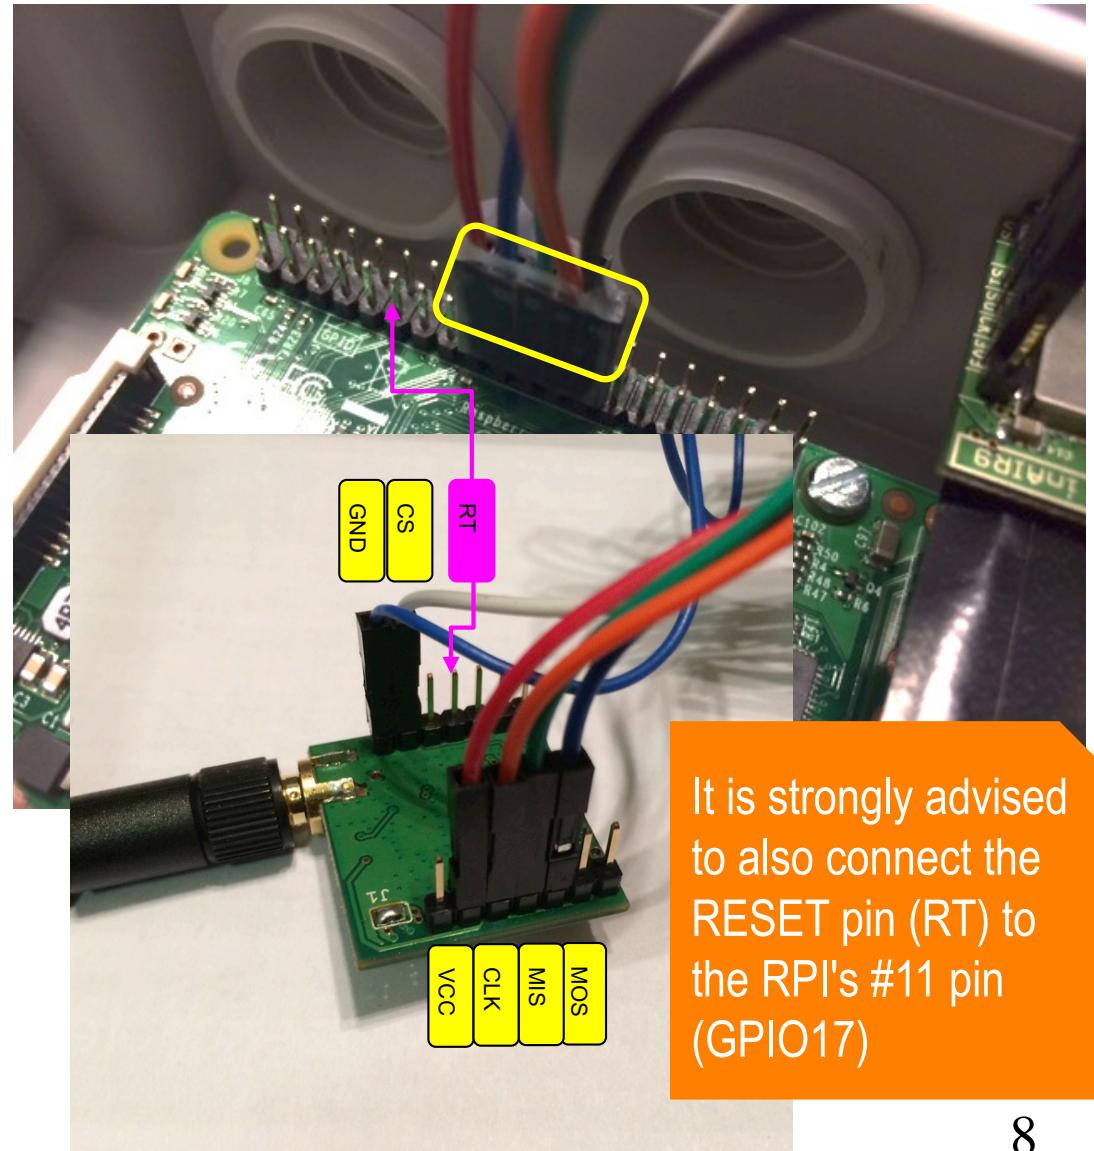

It is strongly advised to also connect the RESET pin (RT) to the RPi's #11 pin (GPIO17)



PUT IT IN A BOX

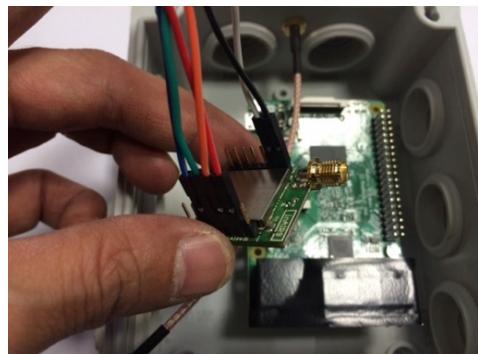

You can have a more integrated version, with a box for outdoor usage and PoE splitter to power the Raspberry with the Ethernet cable. See how we also use a DC-DC converter to get the 5V for the RPI.



ANTENNAS FOR GATEWAY

- Antennas for gateways can be placed on a building, at a high location.
- You can easily use ground plane or sleeve dipole antenna. More complex high gain antenna or a directional Yagi antenna can be purchased depending on your budget and whether the device deployment allows it.

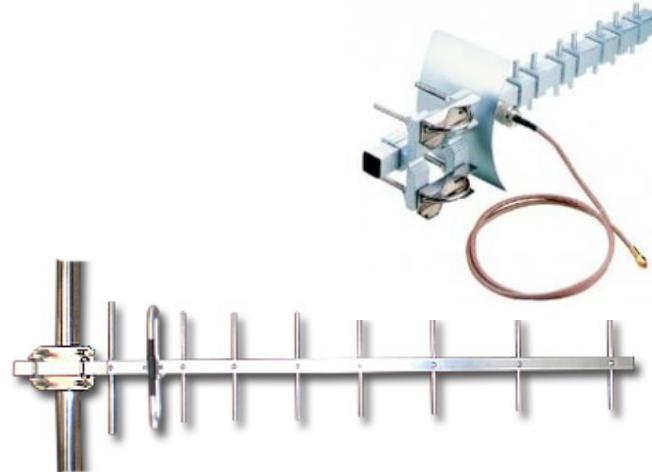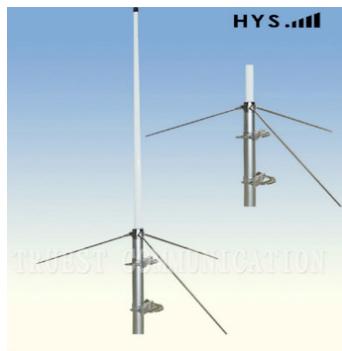


SIMPLE $\frac{1}{4}$ WAVE GROUND PLANE ANTENNA

- The ground plane antenna can be made with 5 pieces of $\frac{1}{4}$ wave wires. $\frac{1}{4}$ wave in 868MHz is about 8.2cm.

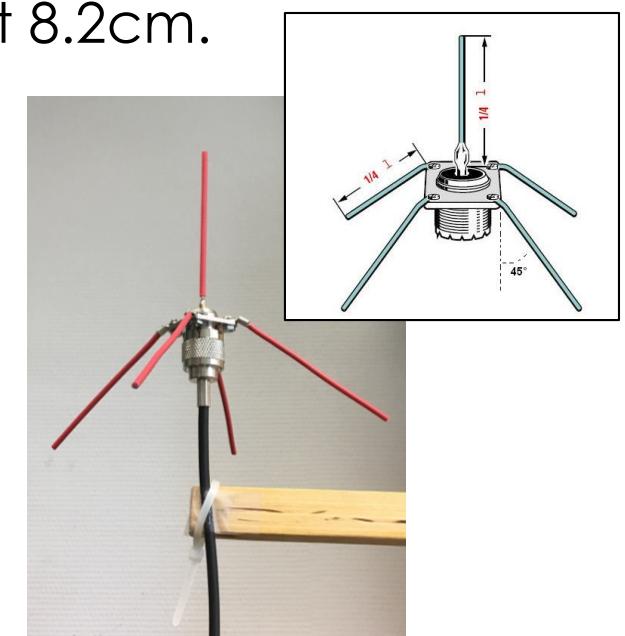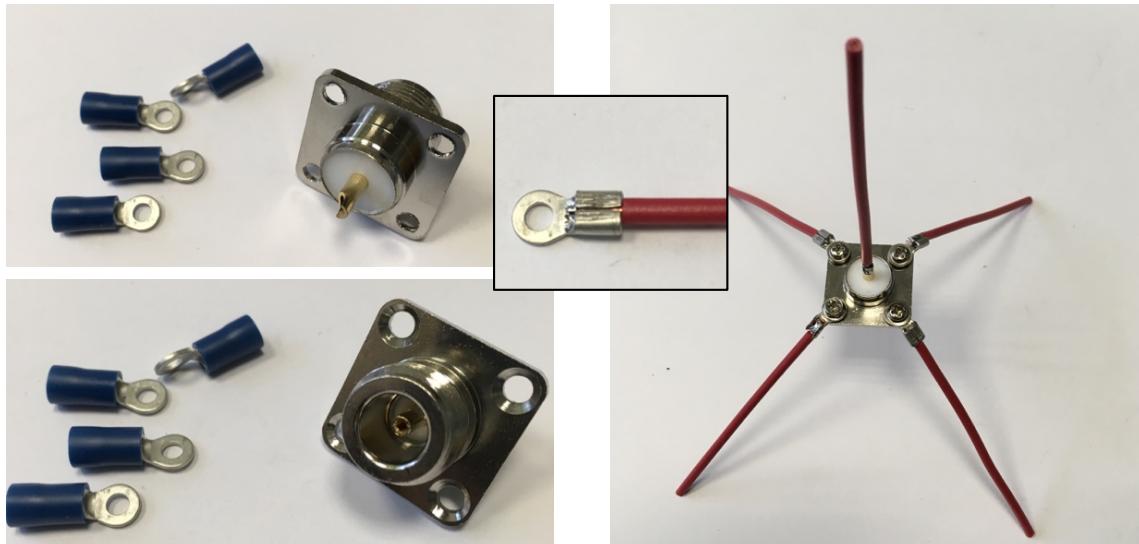

- You can buy a 3m RG58 cable with an SMA-male at one end and a male N-connector at the other end. Or build your own cable.

GETTING, COMPILING & INSTALLING THE SOFTWARE

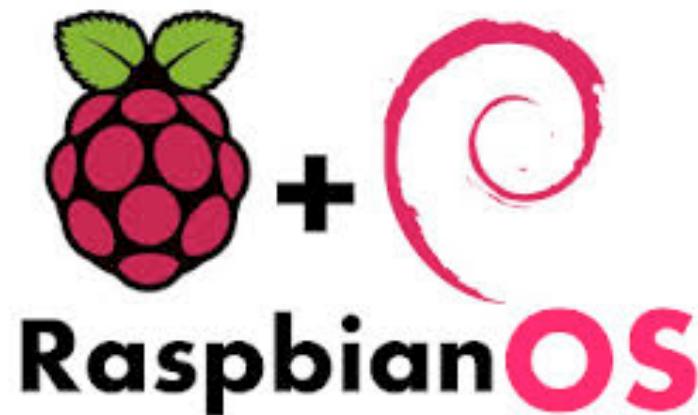

FLASHING THE OS

<http://cpham.perso.univ-pau.fr/LORA/WAZIUP/raspberrypi-jessie-WAZIUP-demo.dmg.zip>

- An SD card image with a Raspberry Raspbian Jessie version is provided.
- You will need an 8GB SD card. Be careful, some SD cards will not work. This one has been successfully tested. It has to be class 10.
- Look at
<https://www.raspberrypi.org/documentation/installation/installing-images/> to see the procedure depending on your OS. 7948206080 bytes should be written, otherwise you may have a problem.
- Once flashed, insert the SD card and power-up the Raspberry-based gateway.

SSH TO THE GATEWAY

- ❑ The Raspbian image sets the Raspberry for DHCP on wired Ethernet and as a WiFi access point.
- ❑ If you connected the gateway to your LAN or laptop using wired Ethernet then the gateway will be assigned an IP address. Use this address to connect with SSH to the gateway
- ❑ Use `ssh pi@rpi_addr`, where `rpi_addr` is the IP address assigned to the gateway
- ❑ Login password is `loragateway` if you installed from the SD card image
- ❑ However, using the built-in WiFi access point is easier as shown in the next slide

SSH TO THE GATEWAY WITH WiFi

- The gateway is also configured as a WiFi access point with address 192.168.200.1
- Select the WAZIUP_PI_GW_xxxxxxxx WiFi
- WiFi password is loragateway
- Then ssh pi@192.168.200.1
- Login password is loragateway

You can use an Android smartphone or tablet to connect to the gateway with the JuiceSSH app! See next slide.





```
MacBookProRetina-de-Congduc-Pham:~ cpham$ ssh pi@192.168.200.1
pi@192.168.200.1's password:

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Thu Aug  4 17:19:00 2016 from 192.168.200.102
pi@raspberrypi:~ $ cd lora_gateway/
pi@raspberrypi:~/lora_gateway $ ll
total 864
-rw----- 1 pi    pi    44155 Aug  3 16:55 arduPi.cpp
-rw----- 1 pi    pi    16715 Aug  3 16:55 arduPi.h
-rw-r--r-- 1 pi    pi    35164 Aug  3 17:01 arduPi.o
-rw----- 1 pi    pi    43310 Aug  3 16:55 arduPi_pi2.cpp
-rw----- 1 pi    pi    14043 Aug  3 16:55 arduPi_pi2.h
-rw----- 1 pi    pi    77976 Aug  3 16:55 bcm2835.h
```

WAZIUP USING ANDROID SMARTPHONE OR TABLET

- Use an Android smartphone or tablet with JuiceSSH to connect to the gateway

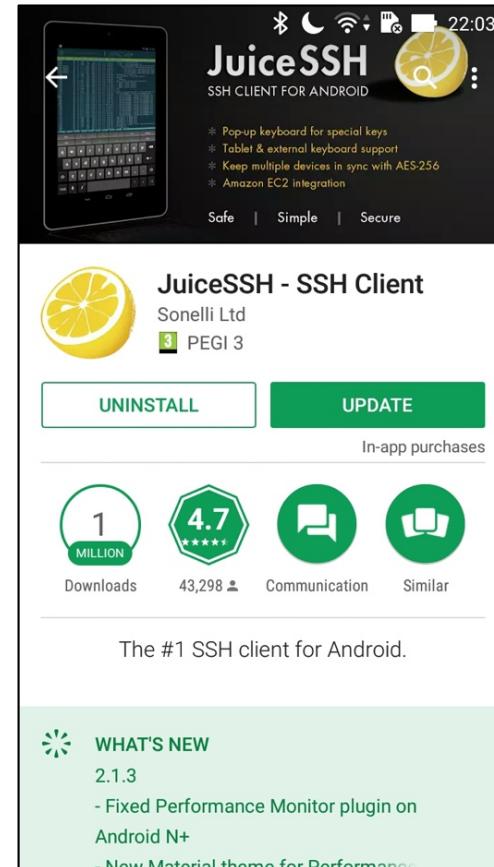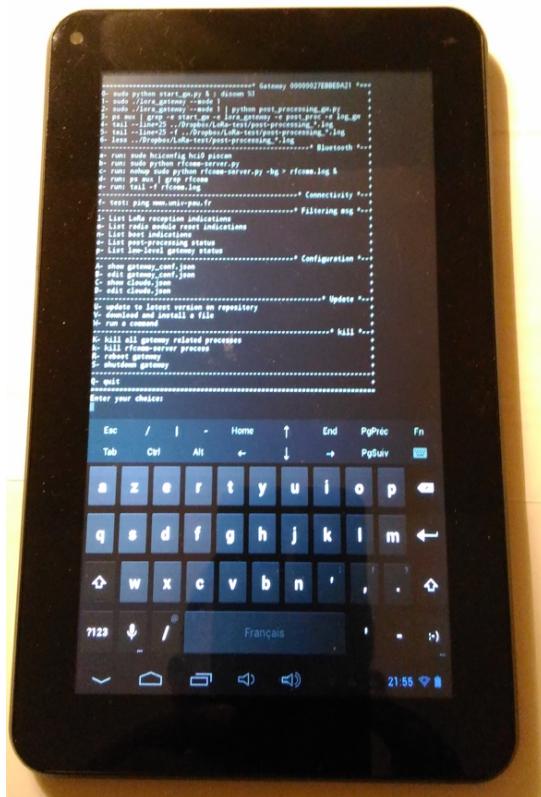

GATEWAY'S SIMPLE COMMAND INTERFACE

- ❑ Once logged on the gateway, you may directly enter in a simple command interface
- ❑ This command interface consists in a cmd.sh shell script
- ❑ In image versions after May 2017, this script is launched when you log into the gateway with ssh
- ❑ If this happens, select Q and RETURN to quit this interface
- ❑ You should be in the lora_gateway folder

```
=====
* Gateway 00000027EB946AE4 ===
0- sudo python start_gw.py & ; disown %1
1- sudo ./lora_gateway --mode 1
2- sudo ./lora_gateway --mode 1 | python post_processing_gw.py
3- ps aux | grep -e start_gw -e lora_gateway -e post_proc -e log_gw
4- tail --line=25 ../Dropbox/LoRa-test/post-processing_*.log
5- tail --line=25 -f ../Dropbox/LoRa-test/post-processing_*.log
6- less ../Dropbox/LoRa-test/post-processing_*.log
-----* Bluetooth *---+
a- run: sudo hciconfig hci0 picon
b- run: sudo python rfcomm-server.py
c- run: nohup sudo python rfcomm-server.py -bg > rfcomm.log &
d- run: ps aux | grep rfcomm
e- run: tail -f rfcomm.log
-----* Connectivity *---+
f- test: ping www.univ-pau.fr
-----* Filtering msg *---+
l- List LoRa reception indications
m- List radio module reset indications
n- List boot indications
o- List post-processing status
p- List low-level gateway status
-----* Configuration *---+
A- show gateway_conf.json
B- edit gateway_conf.json
C- show clouds.json
D- edit clouds.json
-----* kill *---+
K- kill all gateway related processes
k- kill rfcomm-server process
R- reboot gateway
S- shutdown gateway
-----+
Q- quit
=====

Enter your choice:
```

pi@raspberrypi:~/lora_gateway \$

FULL UPDATE OF GW SOFTWARE FROM GITHUB

[CongducPham / LowCostLoRaGw](#)

Code Issues Pull requests Projects Pulse Graphs

Watch 50 Star 161 Fork 95

Low-cost LoRa IoT & gateway with SX1272/76, Raspberry and Arduino

122 commits 1 branch 0 releases 2 contributors

Branch: master New pull request Find file Clone or download

Congduc Pham bug fix in lora_gateway.cpp	Latest commit a0daa4a a day ago
Arduino update SMS scripts	15 days ago
gw_full_latest bug fix in lora_gateway.cpp	a day ago
tutorials update SMS scripts	15 days ago
.gitignore .DS_Store banished	10 months ago
README.md update README	11 days ago

Branch: master LowCostLoRaGw / gw_full_latest /

Congduc Pham update README

- ..
- aes-python-lib/LoRaWAN add the gw_full_latest folder for easier
- downlink add the gw_full_latest folder for easier
- php add the gw_full_latest folder for easier
- rapidjson add the gw_full_latest folder for easier
- scripts add the gw_full_latest folder for easier
- sensors_in_raspi add the gw_full_latest folder for easier
- CloudFireBase.py update Cloud management with separa
- CloudFireBaseAES.py some more bug fixes
- CloudFireBaseLWAES.py some more bug fixes
- CloudGroveStreams.py update Cloud management with separa
- CloudMongoDB.py update cloud scripts
- CloudThingSpeak.py update Cloud management with separa
- MongoDB.py add the gw_full_latest folder for easier
- README-NewCloud.md update Cloud management with separa
- README-advanced.md update README

The software should be installed in a `lora_gateway` folder. Delete any previous folder.

```
> rm -rf lora_gateway
```

then

```
> mkdir lora_gateway
> git clone https://github.com/CongducPham/LowCostLoRaGw.git
> cp -r LowCostLoRaGw/gw_full_latest/* lora_gateway/
```

or

```
> svn checkout https://github.com/CongducPham/LowCostLoRaGw/trunk/gw_full_latest lora_gateway
```

... AND COMPIILING THE GW SOFTWARE

```
> cd lora_gateway  
> make lora_gateway  
g++ -DRASPBERRY -DIS_RCV_GATEWAY -c lora_gateway.cpp -o lora_gateway.o  
g++ -c arduPi.cpp -o arduPi.o  
g++ -c SX1272.cpp -o SX1272.o  
g++ -lrt -lpthread lora_gateway.o arduPi.o SX1272.o -o lora_gateway
```

Edit radio.makefile for PABOOST setting. If inAir9B, RFM92W/FM95W, NiceRF1272, uncomment:

CFLAGS=-DPABOOST

If inAir9/inAir4, Libelium SX1272, leave commented:

#CFLAGS=-DPABOOST

If you have a RPI 2 or RPI3, then type:

```
> make lora_gateway_pi2
```

USE A SCRIPT TO UPDATE THE GATEWAY

- Alternatively, the gateway can also be updated to the latest version with the `update_gw.sh` script.
- The first step is to get the latest version of the update script

```
> cd  
> svn checkout https://github.com/CongducPham/LowCostLoRaGw/trunk/gw_full_latest/scripts  
> cd scripts  
> ll  
total 48  
-rw-r--r-- 1 pi pi 3561 May 10 17:31 bashrc.sh  
-rwxr-xr-x 1 pi pi 10562 May 10 17:31 config_gw.sh  
-rw-r--r-- 1 pi pi 230 May 10 17:31 interfaces_ap  
-rwxr-xr-x 1 pi pi 99 May 10 17:31 mnt-dropbox  
-rwxr-xr-x 1 pi pi 610 May 10 17:31 mongodb_repair.sh  
-rwxr-xr-x 1 pi pi 816 May 10 17:31 start_access_point.sh  
-rwxr-xr-x 1 pi pi 57 May 10 17:31 start_gw.sh  
-rwxr-xr-x 1 pi pi 673 May 10 17:31 stop_access_point.sh  
-rwxr-xr-x 1 pi pi 37 May 10 17:31 unmnt_dropbox  
-rwxr-xr-x 1 pi pi 1537 May 10 17:31 update_gw.sh
```

UPDATING THE GATEWAY SOFTWARE

- Then type the following commands
 - cd
 - cp lora_gateway/scripts/update_gw.sh .
 - rm -rf lora_gateway
 - ./update_gw.sh
- Removing any previous lora_gateway folder triggers a full update
- The gateway will obtain the latest distribution from our github repository and will create a new lora_gateway folder
- Next periodic updates without deleting the existing lora_gateway folder, i.e. preserving existing configuration files, will be presented later on

CONFIGURING THE GATEWAY

(1)

- Go into the scripts folder in the newly created lora_gateway folder.
- And run the config_gw.sh script
 - ./config_gw.sh
- The script will get the hardware address of the gateway
 - ifconfig

```
[pi@raspberrypi:~ $ ifconfig
eth0      Link encap:Ethernet HWaddr b8:27:eb:79:5c:47
          inet addr:10.0.13.185 Bcast:10.0.13.255 Mask:255.255.255.0
          inet6 addr: fe80::ba27:ebff:fe79:5c47/64 Scope:Link
            UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
            RX packets:3500 errors:0 dropped:0 overruns:0 frame:0
            TX packets:121 errors:0 dropped:0 overruns:0 frame:0
```

- to define the gateway'id, using the last 5 bytes of the MAC address
- Then follow the instructions as shown in the next slides.

CONFIGURING THE GATEWAY (2)

```
*****  
*** compile lora_gateway executable Y/N ***  
*****
```

Enter Y

```
*****  
*** create log symb link to ~/Dropbox/LoRa-test Y/N ***  
*****
```

Enter Y

```
*****  
*** configure hostapd.conf Y/N ***  
*****
```

Enter Y

```
*****  
*** configure a newly installed hostapd/dnsmasq package Y/N ***  
*****
```

Enter N

```
*****  
*** configure bluetooth network name Y/N ***  
*****
```

Enter N

```
*****  
*** install DHT22 support Y/N ***  
*****
```

Enter Y

CONFIGURING THE GATEWAY (3)

```
*****  
*** edit gateway_conf.json now? Y/N ***  
*****
```

Enter N

```
*****  
*** activate DHT22 MongoDB Y/N/Q ***  
*****
```

Enter Q

```
*****  
*** edit LoRa data MongoDB local storage option? Y/N ***  
*****
```

Enter N

```
*****  
*** run gateway at boot Y/N ***  
*****
```

Enter Y

```
*****  
*** check configuration (recommended) Y/N ***  
*****
```

Enter N

```
*****  
*** reboot Y/N ***  
*****
```

Enter N

START THE COMMAND INTERFACE

```
> ./cmd.sh
```

As you can see, the gateway id shown by the command interface is now correct

```
pi@raspberrypi:~/lora_gateway $ ./cmd.sh
=====
===== Gateway 00000027EB795C47 =====
0- sudo python start_gw.py &; disown %1
1- sudo ./lora_gateway --mode 1
2- sudo ./lora_gateway --mode 1 | python post_processing_gw.py
3- ps aux | grep -e start_gw -e lora_gateway -e post_proc -e log_gw
4- tail --line=25 ../Dropbox/LoRa-test/post-processing_*.log
5- tail --line=25 -f ../Dropbox/LoRa-test/post-processing_*.log
6- less ../Dropbox/LoRa-test/post-processing_*.log
----- * Bluetooth *---+
a- run: sudo hciconfig hci0 piscan
b- run: sudo python rfcomm-server.py
c- run: nohup sudo python rfcomm-server.py -bg > rfcomm.log &
d- run: ps aux | grep rfcomm
e- run: tail -f rfcomm.log
----- * Connectivity *---+
f- test: ping www.univ-pau.fr
----- * Filtering msg *---+
l- List LoRa reception indications
m- List radio module reset indications
n- List boot indications
o- List post-processing status
p- List low-level gateway status
----- * Configuration *---+
A- show gateway_conf.json
B- edit gateway_conf.json
C- show clouds.json
D- edit clouds.json
----- * Update *---+
U- update to latest version on repository
V- download and install a file
W- run a command
----- * kill *---+
K- kill all gateway related processes
k- kill rfcomm-server process
R- reboot gateway
S- shutdown gateway
-----
Q- quit
=====
Enter your choice:
```

PERIODIC UPDATE PROCEDURE

- ❑ The latest command interface has built-in update procedure
- ❑ You can use option **U** to update from repository and still keep all your configuration files: gateway_conf.json, clouds.json and key*
- ❑ You can also install a single file with option **V** that will prompt for a URL
- ❑ You can enter a URL that has been provided by some administrator
- ❑ Example in the next slide

```
pi@raspberrypi:~/lora_gateway $ ./cmd.sh
=====
===== Gateway 00000027EB795C47 ====
0- sudo python start_gw.py & ; disown %1 +
1- sudo ./lora_gateway --mode 1 +
2- sudo ./lora_gateway --mode 1 | python post_processing_gw.py +
3- ps aux | grep -e start_gw -e lora_gateway -e post_proc -e log_gw +
4- tail --line=25 ../Dropbox/LoRa-test/post-processing_*.log +
5- tail --line=25 -f ../Dropbox/LoRa-test/post-processing_*.log +
6- less ../Dropbox/LoRa-test/post-processing_*.log +
-----* Bluetooth *---+
a- run: sudo hciconfig hci0 pscan +
b- run: sudo python rfcomm-server.py +
c- run: nohup sudo python rfcomm-server.py -bg > rfcomm.log & +
d- run: ps aux | grep rfcomm +
e- run: tail -f rfcomm.log +
-----* Connectivity *---+
f- test: ping www.univ-pau.fr +
-----* Filtering msg *---+
l- List LoRa reception indications +
m- List radio module reset indications +
n- List boot indications +
o- List post-processing status +
p- List low-level gateway status +
-----* Configuration *---+
A- show gateway_conf.json +
B- edit gateway_conf.json +
C- show clouds.json +
D- edit clouds.json +
-----* Update *---+
U- update to latest version on repository +
V- download and install a file +
W- run a command +
-----* Kill *---+
K- kill all gateway related processes +
k- kill rfcomm-server process +
R- reboot gateway +
S- shutdown gateway +
-----+
Q- quit +
=====

Enter your choice:

```

DOWNLOAD AND INSTALL A FILE (1)

- With option **V**, you can enter an URL that points to a file. The file will be downloaded and installed in the `lora_gateway` folder.

```
Enter your choice:
```

```
V
```

```
-----  
BEGIN OUTPUT
```

```
Download and install a file
```

```
Enter the URL of the file:
```

```
https://www.dropbox.com/s/mcmg4yeksr340c2/example-install-file.txt
```

```
Download and install a file
Enter the URL of the file:
https://www.dropbox.com/s/mcmg4yeksr340c2/example-install-file.txt
--2017-05-09 22:16:53--  https://www.dropbox.com/s/mcmg4yeksr340c2/example-install-file.txt
Resolving www.dropbox.com (www.dropbox.com)... 162.125.65.1
Connecting to www.dropbox.com (www.dropbox.com)|162.125.65.1|:443... connected.
HTTP request sent, awaiting response... 302 Found
Location: https://dl.dropboxusercontent.com/content\_link/Veb5Tx1XY65zpGTJ9ZUYQAuAwhDY9GiEmw9HUxcQXuMh62IneXy7BUp1EF450L0l/file [following]
--2017-05-09 22:16:54--  https://dl.dropboxusercontent.com/content\_link/Veb5Tx1XY65zpGTJ9ZUYQAuAwhDY9GiEmw9HUxcQXuMh62IneXy7BUp1EF450L0l/file
Resolving dl.dropboxusercontent.com (dl.dropboxusercontent.com)... 162.125.65.6
Connecting to dl.dropboxusercontent.com (dl.dropboxusercontent.com)|162.125.65.6|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 167 [text/plain]
Saving to: 'example-install-file.txt'

example-install-file.txt      100%[=====]      167  --.-KB/s   in 0s

2017-05-09 22:16:55 (17.2 MB/s) - 'example-install-file.txt' saved [167/167]

Done
END OUTPUT
Press RETURN/ENTER...
```

DOWNLOAD AND INSTALL A FILE (2)

- This feature is very useful for end-users to simply update some files on the gateway.
- An administrator can write appropriate configuration files for the end-user and generate an URL to this file (with Dropbox for instance)
- The URL can be either be sent by mail or SMS to the end-user.
- The end-user has to simply log into the gateway (using an Android smartphone or tablet connecting to the gateway's WiFi) and select option V to enter the URL.
- The end-user will then just reboot the gateway with option R for the new configuration to run.



DOWNLOAD AND INSTALL A FILE (3)

- System files can also be installed with option W that will prompt for a command


```
Enter your choice:  
W  
-----  
BEGIN OUTPUT  
Run a command  
Enter the command to run:  
sudo wget -O /etc/test.txt https://www.dropbox.com/s/mcmg4yeksr340c2/example-install-file.txt
```

- Here, the previous example file will be installed in /etc under the name test.txt
- Like previously, the exact command can be sent to the end-user

OUR LOW-COST GATEWAY ARCHITECTURE

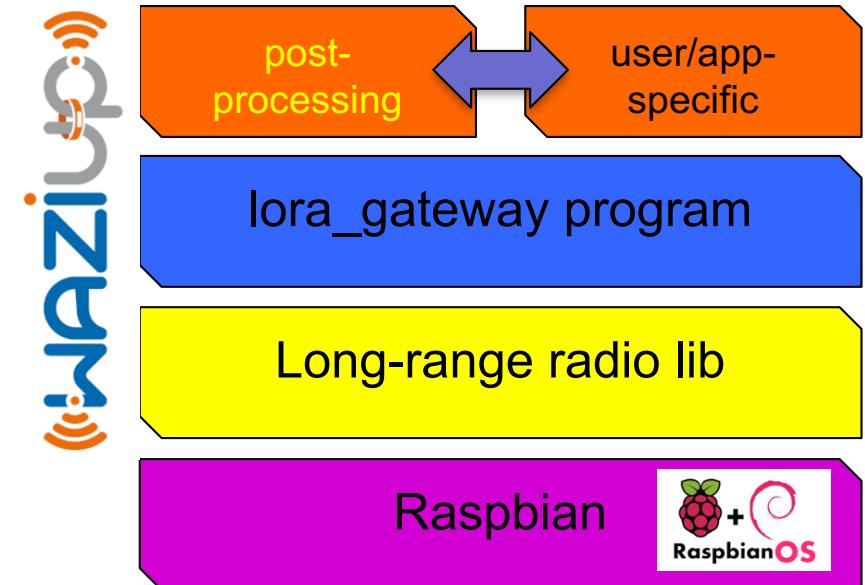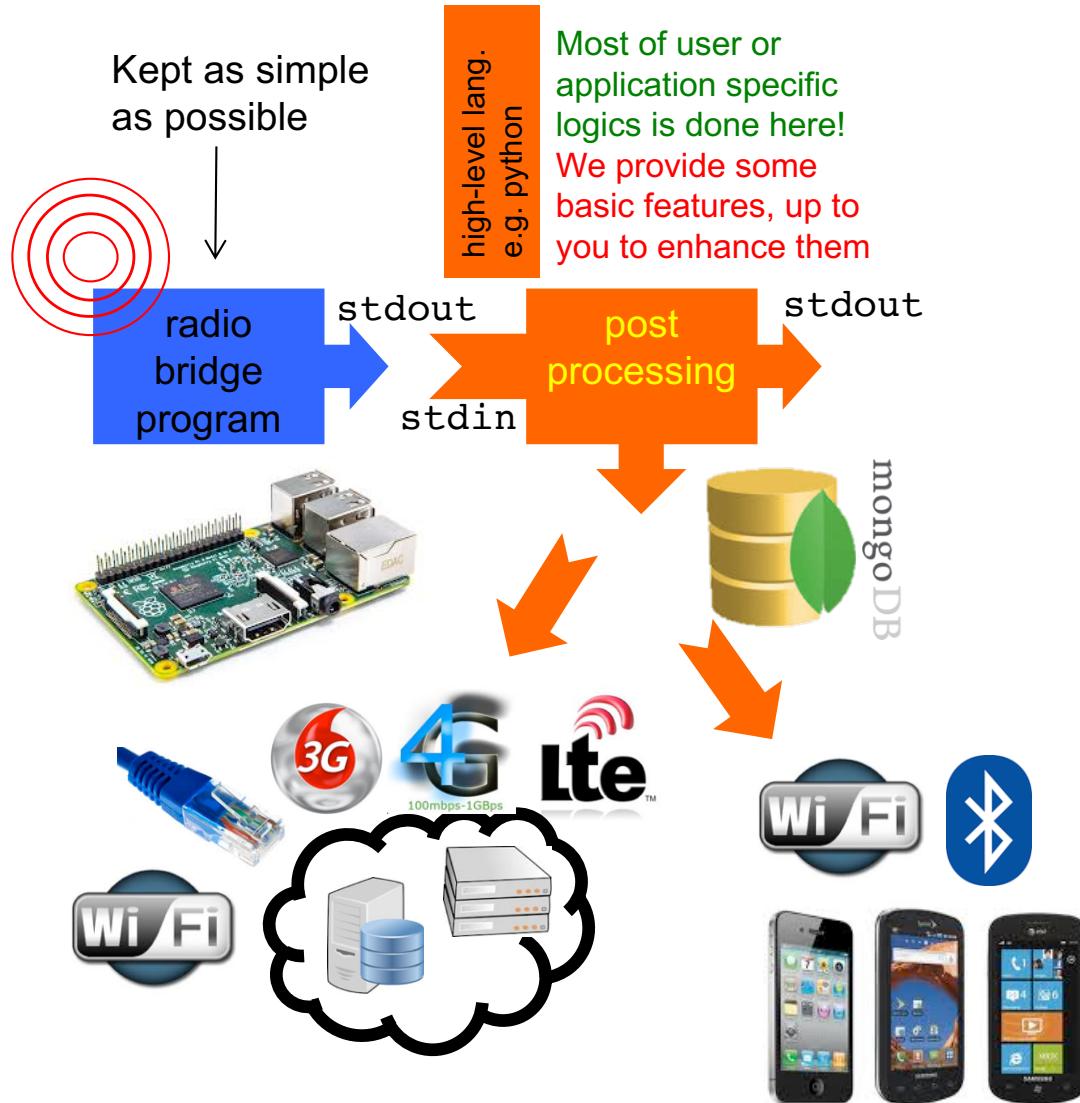


POST-PROCESSING BLOCK

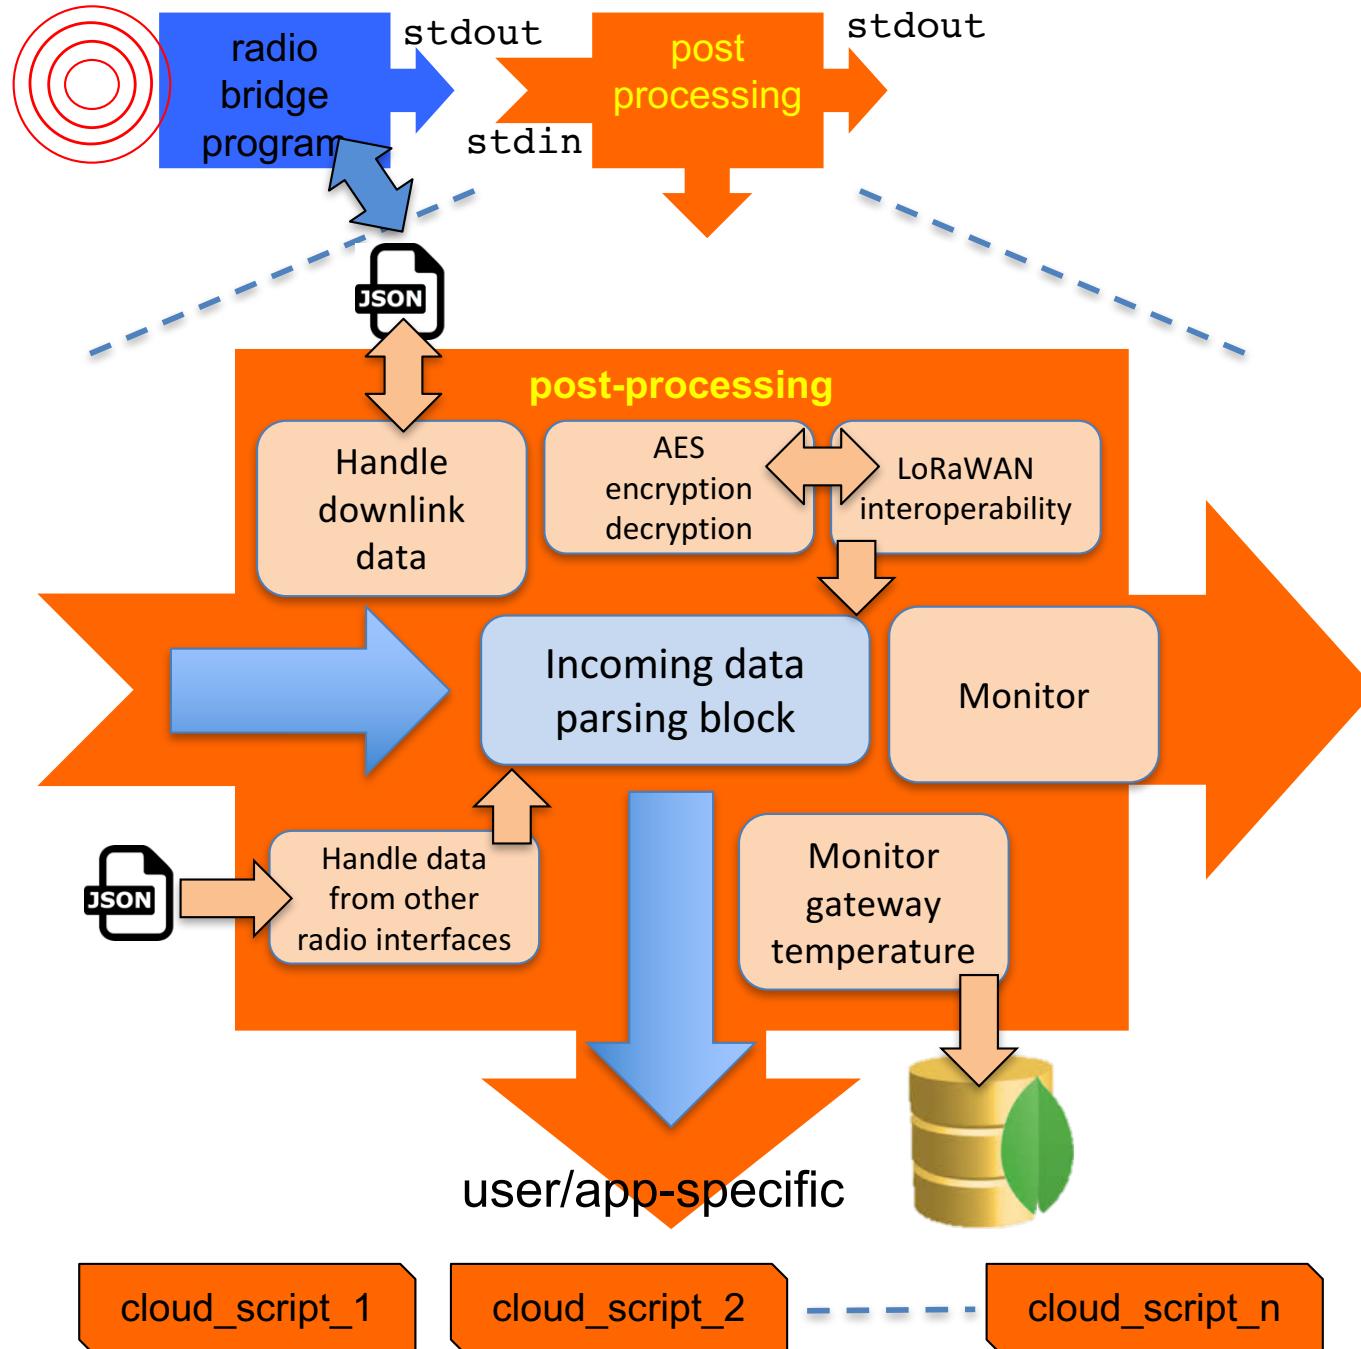

STARTING THE BASIC GATEWAY

```
> sudo ./lora_gateway
Power ON: state 0
Default sync word: 0x12
LoRa mode: 1
Setting mode: state 0
Channel CH_10_868: state 0
Set LoRa Power to M: state 0
Get Preamble Length: state 0
Preamble Length: 8
LoRa addr 1 : state 0
SX1272/76 configured as LR-BS. Waiting RF input for transparent RF-serial bridge
--- rxlora. dst=1 type=0x10 src=10 seq=0 len=4 SNR=9 RSSIpkt=-54
^p1,16,10,0,4,9,-54
^r125,5,12
^t2016-02-25T01:51:11.058
T/23
--- rxlora. dst=1 type=0x10 src=3 seq=0 len=4 SNR=8 RSSIpkt=-54
^p1,16,3,0,4,8,-54
^r125,5,12
^t2016-02-25T01:53:13.067
H/85
```

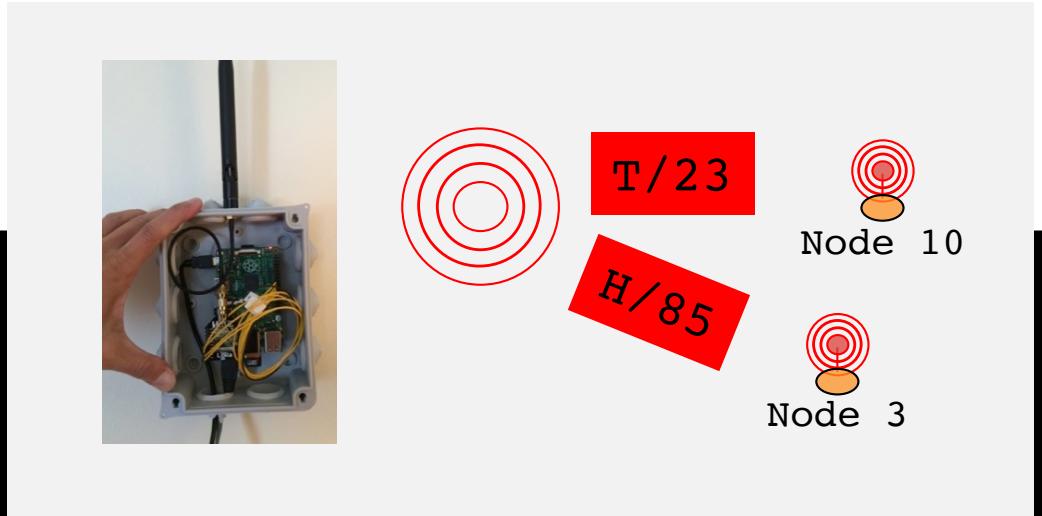

POST-PROCESSING RECEIVED DATA

```
> sudo ./lora_gateway | python ./post_processing_gw.py
Power ON: state 0
Default sync word: 0x12
LoRa mode: 1
Setting mode: state 0
Channel CH_10_868: state 0
Set LoRa Power to M: state 0
Get Preamble Length: state 0
Preamble Length: 8
LoRa addr 1 : state 0
SX1272/76 configured as LR-BS. Waiting RF input for transparent RF-serial bridge
--- rxlora. dst=1 type=0x10(DATA) src=10 seq=0 len=4 SNR=9 RSSIpkt=-54
Rcv ctrl packet info 1,16,10,0,4,9,-54
(dst=1 type=0x10 src=10 seq=0 len=4 SNR=9 RSSI=-54)
rcv ctrl radio info (^r): 125,5,12
splitted in: [125, 5, 12]
(BW=500 CR=5 SF=12)
rcv timestamp (^t): 2016-02-25T01:53:13.067
got first framing byte
--> got data prefix
T/23
```

All lines that are not prefixed by specific character sequence are displayed unchanged


^{^p} provides information on the last received packet: dst, type, src, seq, len, SNR & RSSI

^{^r} provides radio information on the last received packet: bw, cr & sf

^{^t} provides timestamp information on the last received packet

Pre-defined sequences inserted by the gateway or the end-device allow for information exchanged between the gateway and the post-processing program


GATEWAY TO CLOUD



freeboard



FIWARE

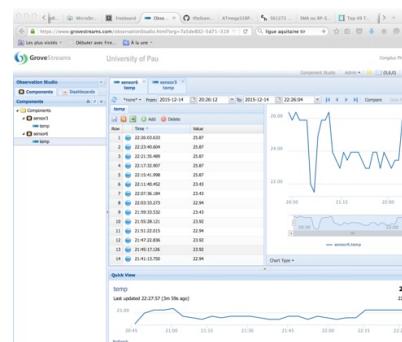

GroveStreams

SensorCloud™

Data received at the gateway can be pushed to IoT clouds. We provide python script examples for many IoT cloud platforms. Most of clouds with REST API can be easily integrated.

LOG RECEIVED MESSAGES

USING CLOUD SERVICES



\!T/23



Node 10

```
SX1272/76 configured as LR-BS. Waiting RF input for transparent RF-serial bridge
--- rxlora. dst=1 type=0x10 src=10 seq=0 len=6 SNR=9 RSSIpkt=-54
Rcv ctrl packet info 1,16,10,0,6,9,-54
(dst=1 type=0x10(DATA) src=10 seq=0 len=6 SNR=9 RSSI=-54)
rcv ctrl radio info (^r): 125,5,12
splitted in: [125, 5, 12]
(BW=500 CR=5 SF=12)
rcv timestamp (^t): 2016-02-25T01:53:13.067
got first framing byte
--> got data prefix
number of enabled clouds is 1
--> cloud[0]
uploading with python CloudThingSpeak.py
ThingSpeak: uploading
rcv msg to log (\!) on ThingSpeak ( default , 4 ): 23
ThingSpeak: will issue curl cmd
curl -s -k -X POST --data field4=23 https://api.thingspeak.com/...
ThingSpeak: returned code from server is 156
--> cloud end
```

\\$ or \! before the data indicates that the data should be logged on a file or a cloud. It is up to the end-device to decide which option


USING Dropbox

- A message starting with '\\$' is logged in a file 'telemetry.log' in a folder shared through Dropbox (if enabled)

```
(src=10 seq=0 len=6 SNR=9 RSSI=-54) 2015-11-04T10:14:30.328413> T/23  
(src=10 seq=1 len=8 SNR=8 RSSI=-54) 2015-11-04T10:14:37.443350> T/23.2  
(src=10 seq=2 len=6 SNR=8 RSSI=-53) 2015-11-04T10:16:23.343657> T/24  
...
```

\\$T/23

Node 10

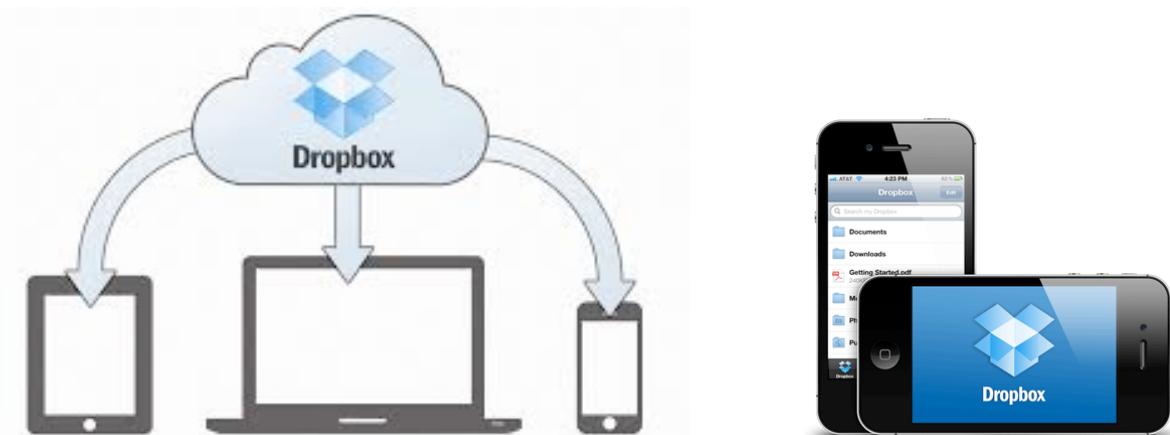

USING ThingSpeak

- A message starting with '\!' is uploaded on a cloud, e.g. ThingSpeak



User: cpham


Test LoRa UPPA

Channel ID: 66583
Author: cpham
Test of LoRa gateway at University of Pau, France

Test, lora, uppa



\!write_key#field_index#T/23

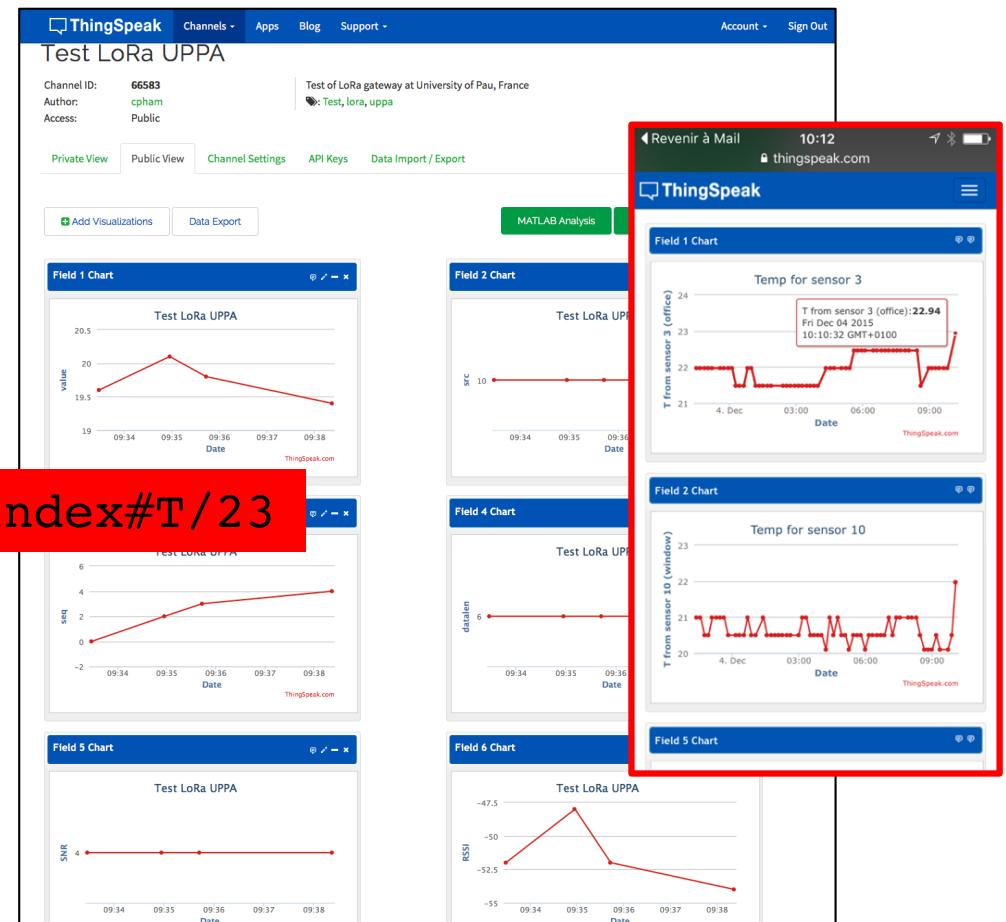

USING Firebase




The screenshot shows the Firebase Realtime Database dashboard with the following details:

- Dashboard** tab is selected.
- VIEWING MY FIRST APP** section is active.
- Account Settings** icon is in the top right.
- Legend** indicates:
 - Changed (Yellow)
 - Added (Green)
 - Deleted (Red)
 - Moved (Blue)
- Path:** SWELTERING-TORCH-4818 > LoRa > LIUPPA > RPIgateway > 2015-11-04 > sensor3 > msg0
- Data:**

```
RSSI: -54
SNR: 8
date: "2015-11-04T10:18:12.254671"
info_str: "(src=3 seq=0 len=5 SNR=8 RSSI=-54) 2015-11-04T1...
len: 5
seq: 0
src: 3
text: "H=85%"
```

USING GroveStreams

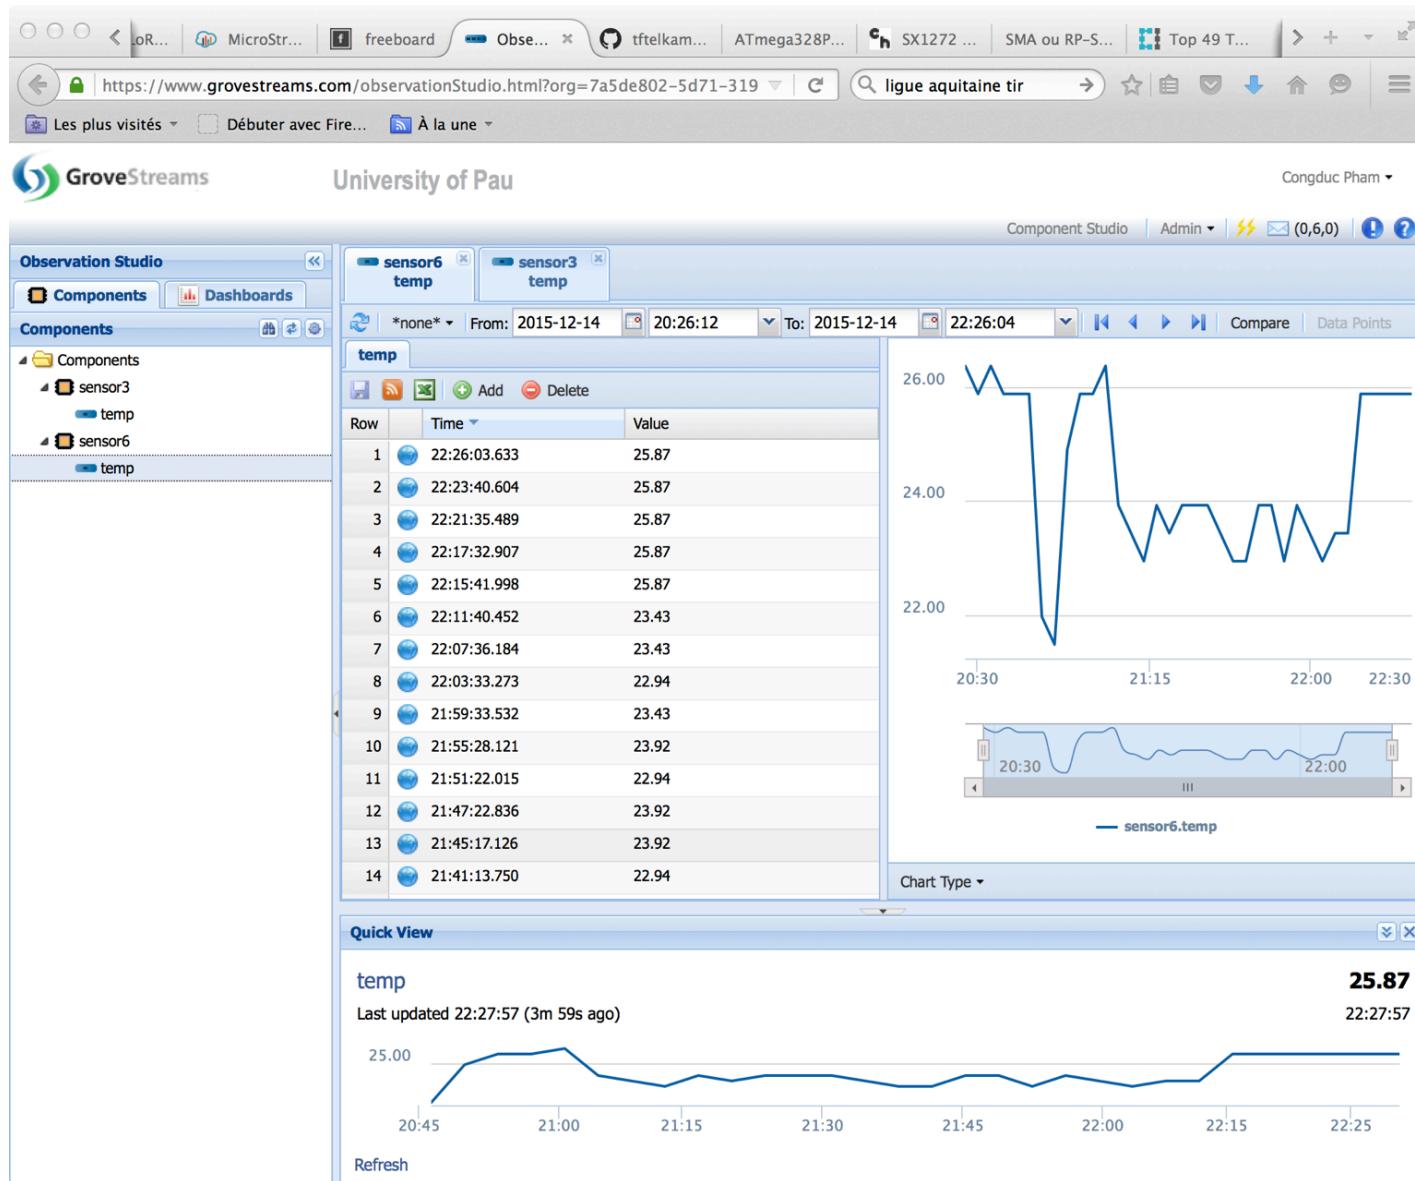

CONFIGURING DATA MANAGEMENT

- For WAZIUP, received data from devices will be uploaded to the WAZIUP Orion data platform. Therefore clouds.json file should be set as follows:

```
{  
    "name": "WAZIUP Orion cloud",  
    "script": "python CloudWAZIUP.py",  
    "type": "iotcloud",  
    "write_key": "",  
    "enabled": true  
},
```
- Modify clouds.json accordingly
- CloudWAZIUP.py script will use information from key_WAZIUP.py to configure data management for each organization
- Therefore we need to configure this file for each organization

KEY_WAZIUP.PY

```
#####
#server: CAUTION must exist
waziup_server="http://broker.waziup.io/v2"

#project name
project_name="waziup"

#your organization: CHANGE HERE
#choose one of the following: "DEF", "UPPA", "EGM", "IT21", "CREATENET", "CTIC", "UI", "ISPACE",
#"UGB", "WOELAB", "FARMERLINE", "C4A", "PUBD"
organization_name="DEF"  

#service tree: CHANGE HERE at your convenience
#should start with /
#service_tree='/LIUPPA/T2I/CPHAM'
service_tree=''

#sensor name: CHANGE HERE but maybe better to leave it as Sensor
#the final name will contain the sensor address
sensor_name=organization_name+"_Sensor"

#service path: DO NOT CHANGE HERE
service_path='/' + organization_name + service_tree

#SUMMARY
#the entity name will then be sensor_name+scr_addr, e.g. "UPPA_Sensor2"
#the Fiware-ServicePath will be service_path which is based on both organization_name and
service_tree, e.g. "/UPPA/LIUPPA/T2I/CPHAM"
#the Fiware-Service will be project_name, e.g. "waziup"

source_list=[]
```

You need to change the
organization_name.

service_tree is optional

EDITING KEY_WAZIUP_WS.PY

```
lora_gw_full_latest — nano key_WAZIUP.py — 143x52
pi@raspberrypi: ~/lo... pi@raspberrypi: ~/lo... pi@raspberrypi: ~/lo... pi@raspberrypi: ~/lo... nano key_WAZIUP.py ...WaterSense — -bash +  

GNU nano 2.0.6 File: key_WAZIUP.py Modified  

#####
#server: CAUTION must exist
waziup_server="http://broker.waziup.io/v2"  

#project name
project_name="waziup"  

#your organization: CHANGE HERE
#choose one of the following: "DEF", "UPPA", "EGM", "IT21", "CREATENET", "CTIC", "UI", "ISPACE", "UGB", "WOELAB", "FARMERLINE", "C4A", "PUBD"
#organization_name="UPPA"
organization_name="DEF"  

#service tree: CHANGE HERE at your convenience
#should start with /
#service_tree='/LIUPPA/T2I/CPHAM'
service_tree=''  

#sensor name: CHANGE HERE but maybe better to leave it as Sensor
#the final name will contain the sensor address
sensor_name=organization_name+"Sensor"  

#service path: DO NOT CHANGE HERE
service_path='/' + organization_name + service_tree  

#SUMMARY
#the entity name will then be sensor_name+scr_addr, e.g. "UPPASensor2"
#the Fiware-ServicePath will be service_path which is based on both organization_name and service_tree, e.g.
#the Fiware-Service will be project_name, e.g. "waziup"  

source_list=[]  

#####  

^G Get Help ^O WriteOut ^R Read File ^Y Prev Page ^K Cut Text  

^X Exit ^J Justify ^W Where Is ^V Next Page ^U Uncut Text ^C Cur Pos  

^T To Spell
```

Use nano to edit the file:

> nano key_WAZIUP.py

Then CTRL-O + RETURN to save

CTRL-X to quit

CLOUDS.JSON

```
{
  "clouds": [
    {
      "notice": "do not remove the MongoDB cloud declaration",
      "name": "Local gateway MongoDB",
      "script": "python CloudMongoDB.py",
      "type": "database",
      "max_months_to_store": 2,
      "enabled": false
    },
    {
      "name": "WAZIUP Orion cloud",
      "script": "python CloudWAZIUP.py",
      "type": "iotcloud",
      "write_key": "",
      "enabled": true
    },
    {
      "name": "ThingSpeak cloud",
      "script": "python CloudThingSpeak.py",
      "type": "iotcloud",
      "write_key": "",
      "enabled": true
    },
    {
      "name": "GroveStreams cloud",
      "script": "python CloudGroveStreams.py",
      "type": "iotcloud",
      "write_key": "",
      "enabled": true
    },
    {
      "name": "Firebase cloud",
      "script": "python CloudFireBase.py",
      "type": "jsoncloud",
      "write_key": "",
      "enabled": true
    },
    {
      "name": "example template",
      "script": "name of your script, preceded by the script launcher",
      "type": "whatever you want FYI",
      "server": "",
      "login": "",
      "password": "",
      "folder": "",
      "write_key": "",
      "enabled": false
    }
  ]
}
```

For each cloud, you have to provide a script and the launcher program (e.g. python)

Enabled clouds will be called by the post-processing stage

REBOOTING THE GATEWAY


- ❑ Your gateway is now updated and configured
- ❑ You can now reboot the gateway. To do so, just type:
 - ❑ sudo shutdown -r now
- ❑ Or run ./cmd.sh and chose option **R**
- ❑ Once the gateway has rebooted, check the WiFi SSID which now should meet your gateway's id
- ❑ Try to avoid unplugging power cable to shutdown your gateway. Log into the gateway and select option **S** instead.
- ❑ Your gateway is now ready to be deployed

GATEWAY WEB ADMIN INTERFACE (1)

- ❑ A gateway web admin interface has been added to the latest version
- ❑ To install the web admin interface, check if you have the `gw_web_admin` folder in your `lora_gateway` folder
- ❑ If you don't, then update to the latest version
- ❑ Then, go into `gw_web_admin` and run the `install.sh` script
 - ❑ `cd gw_web_admin`
 - ❑ `./install.sh`
 - ❑ Answer Y to "install from local version Y/N"

GATEWAY WEB ADMIN INTERFACE (2)

□ <http://192.168.200.1/admin>

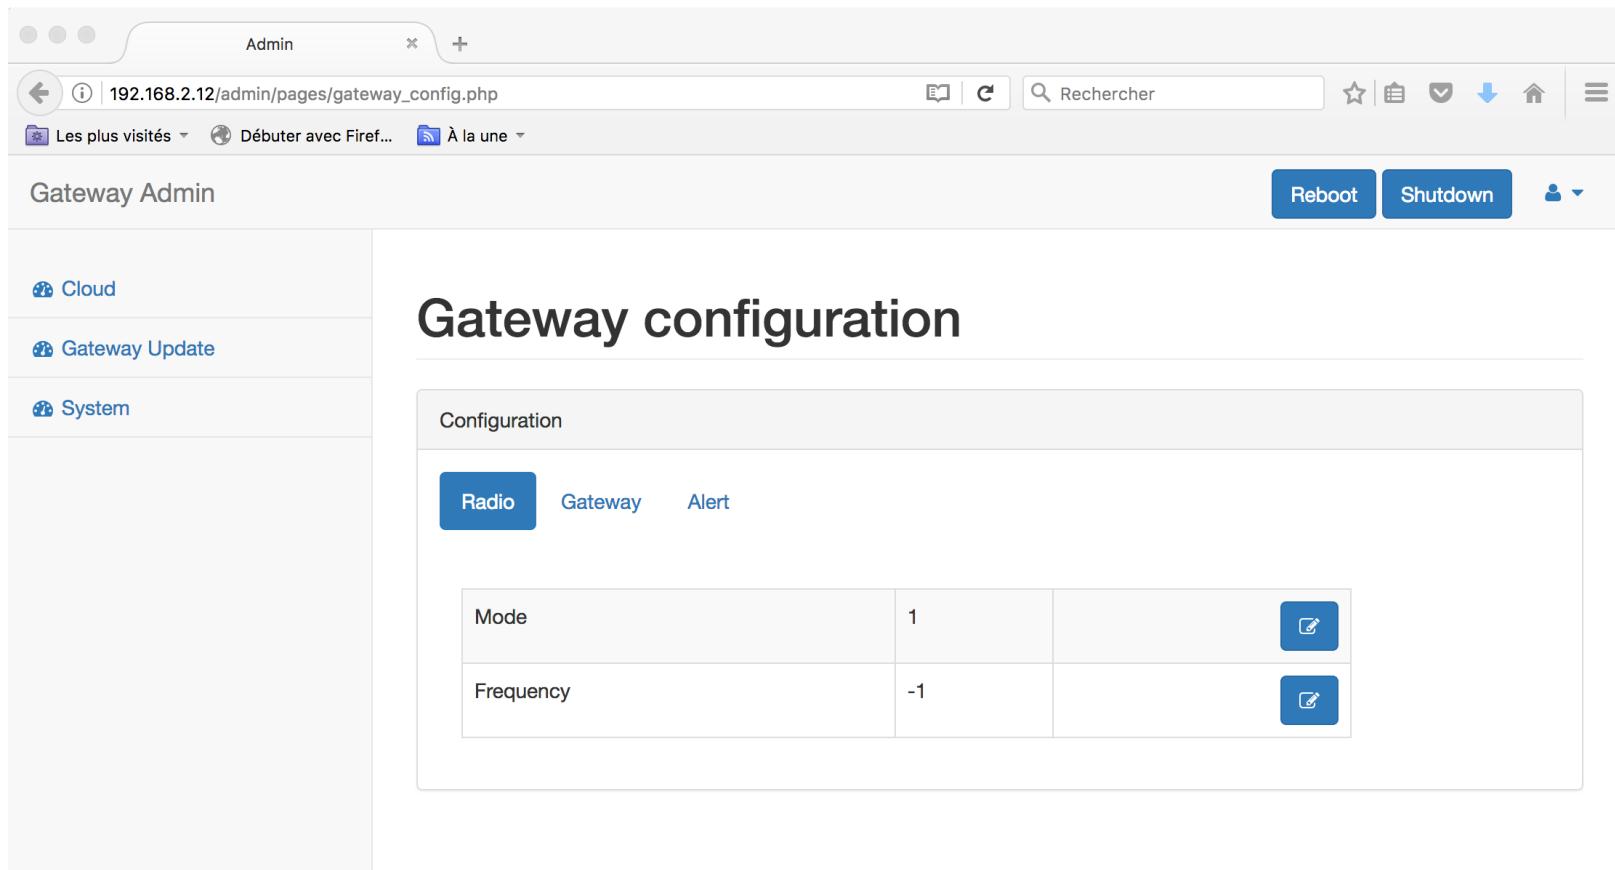


The screenshot shows a web browser window titled "Admin" with the URL "192.168.2.12/admin/pages/gateway_config.php". The page is titled "Gateway configuration" and contains a "Configuration" section with tabs for "Radio", "Gateway", and "Alert". The "Radio" tab is selected. A table displays two configuration items: "Mode" with value "1" and "Frequency" with value "-1", each with an edit icon.

Mode	1	
Frequency	-1	


WEB ADMIN FEATURES

- ❑ Currently, you can use the web admin to:
 - ❑ Easily reboot and shutdown your gateway
 - Be carefull, if you shut down the gateway, you need to physically access the gateway to power it on again
 - ❑ Change LoRa mode and frequency
 - ❑ Update your gateway
 - ❑ Change the WiFi SSID and password
 - ❑ Enable/Disable local AES decryption
 - ❑ Enable/Disable ThingSpeak and WAZIUP Orion cloud
 - ❑ For ThingSpeak, you can specify a new write key
 - ❑ For WAZIUP Orion, you can specify the project name, the organization name and the service tree
 - Fiware-service=project_name
 - sensor_name=organization_name+"_Sensor"
 - Fiware-servicePath='/+organization_name+service_tree
 - See slide 41

DEFAULT CONFIGURATION

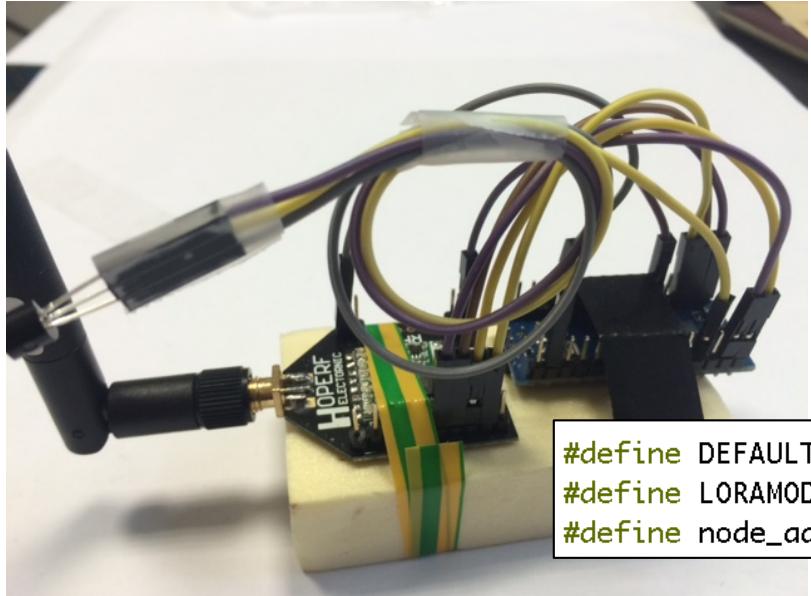

\!##TC/18.5



The default configuration in the Arduino_LoRa_temp example is:

Send packets to the gateway (one or many if in range)
LoRa mode 1 & Node short address is 6

The default gateway configuration is also LoRa mode 1

WRITE YOUR OWN CLOUD SCRIPT

- Use our templates to write your own cloud script
 - CloudMongoDB.py, CloudThingSpeak.py,
CloudFireBase.py, CloudGroveStreams.py,
CloudWAZIUP.py
- A cloud script is called with 5 arguments
 - ldata: the received data
 - e.g. #4#TC/21.5 as 1st argument (sys.argv[1] in python)
 - pdata: packet information
 - e.g. "1,16,3,0,10,8,-45" as 2nd argument (sys.argv[2] in python)
 - interpreted as dst,ptype,src,seq,len,SNR,RSSI for the last received packet
 - rdata: the LoRa radio information
 - e.g. "500,5,12" as 3rd argument (sys.argv[3] in python)
 - interpreted as bw,cr,sf for the last received packet
 - tdata: the timestamp information
 - e.g. "2016-10-04T02:03:28.783385" as 4th argument (sys.argv[4] in python)
 - gwid: the gateway id
 - e.g. 00000027EBBEDA21 as 5th argument (sys.argv[5] in python)

These parameters are passed to the script. It is up to the cloud script to use these parameters or not.


STANDALONE GATEWAY



CONNECT TO THE EMBEDDED WEB SERVER


- On the WiFi interface
 - Gateway address is 192.168.200.1
- On the Ethernet interface
 - Gateway address is the IP address assigned by the DHCP server (of your LAN or laptop)
- Choose any of these solutions and open a web browser to enter the gateway IP address in the URL bar
 - <http://192.168.200.1>

DATA FROM THE LOCAL WEB SERVER


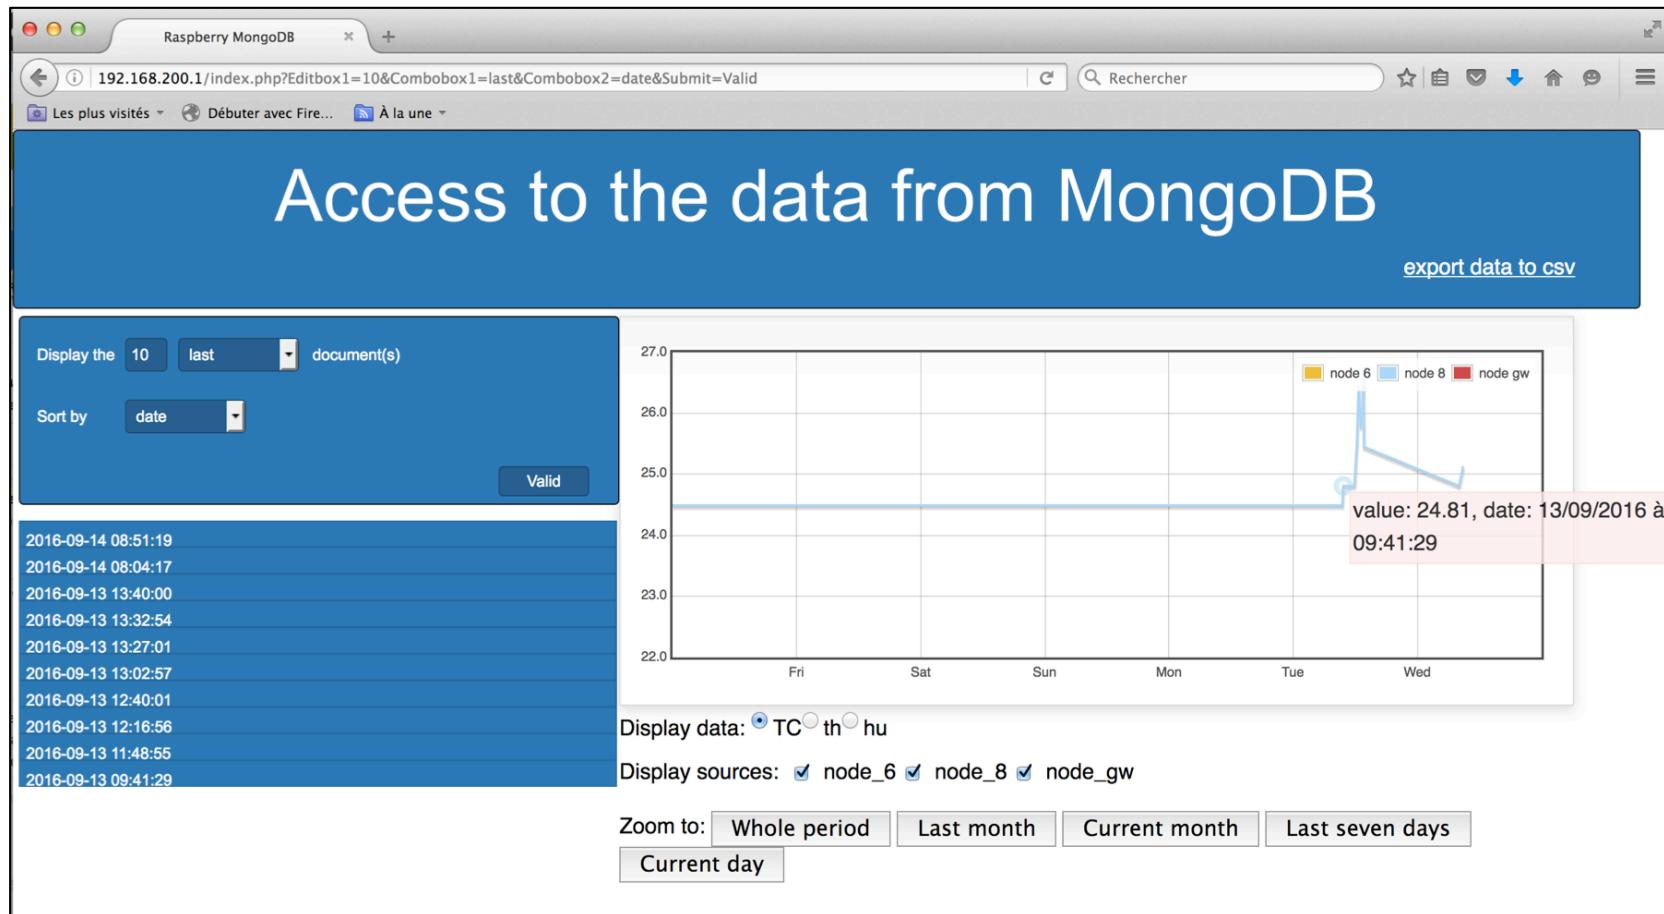


VISUALIZE IT ON YOUR SMARTPHONE!

- Don't forget to join the WAZIUP_PI_GW_xxxxxxxxxx WiFi

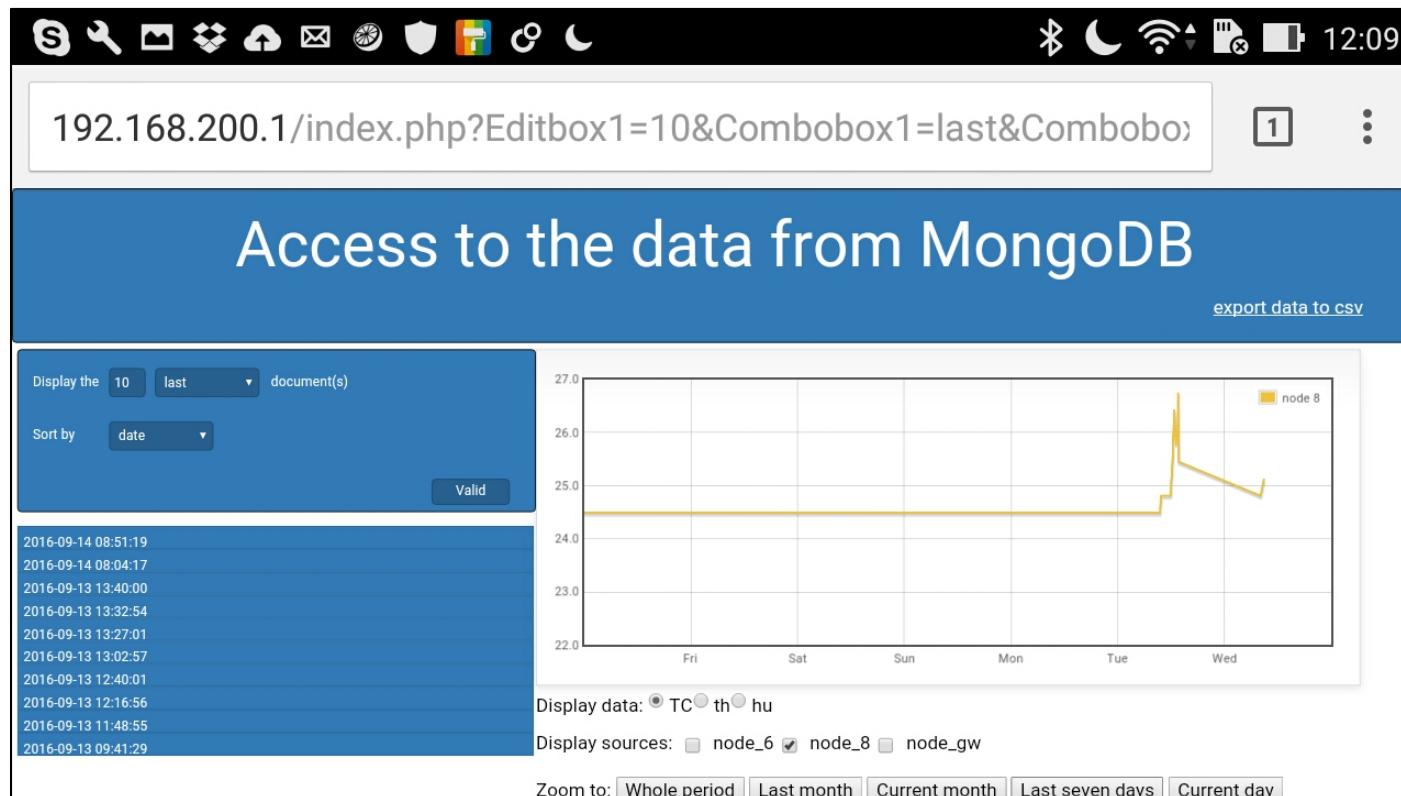

RUNNING THE GATEWAY WITHOUT INTERNET ACCESS

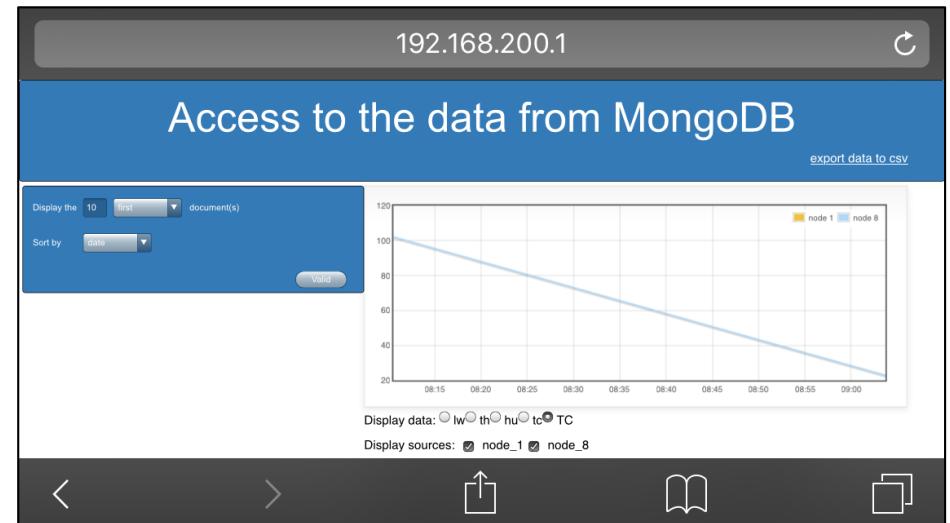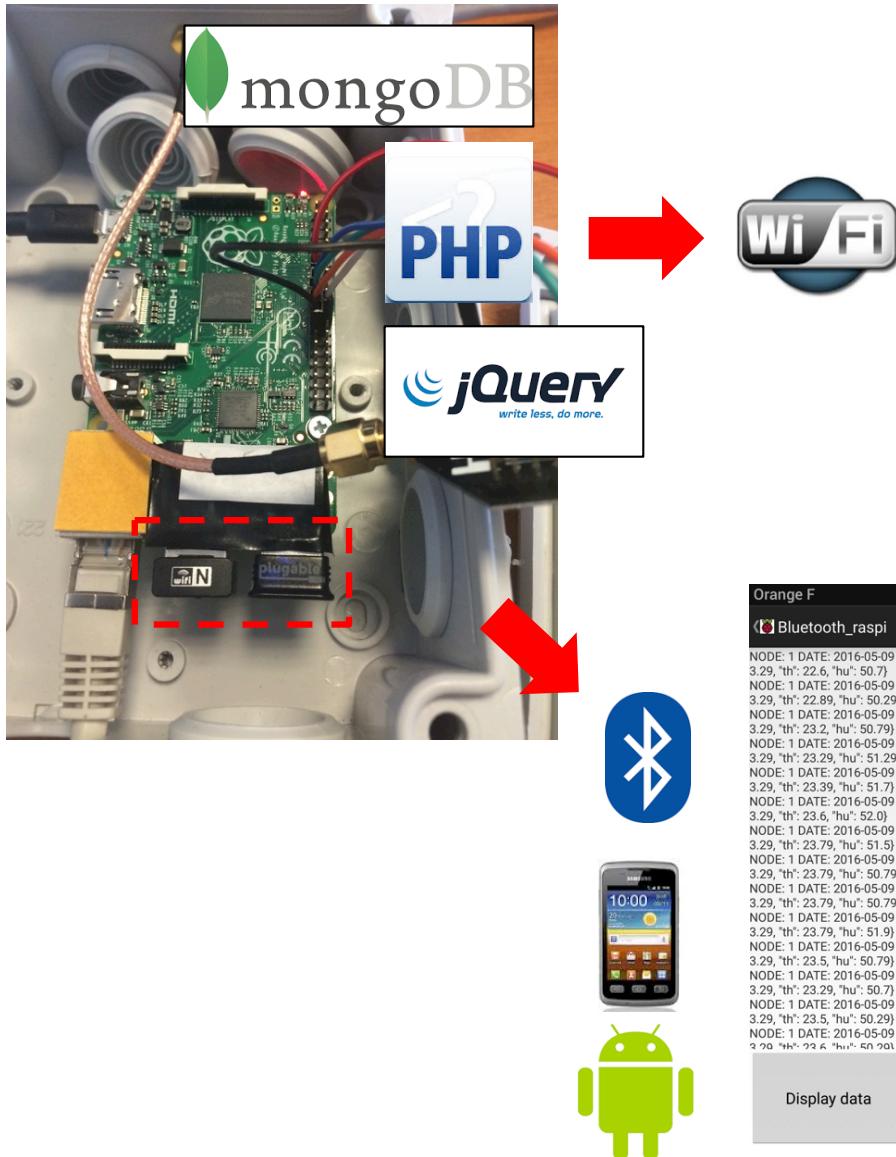

Orange F * N N 10:34
Bluetooth_raspi

```

NODE: 1 DATE: 2016-05-09 08:04:59.807000 DATA: {"lw": 3.29, "th": 22.6, "hu": 50.7}
NODE: 1 DATE: 2016-05-09 08:28:52.993000 DATA: {"lw": 3.29, "th": 22.89, "hu": 50.29}
NODE: 1 DATE: 2016-05-09 08:53:04.317000 DATA: {"lw": 3.29, "th": 23.2, "hu": 50.79}
NODE: 1 DATE: 2016-05-09 09:05:00.997000 DATA: {"lw": 3.29, "th": 23.29, "hu": 51.29}
NODE: 1 DATE: 2016-05-09 09:17:24.482000 DATA: {"lw": 3.29, "th": 23.39, "hu": 51.7}
NODE: 1 DATE: 2016-05-09 09:41:27.437000 DATA: {"lw": 3.29, "th": 23.6, "hu": 52.0}
NODE: 1 DATE: 2016-05-09 10:05:39.032000 DATA: {"lw": 3.29, "th": 23.79, "hu": 51.5}
NODE: 1 DATE: 2016-05-09 10:17:45.186000 DATA: {"lw": 3.29, "th": 23.79, "hu": 50.79}
NODE: 1 DATE: 2016-05-09 10:29:24.285000 DATA: {"lw": 3.29, "th": 23.79, "hu": 50.79}
NODE: 1 DATE: 2016-05-09 10:53:09.347000 DATA: {"lw": 3.29, "th": 23.79, "hu": 51.9}
NODE: 1 DATE: 2016-05-09 11:17:02.953000 DATA: {"lw": 3.29, "th": 23.5, "hu": 50.79}
NODE: 1 DATE: 2016-05-09 11:52:53.334000 DATA: {"lw": 3.29, "th": 23.29, "hu": 50.7}
NODE: 1 DATE: 2016-05-09 12:04:32.437000 DATA: {"lw": 3.29, "th": 23.5, "hu": 50.29}
NODE: 1 DATE: 2016-05-09 12:16:56.116000 DATA: {"lw": 3.29, "th": 22.6, "hu": 50.29}

```

Buttons:

- Display data
- Retrieve data in a csv file

Orange F * N N 10:37
Bluetooth_raspi

NODES PREFERENCES

- 1 check to retrieve its data
- 8 check to retrieve its data

DATES PREFERENCES

Pick a begin date
Retrieve data since 09-05-2016

Pick an end date
Retrieve data until 17-05-2016

Buttons:

- Display data
- Retrieve data in a csv file

Orange F * N N 10:39
Bluetooth_raspi

Creating .csv file with the data received...
File 17-05-2016_10h39m36s.csv created and saved in the folder /storage/emulated/0/Raspberry_local_data

Buttons:

- Display data
- Retrieve data in a csv file


IMPROVING CASING AND ADDING POE TO GATEWAY




OVERVIEW OF THE PARTS





FIXING THE RASPBERRY TO THE CASE

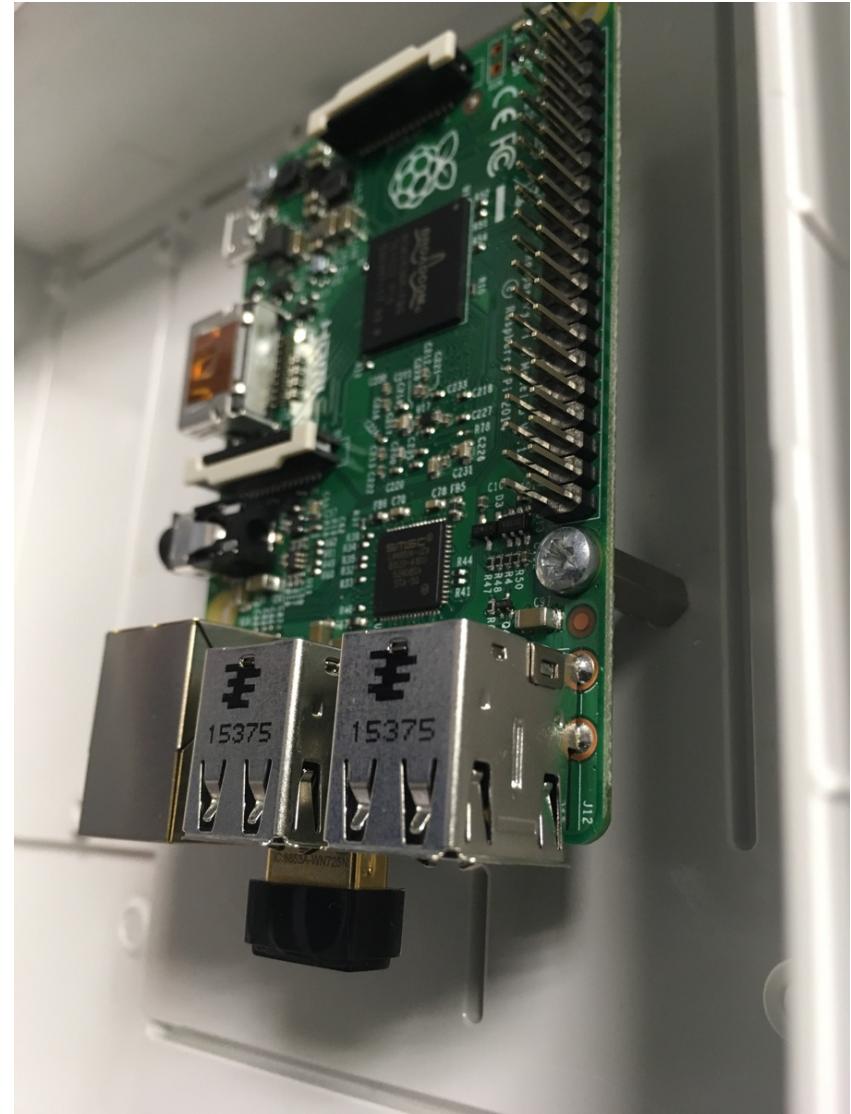

PREPARE THE DC STEP-DOWN (LM2596)

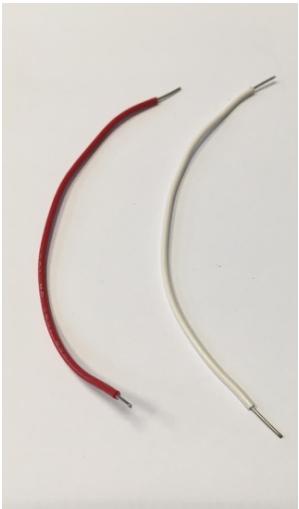


It is advised to connect the DC plugs before soldering

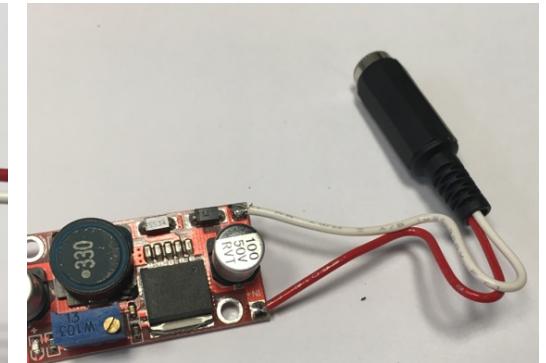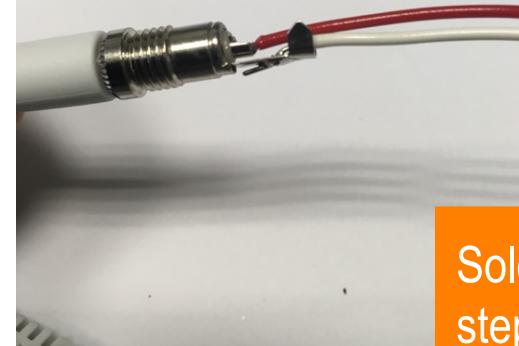

Solder to the IN part of the step-down module






Cut a USB cable, keeping the micro-USB side

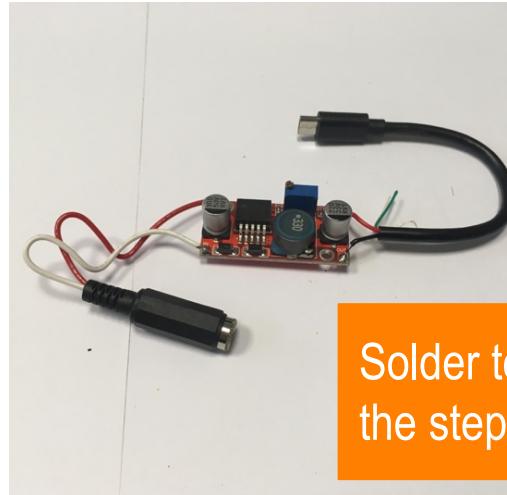


Solder to the OUT part of the step-down module

SETTING THE STEP-DOWN MODULE

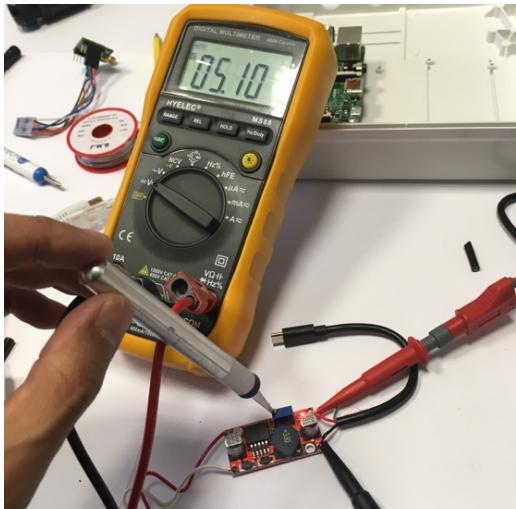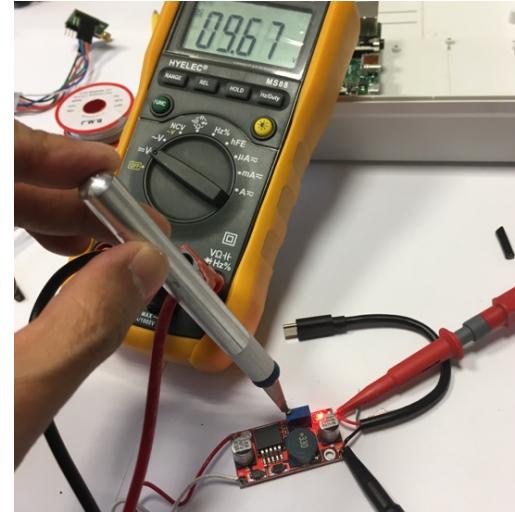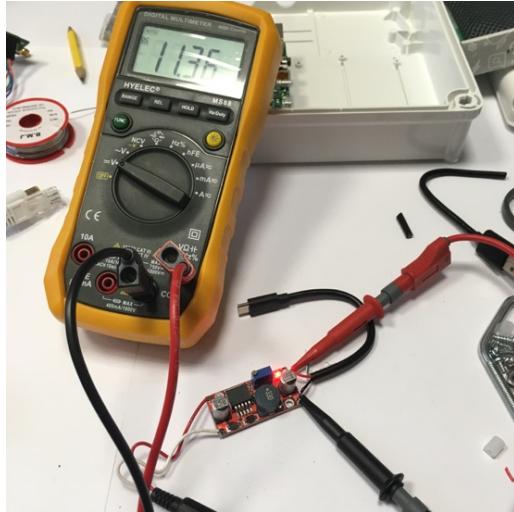


Use for instance a 9v, 12v or 18V AC-DC adaptor, connect to the IN plug, then check the output voltage with a voltmeter and turn the regulation screw until output is about 5.1v.

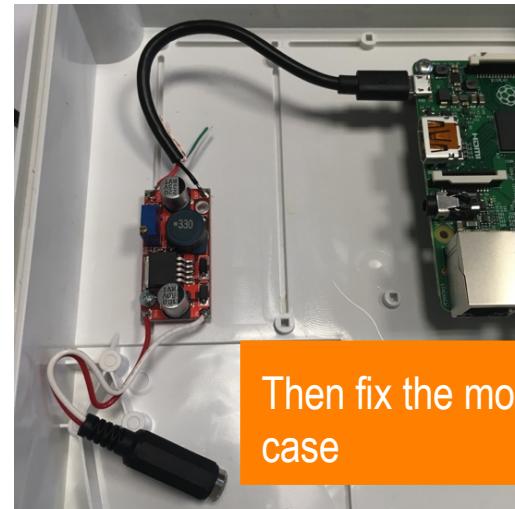


Then fix the module to the case

INSTALLING THE POE INJECTOR AND WATER-RESISTANT ETHERNET PLUG

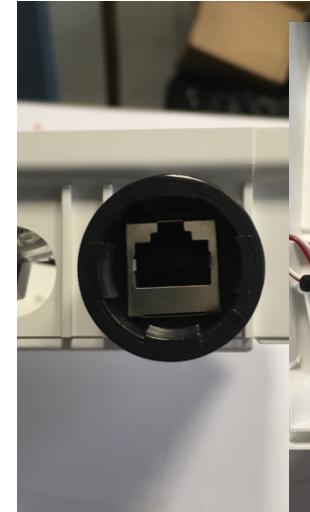

CONNECT THE RADIO MODULE

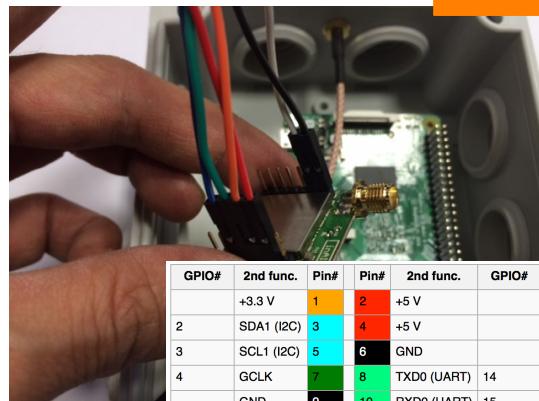


GPIO#	2nd func.	Pin#	Pin#	2nd func.	GPIO#
+3.3 V		1	2	+5 V	
2	SDA1 (I2C)	3	4	+5 V	
3	SCL1 (I2C)	5	6	GND	
4	GCLK	7	8	TXD0 (UART)	14
	GND	9	10	RXD0 (UART)	15
17	GEN0	11	12	GEN1	18
27	GEN2	13	14	GND	
22	GEN3	15	16	GEN4	23
+3.3 V		17	18	GEN5	24
10	MOSI (SPI)	19	20	GND	
9	MISO (SPI)	21	22	GEN6	25
11	SCLK (SPI)	23	24	CE0_N (SPI)	8
	GND	25	26	CE1_N (SPI)	7

(RPi 1 Models A and B stop here)

EEPROM	ID_SD	27	28	ID_SC	EEPROM
5	N/A	29	30	GND	
6	N/A	31	32		12
13	N/A	33	34	GND	
19	N/A	35	36	N/A	16
26	N/A	37	38	Digital IN	20
	GND	39	40	Digital OUT	21

Like previously shown

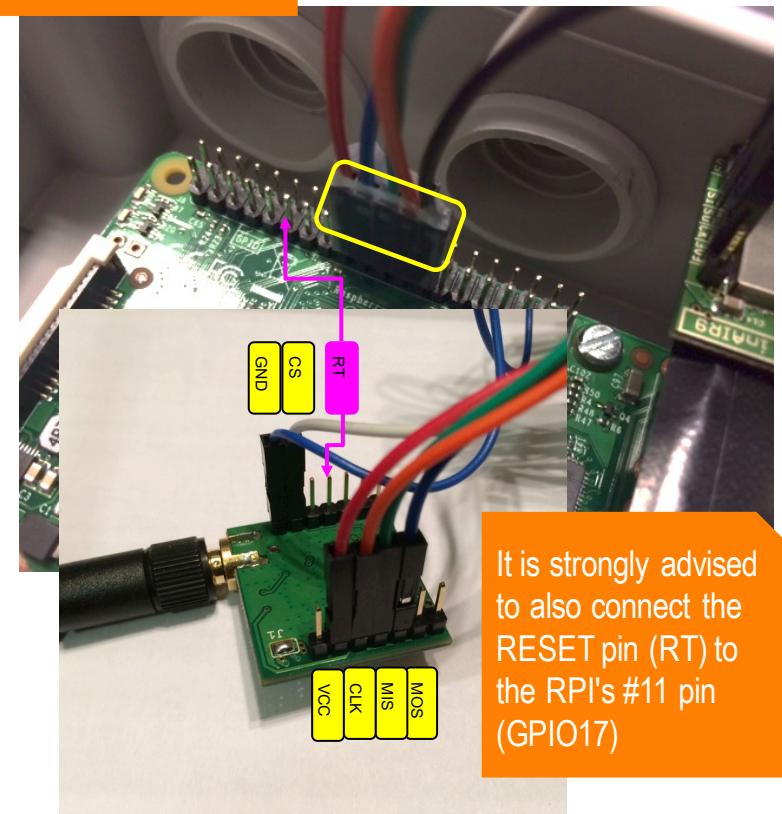

It is strongly advised to also connect the RESET pin (RT) to the RPi's #11 pin (GPIO17)

INSTALL FIXING PARTS OF THE CASE






These parts of course depends on the case that you have.

Here we use the GentleBOX JE-200 case from MHzShop.



FIXING THE ANTENNA CABLE

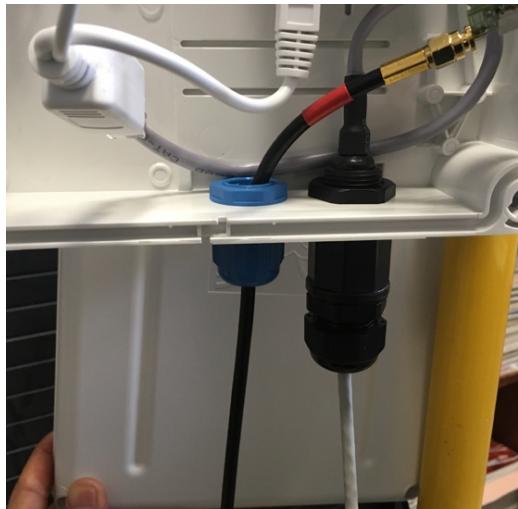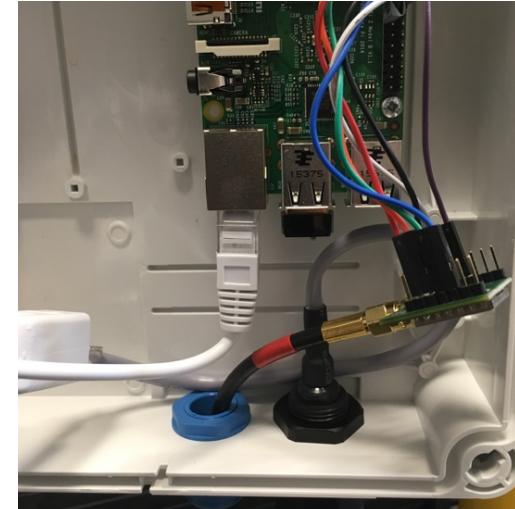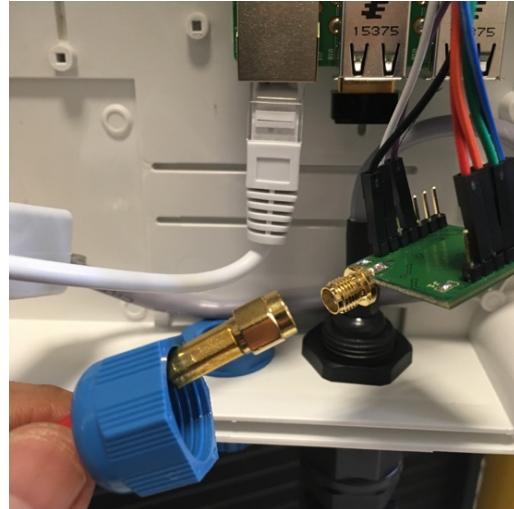

Look at the Antenna tutorial to see how an antenna cable can be made to adapt both the cable length and the antenna connectors

CONNECTING AND POWERING YOUR GATEWAY

